

JEFFERY W. KITCHENS
ACTING DIRECTOR



KAY IVEY
GOVERNOR

Alabama Department of Environmental Management
adem.alabama.gov

1400 Coliseum Blvd. 36110-2400 ■ Post Office Box 301463
Montgomery, Alabama 36130-1463
(334) 271-7700 ■ FAX (334) 271-7950

JUNE 12, 2025

Mary White
President
Knobloch, Inc.
Post Office Box 679
Leeds, AL 35094

RE: Draft Permit
NPDES Permit No. AL0068420
East Tuscaloosa-West Jefferson WWTP
Tuscaloosa County, Alabama

Dear Ms. White:

Transmitted herein is a draft of the referenced permit.

We would appreciate your comments on the permit within **30 days** of the date of this letter. Please direct any comments of a technical or administrative nature to the undersigned.

By copy of this letter and the draft permit, we are also requesting comments within the same time frame from EPA.

Please be aware that Parts I.C.1.c and I.C.2.e of your permit require participation in the Department's Alabama Environmental Permitting and Compliance System (AEPACS) for submittal of DMRs and SSOs upon issuance of this permit unless valid justification as to why you cannot participate is submitted in writing. SSO hotline notifications and hard copy Form 415 SSO reports may be used only with the written approval from the Department. AEPACS allows ADEM to electronically validate and acknowledge receipt of the data. This improves the accuracy of reported compliance data and reduces costs to both the regulated community and ADEM. Please note that all AEPACS users can create the electronic DMRs and SSOs; however, only AEPACS users with certifier permissions will be able to submit the electronic DMRs and SSOs to ADEM.

Please also be aware that Part IV. of your permit requires that you develop, implement, and maintain a Sanitary Sewer Overflow Response Plan.

The Alabama Department of Environmental Management encourages you to voluntarily consider pollution prevention practices and alternatives at your facility. Pollution Prevention may assist you in complying with effluent limitations, and possibly reduce or eliminate monitoring requirements.




Birmingham Office
110 Vulcan Road
Birmingham, AL 35209-4702
(205) 942-6168
(205) 941-1603 (FAX)

Decatur Office
2715 Sandlin Road, S.W.
Decatur, AL 35603-1333
(256) 353-1713
(256) 340-9359 (FAX)

Coastal Office
1615 South Broad Street
Mobile, AL 36605
(251) 450-3400
(251) 479-2593 (FAX)

If you have questions regarding this permit or monitoring requirements, please contact Sandra Lee at slee@adem.alabama.gov or (334) 274-4223.

Sincerely,

A handwritten signature in black ink, appearing to read "Sandra", followed by a long horizontal flourish line.

Sandra Lee
Municipal Section
Water Division

Enclosure

cc: Environmental Protection Agency Email
Ms. Elaine Snyder/U.S. Fish and Wildlife Service
Ms. Elizabeth Brown/Alabama Historical Commission
Advisory Council on Historic Preservation
Department of Conservation and Natural Resources



NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

PERMITTEE: KNOBLOCH, INC.
POST OFFICE BOX 679
LEEDS, AL 35094

FACILITY LOCATION: EAST TUSCALOOSA-WEST JEFFERSON WWTP (0.3 MGD, 0.4 MGD, 0.8 MGD)
12874 WOODLAND PARK CIRCLE
MCCALLA, ALABAMA
TUSCALOOSA COUNTY

PERMIT NUMBER: AL0068420

RECEIVING WATERS: MUD CREEK

In accordance with and subject to the provisions of the Federal Water Pollution Control Act, as amended, 33 U.S.C. §§1251-1388 (the "FWPCA"), the Alabama Water Pollution Control Act, as amended, Code of Alabama 1975, §§ 22-22-1 to 22-22-14 (the "AWPCA"), the Alabama Environmental Management Act, as amended, Code of Alabama 1975, §§22-22A-1 to 22-22A-17, and rules and regulations adopted thereunder, and subject further to the terms and conditions set forth in this permit, the Permittee is hereby authorized to discharge into the above-named receiving waters.

ISSUANCE DATE:

EFFECTIVE DATE:

EXPIRATION DATE:

Draft

Alabama Department of Environmental Management

TABLE OF CONTENTS

PART I: DISCHARGE LIMITATIONS, CONDITIONS, AND REQUIREMENTS	1
A. DISCHARGE LIMITATIONS AND MONITORING REQUIREMENTS.....	1
1. DSN 0011: Treated Domestic Wastewater - Design Flow 0.8 MGD.....	1
2. DSN 0014: Treated Domestic Wastewater - Design Flow 0.3 MGD.....	3
3. DSN 0015: Treated Domestic Wastewater - Design Flow 0.4 MGD.....	5
B. DISCHARGE MONITORING AND RECORD KEEPING REQUIREMENTS	7
1. Representative Sampling.....	7
2. Measurement Frequency	7
3. Test Procedures	7
4. Recording of Results.....	8
5. Records Retention and Production	8
6. Reduction, Suspension or Termination of Monitoring and/or Reporting.....	8
7. Monitoring Equipment and Instrumentation	8
C. DISCHARGE REPORTING REQUIREMENTS	8
1. Reporting of Monitoring Requirements	8
2. Noncompliance Notifications and Reports.....	10
D. OTHER REPORTING AND NOTIFICATION REQUIREMENTS	12
1. Anticipated Noncompliance.....	12
2. Termination of Discharge	12
3. Updating Information.....	12
4. Duty to Provide Information	12
E. SCHEDULE OF COMPLIANCE	12
1. Compliance with discharge limits	12
2. Schedule.....	12
PART II: OTHER REQUIREMENTS, RESPONSIBILITIES, AND DUTIES	13
A. OPERATIONAL AND MANAGEMENT REQUIREMENTS.....	13
1. Facilities Operation and Maintenance.....	13
2. Best Management Practices	13
3. Certified Operator	13
B. OTHER RESPONSIBILITIES.....	13
1. Duty to Mitigate Adverse Impacts	13
2. Right of Entry and Inspection	13
C. BYPASS AND UPSET	13
1. Bypass.....	13
2. Upset.....	14
D. DUTY TO COMPLY WITH PERMIT, RULES, AND STATUTES.....	14
1. Duty to Comply.....	14
2. Removed Substances.....	15
3. Loss or Failure of Treatment Facilities	15
4. Compliance with Statutes and Rules.....	15
E. PERMIT TRANSFER, MODIFICATION, SUSPENSION, REVOCATION, AND REISSUANCE.....	15
1. Duty to Reapply or Notify of Intent to Cease Discharge	15
2. Change in Discharge	15
3. Transfer of Permit	15
4. Permit Modification and Revocation	16
5. Termination.....	16
6. Suspension	17

7. Stay	17
F. COMPLIANCE WITH TOXIC POLLUTANT STANDARD OR PROHIBITION	17
G. NOTICE TO DIRECTOR OF INDUSTRIAL USERS.....	17
H. PROHIBITIONS	17
PART III: ADDITIONAL REQUIREMENTS, CONDITIONS, AND LIMITATIONS	19
A. CIVIL AND CRIMINAL LIABILITY	19
1. Tampering	19
2. False Statements.....	19
3. Permit Enforcement	19
4. Relief from Liability	19
B. OIL AND HAZARDOUS SUBSTANCE LIABILITY	19
C. PROPERTY AND OTHER RIGHTS	19
D. AVAILABILITY OF REPORTS.....	20
E. EXPIRATION OF PERMITS FOR NEW OR INCREASED DISCHARGES.....	20
F. COMPLIANCE WITH WATER QUALITY STANDARDS.....	20
G. GROUNDWATER	20
H. DEFINITIONS.....	21
I. SEVERABILITY	23
PART IV: SPECIFIC REQUIREMENTS, CONDITIONS, AND LIMITATIONS.....	24
A. SLUDGE MANAGEMENT PRACTICES	24
1. Applicability	24
2. Submitting Information.....	24
3. Reopener or Modification	24
B. EFFLUENT TOXICITY TESTING REOPENER.....	24
C. TOTAL RESIDUAL CHLORINE (TRC) REQUIREMENTS.....	24
D. PLANT CLASSIFICATION.....	25
E. SANITARY SEWER OVERFLOW RESPONSE PLAN.....	25

PART I: DISCHARGE LIMITATIONS, CONDITIONS, AND REQUIREMENTS

A. DISCHARGE LIMITATIONS AND MONITORING REQUIREMENTS

1. DSN 0011: Treated Domestic Wastewater - Design Flow 0.8 MGD

During the period beginning on the date of the facility expansion to 0.8 MGD and lasting through the expiration date of this permit, the Permittee is authorized to discharge from Outfall 0011, which is described more fully in the Permittee's application. Such discharge shall be limited and monitored by the Permittee as specified below:

Parameter	Quantity or Loading		Units	Quality or Concentration			Units	Sample Freq See note (1)	Sample Type	Seasonal See note (2)
Oxygen, Dissolved (DO) (00300) Effluent Gross Value	*****	*****	*****	6.0 Minimum Daily	*****	*****	mg/l	3X Weekly test	Grab	Not Seasonal
pH (00400) Effluent Gross Value	*****	*****	*****	6.0 Minimum Daily	*****	8.5 Maximum Daily	S.U.	3X Weekly test	Grab	Not Seasonal
Solids, Total Suspended (00530) Effluent Gross Value	200 Monthly Average	300 Weekly Average	lbs/day	*****	30.0 Monthly Average	45.0 Weekly Average	mg/l	3X Weekly test	24-Hr Composite	Not Seasonal
Solids, Total Suspended (00530) Raw Sew/Influent	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	(Report) Monthly Average	(Report) Weekly Average	mg/l	3X Weekly test	24-Hr Composite	Not Seasonal
Nitrogen, Ammonia Total (As N) (00610) Effluent Gross Value	25.3 Monthly Average	38.0 Weekly Average	lbs/day	*****	3.8 Monthly Average	5.7 Weekly Average	mg/l	3X Weekly test	24-Hr Composite	Not Seasonal
Nitrogen, Kjeldahl Total (As N) (00625) Effluent Gross Value	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	(Report) Monthly Average	(Report) Weekly Average	mg/l	Monthly	24-Hr Composite	S
Nitrite Plus Nitrate Total 1 Det. (As N) (00630) Effluent Gross Value	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	(Report) Monthly Average	(Report) Weekly Average	mg/l	Monthly	24-Hr Composite	S
Phosphorus, Total (As P) (00665) Effluent Gross Value	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	(Report) Monthly Average	(Report) Weekly Average	mg/l	3X Weekly test	24-Hr Composite	W
Phosphorus, Total (As P) (00665) Effluent Gross Value	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	0.3 Monthly Average	(Report) Weekly Average	mg/l	3X Weekly test	24-Hr Composite	S

See Part II.C.1. for Bypass and Part II.C.2. for Upset conditions.

(1) Sample Frequency – See also Part I.B.2

See Permit Requirements for Effluent Toxicity Testing in Part IV.B.

(2) S = Summer (April – October)

W = Winter (November - March)

ECS = E. coli Summer (May - October)

ECW = E. coli Winter (November - April)

(3) See Part IV.C. for Total Residual Chlorine (TRC). Monitoring for TRC is applicable if chlorine is utilized for disinfection purposes. If monitoring is not applicable during the monitoring period, enter “*9” on the monthly DMR.

(4) A measurement of TRC below 0.05 mg/L shall be considered in compliance with the permit limitations above and should be reported as “*B” on the monthly DMR.

DSN 0011 (Continued): Treated Domestic Wastewater - Design Flow 0.8 MGD

During the period beginning on the date of the facility expansion to 0.8 MGD and lasting through the expiration date of this permit, the Permittee is authorized to discharge from Outfall 0011, which is described more fully in the Permittee's application. Such discharge shall be limited and monitored by the Permittee as specified below:

Parameter	Quantity or Loading		Units	Quality or Concentration			Units	Sample Freq See note (1)	Sample Type	Seasonal See note (2)
Flow, In Conduit or Thru Treatment Plant (50050) Effluent Gross Value	(Report) Monthly Average	(Report) Maximum Daily	MGD	*****	*****	*****	*****	Daily	Continuous	Not Seasonal
Chlorine, Total Residual (50060) See notes (3, 4) Effluent Gross Value	*****	*****	*****	*****	0.020 Monthly Average	0.034 Maximum Daily	mg/l	3X Weekly test	Grab	Not Seasonal
E. Coli (51040) Effluent Gross Value	*****	*****	*****	*****	548 Monthly Average	2507 Maximum Daily	col/100mL	3X Weekly test	Grab	ECW
E. Coli (51040) Effluent Gross Value	*****	*****	*****	*****	126 Monthly Average	298 Maximum Daily	col/100mL	3X Weekly test	Grab	ECS
BOD, Carbonaceous 05 Day, 20C (80082) Effluent Gross Value	153 Monthly Average	230 Weekly Average	lbs/day	*****	23.0 Monthly Average	34.5 Weekly Average	mg/l	3X Weekly test	24-Hr Composite	Not Seasonal
BOD, Carbonaceous 05 Day, 20C (80082) Raw Sew/Influent	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	(Report) Monthly Average	(Report) Weekly Average	mg/l	3X Weekly test	24-Hr Composite	Not Seasonal
BOD, Carb-5 Day, 20 Deg C, Percent Remvl (80091) Percent Removal	*****	*****	*****	85.0 Monthly Average Minimum	*****	*****	%	Monthly	Calculated	Not Seasonal
Solids, Suspended Percent Removal (81011) Percent Removal	*****	*****	*****	85.0 Monthly Average Minimum	*****	*****	%	Monthly	Calculated	Not Seasonal

See Part II.C.1. for Bypass and Part II.C.2. for Upset conditions.

(1) Sample Frequency – See also Part I.B.2

See Permit Requirements for Effluent Toxicity Testing in Part IV.B.

(2) S = Summer (April – October)

W = Winter (November - March)

ECS = E. coli Summer (May - October)

ECW = E. coli Winter (November - April)

(3) See Part IV.C. for Total Residual Chlorine (TRC). Monitoring for TRC is applicable if chlorine is utilized for disinfection purposes. If monitoring is not applicable during the monitoring period, enter “*9” on the monthly DMR.

(4) A measurement of TRC below 0.05 mg/L shall be considered in compliance with the permit limitations above and should be reported as “*B” on the monthly DMR.

2. DSN 0014: Treated Domestic Wastewater - Design Flow 0.3 MGD

During the period beginning on the effective date of this permit and lasting through the completion of the facility expansion, the Permittee is authorized to discharge from Outfall 0014, which is described more fully in the Permittee's application. Such discharge shall be limited and monitored by the Permittee as specified below:

Parameter	Quantity or Loading		Units	Quality or Concentration			Units	Sample Freq See note (1)	Sample Type	Seasonal See note (2)
Oxygen, Dissolved (DO) (00300) Effluent Gross Value	*****	*****	*****	6.0 Minimum Daily	*****	*****	mg/l	2X Weekly	Grab	Not Seasonal
pH (00400) Effluent Gross Value	*****	*****	*****	6.0 Minimum Daily	*****	8.5 Maximum Daily	S.U.	2X Weekly	Grab	Not Seasonal
Solids, Total Suspended (00530) Effluent Gross Value	75.0 Monthly Average	112 Weekly Average	lbs/day	*****	30.0 Monthly Average	45.0 Weekly Average	mg/l	2X Weekly	24-Hr Composite	Not Seasonal
Solids, Total Suspended (00530) Raw Sew/Influent	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	(Report) Monthly Average	(Report) Weekly Average	mg/l	2X Weekly	24-Hr Composite	Not Seasonal
Nitrogen, Ammonia Total (As N) (00610) Effluent Gross Value	16.2 Monthly Average	24.3 Weekly Average	lbs/day	*****	6.50 Monthly Average	9.75 Weekly Average	mg/l	2X Weekly	24-Hr Composite	Not Seasonal
Nitrogen, Kjeldahl Total (As N) (00625) Effluent Gross Value	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	(Report) Monthly Average	(Report) Weekly Average	mg/l	Monthly	24-Hr Composite	S
Nitrite Plus Nitrate Total 1 Det. (As N) (00630) Effluent Gross Value	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	(Report) Monthly Average	(Report) Weekly Average	mg/l	Monthly	24-Hr Composite	S
Phosphorus, Total (As P) (00665) Effluent Gross Value	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	(Report) Monthly Average	(Report) Weekly Average	mg/l	2X Weekly	24-Hr Composite	W
Phosphorus, Total (As P) (00665) Effluent Gross Value	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	0.3 Monthly Average	(Report) Weekly Average	mg/l	2X Weekly	24-Hr Composite	S

See Part II.C.1. for Bypass and Part II.C.2. for Upset conditions.

(1) Sample Frequency – See also Part I.B.2

See Permit Requirements for Effluent Toxicity Testing in Part IV.B.

(2) S = Summer (April – October)

W = Winter (November - March)

ECS = E. coli Summer (May - October)

ECW = E. coli Winter (November - April)

(3) See Part IV.C. for Total Residual Chlorine (TRC). Monitoring for TRC is applicable if chlorine is utilized for disinfection purposes. If monitoring is not applicable during the monitoring period, enter “*9” on the monthly DMR.

(4) A measurement of TRC below 0.05 mg/L shall be considered in compliance with the permit limitations above and should be reported as “*B” on the monthly DMR.

DSN 0014 (Continued): Treated Domestic Wastewater - Design Flow 0.3 MGD

During the period beginning on the effective date of this permit and lasting through the completion of the facility expansion, the Permittee is authorized to discharge from Outfall 0014, which is described more fully in the Permittee's application. Such discharge shall be limited and monitored by the Permittee as specified below:

Parameter	Quantity or Loading		Units	Quality or Concentration			Units	Sample Freq See note (1)	Sample Type	Seasonal See note (2)
Flow, In Conduit or Thru Treatment Plant (50050) Effluent Gross Value	(Report) Monthly Average	(Report) Maximum Daily	MGD	*****	*****	*****	*****	Daily	Continuous	Not Seasonal
Chlorine, Total Residual (50060) See notes (3, 4) Effluent Gross Value	*****	*****	*****	*****	0.034 Monthly Average	0.060 Maximum Daily	mg/l	2X Weekly	Grab	Not Seasonal
E. Coli (51040) Effluent Gross Value	*****	*****	*****	*****	548 Monthly Average	2507 Maximum Daily	col/100mL	2X Weekly	Grab	ECW
E. Coli (51040) Effluent Gross Value	*****	*****	*****	*****	126 Monthly Average	298 Maximum Daily	col/100mL	2X Weekly	Grab	ECS
BOD, Carbonaceous 05 Day, 20C (80082) Effluent Gross Value	62.5 Monthly Average	93.8 Weekly Average	lbs/day	*****	25.0 Monthly Average	37.5 Weekly Average	mg/l	2X Weekly	24-Hr Composite	Not Seasonal
BOD, Carbonaceous 05 Day, 20C (80082) Raw Sew/Influent	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	(Report) Monthly Average	(Report) Weekly Average	mg/l	2X Weekly	24-Hr Composite	Not Seasonal
BOD, Carb-5 Day, 20 Deg C, Percent Remvl (80091) Percent Removal	*****	*****	*****	85.0 Monthly Average Minimum	*****	*****	%	Monthly	Calculated	Not Seasonal
Solids, Suspended Percent Removal (81011) Percent Removal	*****	*****	*****	85.0 Monthly Average Minimum	*****	*****	%	Monthly	Calculated	Not Seasonal

See Part II.C.1. for Bypass and Part II.C.2. for Upset conditions.

(1) Sample Frequency – See also Part I.B.2

See Permit Requirements for Effluent Toxicity Testing in Part IV.B.

(2) S = Summer (April – October)

W = Winter (November - March)

ECS = E. coli Summer (May - October)

ECW = E. coli Winter (November - April)

(3) See Part IV.C. for Total Residual Chlorine (TRC). Monitoring for TRC is applicable if chlorine is utilized for disinfection purposes. If monitoring is not applicable during the monitoring period, enter “*9” on the monthly DMR.

(4) A measurement of TRC below 0.05 mg/L shall be considered in compliance with the permit limitations above and should be reported as “*B” on the monthly DMR.

3. DSN 0015: Treated Domestic Wastewater - Design Flow 0.4 MGD

During the period beginning on the date of the facility expansion to 0.4 MGD and lasting through the completion of the facility expansion to 0.8 MGD, the Permittee is authorized to discharge from Outfall 0015, which is described more fully in the Permittee's application. Such discharge shall be limited and monitored by the Permittee as specified below:

Parameter	Quantity or Loading		Units	Quality or Concentration			Units	Sample Freq See note (1)	Sample Type	Seasonal See note (2)
Oxygen, Dissolved (DO) (00300) Effluent Gross Value	*****	*****	*****	6.0 Minimum Daily	*****	*****	mg/l	2X Weekly	Grab	Not Seasonal
pH (00400) Effluent Gross Value	*****	*****	*****	6.0 Minimum Daily	*****	8.5 Maximum Daily	S.U.	2X Weekly	Grab	Not Seasonal
Solids, Total Suspended (00530) Effluent Gross Value	100 Monthly Average	150 Weekly Average	lbs/day	*****	30.0 Monthly Average	45 Weekly Average	mg/l	2X Weekly	24-Hr Composite	Not Seasonal
Solids, Total Suspended (00530) Raw Sew/Influent	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	(Report) Monthly Average	(Report) Weekly Average	mg/l	2X Weekly	24-Hr Composite	Not Seasonal
Nitrogen, Ammonia Total (As N) (00610) Effluent Gross Value	18.0 Monthly Average	27.0 Weekly Average	lbs/day	*****	5.4 Monthly Average	8.1 Weekly Average	mg/l	2X Weekly	24-Hr Composite	Not Seasonal
Nitrogen, Kjeldahl Total (As N) (00625) Effluent Gross Value	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	(Report) Monthly Average	(Report) Weekly Average	mg/l	Monthly	24-Hr Composite	S
Nitrite Plus Nitrate Total 1 Det. (As N) (00630) Effluent Gross Value	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	(Report) Monthly Average	(Report) Weekly Average	mg/l	Monthly	24-Hr Composite	S
Phosphorus, Total (As P) (00665) Effluent Gross Value	(Report) Monthly Average	(Report) Maximum Daily	lbs/day	*****	(Report) Monthly Average	(Report) Maximum Daily	mg/l	2X Weekly	24-Hr Composite	W
Phosphorus, Total (As P) (00665) Effluent Gross Value	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	0.3 Monthly Average	(Report) Weekly Average	mg/l	2X Weekly	24-Hr Composite	S

See Part II.C.1. for Bypass and Part II.C.2. for Upset conditions.

(1) Sample Frequency – See also Part I.B.2

See Permit Requirements for Effluent Toxicity Testing in Part IV.B.

(2) S = Summer (April – October)

W = Winter (November - March)

ECS = E. coli Summer (May - October)

ECW = E. coli Winter (November - April)

(3) See Part IV.C. for Total Residual Chlorine (TRC). Monitoring for TRC is applicable if chlorine is utilized for disinfection purposes. If monitoring is not applicable during the monitoring period, enter “*9” on the monthly DMR.

(4) A measurement of TRC below 0.05 mg/L shall be considered in compliance with the permit limitations above and should be reported as “*B” on the monthly DMR.

DSN 0015 (Continued): Treated Domestic Wastewater - Design Flow 0.4 MGD

During the period beginning on the facility expansion to 0.4 MGD and lasting through the completion of the facility expansion to 0.8 MGD, the Permittee is authorized to discharge from Outfall 0015, which is described more fully in the Permittee's application. Such discharge shall be limited and monitored by the Permittee as specified below:

Parameter	Quantity or Loading		Units	Quality or Concentration			Units	Sample Freq See note (1)	Sample Type	Seasonal See note (2)
Flow, In Conduit or Thru Treatment Plant (50050) Effluent Gross Value	(Report) Monthly Average	(Report) Maximum Daily	MGD	*****	*****	*****	*****	Daily	Continuous	Not Seasonal
Chlorine, Total Residual (50060) See notes (3, 4) Effluent Gross Value	*****	*****	*****	*****	0.029 Monthly Average	0.049 Maximum Daily	mg/l	2X Weekly	Grab	Not Seasonal
E. Coli (51040) Effluent Gross Value	*****	*****	*****	*****	548 Monthly Average	2507 Maximum Daily	col/100mL	2X Weekly	Grab	ECW
E. Coli (51040) Effluent Gross Value	*****	*****	*****	*****	126 Monthly Average	298 Maximum Daily	col/100mL	2X Weekly	Grab	ECS
BOD, Carbonaceous 05 Day, 20C (80082) Effluent Gross Value	83.4 Monthly Average	125 Weekly Average	lbs/day	*****	25.0 Monthly Average	37.5 Weekly Average	mg/l	2X Weekly	24-Hr Composite	Not Seasonal
BOD, Carbonaceous 05 Day, 20C (80082) Raw Sew/Influent	(Report) Monthly Average	(Report) Weekly Average	lbs/day	*****	(Report) Monthly Average	(Report) Weekly Average	mg/l	2X Weekly	24-Hr Composite	Not Seasonal
BOD, Carb-5 Day, 20 Deg C, Percent Remvl (80091) Percent Removal	*****	*****	*****	85.0 Monthly Average Minimum	*****	*****	%	Monthly	Calculated	Not Seasonal
Solids, Suspended Percent Removal (81011) Percent Removal	*****	*****	*****	85.0 Monthly Average Minimum	*****	*****	%	Monthly	Calculated	Not Seasonal

See Part II.C.1. for Bypass and Part II.C.2. for Upset conditions.

(1) Sample Frequency – See also Part I.B.2

See Permit Requirements for Effluent Toxicity Testing in Part IV.B.

(2) S = Summer (April – October)

W = Winter (November - March)

ECS = E. coli Summer (May - October)

ECW = E. coli Winter (November - April)

(3) See Part IV.C. for Total Residual Chlorine (TRC). Monitoring for TRC is applicable if chlorine is utilized for disinfection purposes. If monitoring is not applicable during the monitoring period, enter “*9” on the monthly DMR.

(4) A measurement of TRC below 0.05 mg/L shall be considered in compliance with the permit limitations above and should be reported as “*B” on the monthly DMR.

B. DISCHARGE MONITORING AND RECORD KEEPING REQUIREMENTS

1. Representative Sampling

Sample collection and measurement actions shall be representative of the volume and nature of the monitored discharge and shall be in accordance with the provisions of this permit. The effluent sampling point shall be at the nearest accessible location just prior to discharge and after final treatment, unless otherwise specified in the permit.

2. Measurement Frequency

Measurement frequency requirements found in Provision I.A. shall mean:

- a. Seven days per week shall mean daily.
- b. Five days per week shall mean any five days of discharge during a calendar weekly period of Sunday through Saturday.
- c. Three days per week shall mean any three days of discharge during a calendar week.
- d. Two days per week shall mean any two days of discharge during a calendar week.
- e. One day per week shall mean any day of discharge during a calendar week.
- f. Two days per month shall mean any two days of discharge during the month that are no less than seven days apart. However, if discharges occur only during one seven-day period in a month, then two days per month shall mean any two days of discharge during that seven day period.
- g. One day per month shall mean any day of discharge during the calendar month.
- h. Quarterly shall mean any day of discharge during each calendar quarter.
- i. The Permittee may increase the frequency of sampling, listed in Provisions I.B.2.a through I.B.2.h; however, all sampling results are to be reported to the Department.

3. Test Procedures

For the purpose of reporting and compliance, permittees shall use one of the following procedures:

- a. For parameters with an EPA established Minimum Level (ML), report the measured value if the analytical result is at or above the ML and report "0" or "*B" for values below the ML. Test procedures for the analysis of pollutants shall conform to 40 CFR Part 136 and guidelines published pursuant to Section 304(h) of the FWPCA, 33 U.S.C. Section 1314(h). If more than one method for analysis of a substance is approved for use, a method having a minimum level lower than the permit limit shall be used. If the minimum level of all methods is higher than the permit limit, the method having the lowest minimum level shall be used and a report of less than the minimum level shall be reported as zero and will constitute compliance, however should EPA approve a method with a lower minimum level during the term of this permit the permittee shall use the newly approved method.
- b. For pollutants parameters without an established ML, an interim ML may be utilized. The interim ML shall be calculated as 3.18 times the Method Detection Level (MDL) calculated pursuant to 40 CFR Part 136, Appendix B.

Permittees may develop an effluent matrix-specific ML, where an effluent matrix prevents attainment of the established ML. However, a matrix specific ML shall be based upon proper laboratory method and technique. Matrix-specific MLs must be approved by the Department, and may be developed by the permittee during permit issuance, reissuance, modification, or during compliance schedule.

In either case the measured value should be reported if the analytical result is at or above the ML and "0" or "*B" reported for values below the ML.

- c. For parameters without an EPA established ML, interim ML, or matrix-specific ML, a report of less than the detection limit shall constitute compliance if the detection limit of all analytical methods is higher than the permit limit. For the purpose of calculating a monthly average, "0" shall be used for values reported less than the detection limit.

The Minimum Level utilized for procedures a and b above shall be reported on the permittee's DMR. When an EPA approved test procedure for analysis of a pollutant does not exist, the Director shall approve the procedure to be used.

4. Recording of Results

For each measurement or sample taken pursuant to the requirements of this permit, the permittee shall record the following information:

- a. The facility name and location, point source number, date, time and exact place of sampling;
- b. The name(s) of person(s) who obtained the samples or measurements;
- c. The dates and times the analyses were performed;
- d. The name(s) of the person(s) who performed the analyses;
- e. The analytical techniques or methods used, including source of method and method number; and
- f. The results of all required analyses.

5. Records Retention and Production

- a. The permittee shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by the permit, and records of all data used to complete the above reports or the application for this permit, for a period of at least three years from the date of the sample measurement, report or application. This period may be extended by request of the Director at any time. If litigation or other enforcement action, under the AWPCA and/or the FWPCA, is ongoing which involves any of the above records, the records shall be kept until the litigation is resolved. Upon the written request of the Director or his designee, the permittee shall provide the Director with a copy of any record required to be retained by this paragraph. Copies of these records should not be submitted unless requested.
- b. All records required to be kept for a period of three years shall be kept at the permitted facility or an alternate location approved by the Department in writing and shall be available for inspection.

6. Reduction, Suspension or Termination of Monitoring and/or Reporting

- a. The Director may, with respect to any point source identified in Provision I.A. of this permit, authorize the permittee to reduce, suspend or terminate the monitoring and/or reporting required by this permit upon the submission of a written request for such reduction, suspension or termination by the permittee, supported by sufficient data which demonstrates to the satisfaction of the Director that the discharge from such point source will continuously meet the discharge limitations specified in Provision I.A. of this permit.
- b. It remains the responsibility of the permittee to comply with the monitoring and reporting requirements of this permit until written authorization to reduce, suspend or terminate such monitoring and/or reporting is received by the permittee from the Director.

7. Monitoring Equipment and Instrumentation

All equipment and instrumentation used to determine compliance with the requirements of this permit shall be installed, maintained, and calibrated in accordance with the manufacturer's instructions or, in the absence of manufacturer's instructions, in accordance with accepted practices. At a minimum, flow measurement devices shall be calibrated at least once every 12 months.

C. DISCHARGE REPORTING REQUIREMENTS

1. Reporting of Monitoring Requirements

- a. The permittee shall conduct the required monitoring in accordance with the following schedule:
 - (1) **MONITORING REQUIRED MORE FREQUENTLY THAN MONTHLY AND MONTHLY** shall be conducted during the first full month following the effective date of coverage under this permit and every month thereafter.
 - (2) **QUARTERLY MONITORING** shall be conducted at least once during each calendar quarter. Calendar quarters are the periods of January through March, April through June, July through September, and October through December. The permittee shall conduct the quarterly monitoring during the first complete calendar quarter following the effective date of this permit and is then required to monitor once during each quarter thereafter. Quarterly monitoring should be reported on the last DMR due for the quarter (i.e., March, June, September and December DMRs).

- (3) **SEMIANNUAL MONITORING** shall be conducted at least once during the period of January through June and at least once during the period of July through December. The permittee shall conduct the semiannual monitoring during the first complete calendar semiannual period following the effective date of this permit and is then required to monitor once during each semiannual period thereafter. Semiannual monitoring may be done anytime during the semiannual period, unless restricted elsewhere in this permit, but it should be reported on the last DMR due for the month of the semiannual period (i.e., June and December DMRs).
 - (4) **ANNUAL MONITORING** shall be conducted at least once during the period of January through December. The permittee shall conduct the annual monitoring during the first complete calendar annual period following the effective date of this permit and is then required to monitor once during each annual period thereafter. Annual monitoring may be done anytime during the year, unless restricted elsewhere in this permit, but it should be reported on the December DMR.
- b. The permittee shall submit discharge monitoring reports (DMRs) in accordance with the following schedule:
- (1) **REPORTS OF MORE FREQUENTLY THAN MONTHLY AND MONTHLY TESTING** shall be submitted on a monthly basis. The first report is due on the 28th day of the month following the month the permit becomes effective. The reports shall be submitted so that they are received by the Department no later than the 28th day of the month following the reporting period, unless otherwise directed by the Department.
 - (2) **REPORTS OF QUARTERLY TESTING** shall be submitted on a quarterly basis. The first report is due on the 28th day of the month following the first complete calendar quarter the permit becomes effective. The reports shall be submitted so that they are received by the Department no later than the 28th day of the month following the reporting period, unless otherwise directed by the Department.
 - (3) **REPORTS OF SEMIANNUAL TESTING** shall be submitted on a semiannual basis. The reports are due on the 28th day of JANUARY and the 28th day of JULY. The reports shall be submitted so that they are received by the Department no later than the 28th day of the month following the reporting period, unless otherwise directed by the Department.
 - (4) **REPORTS OF ANNUAL TESTING** shall be submitted on an annual basis. Unless specified elsewhere in the permit, the first report is due on the 28th day of JANUARY. The reports shall be submitted so that they are received by the Department no later than the 28th day of the month following the reporting period, unless otherwise directed by the Department.
- c. Except as allowed by Provision I.C.1.c.(1) or (2), the permittee shall submit all Discharge Monitoring Reports (DMRs) required by Provision I.C.1.b. electronically.
- (1) If the permittee is unable to complete the electronic submittal of DMR data due to technical problems originating with the Department's electronic system (this could include entry/submittal issues with an entire set of DMRs or individual parameters), the permittee is not relieved of their obligation to submit DMR data to the Department by the date specified in Provision I.C.1.b., unless otherwise directed by the Department.

If the Department's electronic system is down on the 28th day of the month in which the DMR is due or is down for an extended period of time, as determined by the Department, when a DMR is required to be submitted, the permittee may submit the data in an alternate manner and format acceptable to the Department. Preapproved alternate acceptable methods include faxing, e-mailing, mailing, or hand-delivery of data such that they are received by the required reporting date. Within five calendar days of the Department's electronic system resuming operation, the permittee shall enter the data into the Department's electronic system, unless an alternate timeframe is approved by the Department. A comment should be included on the electronic DMR submittal verifying the original submittal date (date of the fax, copy of dated e-mail, or hand-delivery stamped date), if applicable.
 - (2) The permittee may submit a request to the Department for a temporary electronic reporting waiver for DMR submittals. The waiver request should include the permit number; permittee name; facility/site name; facility address; name, address, and contact information for the responsible official or duly authorized representative; a detailed statement regarding the basis for requesting such a waiver; and the duration for which the waiver is requested. Approved electronic reporting waivers are not transferrable.
 - (3) A permittee with an approved electronic reporting waiver for DMRs may submit hard copy DMRs for the period that the approved electronic reporting waiver request is effective. The permittee shall submit the Department-approved DMR forms to the address listed in Provision I.C.1.e.

- (4) If a permittee is allowed to submit a hard copy DMR, the DMR must be legible and bear an original signature. Photo and electronic copies of the signature are not acceptable and shall not satisfy the reporting requirements of this permit.
 - (5) If the permittee, using approved analytical methods as specified in Provision I.B.2, monitors any discharge from a point source for a limited substance identified in Provision I.A. of this permit more frequently than required by this permit, the results of such monitoring shall be included in the calculation and reporting of values on the DMR and the increased frequency shall be indicated on the DMR.
 - (6) In the event no discharge from a point source identified in Provision I.A. of this permit and described more fully in the permittee's application occurs during a monitoring period, the permittee shall report "No Discharge" for such period on the appropriate DMR.
- d. All reports and forms required to be submitted by this permit, the AWPCA and the Department's Rules and Regulations, shall be electronically signed (or, if allowed by the Department, traditionally signed) by a "responsible official" of the permittee as defined in ADEM Administrative Code Rule 335-6-6-.09 or a "duly authorized representative" of such official as defined in ADEM Administrative Code Rule 335-6-6-.09 and shall bear the following certification:
- "I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."
- e. Discharge Monitoring Reports required by this permit, the AWPCA, and the Department's Rules that are being submitted in hard copy shall be addressed to:

**Alabama Department of Environmental Management
Office of Water Services, Water Division
Post Office Box 301463
Montgomery, Alabama 36130-1463**

Certified and Registered Mail containing Discharge Monitoring Reports shall be addressed to:

**Alabama Department of Environmental Management
Office of Water Services, Water Division
1400 Coliseum Boulevard
Montgomery, Alabama 36110-2400**

- f. All other correspondence and reports required to be submitted by this permit, the AWPCA, and the Department's Rules shall be addressed to:

**Alabama Department of Environmental Management
Municipal Section, Water Division
Post Office Box 301463
Montgomery, Alabama 36130-1463**

Certified and Registered Mail shall be addressed to:

**Alabama Department of Environmental Management
Municipal Section, Water Division
1400 Coliseum Boulevard
Montgomery, Alabama 36110-2400**

- g. If this permit is a reissuance, then the permittee shall continue to submit DMRs in accordance with the requirements of their previous permit until such time as DMRs are due as discussed in Part I.C.1.b. above.

2. Noncompliance Notifications and Reports

- a. The Permittee shall notify the Department if, for any reason, the Permittee's discharge:
- (1) Does not comply with any daily minimum or maximum discharge limitation for an effluent characteristic specified in Provision I.A. of this permit which is denoted by an "(X)";
 - (2) Potentially threatens human health or welfare;

- (3) Threatens fish or aquatic life;
- (4) Causes an in-stream water quality criterion to be exceeded;
- (5) Does not comply with an applicable toxic pollutant effluent standard or prohibition established under Section 307(a) of the FWPCA, 33 U.S.C. Section 1317(a);
- (6) Contains a quantity of a hazardous substance that may be harmful to public health or welfare under Section 311(b)(4) of the FWPCA, 33 U.S.C. Section 1321(b)(4);
- (7) Exceeds any discharge limitation for an effluent parameter listed in Part I.A. as a result of an unanticipated bypass or upset; or
- (8) Is an unpermitted direct or indirect discharge of a pollutant to a water of the state. (Note that unpermitted discharges properly reported to the Department under any other requirement are not required to be reported under this provision.)

The Permittee shall orally or electronically provide notification of any of the above occurrences, describing the circumstances and potential effects, to the Director or Designee within 24-hours after the Permittee becomes aware of the occurrence of such discharge. In addition to the oral or electronic notification, the Permittee shall submit a report to the Director or Designee, as provided in Provision I.C.2.c. or I.C.2.e., no later than five days after becoming aware of the occurrence of such discharge or occurrence.

- b. If, for any reason, the Permittee's discharge does not comply with any limitation of this permit, then the Permittee shall submit a written report to the Director or Designee, as provided in Provision I.C.2.c below. This report must be submitted with the next Discharge Monitoring Report required to be submitted by Provision I.C.1 of this permit after becoming aware of the occurrence of such noncompliance.
- c. Except for notifications and reports of notifiable SSOs which shall be submitted in accordance with the applicable Provisions of this permit, the Permittee shall submit the reports required under Provisions I.C.2.a. and b. to the Director or Designee on ADEM Form 421, available on the Department's website (<http://www.adem.state.al.us/DeptForms/Form421.pdf>). The completed Form must document the following information:
 - (1) A description of the discharge and cause of noncompliance;
 - (2) The period of noncompliance, including exact dates, times, and duration of the noncompliance. If the noncompliance is not corrected by the due date of the written report, then the Permittee shall provide an estimated date by which the noncompliance will be corrected; and
 - (3) A description of the steps taken by the Permittee and the steps planned to be taken by the Permittee to reduce or eliminate the noncompliant discharge and to prevent its recurrence.
- d. Immediate notification

The Permittee shall provide notification to the Director, the public, the county health department, and any other affected entity such as public water systems, as soon as possible upon becoming aware of any notifiable sanitary sewer overflow. Notification to the Director shall be completed utilizing the Department's web-based electronic environmental SSO reporting system in accordance with Provision I.C.2.e.

- e. The Department is utilizing an electronic system for notification and submittal of SSO reports. Except as noted below, the Permittee must submit all SSO reports electronically in the Department's electronic system. If requested, waivers from utilization of the electronic system shall be submitted in accordance with ADEM Admin. Code 335-6-1-.04(6). The Department's electronic reporting system shall be utilized unless a written waiver has been granted. A waiver is not effective until receipt of written approval from the Department. Utilization of verbal notifications and hard copy SSO report submittals is allowed only if approved in writing by the Department. The Permittee shall include in the SSO reports the information requested by ADEM Form 415. In addition, the Permittee shall include the latitude and longitude of the SSO in the report except when the SSO is a result of an extreme weather event (e.g., hurricane). To participate in the electronic system for SSO reports, an account may be created at <https://aepacs.adem.alabama.gov/nviro/ncore/external/home>. If the electronic system is down (i.e., electronic submittal of SSO data cannot be completed due to technical problems originating with the Department's system), the Permittee is not relieved of its obligation to notify the Department or submit SSO reports to the Department by the required submittal date, and the Permittee shall submit the data in an alternate manner and format acceptable to the Department. Preapproved alternate acceptable methods include verbal reports, reports submitted via the SSO hotline, or reports submitted via fax, e-mail, mail, or hand-delivery such that they are

received by the required reporting date. Within five calendar days of the electronic system resuming operation, the Permittee shall enter the data into the electronic system, unless an alternate timeframe is approved by the Department. For any alternate notification, records of the date, time, notification method, and person submitting the notification should be maintained by the Permittee. If a Permittee is allowed to submit SSO reports via an alternate method, the SSO report must be in a format approved by the Department and must be legible.

D. OTHER REPORTING AND NOTIFICATION REQUIREMENTS

1. Anticipated Noncompliance

The permittee shall give the Director written advance notice of any planned changes or other circumstances regarding a facility which may result in noncompliance with permit requirements.

2. Termination of Discharge

The permittee shall notify the Director, in writing, when all discharges from any point source(s) identified in Provision I. A. of this permit have permanently ceased. This notification shall serve as sufficient cause for instituting procedures for modification or termination of the permit.

3. Updating Information

- a. The permittee shall inform the Director of any change in the permittee's mailing address or telephone number or in the permittee's designation of a facility contact or office having the authority and responsibility to prevent and abate violations of the AWPCA, the Department's Rules and the terms and conditions of this permit, in writing, no later than ten (10) days after such change. Upon request of the Director or his designee, the permittee shall furnish the Director with an update of any information provided in the permit application.
- b. If the permittee becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application or in any report to the Director, it shall promptly submit such facts or information with a written explanation for the mistake and/or omission.

4. Duty to Provide Information

The permittee shall furnish to the Director, within a reasonable time, any information which the Director or his designee may request to determine whether cause exists for modifying, revoking and re-issuing, suspending, or terminating this permit, in whole or in part, or to determine compliance with this permit.

E. SCHEDULE OF COMPLIANCE

1. Compliance with discharge limits

The permittee shall achieve compliance with the discharge limitations specified in Provision I. A. in accordance with the following schedule:

COMPLIANCE SHALL BE ATTAINED ON THE EFFECTIVE DATE OF THIS PERMIT

2. Schedule

No later than 14 calendar days following a date identified in the above schedule of compliance, the permittee shall submit either a report of progress or, in the case of specific actions being required by identified dates, a written notice of compliance or noncompliance. In the latter case, the notice shall include the cause of noncompliance, any remedial actions taken, and the probability of meeting the next scheduled requirement.

PART II: OTHER REQUIREMENTS, RESPONSIBILITIES, AND DUTIES

A. OPERATIONAL AND MANAGEMENT REQUIREMENTS

1. Facilities Operation and Maintenance

The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the permittee to achieve compliance with the conditions of the permit. Proper operation and maintenance includes effective performance, adequate funding, adequate operator staffing and training, and adequate laboratory and process controls, including appropriate quality assurance procedures. This provision requires the operation of backup or auxiliary facilities only when necessary to achieve compliance with the conditions of the permit.

2. Best Management Practices

- a. Dilution water shall not be added to achieve compliance with discharge limitations except when the Director or his designee has granted prior written authorization for dilution to meet water quality requirements.
- b. The permittee shall prepare, implement, and maintain a Spill Prevention, Control and Countermeasures (SPCC) Plan in accordance with 40 C.F.R. Section 112 if required thereby.
- c. The permittee shall prepare, submit for approval and implement a Best Management Practices (BMP) Plan for containment of any or all process liquids or solids, in a manner such that these materials do not present a significant potential for discharge, if so required by the Director or his designee. When submitted and approved, the BMP Plan shall become a part of this permit and all requirements of the BMP Plan shall become requirements of this permit.

3. Certified Operator

The permittee shall not operate any wastewater treatment plant unless the competency of the operator to operate such plant has been duly certified by the Director pursuant to AWPCA, and meets the requirements specified in ADEM Administrative Code, Rule 335-10-1.

B. OTHER RESPONSIBILITIES

1. Duty to Mitigate Adverse Impacts

The permittee shall promptly take all reasonable steps to mitigate and minimize or prevent any adverse impact on human health or the environment resulting from noncompliance with any discharge limitation specified in Provision I. A. of this permit, including such accelerated or additional monitoring of the discharge and/or the receiving waterbody as necessary to determine the nature and impact of the noncomplying discharge.

2. Right of Entry and Inspection

- a. The permittee shall allow the Director, or an authorized representative, upon the presentation of proper credentials and other documents as may be required by law to:
 - (1) Enter upon the permittee's premises where a regulated facility or activity or point source is located or conducted, or where records must be kept under the conditions of the permit;
 - (2) Have access to and copy, at reasonable times, any records that must be kept under the conditions of the permits;
 - (3) Inspect any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under the permit; and
 - (4) Sample or monitor, for the purposes of assuring permit compliance or as otherwise authorized by the AWPCA, any substances or parameters at any location.

C. BYPASS AND UPSET

1. Bypass

- a. Any bypass is prohibited except as provided in b. and c. below:
- b. A bypass is not prohibited if:
 - (1) It does not cause any discharge limitation specified in Provision I. A. of this permit to be exceeded;

- (2) It enters the same receiving stream as the permitted outfall; and
- (3) It is necessary for essential maintenance of a treatment or control facility or system to assure efficient operation of such facility or system.
- c. A bypass is not prohibited and need not meet the discharge limitations specified in Provision I. A. of this permit if:
 - (1) It is unavoidable to prevent loss of life, personal injury, or severe property damage;
 - (2) There are no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime (this condition is not satisfied if adequate back-up equipment should have been installed in the exercise of reasonable engineering judgment to prevent a bypass which occurred during normal periods of equipment downtime or preventive maintenance); and
 - (3) The permittee submits a written request for authorization to bypass to the Director at least ten (10) days prior to the anticipated bypass (if possible), the permittee is granted such authorization, and the permittee complies with any conditions imposed by the Director to minimize any adverse impact on human health or the environment resulting from the bypass.
- d. The permittee has the burden of establishing that each of the conditions of Provision II. C. 1. b. or c. have been met to qualify for an exception to the general prohibition against bypassing contained in a. and an exemption, where applicable, from the discharge limitations specified in Provision I. A. of this permit.

2. Upset

- a. A discharge which results from an upset need not meet the discharge limitations specified in Provision I. A. of this permit if:
 - (1) No later than 24-hours after becoming aware of the occurrence of the upset, the Permittee orally reports the occurrence and circumstances of the upset to the Director or his designee; and
 - (2) No later than five (5) days after becoming aware of the occurrence of the upset, the Permittee furnishes the Director with evidence, including properly signed, contemporaneous operating logs, or other relevant evidence, demonstrating that:
 - (i) An upset occurred;
 - (ii) The Permittee can identify the specific cause(s) of the upset;
 - (iii) The Permittee's facility was being properly operated at the time of the upset; and
 - (iv) The Permittee promptly took all reasonable steps to minimize any adverse impact on human health or the environment resulting from the upset.
- b. The permittee has the burden of establishing that each of the conditions of Provision II. C. 2. a. of this permit have been met to qualify for an exemption from the discharge limitations specified in Provision I. A. of this permit.

D. DUTY TO COMPLY WITH PERMIT, RULES, AND STATUTES

1. Duty to Comply

- a. The permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the AWPCA and the FWPCA and is grounds for enforcement action, permit termination, revocation and reissuance, suspension, modification, or denial of a permit renewal application.
- b. The necessity to halt or reduce production or other activities in order to maintain compliance with the conditions of the permit shall not be a defense for a permittee in an enforcement action.
- c. The discharge of a pollutant from a source not specifically identified in the permit application for this permit and not specifically included in the description of an outfall in this permit is not authorized and shall constitute noncompliance with this permit.
- d. The permittee shall take all reasonable steps, including cessation of production or other activities, to minimize or prevent any violation of this permit or to minimize or prevent any adverse impact of any permit violation.

- e. Nothing in this permit shall be construed to preclude or negate the Permittee's responsibility to apply for, obtain, or comply with other Federal, State, or Local Government permits, certifications, or licenses or to preclude from obtaining other federal, state, or local approvals, including those applicable to other ADEM programs and regulations.

2. Removed Substances

Solids, sludges, filter backwash, or any other pollutant or other waste removed in the course of treatment or control of wastewaters shall be disposed of in a manner that complies with all applicable Department Rules.

3. Loss or Failure of Treatment Facilities

Upon the loss or failure of any treatment facilities, including but not limited to the loss or failure of the primary source of power of the treatment facility, the permittee shall, where necessary to maintain compliance with the discharge limitations specified in Provision I. A. of this permit, or any other terms or conditions of this permit, cease, reduce, or otherwise control production and/or all discharges until treatment is restored. If control of discharge during loss or failure of the primary source of power is to be accomplished by means of alternate power sources, standby generators, or retention of inadequately treated effluent, the permittee must furnish to the Director within six months a certification that such control mechanisms have been installed.

4. Compliance with Statutes and Rules

- a. This permit has been issued under ADEM Administrative Code, Chapter 335-6-6. All provisions of this chapter, that are applicable to this permit, are hereby made a part of this permit. A copy of this chapter may be obtained for a small charge from the Office of General Counsel, Alabama Department of Environmental Management, 1400 Coliseum Boulevard Montgomery, Alabama 36110-2059.
- b. This permit does not authorize the noncompliance with or violation of any Laws of the State of Alabama or the United States of America or any regulations or rules implementing such laws. FWPCA, 33 U.S.C. Section 1319, and Code of Alabama 1975, Section 22-22-14.

E. PERMIT TRANSFER, MODIFICATION, SUSPENSION, REVOCATION, AND REISSUANCE

1. Duty to Reapply or Notify of Intent to Cease Discharge

- a. If the permittee intends to continue to discharge beyond the expiration date of this permit, the permittee shall file a complete permit application for reissuance of this permit at least 180 days prior to its expiration. If the permittee does not intend to continue discharge beyond the expiration of this permit, the permittee shall submit written notification of this intent which shall be signed by an individual meeting the signatory requirements for a permit application as set forth in ADEM Administrative Code Rule 335-6-6-.09.
- b. Failure of the permittee to apply for reissuance at least 180 days prior to permit expiration will void the automatic continuation of the expiring permit provided by ADEM Administrative Code Rule 335-6-6-.06 and should the permit not be reissued for any reason any discharge after expiration of this permit will be an unpermitted discharge.

2. Change in Discharge

Prior to any facility expansion, process modification or any significant change in the method of operation of the permittee's treatment works, the permittee shall provide the Director with information concerning the planned expansion, modification or change. The permittee shall apply for a permit modification at least 180 days prior to any facility expansion, process modification, significant change in the method of operation of the permittee's treatment works, or other actions that could result in the discharge of additional pollutants or increase the quantity of a discharged pollutant or could result in an additional discharge point. This condition applies to pollutants that are or that are not subject to discharge limitations in this permit. No new or increased discharge may begin until the Director has authorized it by issuance of a permit modification or a reissued permit.

3. Transfer of Permit

This permit may not be transferred or the name of the permittee changed without notice to the Director and subsequent modification or revocation and reissuance of the permit to identify the new permittee and to incorporate any other changes as may be required under the FWPCA or AWPCA. In the case of a change in name, ownership or control of the permittee's premises only, a request for permit modification in a format acceptable to the Director is required at least 30 days prior to the change. In the case of a change in name, ownership, or control of the permittee's premises accompanied by a change or proposed change in effluent characteristics, a complete permit application is required to

be submitted to the Director at least 180 days prior to the change. Whenever the Director is notified of a change in name, ownership, or control, he may decide not to modify the existing permit and require the submission of a new permit application.

4. **Permit Modification and Revocation**

- a. This permit may be modified or revoked and reissued, in whole or in part, during its term for cause, including but not limited to, the following:
 - (1) If cause for termination under Provision II. E. 5. of this permit exists, the Director may choose to revoke and reissue this permit instead of terminating the permit;
 - (2) If a request to transfer this permit has been received, the Director may decide to revoke and reissue or to modify the permit; or
 - (3) If modification or revocation and reissuance is requested by the permittee and cause exists, the Director may grant the request.
- b. This permit may be modified during its term for cause, including but not limited to, the following:
 - (1) If cause for termination under Provision II. E. 5. of this permit exists, the Director may choose to modify this permit instead of terminating this permit;
 - (2) There are material and substantial alterations or additions to the facility or activity generating wastewater which occurred after permit issuance which justify the application of permit conditions that are different or absent in the existing permit;
 - (3) The Director has received new information that was not available at the time of permit issuance and that would have justified the application of different permit conditions at the time of issuance;
 - (4) A new or revised requirement(s) of any applicable standard or limitation is promulgated under Sections 301(b)(2)(C), (D), (E), and (F), and 307(a)(2) of the FWPCA;
 - (5) Errors in calculation of discharge limitations or typographical or clerical errors were made;
 - (6) To the extent allowed by ADEM Administrative Code, Rule 335-6-6-.17, when the standards or regulations on which the permit was based have been changed by promulgation of amended standards or regulations or by judicial decision after the permit was issued;
 - (7) To the extent allowed by ADEM Administrative Code, Rule 335-6-6-.17, permits may be modified to change compliance schedules;
 - (8) To agree with a granted variance under 301(c), 301(g), 301(h), 301(k), or 316(a) of the FWPCA or for fundamentally different factors;
 - (9) To incorporate an applicable 307(a) FWPCA toxic effluent standard or prohibition;
 - (10) When required by the reopener conditions in this permit;
 - (11) When required under 40 CFR 403.8(e) (compliance schedule for development of pretreatment program);
 - (12) Upon failure of the state to notify, as required by Section 402(b)(3) of the FWPCA, another state whose waters may be affected by a discharge permitted by this permit;
 - (13) When required to correct technical mistakes, such as errors in calculation, or mistaken interpretations of law made in determining permit conditions; or
 - (14) When requested by the permittee and the Director determines that the modification has cause and will not result in a violation of federal or state law, regulations or rules; or

5. **Termination**

This permit may be terminated during its term for cause, including but not limited to, the following:

- a. Violation of any term or condition of this permit;
- b. The permittee's misrepresentation or failure to disclose fully all relevant facts in the permit application or during the permit issuance process or the permittee's misrepresentation of any relevant facts at any time;
- c. Materially false or inaccurate statements or information in the permit application or the permit;

- d. A change in any condition that requires either a temporary or permanent reduction or elimination of the permitted discharge;
- e. The permittee's discharge threatens human life or welfare or the maintenance of water quality standards;
- f. Permanent closure of the facility generating the wastewater permitted to be discharged by this permit or permanent cessation of wastewater discharge;
- g. New or revised requirements of any applicable standard or limitation that is promulgated under Sections 301(b)(2)(C), (D), (E), and (F), and 307(a)(2) of the FWPCA that the Director determines cannot be complied with by the permittee.
- h. Any other cause allowed by the ADEM Administrative Code, Chapter 335-6-6.

6. Suspension

This permit may be suspended during its term for noncompliance until the permittee has taken action(s) necessary to achieve compliance.

7. Stay

The filing of a request by the permittee for modification, suspension, or revocation of this permit, in whole or in part, does not stay any permit term or condition.

F. COMPLIANCE WITH TOXIC POLLUTANT STANDARD OR PROHIBITION

If any applicable effluent standard or prohibition (including any schedule of compliance specified in such effluent standard or prohibition) is established under Section 307(a) of the FWPCA, 33 U.S.C. Section 1317(a), for a toxic pollutant discharged by the permittee and such standard or prohibition is more stringent than any discharge limitation on the pollutant specified in Provision I. A. of this permit, or controls a pollutant not limited in Provision I. A. of this permit, this permit shall be modified to conform to the toxic pollutant effluent standard or prohibition and the permittee shall be notified of such modification. If this permit has not been modified to conform to the toxic pollutant effluent standard or prohibition before the effective date of such standard or prohibition, the permittee shall attain compliance with the requirements of the standard or prohibition within the time period required by the standard or prohibition and shall continue to comply with the standard or prohibition until this permit is modified or reissued.

G. NOTICE TO DIRECTOR OF INDUSTRIAL USERS

- 1. The permittee shall not allow the introduction of wastewater, other than domestic wastewater, from a new indirect discharger prior to approval and permitting, if applicable, of the discharge by the Department.
- 2. The permittee shall not allow an existing indirect discharger to increase the quantity or change the character of its wastewater, other than domestic wastewater, prior to approval and permitting, if applicable, of the increased discharge by the Department.
- 3. The permittee shall report to the Department any adverse impact caused or believed to be caused by an indirect discharger on the treatment process, quality of discharged water or quality of sludge. Such report shall be submitted within seven days of the permittee becoming aware of the adverse impacts.

H. PROHIBITIONS

The permittee shall not allow, and shall take effective enforcement action to prevent and terminate, the introduction of any of the following into its treatment works by industrial users:

- 1. Pollutants which may create a fire or explosive hazard, including, but not limited to, waste streams with a closed cup flashpoint of less than 140 degrees Fahrenheit or 60 degrees Centigrade using the test methods specified in 40 CFR 261.21;
- 2. Pollutants which may cause corrosive structural damage to the treatment works, but in no case discharges with a pH lower than 5.0;
- 3. Solid or viscous pollutants in amounts which may cause obstruction to the flow in sewers, or other interference in the treatment works;
- 4. Any pollutant, including oxygen demanding pollutants (BOD, etc.) of such volume or strength as to cause interference in the treatment works;

5. Heat in amounts which may inhibit biological activity in the treatment plant resulting in interference but in no case in such quantities that the temperature of the influent, at the treatment plant, exceeds 40 degrees centigrade or 104 degrees Fahrenheit;
6. Pollutants which may result in the presence of toxic gases, vapors, or fumes within the treatment works in a quantity that may cause acute worker health and safety problems;
7. Unless specifically authorized by this permit, any pollutants not generated at the facility for which this permit was issued; or
8. Petroleum oil, biodegradable cutting oil, or products of mineral oil origin in amounts that will cause pass through or interference.

PART III: ADDITIONAL REQUIREMENTS, CONDITIONS, AND LIMITATIONS

A. CIVIL AND CRIMINAL LIABILITY

1. Tampering

Any person who falsifies, tampers with, or knowingly renders inaccurate any monitoring device or method required to be maintained or performed under the permit shall, upon conviction, be subject to penalties as provided by the AWPCA.

2. False Statements

Any person who knowingly makes any false statement, representation, or certification in any record or other document submitted or required to be maintained under this permit, including monitoring reports or reports of compliance or noncompliance shall, upon conviction, be subject to penalties as provided by the AWPCA.

3. Permit Enforcement

- a. Any NPDES permit issued or reissued by the Department is a permit for the purpose of the AWPCA and the FWPCA and as such any terms, conditions, or limitations of the permit are enforceable under state and federal law.
- b. Any person required to have a NPDES permit pursuant to ADEM Administrative Code Chapter 335-6-6 and who discharges pollutants without said permit, who violates the conditions of said permit, who discharges pollutants in a manner not authorized by the permit, or who violates applicable orders of the Department or any applicable rule or standard of the Department, is subject to any one or combination of the following enforcement actions under applicable state statutes:
 - (1) An administrative order requiring abatement, compliance, mitigation, cessation, clean-up, and/or penalties;
 - (2) An action for damages;
 - (3) An action for injunctive relief; or
 - (4) An action for penalties.
- c. If the permittee is not in compliance with the conditions of an expiring or expired permit the Director may choose to do any or all of the following provided the permittee has made a timely and complete application for reissuance of the permit:
 - (1) Initiate enforcement action based upon the permit which has been continued;
 - (2) Issue a notice of intent to deny the permit reissuance. If the permit is denied, the owner or operator would then be required to cease the activities authorized by the continued permit or be subject to enforcement action for operating without a permit;
 - (3) Reissue the new permit with appropriate conditions; or
 - (4) Take other actions authorized by these rules and AWPCA.

4. Relief from Liability

Except as provided in Provision II. C. 1. (Bypass) and Provision II. C. 2. (Upset), nothing in this permit shall be construed to relieve the permittee of civil or criminal liability under the AWPCA or FWPCA for noncompliance with any term or condition of this permit.

B. OIL AND HAZARDOUS SUBSTANCE LIABILITY

Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the permittee from any responsibilities, liabilities or penalties to which the permittee is or may be subject under Section 311 of the FWPCA, 33 U.S.C. Section 1321.

C. PROPERTY AND OTHER RIGHTS

This permit does not convey any property rights in either real or personal property, or any exclusive privileges, nor does it authorize any injury to persons or property or invasion of other private rights, or any infringement of federal, state, or local laws or regulations, nor does it authorize or approve the construction of any physical structures or facilities or the undertaking of any work in any waters of the state or of the United States.

D. AVAILABILITY OF REPORTS

Except for data determined to be confidential under Code of Alabama 1975, Section 22-22-9(c), all reports prepared in accordance with the terms of this permit shall be available for public inspection at the offices of the Department. Effluent data shall not be considered confidential.

E. EXPIRATION OF PERMITS FOR NEW OR INCREASED DISCHARGES

1. If this permit was issued for a new discharger or new source, this permit shall expire eighteen months after the issuance date if construction of the facility has not begun during the eighteen-month period.
2. If this permit was issued or modified to allow the discharge of increased quantities of pollutants to accommodate the modification of an existing facility, and if construction of this modification has not begun during the eighteen month period after issuance of this permit or permit modification, this permit shall be modified to reduce the quantities of pollutants allowed to be discharged to those levels that would have been allowed if the modification of the facility had not been planned.
3. Construction has begun when the owner or operator has:
 - a. Begun, or caused to begin as part of a continuous on-site construction program:
 - (1) Any placement, assembly, or installation of facilities or equipment; or
 - (2) Significant site preparation work including clearing, excavation, or removal of existing buildings, structures, or facilities which are necessary for the placement, assembly, or installation of new source facilities or equipment; or
 - b. Entered into a binding contractual obligation for the purpose of placement, assembly, or installation of facilities or equipment which are intended to be used in its operation within a reasonable time. Options to purchase or contracts which can be terminated or modified without substantial loss, and contracts for feasibility, engineering, and design studies do not constitute a contractual obligation under this paragraph.
4. Final plans and specifications for a waste treatment facility at a new source or new discharger, or a modification to an existing waste treatment facility must be submitted to and examined by the Department prior to initiating construction of such treatment facility by the permittee.
5. Upon completion of construction of waste treatment facilities and prior to operation of such facilities, the permittee shall submit to the Department a certification from a registered professional engineer, licensed to practice in the State of Alabama, that the treatment facilities have been built according to plans and specifications submitted to and examined by the Department.

F. COMPLIANCE WITH WATER QUALITY STANDARDS

1. On the basis of the permittee's application, plans, or other available information, the Department has determined that compliance with the terms and conditions of this permit should assure compliance with the applicable water quality standards.
2. Compliance with permit terms and conditions notwithstanding, if the permittee's discharge(s) from point sources identified in Provision I. A. of this permit cause or contribute to a condition in contravention of state water quality standards, the Department may require abatement action to be taken by the permittee in emergency situations or modify the permit pursuant to the Department's Rules, or both.
3. If the Department determines, on the basis of a notice provided pursuant to this permit or any investigation, inspection or sampling, that a modification of this permit is necessary to assure maintenance of water quality standards or compliance with other provisions of the AWPCA or FWPCA, the Department may require such modification and, in cases of emergency, the Director may prohibit the discharge until the permit has been modified.

G. GROUNDWATER

Unless specifically authorized under this permit, this permit does not authorize the discharge of pollutants to groundwater. Should a threat of groundwater contamination occur, the Director may require groundwater monitoring to properly assess the degree of the problem, and the Director may require that the permittee undertake measures to abate any such discharge and/or contamination.

H. DEFINITIONS

1. **Average monthly discharge limitation** - means the highest allowable average of "daily discharges" over a calendar month, calculated as the sum of all "daily discharges" measured during a calendar month divided by the number of "daily discharges" measured during that month (zero discharge days shall not be included in the number of "daily discharges" measured and a less than detectable test result shall be treated as a concentration of zero if the most sensitive EPA approved method was used).
2. **Average weekly discharge limitation** - means the highest allowable average of "daily discharges" over a calendar week, calculated as the sum of all "daily discharges" measured during a calendar week divided by the number of "daily discharges" measured during that week (zero discharge days shall not be included in the number of "daily discharges" measured and a less than detectable test result shall be treated as a concentration of zero if the most sensitive EPA approved method was used).
3. **Arithmetic Mean** – means the summation of the individual values of any set of values divided by the number of individual values.
4. **AWPCA** - means the Alabama Water Pollution Control Act.
5. **BOD** – means the five-day measure of the pollutant parameter biochemical oxygen demand.
6. **Bypass** - means the intentional diversion of waste streams from any portion of a treatment facility.
7. **CBOD** – means the five-day measure of the pollutant parameter carbonaceous biochemical oxygen demand.
8. **Daily discharge** - means the discharge of a pollutant measured during any consecutive 24-hour period in accordance with the sample type and analytical methodology specified by the discharge permit.
9. **Daily maximum** - means the highest value of any individual sample result obtained during a day.
10. **Daily minimum** - means the lowest value of any individual sample result obtained during a day.
11. **Day** - means any consecutive 24-hour period.
12. **Department** - means the Alabama Department of Environmental Management.
13. **Director** - means the Director of the Department.
14. **Discharge** - means "[t]he addition, introduction, leaking, spilling or emitting of any sewage, industrial waste, pollutant or other waste into waters of the state". Code of Alabama 1975, Section 22-22-1(b)(9).
15. **Discharge Monitoring Report (DMR)** - means the form approved by the Director to accomplish reporting requirements of an NPDES permit.
16. **DO** – means dissolved oxygen.
17. **8HC** – means 8-hour composite sample, including any of the following:
 - a. The mixing of at least 8 equal volume samples collected at constant time intervals of not more than 1 hour over a period of not less than 8 hours between the hours of 6:00 a.m. and 6:00 p.m. If the sampling period exceeds 8 hours, sampling may be conducted beyond the 6:00 a.m. to 6:00 p.m. period.
 - b. A sample continuously collected at a constant rate over period of not less than 8 hours between the hours of 6:00 a.m. and 6:00 p.m. If the sampling period exceeds 8 hours, sampling may be conducted beyond the 6:00 a.m. to 6:00 p.m. period.
18. **EPA** - means the United States Environmental Protection Agency.
19. **FC** – means the pollutant parameter fecal coliform.
20. **Flow** – means the total volume of discharge in a 24-hour period.
21. **FWPCA** - means the Federal Water Pollution Control Act.
22. **Geometric Mean** – means the Nth root of the product of the individual values of any set of values where N is equal to the number of individual values. The geometric mean is equivalent to the antilog of the arithmetic mean of the logarithms of the individual values. For purposes of calculating the geometric mean, values of zero (0) shall be considered one (1).

23. **Grab Sample** – means a single influent or effluent portion which is not a composite sample. The sample(s) shall be collected at the period(s) most representative of the discharge.
24. **Indirect Discharger** – means a nondomestic discharger who discharges pollutants to a publicly owned treatment works or a privately owned treatment facility operated by another person.
25. **Industrial User** – means those industries identified in the Standard Industrial Classification manual, Bureau of the Budget 1967, as amended and supplemented, under the category “Division D – Manufacturing” and such other classes of significant waste producers as, by regulation, the Director deems appropriate.
26. **MGD** – means million gallons per day.
27. **Monthly Average** – means the arithmetic mean of all the composite or grab samples taken for the daily discharges collected in one month period. The monthly average for flow is the arithmetic mean of all flow measurements taken in a one month period.
28. **New Discharger** – means a person, owning or operating any building, structure, facility, or installation:
 - a) From which there is or may be a discharge of pollutants;
 - b) That did not commence the discharge of pollutants prior to August 13, 1979, and which is not a new source; and
 - c) Which has never received a final effective NPDES permit for dischargers at that site.
29. **NH3-N** – means the pollutant parameter ammonia, measured as nitrogen.
30. **Notifiable sanitary sewer overflow** - means an overflow, spill, release or diversion of wastewater from a sanitary sewer system that:
 - a) Reaches a surface water of the State; or
 - b) May imminently and substantially endanger human health based on potential for public exposure including but not limited to close proximity to public or private water supply wells or in areas where human contact would be likely to occur.
31. **Permit application** - means forms and additional information that is required by ADEM Administrative Code Rule 335-6-6-.08 and applicable permit fees.
32. **Point source** - means "any discernible, confined and discrete conveyance, including but not limited to any pipe, channel, ditch, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation, or vessel or other floating craft, . . . from which pollutants are or may be discharged." Section 502(14) of the FWPCA, 33 U.S.C. Section 1362(14).
33. **Pollutant** - includes for purposes of this permit, but is not limited to, those pollutants specified in Code of Alabama 1975, Section 22-22-1(b)(3) and those effluent characteristics specified in Provision I. A. of this permit.
34. **Privately Owned Treatment Works** – means any devices or system which is used to treat wastes from any facility whose operator is not the operator of the treatment works, and which is not a “POTW”.
35. **Publicly Owned Treatment Works (POTW)** – means a wastewater collection and treatment facility owned by the State, municipality, regional entity composed of two or more municipalities, or another entity created by the State or local authority for the purpose of collecting and treating municipal wastewater.
36. **Receiving Stream** – means the “waters” receiving a “discharge” from a “point source”.
37. **Severe property damage** - means substantial physical damage to property, damage to the treatment facilities which causes them to become inoperable, or substantial and permanent loss of natural resources which can reasonably be expected to occur in the absence of a bypass. Severe property damage does not mean economic loss caused by delays in production.
38. **Significant Source** – means a source which discharges 0.025 MGD or more to a POTW or greater than five percent of the treatment work’s capacity, or a source which is a primary industry as defined by the U.S. EPA or which discharges a priority or toxic pollutant.
39. **TKN** – means the pollutant parameter Total Kjeldahl Nitrogen.
40. **TON** – means the pollutant parameter Total Organic Nitrogen.
41. **TRC** – means Total Residual Chlorine.

42. **TSS** – means the pollutant parameter Total Suspended Solids.
43. **24HC** – means 24-hour composite sample, including any of the following:
- a) The mixing of at least 8 equal volume samples collected at constant time intervals of not more than 2 hours over a period of 24 hours;
 - b) A sample collected over a consecutive 24-hour period using an automatic sampler composite to one sample. As a minimum, samples shall be collected hourly and each shall be no more than one twenty-fourth (1/24) of the total sample volume collected;
 - c) A sample collected over a consecutive 24-hour period using an automatic composite sampler composited proportional to flow.
44. **Upset** - means an exceptional incident in which there is an unintentional and temporary noncompliance with technology-based permit discharge limitations because of factors beyond the reasonable control of the permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation.
45. **Waters** - means "[a]ll waters of any river, stream, watercourse, pond, lake, coastal, ground or surface water, wholly or partially within the state, natural or artificial. This does not include waters which are entirely confined and retained completely upon the property of a single individual, partnership or corporation unless such waters are used in interstate commerce." Code of Alabama 1975, Section 22-22-1(b)(2). Waters "include all navigable waters" as defined in Section 502(7) of the FWPCA, 22 U.S.C. Section 1362(7), which are within the State of Alabama.
46. **Week** - means the period beginning at twelve midnight Saturday and ending at twelve midnight the following Saturday.
47. **Weekly (7-day and calendar week) Average** – is the arithmetic mean of all samples collected during a consecutive 7-day period or calendar week, whichever is applicable. The calendar week is defined as beginning on Sunday and ending on Saturday. Weekly averages shall be calculated for all calendar weeks with Saturdays in the month. If a calendar week overlaps two months (i.e., the Sunday is in one month and the Saturday in the following month), the weekly average calculated for the calendar week shall be included in the data for the month that contains the Saturday.

I. SEVERABILITY

The provisions of this permit are severable, and if any provision of this permit or the application of any provision of this permit to any circumstance is held invalid, the application of such provision to other circumstances, and the remainder of this permit, shall not be affected thereby.

PART IV: SPECIFIC REQUIREMENTS, CONDITIONS, AND LIMITATIONS

A. SLUDGE MANAGEMENT PRACTICES

1. Applicability

- a. Provisions of Provision IV.A. apply to a sewage sludge generated or treated in treatment works that is applied to agricultural and non-agricultural land, or that is otherwise distributed, marketed, incinerated, or disposed in landfills or surface disposal sites.
- b. Provisions of Provision IV.A. do not apply to:
 - (1) Sewage sludge generated or treated in a privately owned treatment works operated in conjunction with industrial manufacturing and processing facilities and which receive no domestic wastewater.
 - (2) Sewage sludge that is stored in surface impoundments located at the treatment works prior to ultimate disposal.

2. Submitting Information

- a. If applicable, the Permittee must submit annually with its Municipal Water Pollution Prevention (MWPP) report the following:
 - (1) Type of sludge stabilization/digestion method;
 - (2) Daily or annual sludge production (dry weight basis);
 - (3) Ultimate sludge disposal practice(s).
- b. The Permittee shall provide sludge inventory data to the Director as requested. These data may include, but are not limited to, sludge quantity and quality reported in Provision IV.A.2.a as well as other specific analyses required to comply with State and Federal laws regarding solid and hazardous waste disposal.
- c. The Permittee shall give prior notice to the Director of at least 30 days of any change planned in the Permittee's sludge disposal practices.

3. Reopener or Modification

- a. Upon review of information provided by the Permittee as required by Provision IV.A.2. or, based on the results of an on-site inspection, the permit shall be subject to modification to incorporate appropriate requirements.
- b. If an applicable "acceptable management practice" or if a numerical limitation for a pollutant in sewage sludge promulgated under Section 405 of FWPCA is more stringent than the sludge pollutant limit or acceptable management practice in this permit. This permit shall be modified or revoked or reissued to conform to requirements promulgated under Section 405. The Permittee shall comply with the limitations no later than the compliance deadline specified in applicable regulations as required by Section 405 of FWPCA.

B. EFFLUENT TOXICITY TESTING REOPENER

Upon notification under Part II.G. of any newly introduced toxic industrial wastewaters, the Director may reopen the permit to include effluent toxicity limitations and testing requirements.

C. TOTAL RESIDUAL CHLORINE (TRC) REQUIREMENTS

1. If chlorine is not utilized for disinfection purposes, TRC monitoring under Part I of this Permit is not required. If TRC monitoring is not required (conditional monitoring), "*9" should be reported on the DMR forms.
2. Testing for TRC shall be conducted according to either the amperometric titration method or the DPD colorimetric method as specified in Section 408(C) or (E), Standards Methods for the Examination of Water and Wastewater, 18th edition. If the analytical result is less than the detection level or a value otherwise indicated in this permit, the Permittee shall report on the DMR form "*B" or "0". The Permittee shall then be considered to be in compliance with the daily maximum concentration limit for TRC.
3. This permit contains a maximum allowable TRC level in the effluent. The Permittee is responsible for determining the minimum TRC level needed in the chlorine contact chamber to comply with E.coli limits. The effluent shall be dechlorinated if necessary to meet the maximum allowable effluent TRC level.

4. The sample collection point for effluent TRC shall be at a point downstream of the chlorine contact chamber (downstream of dechlorination, if applicable). The exact location is to be approved by the Director.

D. PLANT CLASSIFICATION

The Permittee shall report to the Director within 30 days of the effective date of this permit, the name, address and operator number of the certified wastewater operator in responsible charge of the facility. Unless specified elsewhere in this permit, this facility shall be classified in accordance with ADEM Admin. Code R. 335-10-1-.03.

E. SANITARY SEWER OVERFLOW RESPONSE PLAN

1. SSO Response Plan

Within 120 days of the effective date of this Permit, the Permittee shall develop a Sanitary Sewer Overflow (SSO) Response Plan to establish timely and effective methods for responding to notifiable sanitary sewer overflows. The SSO Response Plan shall address each of the following:

a. General Information

- (1) Approximate population of City/Town, if applicable
- (2) Approximate number of customers served by the Permittee
- (3) Identification of any subbasins designated by the Permittee, if applicable
- (4) Identification of estimated linear feet of sanitary sewers
- (5) Number of Pump/Lift Stations in the collection system

b. Responsibility Information

- (1) The title(s) and contact information of key position(s) who will coordinate the SSO response, including information for a backup coordinator in the event that the primary SSO coordinator is unavailable. The SSO coordinator is the person responsible for assessing the SSO and initiating a series of response actions based on the type, severity, and destination of the SSO, except for routine SSOs for which the coordinator may pre-approve written procedures. Routine SSOs are those for which the corrective action procedures are generally consistent.
- (2) The title(s), and contact information of key position(s) who will respond to SSOs, including information for backup responder(s) in the event the primary responder(s) are unavailable (i.e., position(s) who provide notification to the Department, the public, the county health department, and other affected entities such as public water systems; position(s) responsible for organizing crews for response; position(s) responsible for addressing public inquiries)

c. SSO and Surface Water Assessment

- (1) Identification of locations within the collection system at which an SSO is likely to occur (e.g., based upon historical SSOs, lift stations where electricity may be lost, etc.)
- (2) A map of the general collection system area, including identification of surface waterbodies and the location(s) of public drinking water source(s). Mapping of all collection system piping, pump stations, etc. is not required; however, if this information is already available, it should be included.
- (3) Identification of surface waterbodies within the collection system area which are classified as Swimming according to ADEM Admin. Code chap. 335-6-11. References available to assist in this requirement include the following: <http://adem.alabama.gov/alEnviroRegLaws/files/Division6Vol1.pdf> and <http://adem.alabama.gov/wqmap>.
- (4) Identification of surface waterbodies within the collection system area which are not classified as Swimming as indicated in paragraph c above, but are known locally as areas where swimming occurs or as areas that are heavily recreated

d. Public Reporting of SSOs

- (1) Contact information for the public to report an SSO to the Permittee, during both normal and outside of normal business hours (e.g., telephone number, website, email address, etc.)

- (2) Information requested from the person reporting an SSO to assist the Permittee in identifying the SSO (e.g., date, time, location, contact information)
- (3) Procedures for communication of the SSO report to the appropriate positions for follow-up investigation and response, if necessary
- e. Procedures to immediately notify the Department, the county health department, and other affected entities (such as public water systems) upon becoming aware of notifiable SSOs
- f. Public Notification Methods for SSOs
 - (1) A listing of methods that are feasible, as determined by the Permittee, for public notifications (e.g., flyers distributed to nearby residents; signs posted at the location of the SSO, where the SSO enters a water of the state, and/or at a central public location; signs posted at fishing piers, boat launches, parks, swimming waterbodies, etc.; website and/or social media notifications; local print or radio and broadcast media notifications; "opt in" email, text message, or automated phone message notifications)
 - (i) If signage is a feasible method for public notification, procedures for use and removal of signage (e.g., availability and maintenance of signs, appropriate duration of postings)
 - (2) Minimum information to be included in public notifications (e.g., identification that an SSO has occurred, date, duration if known, estimated volume if known, location of the SSO by street address or other appropriate method, initial destination of the SSO)
 - (3) Procedures developed by the Permittee for determining the appropriate public notification method(s) based upon the potential for public exposure to health risks associated with the SSO
- g. Standard Procedures shall be developed by the Permittee and shall include, at a minimum
 - (1) General SSO Response Procedures (e.g., procedures for dispatching staff to assess/correct an SSO; procedures for routine SSO corrective actions such as those for sewer blockages, overflowing manholes, line breakages, pump station power failure, etc.; procedures for disinfection of affected area, if applicable);
 - (2) Procedures for collection and proper disposal of the SSO, if feasible.
 - (3) General procedures for coordinating instream water quality monitoring, including, but not limited to, procedures for mobilizing staff, collecting samples, and typical test methods should the Department or the Permittee determine monitoring is appropriate following an SSO. Identification of a contractor who will collect and analyze the sample(s) may be listed in lieu of the procedures.
 - (4) References to other documents (such as Standard Operating Procedures for SSO Responses) may be acceptable for this section; however, the referenced document shall be identified and shall be reviewed at a frequency of at least that required by the Administrative Procedures Section.
- h. Date of the SSO Response Plan, dates of all modifications and/or reviews, the title and signature of the reviewer(s) for each date and the signature of the responsible official or the appropriate designee.

2. SSO Response Plan Implementation

Except as otherwise required by this Permit, the Permittee shall fully implement the SSO Response Plan as soon as practicable, but no later than 180 days after the effective date of this Permit.

3. Department Review of the SSO Response Plan

- a. When requested by the Director or his designee, the Permittee shall make the SSO Response Plan available for review by the Department.
- b. Upon review, the Director or his designee may notify the Permittee that the SSO Response Plan is deficient and require modification of the Plan.
- c. Within thirty days of receipt of notification, or an alternate timeframe as approved by the Department, the Permittee shall modify any SSO Response Plan deficiency identified by the Director or his designee and shall certify to the Department that the modification has been made.

4. SSO Response Plan Administrative Procedures

- a. The Permittee shall maintain a copy of the SSO Response Plan at the permitted facility or an alternate location approved by the Department in writing and shall make it available for inspection by the Department.

- b. The Permittee shall make a copy of the SSO Response Plan available to the public upon written request within 30 days of such request. The Permittee may redact information which may present security issues, such as location of public water supplies, identification of specific details of vulnerabilities, employee information, etc.
- c. The Permittee shall provide training for any personnel required to implement the SSO Response Plan and shall retain at the facility documentation of such training. This documentation shall be available for inspection by the Department. Training shall be provided for existing personnel prior to the date by which implementation of the SSO Response Plan is required and for new personnel as soon as possible. Should significant revisions be made to the SSO Response Plan, training regarding the revisions shall be conducted as soon as possible.
- d. The Permittee shall complete a review and evaluation of the SSO Response Plan at least once every three years. Documentation of the SSO Response Plan review and evaluation shall be signed and dated by the responsible official or the appropriate designee as part of the SSO Response Plan.

NPDES PERMIT RATIONALE

NPDES Permit No: **AL0068420** Date: April 9, 2025

Permit Applicant: Knobloch, Inc.
Post Office Box 679
Leeds, AL 35094

Location: **East Tuscaloosa-West Jefferson WWTP**
12874 Woodland Park Circle
McCalla, AL 35111

Draft Permit is: Initial Issuance:
Reissuance due to expiration: X
Modification of existing permit:
Revocation and Reissuance:

Basis for Limitations: Water Quality Model: DO, CBOD₅, NH₃N
Reissuance with no modification: pH, TSS, TP, DO, TSS Percent Removal, CBOD₅ Percent Removal (Outfalls 0011 and 0014).
Instream calculation at 7Q10: ~56% (0011), ~32% (0014), ~39% (0015)
Toxicity based: TRC, NH₃N
Secondary Treatment Levels: TSS, TSS Percent Removal, CBOD₅ Percent Removal
Other (described below): pH, E. Coli, TP

Design Flow (MGD): 0.3 MGD (Outfall 0014), 0.4 MGD (Outfall 0015), 0.8 MGD (Outfall 0011)

Major: No

Description of Discharge:

Feature ID	Description	Receiving Water	Waterbody Use Classification	303(d)	TMDL
001	Treated Domestic Wastewater	Mud Creek	Fish and Wildlife (F&W)	No	Yes

Discussion: This permit is a reissuance due to expiration.

At the request of the Permittee, this permit will be tiered for Design Flows of 0.3 MGD, 0.4 MGD, and 0.8 MGD. The previous outfall 0012 (0.2 MGD) is not included in this reissuance.

This discharge is included as a point source in the Cahaba River Watershed Nutrient TMDL, which was approved by EPA in October 26, 2006. The TMDL states that minor dischargers must attain a growing season (April – October) Total Phosphorus (TP) monthly average limit of 0.3 mg/L. Therefore, Total Phosphorus will be in the permit with a monthly average limit of 0.3 mg/L. TP will be in the permit on a monitor only basis during the winter months (November – March). The monitoring frequencies will be twice per week for Design Flows of 0.3 MGD and 0.4 MGD and three times per week for the Design Flow of 0.8 MGD.

This discharge is included as an indirect point source in the Shades Creek Watershed Fecal Coliform TMDL which was finalized in October 2003. The TMDL indicated that the Department's current regulatory limits for fecal coliform were protective of water quality. However, since the Department has amended the bacterial indicator for non-coastal waters from fecal coliform to E. coli, the E. coli limits as specified below are considered protective.

This discharge is located in the Upper Cahaba River Watershed which has a Siltation and Habitat Alteration TMDL which was finalized in October 27, 2013. The TMDL indicated that the sediment loading from NPDES regulated Municipal point sources are not significant compared to loadings generated during wet weather events. In addition, the discharges are comprised mostly of organic material different in nature than sediment produced from erosional processes. Therefore, this facility was not considered to be significantly impacting the Cahaba River and were not included in the Wasteload Allocation of the TMDL.

East Tuscaloosa-West Jefferson WWTP is included as a point source in the Shades Creek Turbidity, Siltation, and Habitat Alteration TMDL which was finalized in November 1, 2004. The TMDL states that in general, sediment loads from point sources are negligible in relation to the nonpoint sources. In addition, sediment from point sources are generally composed of organic material and would provide less direct impact to biological integrity than would direct soil loss to the streams. Therefore, turbidity limits are not required.

Mud Creek is a Tier I stream and is not on the most recent 303(d) list. The limits imposed in this permit are consistent with the Cahaba River Watershed Nutrient TMDL.

No toxicity testing is required because there are no industrial direct discharges to the plant and because this is a minor facility.

ADEM Administrative Rule 335-6-10-.12 requires applicants to new or expanded discharges to Tier II waters demonstrate that the proposed discharge is necessary for important economic or social development in the area in which the waters are located. The application submitted by the facility is not for a new or expanded discharge, so the applicant is not required to demonstrate that the discharge is necessary for economic and social development.

Outfall 0014 – Design Flow 0.3 MGD

The pH limits for Outfall 0014 were developed to be consistent with the water-use designation of the receiving stream. The daily maximum pH limit is 8.5 s.u. and the daily minimum is 6.0 s.u. The monitoring frequency will be twice per week. Flow will be monitored continuously, on a daily basis.

Total Suspended Solids (TSS) and TSS Percent Removal limits of 30 mg/L and 85%, respectively, are based on 40 CFR part 133.102 regarding Secondary Treatment. A CBOD₅ Percent Removal limit of 85% is based on 40 CFR 133.102. The monitoring for TSS will be twice per week. CBOD₅ and TSS Percent Removals will be calculated once per month.

The limits for Dissolved Oxygen (DO), Five Day Carbonaceous Biochemical Oxygen Demand (CBOD₅), and Total Ammonia as Nitrogen (NH₃N) are based on the Waste Load Allocation (WLA) model prepared by ADEM's Water Quality Branch on April 7, 2025. The monthly average limits for CBOD₅ and NH₃N are 25 mg/L and 6.5 mg/L, respectively. The less stringent limits for CBOD₅ and NH₃N are not considered backsliding because they are consistent with the Department's anti-degradation policy and water quality standards are being attained. The daily minimum DO limit is 6.0 mg/L. The monitoring frequencies will be twice per week.

The imposed E. coli limits were determined based on the water-use classification of the receiving stream. Since Mud Creek is classified as Fish & Wildlife, the limits for May – October are 126 col/100ml (monthly average) and 298 col/100ml (daily maximum), while the limits for November – April are 548 col/100ml (monthly average) and 2507 col/100ml (daily maximum). The monitoring frequency will be twice per week.

The Total Residual Chlorine (TRC) limits are based on calculations to ensure that acute and chronic toxic concentrations of TRC in the receiving stream are not exceeded. The TRC limits are 0.060 mg/L (daily maximum) and 0.034 mg/L (monthly average). The monitoring frequency will be twice per week. The less stringent limits for TRC is not considered backsliding since it is consistent with the Department's anti-degradation policy and water quality standards are being attained. A measurement of TRC below 0.05 mg/L shall be considered in compliance with the permit limitations above and should be reported as NODI=B or *B on the discharge monitoring reports. Monitoring for TRC is only applicable if chlorine is utilized for disinfection purposes.

The Municipal Section, in consultation with the Department's Water Quality Branch, has conducted a narrative nutrient reasonable potential analysis. Based on a review of the facility's current levels of nutrients in the discharge and current assessments of the available information, the Permittee is required to monitor and report effluent test results for Total Kjeldahl Nitrogen (TKN) and Nitrite plus Nitrate (NO₂+NO₃) during the summer season (April – October). Monitoring for these nutrient-related parameters is imposed so that sufficient information will be available regarding the nutrient contribution from this point source, should it be necessary at some later time to impose additional nutrient limits on this discharge.

Outfall 0015 – Design Flow 0.4 MGD

The pH limits for Outfall 0015 were developed to be consistent with the water-use designation of the receiving stream. The daily maximum pH limit is 8.5 s.u. and the daily minimum is 6.0 s.u. The monitoring frequency will be twice per week. Flow will be monitored continuously, on a daily basis.

TSS and TSS Percent Removal limits of 30 mg/L and 85%, respectively, are based on 40 CFR part 133.102 regarding Secondary Treatment. A CBOD₅ Percent Removal limit of 85% is based on 40 CFR 133.102. The monitoring for TSS will be twice per week. CBOD₅ and TSS Percent Removals will be calculated once per month.

The limits for DO, CBOD₅, and NH₃N are based on the Waste Load Allocation model prepared by ADEM's Water Quality Branch on April 7, 2025. The monthly average limits for CBOD₅ and NH₃N are 25 mg/L and 5.4 mg/L, respectively. The daily minimum DO limit is 6.0 mg/L. The monitoring frequencies will be twice per week.

The imposed E. coli limits were determined based on the water-use classification of the receiving stream. Since Mud Creek is classified as Fish & Wildlife, the E. Coli limits for May – October are 126 col/100ml (monthly average) and 298 col/100ml (daily maximum), while the limits for November – April are 548 col/100ml (monthly average) and 2507 col/100ml (daily maximum). The monitoring frequency will be twice per week.

The TRC limits are based on calculations to ensure that acute and chronic toxic concentrations of TRC in the receiving stream are not exceeded. The TRC limits are 0.049 mg/L (daily maximum) and 0.029 mg/L (monthly average). The monitoring frequency will be twice per week. A measurement of TRC below 0.05 mg/L shall be considered in compliance with the permit limitations above and should be reported as NODI=B or *B on the discharge monitoring reports. Monitoring for TRC is only applicable if chlorine is utilized for disinfection purposes.

The Municipal Section, in consultation with the Department's Water Quality Branch, has conducted a narrative nutrient reasonable potential analysis. Based on a review of the facility's current levels of nutrients in the discharge and current assessments of the available information, the Permittee is required to monitor and report effluent test results for TKN and NO₂+NO₃ during the summer season (April – October). Monitoring for these nutrient-related parameters is imposed so that sufficient information will be available regarding the nutrient contribution from this point source, should it be necessary at some later time to impose additional nutrient limits on this discharge.

Outfall 0011 – Design Flow 0.8 MGD

The pH limits for Outfall 0011 were developed consistent with the water-use designation of the receiving stream. The daily maximum pH limit is 8.5 s.u. and the daily minimum is 6.0 s.u. The monitoring frequency will be three times per week. Flow will be monitored continuously, on a daily basis.

The TSS and TSS % removal limits of 30 mg/L and 85%, respectively, are based on 40 CFR part 133.102 regarding Secondary Treatment. A CBOD₅ Percent Removal limit of 85% is based on 40 CFR part 133.102. The monitoring frequency for TSS will be three times per week. The TSS and CBOD₅ Percent Removals will be calculated monthly.

The limits for DO, CBOD₅, and NH₃-N are based on a Waste Load Allocation model prepared by ADEM's Water Quality Branch on April 7, 2025. The monthly average limits for CBOD₅ and NH₃N are 23 mg/l and 3.8 mg/l, respectively. The less stringent limits for CBOD₅ and NH₃N are not considered backsliding because they are consistent with the Department's anti-degradation policy and water quality standards are being attained. The daily minimum DO limit is 6.0 mg/L. The monitoring frequencies will be three times per week.

The imposed E. coli limits were determined based on the water-use classification of the receiving stream. Since Mud Creek is classified as Fish & Wildlife, the E. Coli limits for May – October are 126 col/100ml (monthly average) and 298 col/100ml (daily maximum), while the limits for November – April are 548 col/100ml (monthly average) and 2507 col/100ml (daily maximum). The monitoring frequency will be three times per week.

The TRC limits are based on calculations to ensure that acute and chronic toxic concentrations of TRC in the receiving stream are not exceeded. The TRC limits are 0.034 mg/L (daily maximum) and 0.020 mg/L (monthly average). The monitoring frequency will be three times per week. The less stringent limits for TRC is not considered backsliding because it is consistent with the Department's anti-degradation policy and water quality standards are being attained. A measurement of TRC below 0.05 mg/L shall be considered in compliance with the permit limitations above and should be reported as NODI=B or *B on the discharge monitoring reports. Monitoring for TRC is only applicable if chlorine is utilized for disinfection purposes.

The Municipal Section, in consultation with the Department's Water Quality Branch, has conducted a narrative nutrient reasonable potential analysis. Based on a review of the facility's current levels of nutrients in the discharge and current assessments of the available information, the Permittee is required to monitor and report effluent test results for TKN and NO₂+NO₃ during the summer season (April – October). Monitoring for these nutrient-related parameters is imposed so that sufficient information will be available regarding the nutrient contribution from this point source, should it be necessary at some later time to impose additional nutrient limits on this discharge.

Prepared by: Sandra Lee

TOXICITY AND DISINFECTION RATIONALE

Facility Name:	East Tuscaloosa - West Jefferson WWTP	
NPDES Permit Number:	AL0068420	
Receiving Stream:	Mud Creek	
Facility Design Flow (Q _w):	0.300 MGD	
Receiving Stream 7Q ₁₀ :	0.990 cfs	
Receiving Stream 1Q ₁₀ :	0.740 cfs	
Winter Headwater Flow (WHF):	3.39 cfs	
Summer Temperature for CCC:	30 deg. Celsius	
Winter Temperature for CCC:	30 deg. Celsius	
Headwater Background NH ₃ -N Level:	0.09 mg/l	
Receiving Stream pH:	7.0 s.u.	
Headwater Background FC Level (summer):	N/A.	(Only applicable for facilities with diffusers.)
(winter):	N/A.	

The Stream Dilution Ratio (SDR) is calculated using the 7Q₁₀ for all stream classifications.

$$\text{Stream Dilution Ratio (SDR)} = \frac{Q_w}{7Q_{10} + Q_w} = 31.92\%$$

AMMONIA TOXICITY LIMITATIONS

Toxicity-based ammonia limits are calculated in accordance with the *Ammonia Toxicity Protocol* and the *General Guidance for Writing Water Quality Based Toxicity Permits*.

If the Limiting Dilution is less than 1%, the waterbody is considered stream-dominated and the CMC applies.

If the Limiting Dilution is greater than 1%, the waterbody is considered effluent-dominated and the CCC applies.

$$\begin{aligned} \text{Limiting Dilution} &= \frac{Q_w}{7Q_{10} + Q_w} \\ &= 31.92\% \quad \text{Effluent-Dominated, CCC Applies} \end{aligned}$$

$$\begin{aligned} \text{Criterion Maximum Concentration (CMC):} & \quad \text{CMC} = 0.411 / (1 + 10^{(7.204 - \text{pH})}) + 58.4 / (1 + 10^{(\text{pH} - 7.204)}) \\ \text{Criterion Continuous Concentration (CCC):} & \quad \text{CCC} = [0.0577 / (1 + 10^{(7.688 - \text{pH})}) + 2.487 / (1 + 10^{(\text{pH} - 7.688)})] * \text{Min}[2.85, 1.45 * 10^{(0.028 * (25 - T))}] \end{aligned}$$

	<u>CMC</u>	<u>CCC</u>
Allowable Summer Instream NH ₃ -N:	36.09 mg/l	2.18 mg/l
Allowable Winter Instream NH ₃ -N:	36.09 mg/l	2.18 mg/l

$$\begin{aligned} \text{Summer NH}_3\text{-N Toxicity Limit} &= \frac{[(\text{Allowable Instream NH}_3\text{-N}) * (7Q_{10} + Q_w)] - [(\text{Headwater NH}_3\text{-N}) * (7Q_{10})]}{Q_w} \\ &= 6.7 \text{ mg/l NH}_3\text{-N at 7Q}_{10} \end{aligned}$$

$$\begin{aligned} \text{Winter NH}_3\text{-N Toxicity Limit} &= \frac{[(\text{Allowable Instream NH}_3\text{-N}) * (\text{WHF} + Q_w)] - [(\text{Headwater NH}_3\text{-N}) * (\text{WHF})]}{Q_w} \\ &= \text{N/A.} \end{aligned}$$

The ammonia limits established in the permit will be the lesser of the DO-based ammonia limit (from the wasteload allocation model) or the toxicity limits calculated above.

	<u>DO-based NH₃-N limit</u>	<u>Toxicity-based NH₃-N limit</u>
Summer	6.50 mg/l NH₃-N	6.50 mg/l NH₃-N
Winter	N/A.	N/A.

Summer: The toxicity-based limit of 6.50 mg/l NH₃-N applies.

Winter limits are not applicable.

TOXICITY TESTING REQUIREMENTS (REFERENCE: MUNICIPAL BRANCH TOXICITY PERMITTING STRATEGY)

The following factors trigger toxicity testing requirements:

1. Facility design flow is equal to or greater than 1.0 MGD (major facility).
2. There are significant industrial contributors (SID permits).

Acute toxicity testing is specified for A&I receiving streams, or for stream dilution ratios of 1% or less.
Chronic toxicity testing is specified for all other situations requiring toxicity testing.

This is a minor facility ($Q_w < 1.0$ MGD) with no SID permits. No toxicity testing is required.

$$\text{Instream Waste Concentration (IWC)} = \frac{Q_w}{7Q_{10} + Q_w} = 31.92\%$$

Note: This number will be rounded up for toxicity testing purposes.

DISINFECTION REQUIREMENTS

Bacteria limits are required, and will be the water quality limit for the receiving stream, except where diffusers are used the limit may be adjusted for the dilution provided by the diffuser.

See the attached Disinfection Guidance for applicable stream standards.

(Non-coastal limits apply)

Applicable Stream Classification: **Fish & Wildlife**

Disinfection Type: **Chlorination**

Limit calculation method: **Limits based on meeting stream standards at the point of discharge.**

	Stream Standard (colonies/100ml)	Effluent Limit (colonies/100ml)
<u>E. Coli (applies to Non-coastal and Shellfish Harvesting Coastal)</u>		
Monthly limit as monthly average (November through April):	548	548
Monthly limit as monthly average (May through October):	126	126
Daily Max (November through April):	2507	2507
Daily Max (May through October):	298	298
<u>Enterococci (applies to Coastal)</u>		
Monthly limit as geometric mean (October through May):	Not applicable	Not applicable
Monthly limit as geometric mean (June through September):	Not applicable	Not applicable
Daily Max (October through May):	Not applicable	Not applicable
Daily Max (June through September):	Not applicable	Not applicable

MAXIMUM ALLOWABLE CHLORINATION LIMITS

Toxicity-based chlorine limits are calculated in accordance with the General Guidance for Writing Water Quality Based Toxicity Permits.

Chlorine has been shown to be acutely toxic at 0.019 mg/l and chronically toxic at 0.011 mg/l.

Maximum allowable TRC in effluent:	0.034 mg/l (chronic)	(0.011)/(SDR)
Maximum allowable TRC in effluent:	0.060 mg/l (acute)	(0.019)/(SDR)

NOTE: A maximum chlorine limit will be imposed such that the instream concentration will not exceed acutely toxic concentrations in A & I streams and chronically toxic concentrations in all other streams, but may not exceed 1.0 mg/l.

Prepared By:

Sandra Lee

Date:

4/9/2025

TOXICITY AND DISINFECTION RATIONALE

Facility Name:	East Tuscaloosa - West Jefferson WWTP	
NPDES Permit Number:	AL0068420	
Receiving Stream:	Mud Creek	
Facility Design Flow (Q _w):	0.400 MGD	
Receiving Stream 7Q ₁₀ :	0.990 cfs	
Receiving Stream 1Q ₁₀ :	0.740 cfs	
Winter Headwater Flow (WHF):	3.39 cfs	
Summer Temperature for CCC:	30 deg. Celsius	
Winter Temperature for CCC:	30 deg. Celsius	
Headwater Background NH ₃ -N Level:	0.09 mg/l	
Receiving Stream pH:	7.0 s.u.	
Headwater Background FC Level (summer):	N/A.	(Only applicable for facilities with diffusers.)
(winter):	N/A.	

The Stream Dilution Ration (SDR) is calculated using the 7Q₁₀ for all stream classifications.

$$\text{Stream Dilution Ration (SDR)} = \frac{Q_w}{7Q_{10} + Q_w} = 38.47\%$$

AMMONIA TOXICITY LIMITATIONS

Toxicity-based ammonia limits are calculated in accordance with the *Ammonia Toxicity Protocol* and the *General Guidance for Writing Water Quality Based Toxicity Permits*.

If the Limiting Dilution is less than 1%, the waterbody is considered stream-dominated and the CMC applies.

If the Limiting Dilution is greater than 1%, the waterbody is considered effluent-dominated and the CCC applies.

$$\begin{aligned} \text{Limiting Dilution} &= \frac{Q_w}{7Q_{10} + Q_w} \\ &= 38.47\% \quad \text{Effluent-Dominated, CCC Applies} \end{aligned}$$

Criterion Maximum Concentration (CMC):	CMC = $0.411 / (1 + 10^{(7.204 - \text{pH})}) + 58.4 / (1 + 10^{(\text{pH} - 7.204)})$
Criterion Continuous Concentration (CCC):	CCC = $[0.0577 / (1 + 10^{(7.688 - \text{pH})}) + 2.487 / (1 + 10^{(\text{pH} - 7.688)})] * \text{Min}[2.85, 1.45 * 10^{(0.028 * (25 - T))}]$

	<u>CMC</u>	<u>CCC</u>
Allowable Summer Instream NH ₃ -N:	36.09 mg/l	2.18 mg/l
Allowable Winter Instream NH ₃ -N:	36.09 mg/l	2.18 mg/l

$$\begin{aligned} \text{Summer NH}_3\text{-N Toxicity Limit} &= \frac{[(\text{Allowable Instream NH}_3\text{-N}) * (7Q_{10} + Q_w)] - [(\text{Headwater NH}_3\text{-N}) * (7Q_{10})]}{Q_w} \\ &= 5.6 \text{ mg/l NH}_3\text{-N at } 7Q_{10} \end{aligned}$$

$$\begin{aligned} \text{Winter NH}_3\text{-N Toxicity Limit} &= \frac{[(\text{Allowable Instream NH}_3\text{-N}) * (\text{WHF} + Q_w)] - [(\text{Headwater NH}_3\text{-N}) * (\text{WHF})]}{Q_w} \\ &= \text{N/A.} \end{aligned}$$

The ammonia limits established in the permit will be the lesser of the DO-based ammonia limit (from the wasteload allocation model) or the toxicity limits calculated above.

	<u>DO-based NH₃-N limit</u>	<u>Toxicity-based NH₃-N limit</u>
Summer	5.40 mg/l NH ₃ -N	5.40 mg/l NH ₃ -N
Winter	N/A.	N/A.

Summer: The toxicity-based limit of 5.40 mg/l NH₃-N applies.

Winter limits are not applicable.

TOXICITY TESTING REQUIREMENTS (REFERENCE: MUNICIPAL BRANCH TOXICITY PERMITTING STRATEGY)

The following factors trigger toxicity testing requirements:

1. Facility design flow is equal to or greater than 1.0 MGD (major facility).
2. There are significant industrial contributors (SID permits).

Acute toxicity testing is specified for A&I receiving streams, or for stream dilution ratios of 1% or less.

Chronic toxicity testing is specified for all other situations requiring toxicity testing.

This is a minor facility (Qw < 1.0 MGD) with no SID permits. No toxicity testing is required.

$$\text{Instream Waste Concentration (IWC)} = \frac{Q_w}{7Q_{10} + Q_w} = 38.47\%$$

Note: This number will be rounded up for toxicity testing purposes.

DISINFECTION REQUIREMENTS

Bacteria limits are required, and will be the water quality limit for the receiving stream, except where diffusers are used the limit may be adjusted for the dilution provided by the diffuser.

See the attached Disinfection Guidance for applicable stream standards.

(Non-coastal limits apply)

Applicable Stream Classification: **Fish & Wildlife**

Disinfection Type: **Chlorination**

Limit calculation method: **Limits based on meeting stream standards at the point of discharge.**

	Stream Standard (colonies/100ml)	Effluent Limit (colonies/100ml)
<u>E. Coli (applies to Non-coastal and Shellfish Harvesting Coastal)</u>		
Monthly limit as monthly average (November through April):	548	548
Monthly limit as monthly average (May through October):	126	126
Daily Max (November through April):	2507	2507
Daily Max (May through October):	298	298
<u>Enterococci (applies to Coastal)</u>		
Monthly limit as geometric mean (October through May):	Not applicable	Not applicable
Monthly limit as geometric mean (June through September):	Not applicable	Not applicable
Daily Max (October through May):	Not applicable	Not applicable
Daily Max (June through September):	Not applicable	Not applicable

MAXIMUM ALLOWABLE CHLORINATION LIMITS

Toxicity-based chlorine limits are calculated in accordance with the General Guidance for Writing Water Quality Based Toxicity Permits.

Chlorine has been shown to be acutely toxic at 0.019 mg/l and chronically toxic at 0.011 mg/l.

Maximum allowable TRC in effluent:	0.029 mg/l (chronic)	(0.011)/(SDR)
Maximum allowable TRC in effluent:	0.049 mg/l (acute)	(0.019)/(SDR)

NOTE: A maximum chlorine limit will be imposed such that the instream concentration will not exceed acutely toxic concentrations in A & I streams and chronically toxic concentrations in all other streams, but may not exceed 1.0 mg/l.

Prepared By:

Sandra Lee

Date:

4/9/2025

TOXICITY AND DISINFECTION RATIONALE

Facility Name:	East Tuscaloosa - West Jefferson WWTP	
NPDES Permit Number:	AL0068420	
Receiving Stream:	Mud Creek	
Facility Design Flow (Q _w):	0.800 MGD	
Receiving Stream 7Q ₁₀ :	0.990 cfs	
Receiving Stream 1Q ₁₀ :	0.740 cfs	
Winter Headwater Flow (WHF):	3.39 cfs	
Summer Temperature for CCC:	30 deg. Celsius	
Winter Temperature for CCC:	30 deg. Celsius	
Headwater Background NH ₃ -N Level:	0.09 mg/l	
Receiving Stream pH:	7.0 s.u.	
Headwater Background FC Level (summer):	N/A.	(Only applicable for facilities with diffusers.)
(winter):	N/A.	

The Stream Dilution Ratio (SDR) is calculated using the 7Q₁₀ for all stream classifications.

$$\text{Stream Dilution Ratio (SDR)} = \frac{Q_w}{7Q_{10} + Q_w} = 55.56\%$$

AMMONIA TOXICITY LIMITATIONS

Toxicity-based ammonia limits are calculated in accordance with the *Ammonia Toxicity Protocol* and the *General Guidance for Writing Water Quality Based Toxicity Permits*.

If the Limiting Dilution is less than 1%, the waterbody is considered stream-dominated and the CMC applies.

If the Limiting Dilution is greater than 1%, the waterbody is considered effluent-dominated and the CCC applies.

$$\begin{aligned} \text{Limiting Dilution} &= \frac{Q_w}{7Q_{10} + Q_w} \\ &= 55.56\% \quad \text{Effluent-Dominated, CCC Applies} \end{aligned}$$

Criterion Maximum Concentration (CMC):	CMC = $0.411 / (1 + 10^{(7.204 - \text{pH})}) + 58.4 / (1 + 10^{(\text{pH} - 7.204)})$
Criterion Continuous Concentration (CCC):	CCC = $[0.0577 / (1 + 10^{(7.688 - \text{pH})}) + 2.487 / (1 + 10^{(\text{pH} - 7.688)})] * \text{Min}[2.85, 1.45 * 10^{(0.028 * (25 - T))}]$

	<u>CMC</u>	<u>CCC</u>
Allowable Summer Instream NH ₃ -N:	36.09 mg/l	2.18 mg/l
Allowable Winter Instream NH ₃ -N:	36.09 mg/l	2.18 mg/l

$$\begin{aligned} \text{Summer NH}_3\text{-N Toxicity Limit} &= \frac{[(\text{Allowable Instream NH}_3\text{-N}) * (7Q_{10} + Q_w)] - [(\text{Headwater NH}_3\text{-N}) * (7Q_{10})]}{Q_w} \\ &= 3.9 \text{ mg/l NH}_3\text{-N at 7Q}_{10} \end{aligned}$$

$$\begin{aligned} \text{Winter NH}_3\text{-N Toxicity Limit} &= \frac{[(\text{Allowable Instream NH}_3\text{-N}) * (\text{WHF} + Q_w)] - [(\text{Headwater NH}_3\text{-N}) * (\text{WHF})]}{Q_w} \\ &= \text{N/A.} \end{aligned}$$

The ammonia limits established in the permit will be the lesser of the DO-based ammonia limit (from the wasteload allocation model) or the toxicity limits calculated above.

	<u>DO-based NH₃-N limit</u>	<u>Toxicity-based NH₃-N limit</u>
Summer	3.80 mg/l NH ₃ -N	3.80 mg/l NH ₃ -N
Winter	N/A.	N/A.

Summer: The toxicity-based limit of 3.80 mg/l NH₃-N applies.

Winter limits are not applicable.

TOXICITY TESTING REQUIREMENTS (REFERENCE: MUNICIPAL BRANCH TOXICITY PERMITTING STRATEGY)

The following factors trigger toxicity testing requirements:

1. Facility design flow is equal to or greater than 1.0 MGD (major facility).
2. There are significant industrial contributors (SID permits).

Acute toxicity testing is specified for A&I receiving streams, or for stream dilution ratios of 1% or less.
Chronic toxicity testing is specified for all other situations requiring toxicity testing.

This is a minor facility ($Q_w < 1.0$ MGD) with no SID permits. No toxicity testing is required.

$$\text{Instream Waste Concentration (IWC)} = \frac{Q_w}{7Q_{10} + Q_w} = 55.56\% \quad \text{Note: This number will be rounded up for toxicity testing purposes.}$$

DISINFECTION REQUIREMENTS

Bacteria limits are required, and will be the water quality limit for the receiving stream, except where diffusers are used the limit may be adjusted for the dilution provided by the diffuser.

See the attached Disinfection Guidance for applicable stream standards.

(Non-coastal limits apply)

Applicable Stream Classification: **Fish & Wildlife**

Disinfection Type: **Chlorination**

Limit calculation method: **Limits based on meeting stream standards at the point of discharge.**

	Stream Standard (colonies/100ml)	Effluent Limit (colonies/100ml)
<u>E. Coli (applies to Non-coastal and Shellfish Harvesting Coastal)</u>		
Monthly limit as monthly average (November through April):	548	548
Monthly limit as monthly average (May through October):	126	126
Daily Max (November through April):	2507	2507
Daily Max (May through October):	298	298
<u>Enterococci (applies to Coastal)</u>		
Monthly limit as geometric mean (October through May):	Not applicable	Not applicable
Monthly limit as geometric mean (June through September):	Not applicable	Not applicable
Daily Max (October through May):	Not applicable	Not applicable
Daily Max (June through September):	Not applicable	Not applicable

MAXIMUM ALLOWABLE CHLORINATION LIMITS

Toxicity-based chlorine limits are calculated in accordance with the General Guidance for Writing Water Quality Based Toxicity Permits.

Chlorine has been shown to be acutely toxic at 0.019 mg/l and chronically toxic at 0.011 mg/l.

Maximum allowable TRC in effluent:	0.020 mg/l (chronic)	(0.011)/(SDR)
Maximum allowable TRC in effluent:	0.034 mg/l (acute)	(0.019)/(SDR)

NOTE: A maximum chlorine limit will be imposed such that the instream concentration will not exceed acutely toxic concentrations in A & I streams and chronically toxic concentrations in all other streams, but may not exceed 1.0 mg/l.

Prepared By:

Sandra Lee

Date:

4/9/2025

Waste Load Allocation Summary

Page 1

REQUEST INFORMATION

Request Number: 4045

From: Sandy Lee In Branch/Section Municipal
Date Submitted 2/3/2025 Date Required 3/5/2025 FUND Code 605

Date Permit application received by NPDES program 1/21/2025

Receiving Waterbody Mud Creek

Previous Stream Name

Facility Name East Tuscaloosa-West Jefferson WWTP (Name of Discharger-WQ will use to file)

Previous Discharger Name

River Basin Cahaba

Outfall Latitude 33.244149

(decimal degrees)

*County Bibb

Outfall Longitude -87.058761

(decimal degrees)

Permit Number AL0068420

Permit Type Permit Reissuance

Permit Status Active

Type of Discharger SEMIPUBLIC/PRIVATE

Do other discharges exist that may impact the model?

☒ Yes☐ NoIf yes, impacting
dischargers
names.Woodstock Clean Water Facility
Tannehill Preserve WRFImpacting
dischargers permit
numbers.AL0084496
AL0084474

Existing Discharge Design Flow

MGD

Proposed Discharge Design Flow 0.3

MGD

Note: The flow rates given should
be those requested for modeling.

Comments included

☒ Yes ☐ NoInformation
Verified By

HAW

Year File Was Created

Response ID Number 2031

Lat/Long Method

GPS

12 Digit HUC Code 031502020302

Use Classification F&W

Site Visit Completed? ☒ Yes ☐ No

Date of Site Visit 2/26/2025

Waterbody Impaired? ☐ Yes ☒ No

Date of WLA Response 4/7/2025

Antidegradation ☐ Yes ☒ No

Approved TMDL?

☒ Yes ☐ No

Waterbody Tier Level Tier I

Use Support Category 1

Approval Date of TMDL 10/26/2006

Waste Load Allocation Information

Modeled Reach Length 15.97

Miles

Date of Allocation 4/7/2025

Name of Model Used SWQM

Allocation Type Annual

Model Completed by Hayden Willis

Type of Model Used Desk-top

Allocation Developed by Water Quality Branch

Waste Load Allocation Summary

Page 2

Annual Effluent Limits	Conventional Parameters				Other Parameters				
	Qw	MGD	Qw	MGD	Qw	0.3	MGD	Qw	MGD
Season			Season		Season	Summer		Season	
From			From		From	Apr		From	
Through			Through		Through	Oct		Through	
CBOD5 25 mg/L			CBOD5		TP 0.3 mg/L			TP	
NH3-N 6.5 mg/L			NH3-N		TN			TN	
TKN			TKN		TSS			TSS	
D.O. 6 mg/L			D.O.						

"Monitor Only" Parameters for Effluent:

Parameter	Frequency	Parameter	Frequency
NO2+NO3-N	Monthly (Apr-Oct)		
TKN	Monthly (Apr-Oct)		
TP	Monthly (Nov-Mar)		

Water Quality Characteristics Immediately Upstream of Discharge

Parameter	Summer	Winter
CBODu	1.3034 mg/l	
NH3-N	0.0929 mg/l	
Temperature	30 °C	
pH	7 su	

Hydrology at Discharge Location

Drainage Area Qualifier

Exact

Drainage Area	26.61	sq mi
Stream 7Q10	0.99	cfs
Stream 1Q10	0.74	cfs
Stream 7Q1	3.39	cfs
Annual Average	51.36	cfs

Method Used to Calculate

ADEM Estimate w/USGS Gage Data
75% of 7Q10
ADEM Estimate w/USGS Gage Data
ADEM Estimate w/USGS Gage Data

Comments and/or Notations

A TP limit of 0.3 mg/L is required for all minor facilities within the Cahaba River watershed, as stipulated in the 2006 Nutrient TMDL. The TP limit is applicable during the growing season (i.e., April through October).

The ammonia-nitrogen limit is toxicity-based.

Waste Load Allocation Summary

Page 1

REQUEST INFORMATION

Request Number: 4046

From:	Sandy Lee	In Branch/Section	Municipal
Date Submitted	2/3/2025	Date Required	3/5/2025
FUND Code	605		
Date Permit application received by NPDES program 1/21/2025			
Receiving Waterbody	Mud Creek		
Previous Stream Name			
Facility Name	East Tuscaloosa-West Jefferson WWTP	(Name of Discharger-WQ will use to file)	
		Previous Discharger Name	
River Basin	Cahaba	Outfall Latitude	33.244149 (decimal degrees)
*County	Bibb	Outfall Longitude	-87.058761 (decimal degrees)
Permit Number	AL0068420	Permit Type	Permit Reissuance
		Permit Status	Active
		Type of Discharger	SEMI-PUBLIC/PRIVATE

Do other discharges exist that may impact the model?

☒ Yes ☐ No

If yes, impacting dischargers names.

Woodstock Clean Water Facility
Tannehill Preserve WRF

Impacting dischargers permit numbers.

AL0084496
AL0084474

Existing Discharge Design Flow

MGD

Proposed Discharge Design Flow

0.4

MGD

Note: The flow rates given should be those requested for modeling.

Comments included

☒ Yes ☐ No

Information Verified By

HAW

Year File Was Created

Response ID Number 2032

Lat/Long Method

GPS

12 Digit HUC Code 031502020302

Use Classification F&W

Site Visit Completed? ☒ Yes ☐ NoWaterbody Impaired? ☐ Yes ☒ NoAntidegradation ☐ Yes ☒ No

Waterbody Tier Level Tier I

Use Support Category 1

Approved TMDL?

☒ Yes ☐ No

Approval Date of TMDL 10/26/2006

Waste Load Allocation Information

Modeled Reach Length 15.97

Miles

Date of Allocation 4/7/2025

Name of Model Used SWQM

Allocation Type Annual

Model Completed by Hayden Willis

Type of Model Used Desk-top

Allocation Developed by Water Quality Branch

Waste Load Allocation Summary

Page 2

Annual Effluent Limits	Conventional Parameters				Other Parameters				
	Qw	MGD	Qw	MGD	Qw	0.4	MGD	Qw	MGD
	Season		Season		Season	Summer		Season	
Qw	0.4	MGD	From		From	Apr		From	
			Through		Through	Oct		Through	
CBOD5	25	mg/L							
NH3-N	5.4	mg/L	CBOD6		CBOD5		TP	0.3	mg/L
TKN			NH3-N		NH3-N		TN		
D.O.	6	mg/L	TKN		TKN		TSS		
			D.O.		D.O.				

"Monitor Only" Parameters for Effluent:

Parameter	Frequency	Parameter	Frequency
NO2+NO3-N	Monthly (Apr-Oct)		
TKN	Monthly (Apr-Oct)		
TP	Monthly (Nov-Mart)		

Water Quality Characteristics Immediately Upstream of Discharge

Parameter	Summer	Winter
CBODu	1.3034 mg/l	
NH3-N	0.0929 mg/l	
Temperature	30 °C	
pH	7 su	

Hydrology at Discharge Location

Drainage Area Qualifier

Exact

Drainage Area	26.61	sq mi
Stream 7Q10	0.99	cfs
Stream 1Q10	0.74	cfs
Stream 7Q2	3.39	cfs
Annual Average	51.36	cfs

Method Used to Calculate

ADEM Estimate w/USGS Gage Data
75% of 7Q10
ADEM Estimate w/USGS Gage Data
ADEM Estimate w/USGS Gage Data

Comments and/or Notations

A TP limit of 0.3 mg/L is required for all minor facilities within the Cahaba River watershed, as stipulated in the 2006 Nutrient TMDL. The TP limit is applicable during the growing season (i.e., April through October).

The ammonia-nitrogen limit is toxicity-based.

Waste Load Allocation Summary

Page 1

REQUEST INFORMATION

Request Number: 4044

From:	Sandy Lee	In Branch/Section	Municipal
Date Submitted	2/3/2025	Date Required	3/5/2025
FUND Code		605	
Date Permit application received by NPDES program		1/21/2025	
Receiving Waterbody	Mud Creek		
Previous Stream Name			
Facility Name	East Tuscaloosa-West Jefferson WWTP	(Name of Discharger-WQ will use to file)	
Previous Discharger Name			
River Basin	Cahaba	Outfall Latitude	33.244149 (decimal degrees)
*County	Bibb	Outfall Longitude	-87.058761 (decimal degrees)
Permit Number	AL0068420	Permit Type	Permit Reissuance
Permit Status		Active	
Type of Discharger		SEMIPUBLIC/PRIVATE	
Do other discharges exist that may impact the model?		☒ Yes ☐ No	

If yes, impacting dischargers names.

Woodstock Clean Water Facility
Tannehill Preserve WRF

Impacting dischargers permit numbers.

AL0084496
AL0084474

Existing Discharge Design Flow

0.8

MGD

Proposed Discharge Design Flow

MGD

Note: The flow rates given should be those requested for modeling.

Comments included

☒ Yes ☐ No

Information Verified By

HAW

Year File Was Created

Response ID Number 2030

Lat/Long Method

GPS

12 Digit HUC Code 0315020302

Use Classification F&W

Site Visit Completed? ☒ Yes ☐ No

Date of Site Visit 2/26/2025

Waterbody Impaired? ☐ Yes ☒ No

Date of WLA Response 4/7/2025

Antidegradation ☐ Yes ☒ No

Approved TMDL?

☒ Yes ☐ No

Waterbody Tier Level Tier I

Use Support Category 1

Approval Date of TMDL 10/26/2006

Waste Load Allocation Information

Modeled Reach Length 15.97

Miles

Date of Allocation 4/7/2025

Name of Model Used SWQM

Allocation Type Annual

Model Completed by Hayden Willis

Type of Model Used Desk-top

Allocation Developed by Water Quality Branch

Waste Load Allocation Summary

Page 2

Annual Effluent Limits	Conventional Parameters				Other Parameters				
	Qw	MGD	Qw	MGD	Qw	0.8	MGD	Qw	MGD
	Season		Season		Season	Summer		Season	
	From		From		From	Apr		From	
	Through		Through		Through	Oct		Through	
CBOD5	23	mg/L							
NH3-N	3.8	mg/L	CBOD5		TP	0.3	mg/L	TP	
TKN			NH3-N		TN			TN	
D.O.	6	mg/L	TKN		TSS			TSS	
			D.O.						

"Monitor Only" Parameters for Effluent:

Parameter	Frequency	Parameter	Frequency
NO2+NO3-N	Monthly (Apr-Oct)		
TKN	Monthly (Apr-Oct)		
TP	Monthly (Nov-Mar)		

Water Quality Characteristics Immediately Upstream of Discharge

Parameter	Summer		Winter	
CBODu	1.3034	mg/l		mg/l
NH3-N	0.0929	mg/l		mg/l
Temperature	30	°C		°C
pH	7	su		su

Hydrology at Discharge Location

Drainage Area Qualifier	Drainage Area	sq mi	Method Used to Calculate
Exact	Stream 7Q10	0.99	ADEM Estimate w/USGS Gage Data
	Stream 1Q10	0.74	75% of 7Q10
	Stream 7Q2	3.39	ADEM Estimate w/USGS Gage Data
	Annual Average	51.36	ADEM Estimate w/USGS Gage Data

Comments and/or Notations: A TP limit of 0.3 mg/L is required for all minor facilities within the Cahaba River watershed, as stipulated in the 2006 Nutrient TMDL. The TP limit is applicable during the growing season (i.e., April through October).

The ammonia-nitrogen limit is toxicity-based.



Alabama Department of Environmental Management
adem.alabama.gov

1400 Coliseum Blvd. 36110-2400 ■ Post Office Box 301463
Montgomery, Alabama 36130-1463
(334) 271-7700 ■ FAX (334) 271-7950

April 7, 2025

MEMORANDUM

TO: Sandy Lee
Industrial/Municipal Branch

FROM: Hayden Willis
Water Quality Branch

RE: East Tuscaloosa-West Jefferson WWTP (AL0068420) – Mud Creek WLA

A wasteload allocation (WLA) was completed for the existing discharge (Outfall 001) from East Tuscaloosa-West Jefferson Wastewater Treatment Plant (WWTP) to Mud Creek. The Department's Spreadsheet Water Quality Model was utilized to determine the annual effluent limits for discharge rates of 0.3 MGD, 0.4 MGD, and 0.8 MGD. The use classification for Mud Creek at the discharge location is Fish and Wildlife (F&W). ADEM Admin Code r. 335-6-10-.09(5)(e)(4.) (i) states the following in regard to the dissolved oxygen (DO) criteria for the F&W use classification: "For a diversified warm water biota, including game fish, daily dissolved oxygen concentrations shall not be less than 5 mg/L at all times." The following annual effluent limits are expected to be protective of water quality and maintain instream DO concentrations above 5 mg/L:

	East Tuscaloosa-West Jefferson WWTP Annual Effluent Limits		
	0.3 MGD	0.4 MGD	0.8 MGD
CBOD ₅ (mg/L)	25	25	23
NH ₃ -N (mg/L)	6.5*	5.4*	3.8*
Minimum DO (mg/L)	6	6	6

*Ammonia-nitrogen (NH₃-N) limit is toxicity-based.

In addition, a total phosphorus (TP) limit of 0.3 mg/L is required for all minor facilities within the Cahaba River watershed, as stipulated in the 2006 Nutrient TMDL. The TP limit is applicable during the growing season (i.e., April through October). Mud Creek at the East Tuscaloosa-West Jefferson WWTP discharge location is a Tier 1 waterbody within the Cahaba River Basin.

HAW: haw



Birmingham Office
110 Vulcan Road
Birmingham, AL 35209 4702
(205) 942-6168
(205) 941-1603 (FAX)

Decatur Office
2715 Sandlin Road, S.W.
Decatur, AL 35603-1333
(256) 353-1713
(256) 340-9359 (FAX)

Coastal Office
1615 South Broad Street
Mobile, AL 36605
(251) 450-3400
(251) 479-2593 (FAX)

Birmingham Office

206-A Oak Mountain Circle
Pelham, Alabama 35124

Tel. 205.396.3170
Fax 205.581.8680



January 21, 2025

Ms. Sandra Lee
Alabama Department of Environmental Management
P.O. Box 301463
Montgomery, AL 36130-1463

RE: Application for Permit Renewal
NPDES Permit No. AL0068420
East Tuscaloosa-West Jefferson WWTP

Dear Ms. Lee

Knobloch, Inc. is requesting a Tiered Permit with the following tiers

Tier 1 – 0.3 MGD
Tier 2 – 0.4 MGD
Tier 3 – 0.8 MGD

Should you have any questions please let me know.

Sincerely,

A handwritten signature in black ink, appearing to read "Mike Walraven", is written over a light blue rectangular background.

Mike Walraven
Operations Manager

NPDES Individual Permit - Modification/Reissuance - Municipal (Form 188)

version 1.13

(Submission #: HQ9-T59N-E15FA, version 1)

Digitally signed by:
AEPACS
Date: 2025.01.21 09:19:02 -06:00
Reason: Submission Data
Location: State of Alabama

Details

Submission ID HQ9-T59N-E15FA

Form Input

General Instructions

NPDES Individual Permit Modification and Reissuance Form ♦ Publicly-Owned Treatment Works (POTW), Other Treatment Works Treating Domestic Sewage (TWTDS), and Public Water Supply Treatment Plants

IF YOU ARE APPLYING FOR A PERMIT MODIFICATION, PLEASE CONTACT YOUR ASSIGNED PERMIT CONTACT TO DISCUSS THE TYPE OF MODIFICATION YOU SHOULD APPLY FOR BEFORE COMPLETING THIS FORM.

This form should be used to submit the following permit requests for permitted Publicly-Owned Treatment Works (POTW), Other Treatment Works Treating Domestic Sewage (TWTDS), and Public Water Supply Treatment Plants:

- (1) Permit Transfers
- (2) Permittee/Facility Name Changes
- (3) Minor Modifications
This modification may not be used for changes that would result in changes to permit conditions
- (4) Major Modifications (No Effluent Limit Change)
- (5) Major Modifications (Effluent Limit Change)
- (6) Reissuances
Reissuance of a permit due to approaching expiration
Revocation and Reissuance of permit prior to its scheduled expiration

Please complete all questions and attach all necessary documentation as prompted throughout the application process. Incomplete or incorrect information will delay processing.

Applicable Fees:

Permit Transfers and/or Permittee/Facility Name Changes

\$800

Minor Modifications

\$800

Major Modifications (No Effluent Limit Change)

\$3,140 (Major Sources)

\$2,250 (Minor Sources or Public Water Supply Treatment Plants)

Major Modifications (Effluent Limit Change)

\$7,060 (Major Sources)

\$4,290 (Minor Sources or Public Water Supply Treatment Plants)

Reissuances

\$7,060 (Major Sources)

\$4,290 (Minor Sources or Public Water Supply Treatment Plants)

For assistance, please click here to determine the permit engineer responsible for the site or call (334) 271-7810.

Processing Information

Purpose of Application

Reissuance of Permit Due to Approaching Expiration

Please indicate if the Permittee is applying for a permit transfer and/or name change in addition to permit modification or reissuance:

None

Action Type

Reissuance

Briefly describe any planned changes at the facility that are included in this reissuance application:

Tier 1 - 0.3 MGD (current design)

Tier 2- 0.4 MGD

Tier 3 - 0.8 MGD

Do you have additional contacts associated with this site?

No

Permit Information**Permit Number**

AL0068420

Current Permittee Name

Knobloch, Inc.

Permittee**Permittee Name**

Knobloch, Inc.

Mailing Address

Post Office Box 679

Leeds, AL 35094

Is the Operator the same as the Permittee?

No

NOTE:

If the contracted Operator is a company instead of an individual, please provide the contact information for the primary point of contact for the contracted company.

Operator**Prefix**

Mr.

First Name Last Name

Michael Walraven

Organization Name

EOS Utility Services

Phone Type Number Extension

Business 2053963170

Email

mike@eosutilityservices.com

Address

206A Oak Mountain Cir

PELHAM, AL 35124

Has the Operator's scope of responsibility changed?

No

Responsible Official**Prefix**

Ms.

First Name

Mary

Last Name

White

Title

President

Organization Name

Knobloch, Inc

Phone Type

Business

Number

2056995200

Extension**Email**

pdw7110@gmail.com

Mailing Address

PO Box 679

Leeds, AL 35094

Existing Permit Contacts

Affiliation Type	Contact Information	Remove?
DMR Contact,Environmental Contact	J. Michael White	NONE PROVIDED
Permittee	Knobloch, Inc.	NONE PROVIDED
Notification Recipient,Responsible Official	Michael White, Knobloch, Inc.	NONE PROVIDED
Emergency Contact	Mike Walraven, EOS	NONE PROVIDED

Facility/Site Information**Facility/Site Name**

East Tuscaloosa-West Jefferson WWTP

Organization/Ownership Type

Corporation

The Facility/Site Address is the physical location of the treatment plant. Do not enter a PO Box. Do not enter the address of the office of the Permittee if different from the treatment plant.

Facility/Site Physical Location Address

12874 Woodland Park Circle

McCalla, AL 35111

Facility/Site County

Tuscaloosa

Facility/Site Contact

Prefix

Mr.

First Name Last Name

Michael Walraven

Title

Operations Manager

Organization Name

EOS Utility Services

Phone Type Number Extension

Business 2053963170

Email

mike@eosutilityservices.com

Note

Detailed directions should be included if a street address is not available.

Detailed Directions to the Facility/Site

Exit 100 off of I-59/20 left on to Old Tuscaloosa Hwy go East (right) to Kimbrell Rd, go south to sewage treatment Plant Tannehill Pkwy for Stone Forest, and Eastern Valley Road for Tyler Chase and Woodland Gardens

Please refer to the link below for Lat/Long map instruction help.

[Map Instruction Help](#)

Facility/Site Front Gate Latitude and Longitude

33.27305600000000,-87.06861100000000

12874 Woodland Park Circle, McCalla, AL

Primary SIC Code

4952-Sewerage Systems

Primary NAICS Code

221320-Sewage Treatment Facilities

Emergency Contact

Prefix

Mr.

First Name Last Name

Michael Walraven

Title

Operations Manager

Phone Type Number Extension

Business 2053963170

Email

mike@eosutilityservices.com

Does the facility have a designated Environmental Contact who is different than the Facility Contact or Emergency Contact listed above?

No

Enforcement History

Has the applicant been issued any Notices of Violation, Orders (Consent or Administrative/Unilateral), or Judicial Actions (Complaint, Settlement Agreement, Consent Decree, or Court Order) concerning water pollution or other permit violations within the State of Alabama in the past five years?

No

Wastewater Treatment & Discharge Information

Please indicate which type of operations occur at this facility:

Treatment Works Treating Domestic Sewage

What treatment type is used at this facility:

Mechanical (WWTP)

What discharge options are used at this facility:

Surface Water

What is the Total Design Flow (in millions of gallons per day, MGD) for this facility?

0.3

What is the facility's total 2-Year Actual Average Flow (in millions of gallons per day, MGD)?

0.20

Process Flow Schematic

[Schematics.pdf - 01/21/2025 09:01 AM](#)

Comment

NONE PROVIDED

Do you share an outfall with another facility?

No

Indicate if automatic sampling equipment or continuous wastewater flow metering equipment is being operated at this facility:

Current	Yes/No
Continuous Wastewater Flow Metering Equipment	Yes
Automatic Sampling Equipment	Yes

Indicate if installation of automatic sampling equipment or continuous wastewater flow metering equipment is planned at this facility:

Planned	Yes/No
Continuous Wastewater Flow Metering Equipment	N/A
Automatic Sampling Equipment	N/A

Schematic Diagram

[Schematics.pdf - 01/21/2025 09:02 AM](#)

Comment

NONE PROVIDED

Are any wastewater collection or treatment modifications or expansions planned during the next three years that could alter wastewater volumes or characteristics (Note: Permit Modification may be required)?

Yes

Please briefly describe these changes and any potential or anticipated effects on the wastewater quality and quantity:

Addition of 100,000 GPD package plant

Treatment Methods (TWTDS)

Treatment Level

Advanced Phosphorus Removal Treatment

Wastewater Disinfection Technology Information

Chlorination
Ultraviolet Light Disinfection
Dechlorination

Please select all POTW Treatment Categories that apply.

Activated Sludge Process & Modifications
Disinfection
Clarification
Dechlorination
Phosphorus Removal (Chemical)

Please select all unit operations that apply for Activated Sludge Process & Modifications:

Package Plant (Other)

Please select all unit operations that apply for Clarification:

Clarification, Secondary

Please select all unit operations that apply for Disinfection:

Disinfection, UV Radiation
Disinfection, Chlorination

Please select all unit operations that apply for Phosphorus Removal (Chemical):

Chemical Addition (Alum), Secondary

Waste Storage & Disposal Information

Any storage of solids or liquids at the facility that have any potential for accidental discharge to a water of the state?
Yes

Describe the location of all sites used for the storage of solids or liquids that have any potential for accidental discharge to a water of the state, either directly or indirectly via storm sewer, municipal sewer, municipal wastewater treatment plants, or other collection or distribution systems that are located at or operated by the subject existing or proposed NPDES- permitted facility. Indicate the location of any potential release areas and provide a map or detailed narrative description of the areas of concern as an attachment to this app

Description of Waste	Description of Storage Location	Disposal Location
Waste Sludge	Sludge holding tank	On-site

Collection System Information

Collection Systems

Collection System ID	Collection System Name	Owner Type of Collection System	Population of Collection System
NONE PROVIDED	NONE PROVIDED	NONE PROVIDED	NONE PROVIDED

Industrial Indirect Discharge Contributors

Does this wastewater treatment system receive or plan to receive industrial source wastewater contributions?
No

Coastal Zone Information

Is the discharge(s) located within the 10-foot elevation contour and within the limits of Mobile or Baldwin County?
No

Anti-Degradation Evaluation

Does this modification/reissuance include a new or increased discharge that began after April 3, 1991?

No

Has an Anti-Degradation Analysis been previously conducted and submitted to the Department for the new or increased discharge referenced above?

Yes

Does the facility discharge to a Tier II waterbody as defined in ADEM Code r. 335-6-10-.12(4)?

No

EPA Application Forms

All Applicants must submit certain EPA permit application forms. More than one application form may be required from a POTW or other TWTDS depending on the number and types of discharges or outfalls.

The EPA application forms must be submitted as follows:

1. Applicants for new or existing discharges of sanitary wastewater from Publicly-Owned Treatment Works (POTW) and Other Treatment Works Treating Domestic Sewage (TWTDS) must submit Form 2A. If the facility design capacity is equal to or greater than 1 MGD, Form 2F is also required.
2. Applicants for new or existing land application of sanitary wastewater must submit Form 2A and Form 2F.
3. Applicants for new and existing discharges of process wastewater from water treatment facilities (i.e. public water supply treatment plants) must submit Form 1 and Form 2C.
4. Applicants that generate sewage sludge, derive a material from sewage sludge, or dispose of sewage sludge must submit Part 2 of Form 2S.

The EPA application forms are found on the Department's website here.

EPA Form 2A

Form 2A- Executed.pdf - 01/21/2025 09:09 AM

Comment

NONE PROVIDED

EPA form 2S

Form 2S- Executed.pdf - 01/21/2025 09:09 AM

Comment

NONE PROVIDED

Other attachments (as needed)

Figure 2.pdf - 01/21/2025 09:09 AM

Cover Letter for Permit Renewal.pdf - 01/21/2025 09:10 AM

Comment

NONE PROVIDED

Topographic Map

Attach topographic map here.

Figure 1.pdf - 01/21/2025 09:11 AM

Comment

NONE PROVIDED

Engineering Report/BMP Plan Requirements

Engineering Report/BMP Plan Requirements

NONE PROVIDED

Comment

NONE PROVIDED

Outfalls (1 of 1)

Outfall: 001

Do you want to remove this outfall from the modified/reissued permit?

No

Outfall Identifier

001

Is this Outfall equipped with a diffuser?

No

What is this Outfall's 2-Year Average Flow (in millions of gallons per day, MGD)?

0.20

Receiving Water

Mud Creek

Does the discharge enter the named receiving water via an unnamed tributary?

NONE PROVIDED

Please refer to the link below for Lat/Long map instruction help.

[Map Instruction Help](#)

Location of Outfall or Discharge Point/Receiving Water

33.24402800000000, -87.05869400000000

[A list of the 303\(d\) impaired waters can be found here.](#)

303(d) Segment?

No

[A list of waters subject to a TMDL can be found here.](#)

TMDL Segment?

No

NOTE

If a TMDL Compliance Schedule is requested, the following should be attached as supporting documentation: (1) Justification for the requested Compliance Schedule (e.g., time for design and installation of control equipment, etc.); (2) Monitoring results for the pollutant(s) of concern which have not previously been submitted to the Department (sample collection dates, analytical results (mass and concentration), methods utilized, and MDL/ML, etc. should be submitted as available); (3) Requested interim limitations, if applicable; (4) Date of final compliance with the TMDL limitations; and (5) Any other additional information available to support the requested compliance schedule.

TMDL Attachments

NONE PROVIDED

Comment

NONE PROVIDED

Fee

Fee

4290

Note: Additional Fees may be assessed after the review of the application is complete. These fees may include any of the following:

Modeling with Data Collection (10 Stations) - \$60,390

Modeling with Data Collection (5 Stations) - \$49,315

Modeling - desktop - \$4,855

Review of Model Performed by Others - \$2,705

Seasonal Limits - \$4,855/additional season

Biomonitoring & Toxicity Limits - \$1,015

Please contact your area engineer if you have any questions about which additional fees may be assessed for this application.

Application Preparer

Application Preparer

Prefix

Mr.

First Name

Michael

Last Name

Walraven

Title

Operations Manager

Organization Name

EOS Utility Services

Phone Type

Business

Number

2053963170

Extension**Email**

mike@eosutilityservices.com

Address

206A Oak Mountain Cir

PELHAM, AL 35124

Agreements and Signature(s)

SUBMISSION AGREEMENTS

- ☒ I am the owner of the account used to perform the electronic submission and signature.
- ☒ I have the authority to submit the data on behalf of the facility I am representing.
- ☒ I agree that providing the account credentials to sign the submission document constitutes an electronic signature equivalent to my written signature.
- ☒ I have reviewed the electronic form being submitted in its entirety, and agree to the validity and accuracy of the information contained within it to the best of my knowledge.

The information contained in this form must be certified by a responsible official as defined in ADEM Administrative Code r. 335-6-6-.09 "signatories to permit applications and reports" (see below).

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information including the possibility of fine and imprisonment for knowing violations.

335-6-6-.09 SIGNATORIES TO PERMIT APPLICATIONS AND REPORTS.

(1) The application for an NPDES permit shall be signed by a responsible official, as indicated below:


(a) In the case of a corporation, by a principal executive officer of at least the level of vice president, or a manager assigned or delegated in accordance with corporate procedures, with such delegation submitted in writing if required by the Department, who is responsible for manufacturing, production, or operating facilities and is authorized to make management decisions which govern the operation of the regulated facility;

(b) In the case of a partnership, by a general partner;

(c) In the case of a sole proprietorship, by the proprietor; or

(d) In the case of a municipal, state, federal, or other public entity, by either a principal executive officer, or ranking elected official.

Signed
By Mike Walraven on 01/21/2025 at 9:13 AM

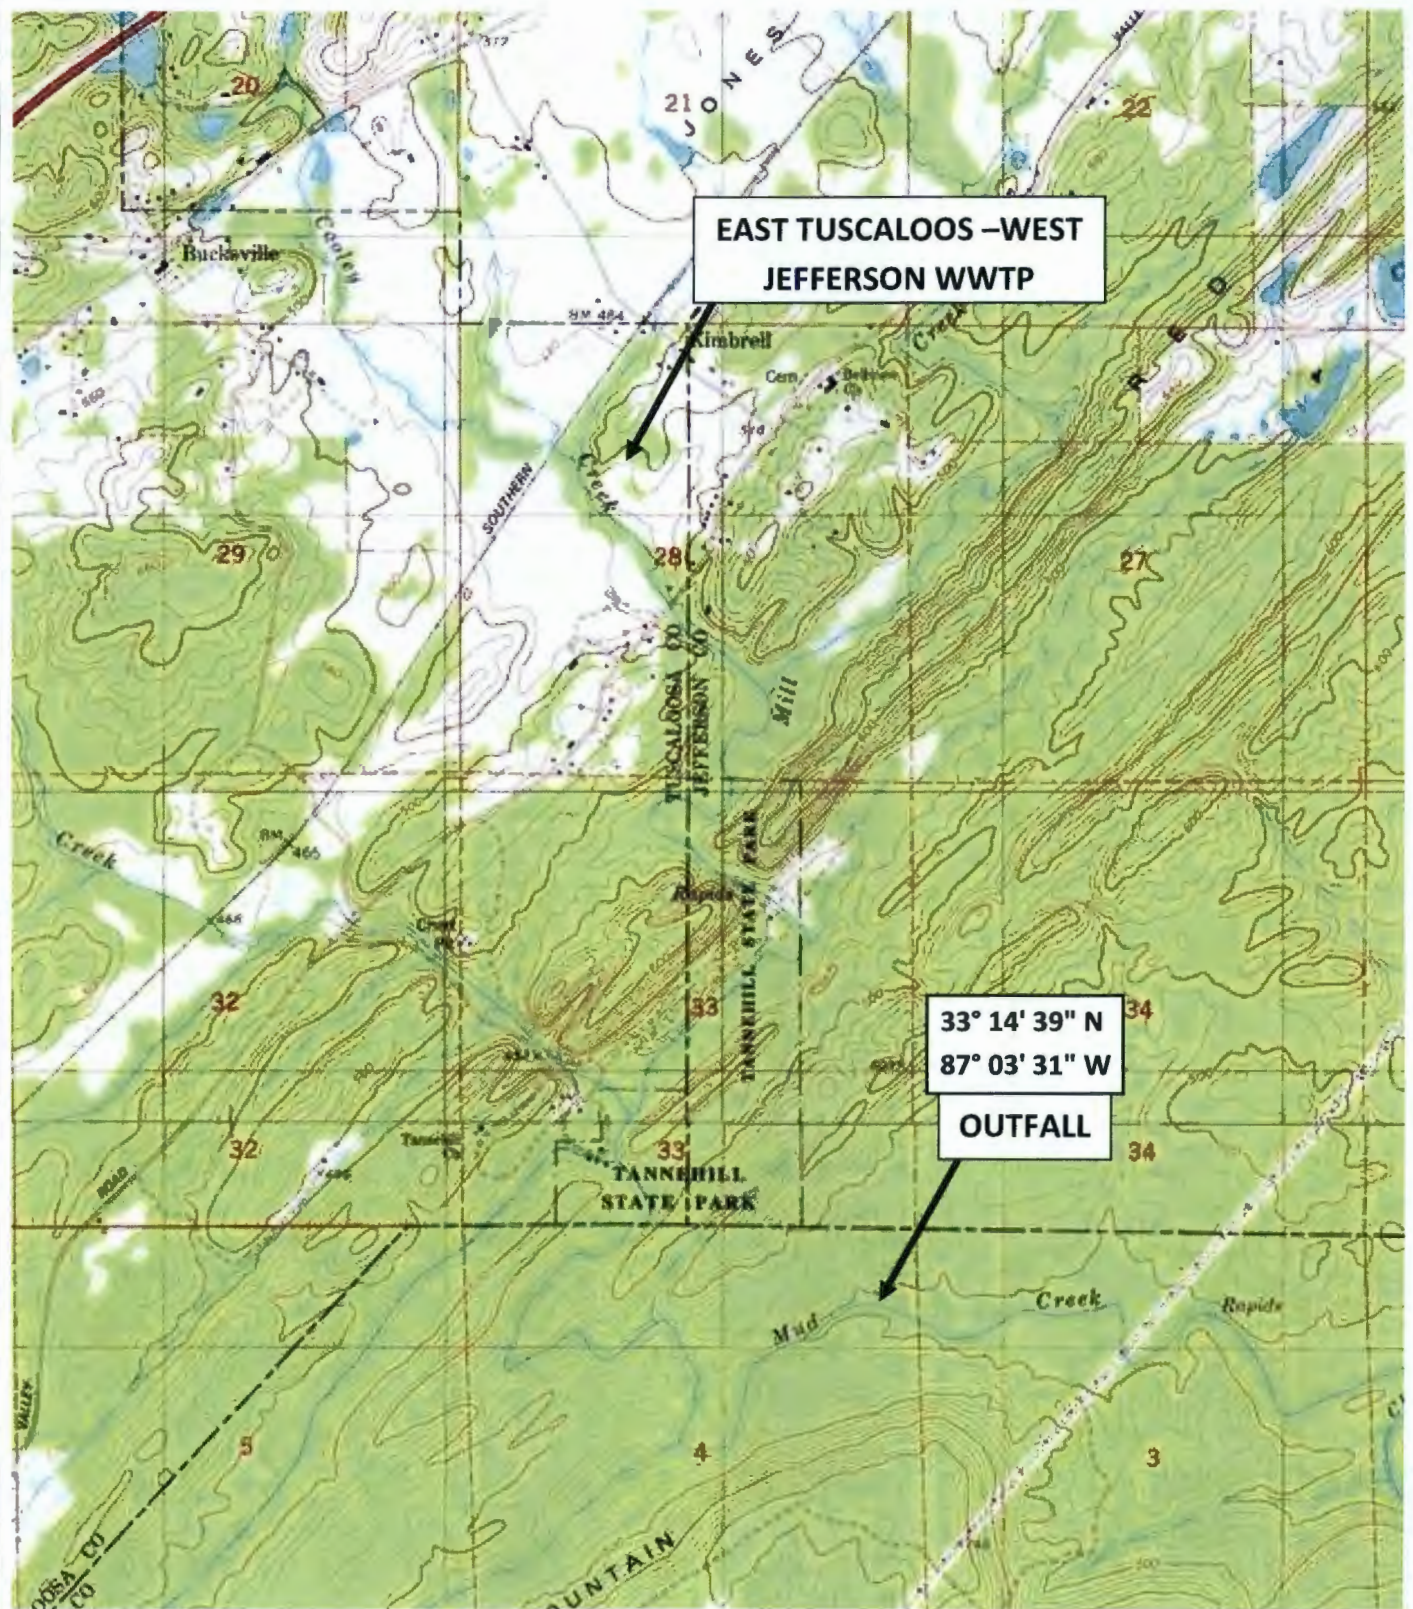


ENGINEERS Tel: 205.327.9140
OF THE SOUTH Fax: 205.581.8680

206-A Oak Mountain Circle
 Pelham, AL 35124

EAST TUSCALOOSA - WEST JEFFERSON WWTP

NDPES Permit # AL 0068420

**FIGURE 1
 AREA TOPOGRAPHY**

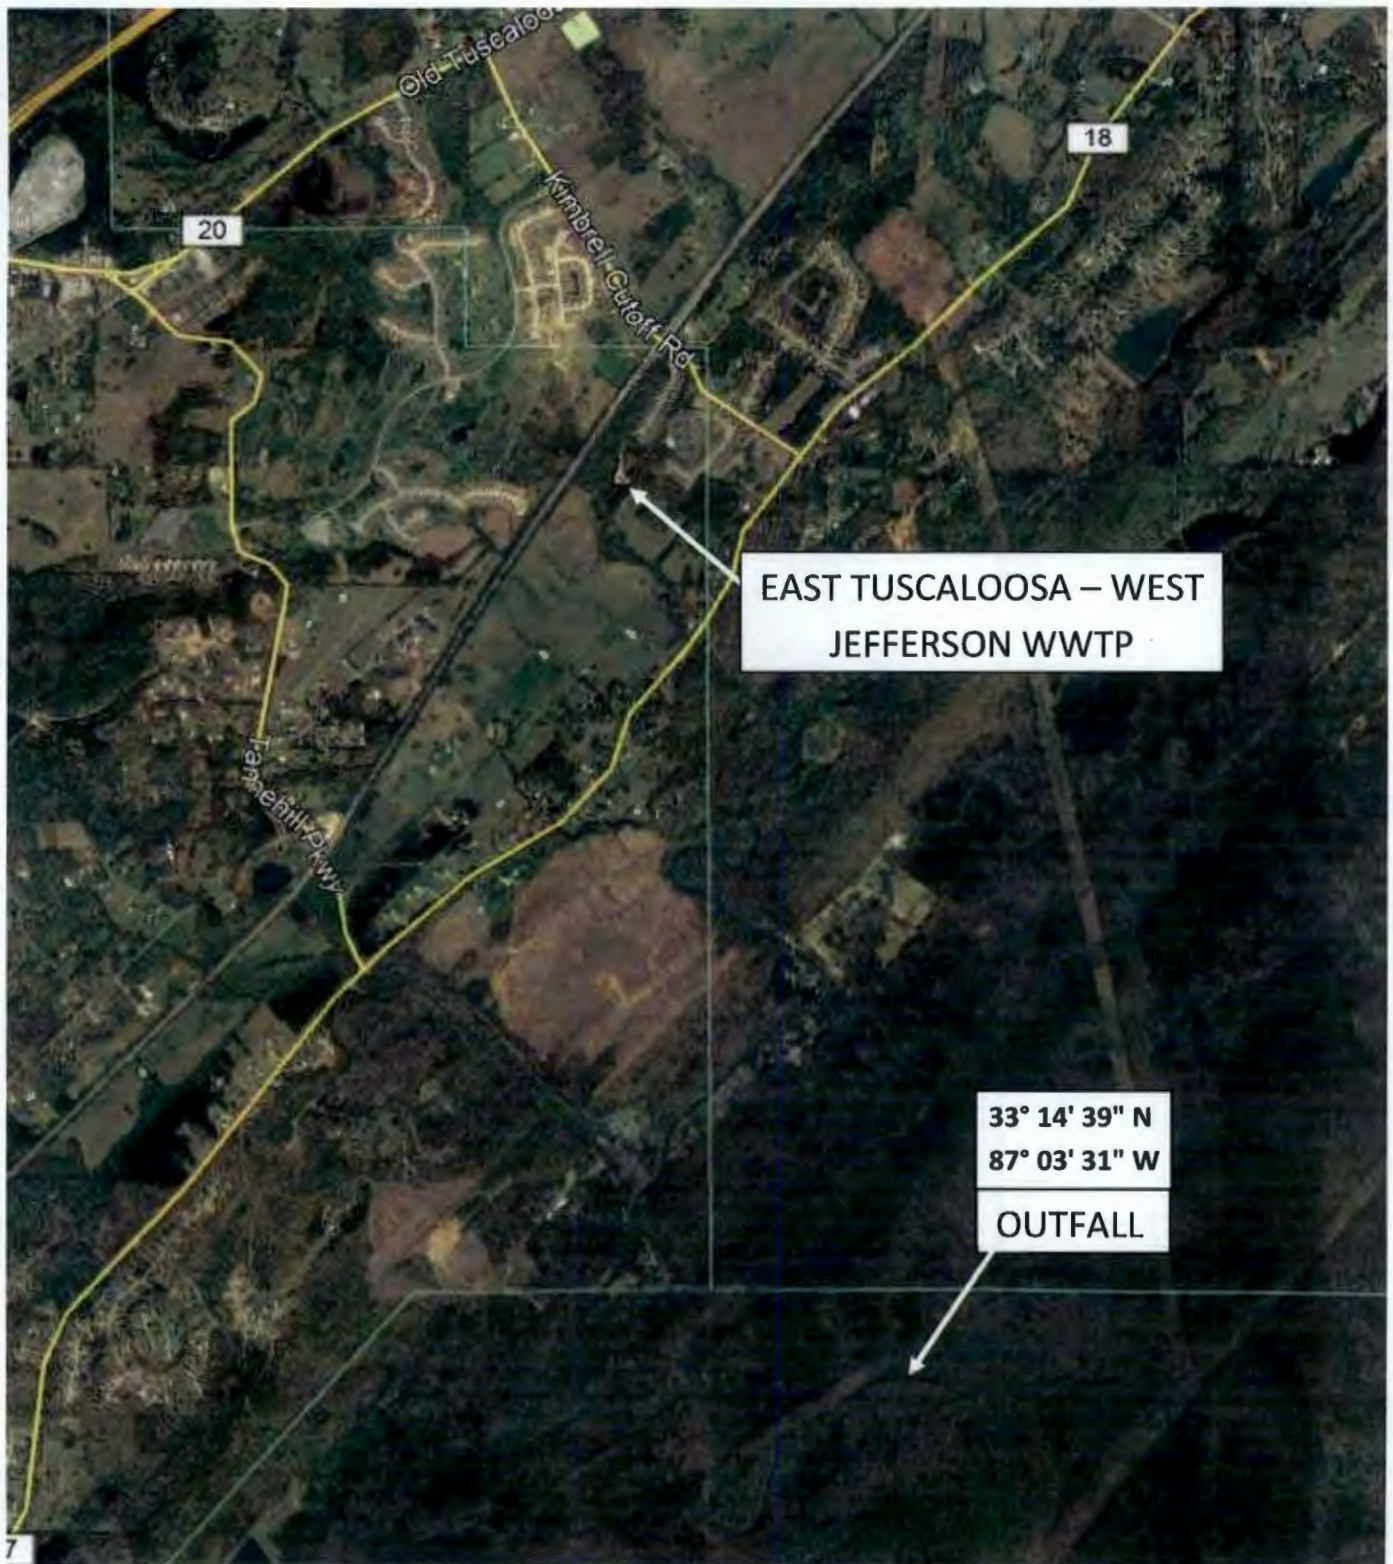

ENGINEERS
OF THE SOUTH

206-A Oak Mountain Circle
Pelham, AL 35124


Tel: 205.327.9140
Fax: 205.581.8680

EAST TUSCALOOSA - WEST JEFFERSON WWTP

NDPES Permit # AL 0068420

**FIGURE 2
AERIAL IMAGE**

EAST TUSCALOOSA - WEST JEFFERSON WWTP
NPDES PERMIT NO. AL0068420
TIER 1 - 0.3 MGD

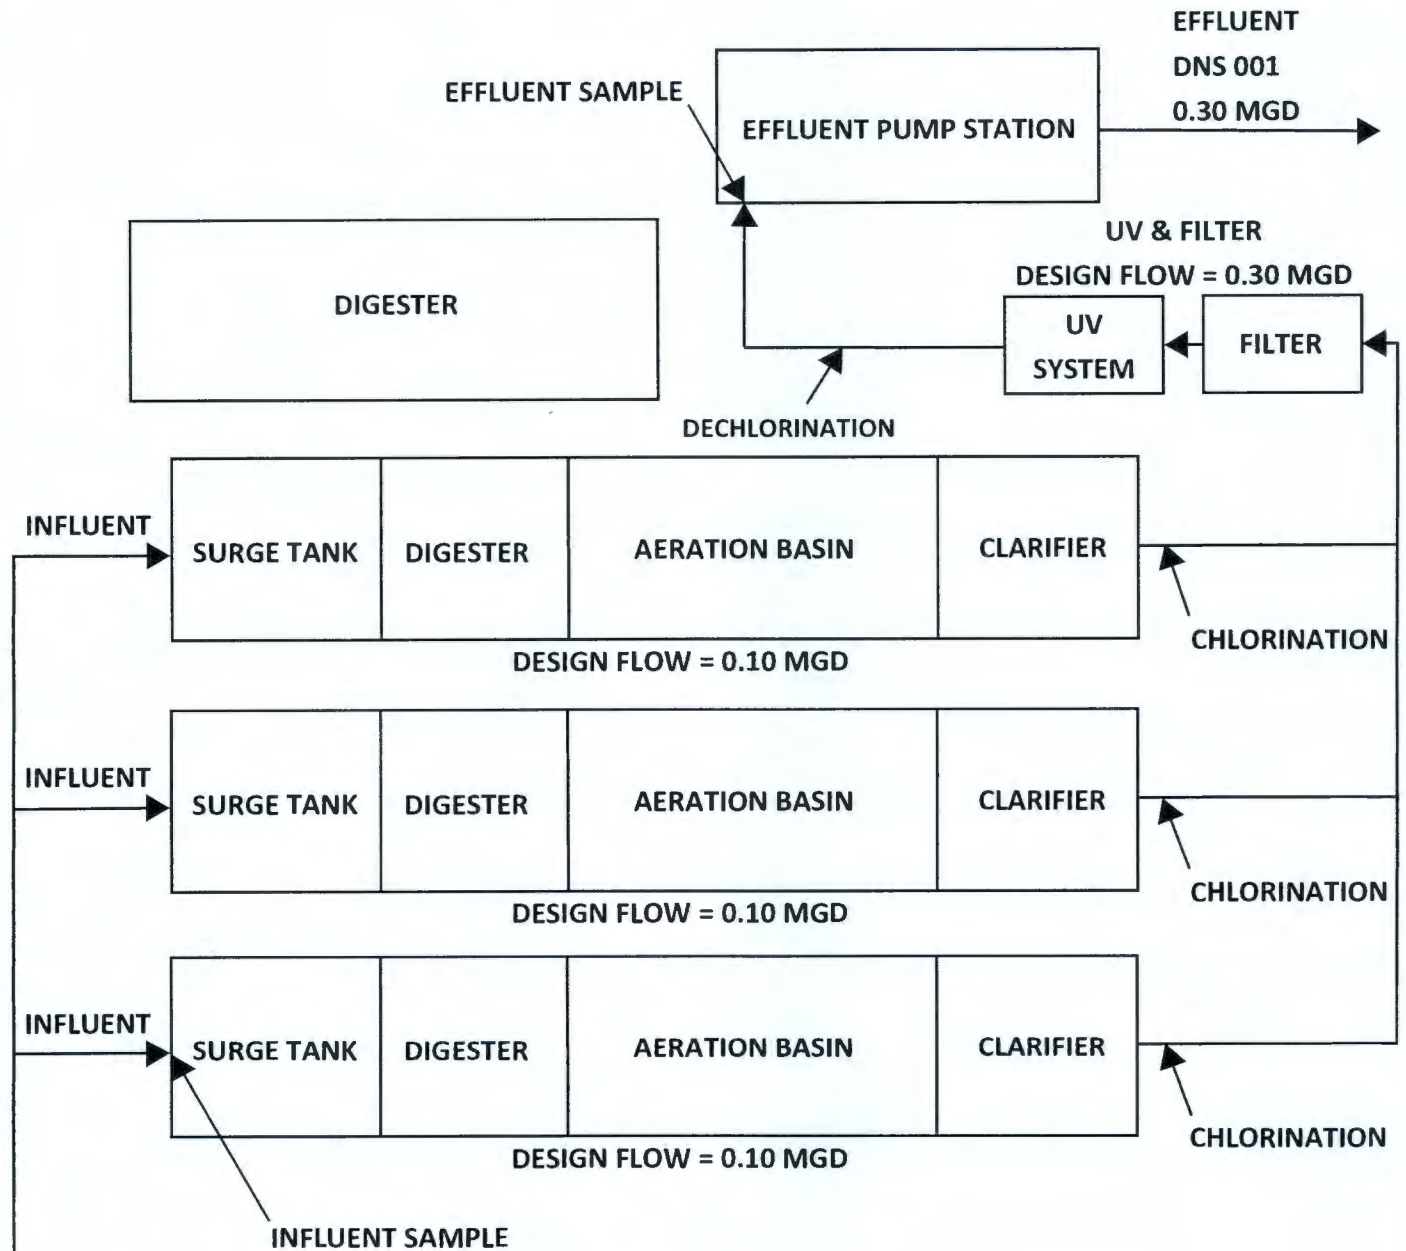

206-A Oak Mountain Circle
 Pelham, AL 35124

ENGINEERS Tel: 205.327.9140
OF THE SOUTH Fax: 205.581.8680

**EAST TUSCALOOSA – WEST
 JEFFERSON WWTP**


NPDES Permit # AL 0068420

FIGURE 3-1
(not to scale)

EAST TUSCALOOSA - WEST JEFFERSON WWTP

NPDES PERMIT NO. AL0068420

TIER 2 - 0.4 MGD

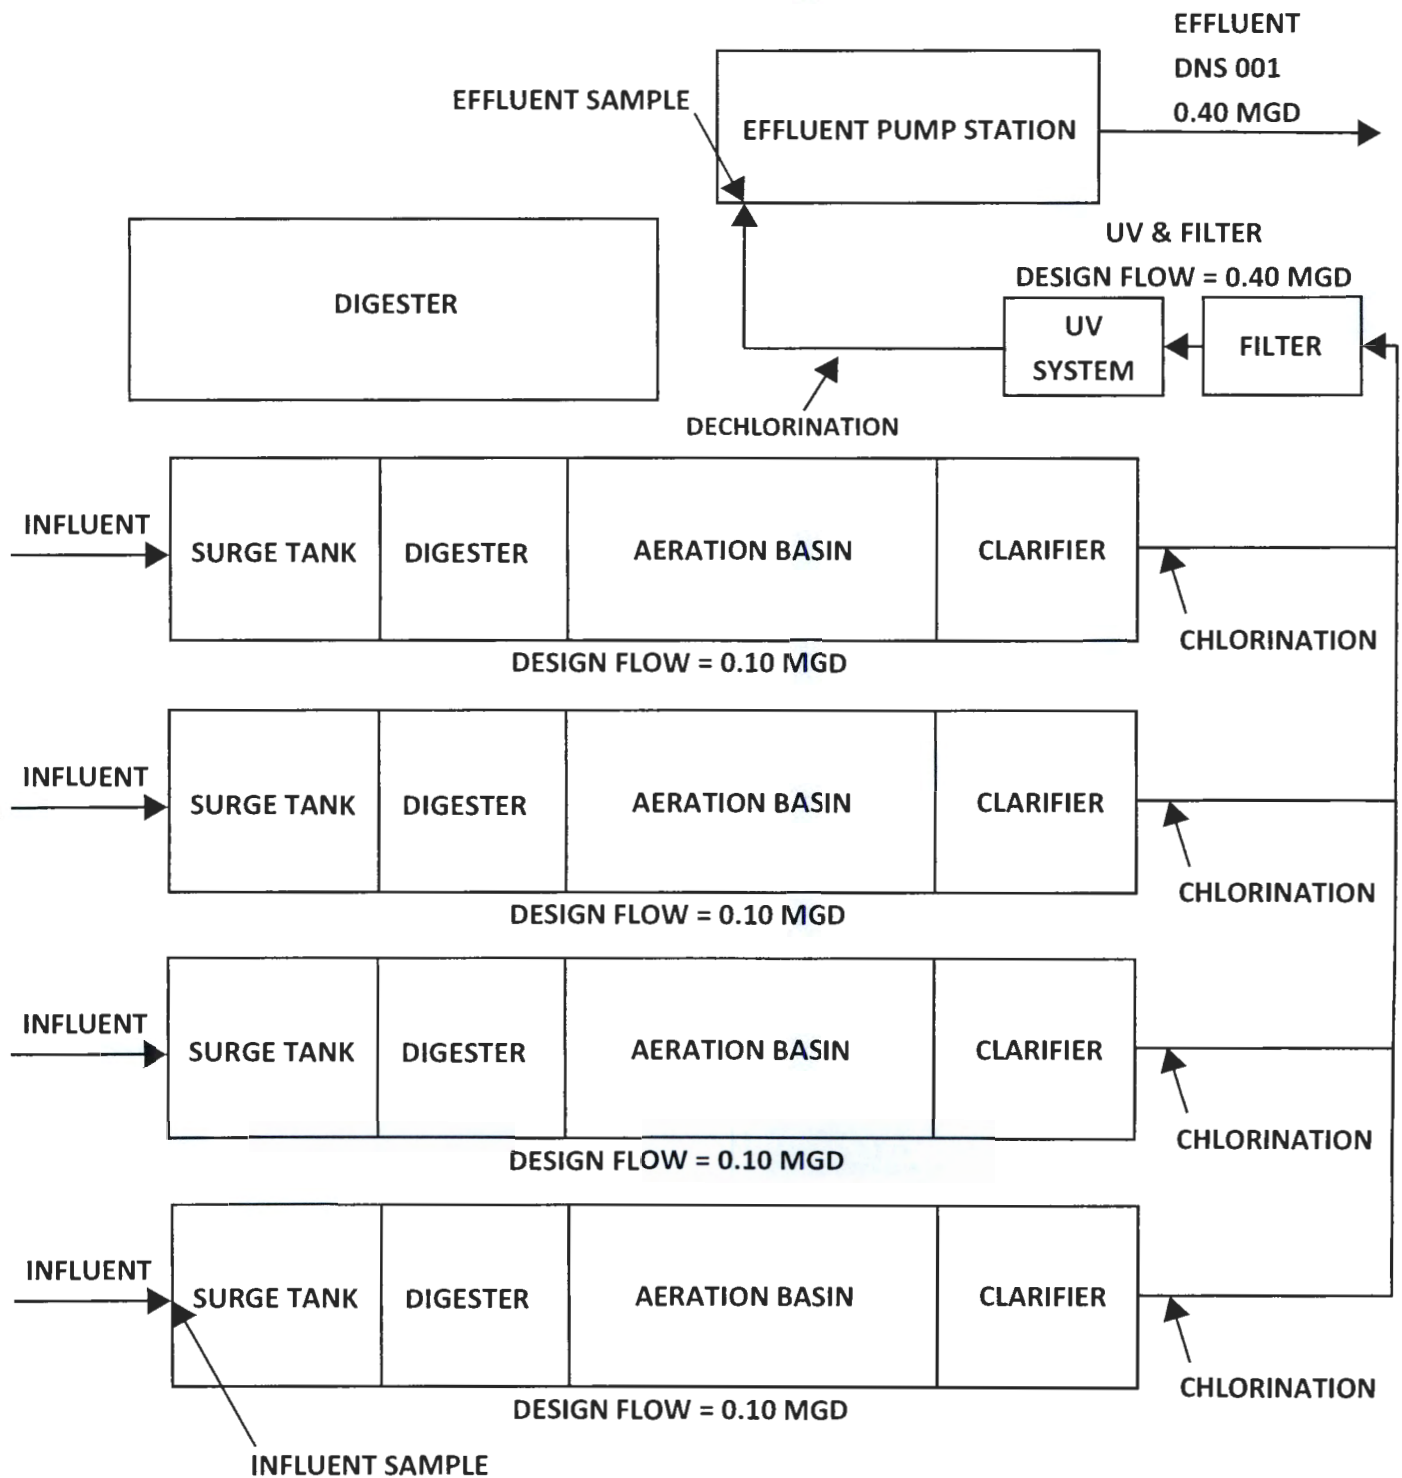

206-A Oak Mountain Circle
Pelham, AL 35124

ENGINEERS Tel: 205.327.9140
OF THE SOUTH Fax: 205.581.8680

**EAST TUSCALOOSA - WEST
JEFFERSON WWTP**

NDPES Permit # AL 0068420

**FIGURE 3-2
(not to scale)**

EAST TUSCALOOSA - WEST JEFFERSON WWTP


NPDES PERMIT NO. AL0068420

TIER 3 - 0.8 MGD

RECEIVED

JUN 05 2025

MUNICIPAL SECTION

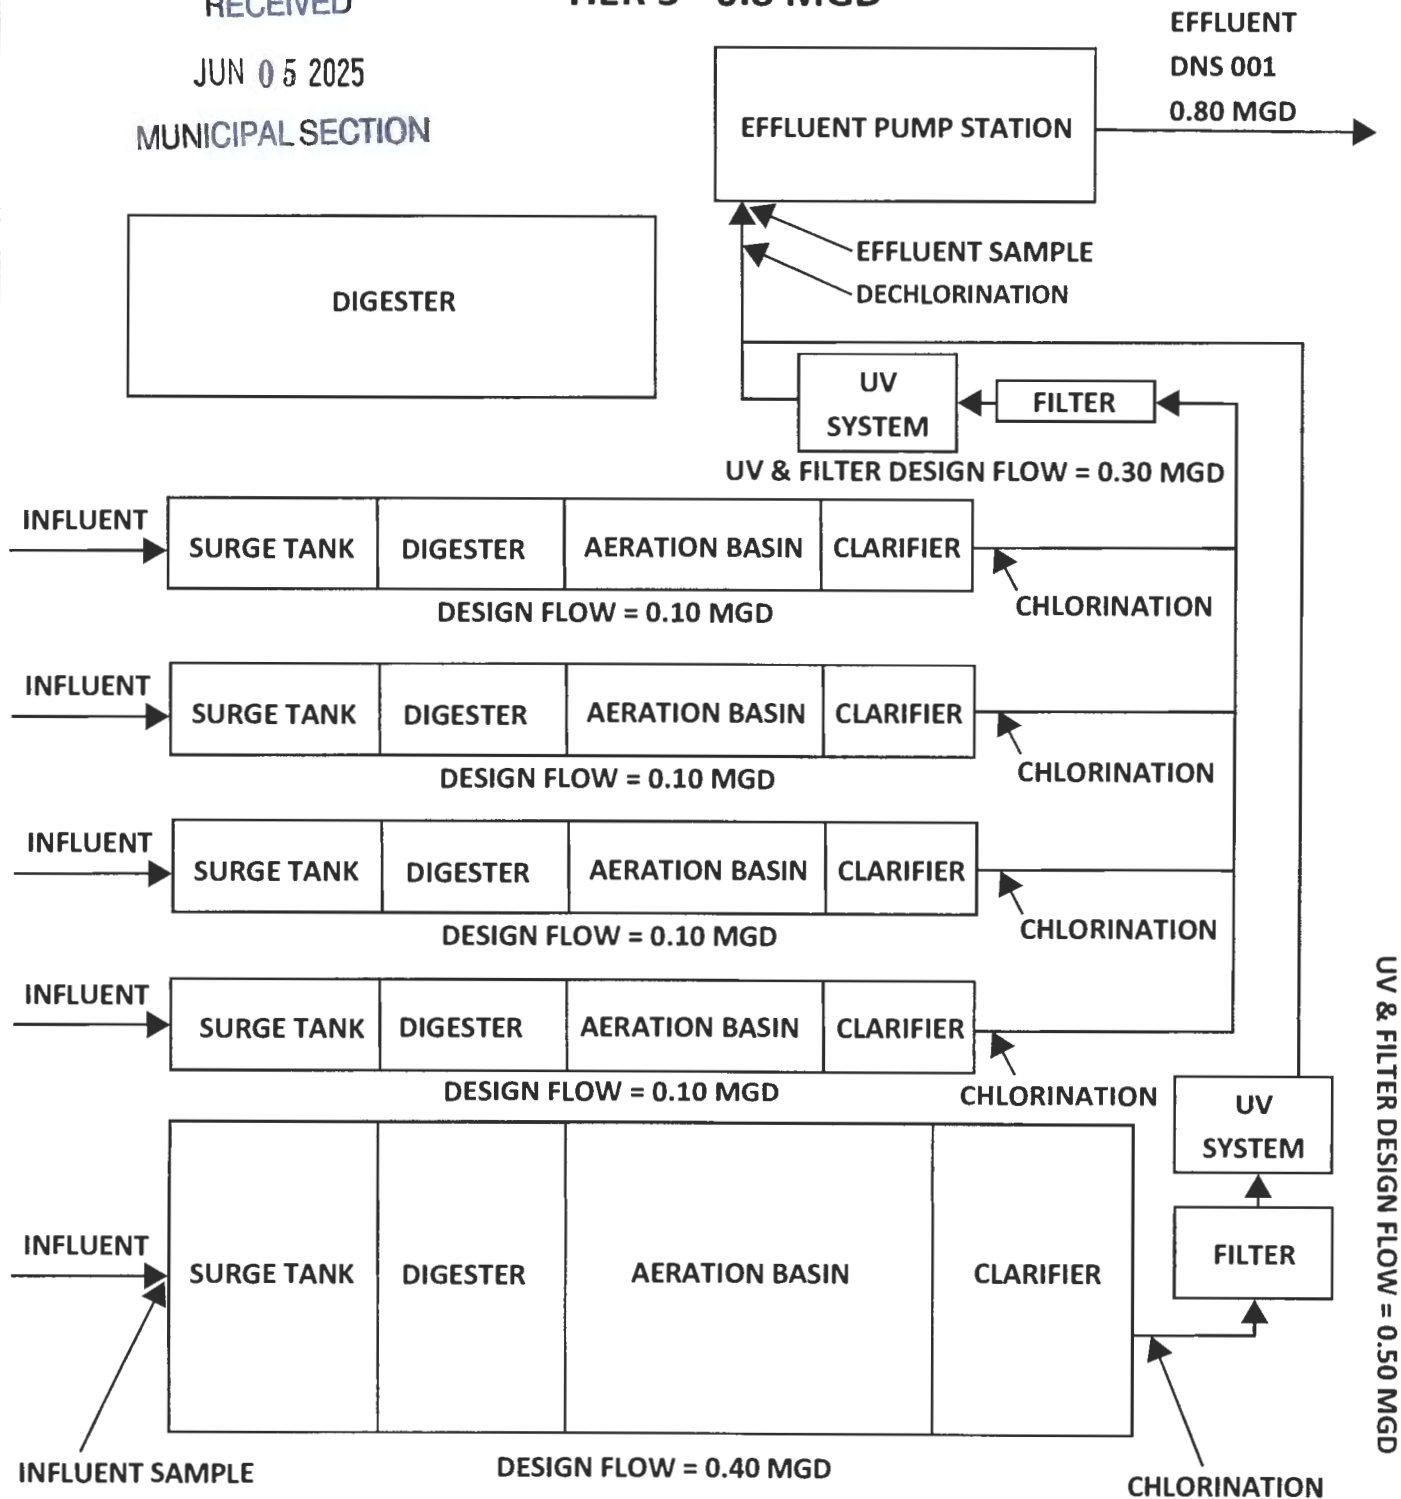

206-A Oak Mountain Circle
Pelham, AL 35124

ENGINEERS OF THE SOUTH Tel: 205.327.9140
Fax: 205.581.8680

EAST TUSCALOOSA - WEST JEFFERSON WWTP

NPDES Permit # AL 0068420

FIGURE 3-3
(not to scale)

EPA Identification Number		NPDES Permit Number AL0068420		Facility Name East Tuscaloosa - West Jefferson		Form Approved 03/05/19 OMB No. 2040-0004	
Form 2A NPDES		U.S. Environmental Protection Agency Application for NPDES Permit to Discharge Wastewater NEW AND EXISTING PUBLICLY OWNED TREATMENT WORKS					
SECTION 1. BASIC APPLICATION INFORMATION FOR ALL APPLICANTS (40 CFR 122.21(j)(1) and (9))							
Facility Information	1.1	Facility name East Tuscaloosa - West Jefferson WWTP					
		Mailing address (street or P.O. box) PO Box 679					
		City or town Leeds			State Alabama		ZIP code 35094
		Contact name (first and last) Mary P. White		Title President		Phone number (205) 699-5200	Email address pdw7110@gmail.com
		Location address (street, route number, or other specific identifier) ☐ Same as mailing address 12874 Woodland Park Circle					
		City or town McCalla			State Alabama		ZIP code 35111
	1.2	Is this application for a facility that has yet to commence discharge? ☐ Yes → See instructions on data submission requirements for new dischargers. ☒ No					
Applicant Information	1.3	Is applicant different from entity listed under Item 1.1 above? ☒ Yes ☐ No → SKIP to Item 1.4.					
		Applicant name Knobloch, Inc					
		Applicant address (street or P.O. box) PO Box 679					
		City or town Leeds			State Alabama		ZIP code 35094
		Contact name (first and last) Mary P. White		Title President		Phone number (205) 699-5200	Email address pdw7110@gmail.com
	1.4	Is the applicant the facility's owner, operator, or both? (Check only one response.) ☒ Owner ☐ Operator ☐ Both					
	1.5	To which entity should the NPDES permitting authority send correspondence? (Check only one response.) ☐ Facility ☒ Applicant ☐ Facility and applicant (they are one and the same)					
Existing Environmental Permits	1.6	Indicate below any existing environmental permits. (Check all that apply and print or type the corresponding permit number for each.)					
		Existing Environmental Permits					
		☒ NPDES (discharges to surface water) AL0068420		☐ RCRA (hazardous waste)		☐ UIC (underground injection control)	
		☐ PSD (air emissions)		☐ Nonattainment program (CAA)		☐ NESHAPs (CAA)	
		☐ Ocean dumping (MPRSA)		☐ Dredge or fill (CWA Section 404)		☐ Other (specify)	

EPA Identification Number		NPDES Permit Number AL0068420		Facility Name East Tuscaloosa - West Jefferson		Form Approved 03/05/19 OMB No. 2040-0004	
Collection System and Population Served	1.7	Provide the collection system information requested below for the treatment works.					
		Municipality Served	Population Served	Collection System Type (indicate percentage)		Ownership Status	
		East Tuscaloosa-West Jefferson	1,750	<u>100</u> % separate sanitary sewer ☐ % combined storm and sanitary sewer ☐ Unknown	☒ Own ☐ Own ☐ Own	☒ Maintain ☐ Maintain ☐ Maintain	
				<u> </u> % separate sanitary sewer <u> </u> % combined storm and sanitary sewer ☐ Unknown	☐ Own ☐ Own ☐ Own	☐ Maintain ☐ Maintain ☐ Maintain	
				<u> </u> % separate sanitary sewer <u> </u> % combined storm and sanitary sewer ☐ Unknown	☐ Own ☐ Own ☐ Own	☐ Maintain ☐ Maintain ☐ Maintain	
				<u> </u> % separate sanitary sewer <u> </u> % combined storm and sanitary sewer ☐ Unknown	☐ Own ☐ Own ☐ Own	☐ Maintain ☐ Maintain ☐ Maintain	
				<u> </u> % separate sanitary sewer <u> </u> % combined storm and sanitary sewer ☐ Unknown	☐ Own ☐ Own ☐ Own	☐ Maintain ☐ Maintain ☐ Maintain	
		Total Population Served	1,750				
				Separate Sanitary Sewer System	Combined Storm and Sanitary Sewer		
		Total percentage of each type of sewer line (in miles)		100 %			
Indian Country	1.8	Is the treatment works located in Indian Country? ☐ Yes ☒ No					
	1.9	Does the facility discharge to a receiving water that flows through Indian Country? ☐ Yes ☒ No					
Design and Actual Flow Rates	1.10	Provide design and actual flow rates in the designated spaces.				Design Flow Rate	
						0.300 mgd	
		Annual Average Flow Rates (Actual)					
		Two Years Ago	Last Year		This Year		
		0.112 mgd	0.150 mgd		0.200 mgd		
		Maximum Daily Flow Rates (Actual)					
	Two Years Ago	Last Year		This Year			
	0.170 mgd	0.190 mgd		0.233 mgd			
Discharge Points by Type	1.11	Provide the total number of effluent discharge points to waters of the United States by type.					
		Total Number of Effluent Discharge Points by Type					
		Treated Effluent	Untreated Effluent	Combined Sewer Overflows	Bypasses	Constructed Emergency Overflows	
	1	0	0	0	0		

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa - West Jefferson
---------------------------	----------------------------------	---

Form Approved 03/05/19
OMB No. 2040-0004

Collection System and Population Served	1.7	Provide the collection system information requested below for the treatment works.				
		Municipality Served	Population Served	Collection System Type (indicate percentage)	Ownership Status	
		East Tuscaloosa-West Jefferson	4700	☒ 100 % separate sanitary sewer ☐ % combined storm and sanitary sewer ☐ Unknown	☒ Own ☒ Maintain ☐ Own ☐ Maintain ☐ Own ☐ Maintain	
				☐ % separate sanitary sewer ☐ % combined storm and sanitary sewer ☐ Unknown	☐ Own ☐ Maintain ☐ Own ☐ Maintain ☐ Own ☐ Maintain	
				☐ % separate sanitary sewer ☐ % combined storm and sanitary sewer ☐ Unknown	☐ Own ☐ Maintain ☐ Own ☐ Maintain ☐ Own ☐ Maintain	
				☐ % separate sanitary sewer ☐ % combined storm and sanitary sewer ☐ Unknown	☐ Own ☐ Maintain ☐ Own ☐ Maintain ☐ Own ☐ Maintain	
		Total Population Served	4700			
		Total percentage of each type of sewer line (in miles)		Separate Sanitary Sewer System 100 %	Combined Storm and Sanitary Sewer %	
Indian Country	1.8	Is the treatment works located in Indian Country? ☐ Yes ☒ No				
	1.9	Does the facility discharge to a receiving water that flows through Indian Country? ☐ Yes ☒ No				
Design and Actual Flow Rates	1.10	Provide design and actual flow rates in the designated spaces.			Design Flow Rate 0.8 mgd	
		Annual Average Flow Rates (Actual)				
		Two Years Ago	Last Year	This Year		
		0.112 mgd	0.150 mgd	0.200 mgd		
		Maximum Daily Flow Rates (Actual)				
		Two Years Ago	Last Year	This Year		
	0.170 mgd	0.190 mgd	0.233 mgd			
Discharge Points by Type	1.11	Provide the total number of effluent discharge points to waters of the United States by type.				
		Total Number of Effluent Discharge Points by Type				
		Treated Effluent	Untreated Effluent	Combined Sewer Overflows	Bypasses	Constructed Emergency Overflows
	1	0	0	0	0	

RECEIVED

APR 15

MUNICIPAL SECTION

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa - West Jefferson	Form Approved 03/05/19 OMB No. 2040-0004
---------------------------	----------------------------------	---	---

Outfalls and Other Discharge or Disposal Methods

Outfalls Other Than to Waters of the United States

1.12 Does the POTW discharge wastewater to basins, ponds, or other surface impoundments that do not have outlets for discharge to waters of the United States?
☐ Yes ☒ No → SKIP to Item 1.14.

1.13 Provide the location of each surface impoundment and associated discharge information in the table below.

Surface Impoundment Location and Discharge Data		
Location	Average Daily Volume Discharged to Surface Impoundment	Continuous or Intermittent (check one)
	gpd	☐ Continuous ☐ Intermittent
	gpd	☐ Continuous ☐ Intermittent
	gpd	☐ Continuous ☐ Intermittent

1.14 Is wastewater applied to land?
☐ Yes ☒ No → SKIP to Item 1.16.

1.15 Provide the land application site and discharge data requested below.

Land Application Site and Discharge Data			
Location	Size	Average Daily Volume Applied	Continuous or Intermittent (check one)
	acres	gpd	☐ Continuous ☐ Intermittent
	acres	gpd	☐ Continuous ☐ Intermittent
	acres	gpd	☐ Continuous ☐ Intermittent

1.16 Is effluent transported to another facility for treatment prior to discharge?
☐ Yes ☒ No → SKIP to Item 1.21.

1.17 Describe the means by which the effluent is transported (e.g., tank truck, pipe).

1.18 Is the effluent transported by a party other than the applicant?
☐ Yes ☐ No → SKIP to Item 1.20.

1.19 Provide information on the transporter below.

Transporter Data		
Entity name	Mailing address (street or P.O. box)	
City or town	State	ZIP code
Contact name (first and last)	Title	
Phone number	Email address	

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa - West Jefferson	Form Approved 03/05/19 OMB No. 2040-0004
---------------------------	----------------------------------	---	---

Outfalls and Other Discharge or Disposal Methods Continued	1.20	In the table below, indicate the name, address, contact information, NPDES number, and average daily flow rate of the receiving facility.			
	Receiving Facility Data				
	Facility name		Mailing address (street or P.O. box)		
	City or town		State	ZIP code	
	Contact name (first and last)		Title		
	Phone number		Email address		
	NPDES number of receiving facility (if any) ☐ None		Average daily flow rate mgd		
	1.21	Is the wastewater disposed of in a manner other than those already mentioned in Items 1.14 through 1.21 that do not have outlets to waters of the United States (e.g., underground percolation, underground injection)? ☐ Yes ☒ No → SKIP to Item 1.23.			
	1.22	Provide information in the table below on these other disposal methods.			
	Information on Other Disposal Methods				
Disposal Method Description	Location of Disposal Site	Size of Disposal Site	Annual Average Daily Discharge Volume	Continuous or Intermittent (check one)	
		acres	gpd	☐ Continuous ☐ Intermittent	
		acres	gpd	☐ Continuous ☐ Intermittent	
		acres	gpd	☐ Continuous ☐ Intermittent	

Variance Requests	1.23	Do you intend to request or renew one or more of the variances authorized at 40 CFR 122.21(n)? (Check all that apply. Consult with your NPDES permitting authority to determine what information needs to be submitted and when.) ☐ Discharges into marine waters (CWA Section 301(h)) ☐ Water quality related effluent limitation (CWA Section 302(b)(2)) ☒ Not applicable			
--------------------------	------	---	--	--	--

Contractor Information	1.24	Are any operational or maintenance aspects (related to wastewater treatment and effluent quality) of the treatment works the responsibility of a contractor? ☒ Yes ☐ No → SKIP to Section 2			
	1.25	Provide location and contact information for each contractor in addition to a description of the contractor's operational and maintenance responsibilities.			
	Contractor Information				
		Contractor 1	Contractor 2	Contractor 3	
	Contractor name (company name)	EOS Utility Services, LLC			
	Mailing address (street or P.O. box)	206-A Oak Mountain Circle			
	City, state, and ZIP code	Pelham, AL 35124			
	Contact name (first and last)	Mike Walraven			
	Phone number	(205) 929-7261			
	Email address	mike@eosutilityservices.com			
Operational and maintenance responsibilities of contractor	Contract Operations and laboratory testing and reporting.				

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa - West Jefferson
---------------------------	----------------------------------	---

Form Approved 03/05/19
OMB No. 2040-0004

SECTION 2. ADDITIONAL INFORMATION (40 CFR 122.21(j)(1) and (2))							
Design Flow	Outfalls to Waters of the United States						
	2.1	Does the treatment works have a design flow greater than or equal to 0.1 mgd? ☒ Yes ☐ No → SKIP to Section 3.					
Inflow and Infiltration	2.2	Provide the treatment works' current average daily volume of inflow and infiltration.			Average Daily Volume of Inflow and Infiltration 10,000 gpd		
	Indicate the steps the facility is taking to minimize inflow and infiltration. Look for I/I sources						
Topographic Map	2.3	Have you attached a topographic map to this application that contains all the required information? (See instructions for specific requirements.) ☒ Yes ☐ No					
Flow Diagram	2.4	Have you attached a process flow diagram or schematic to this application that contains all the required information? (See instructions for specific requirements.) ☒ Yes ☐ No					
Scheduled Improvements and Schedules of Implementation	2.5	Are improvements to the facility scheduled? ☐ Yes ☒ No → SKIP to Section 3.					
	Briefly list and describe the scheduled improvements.						
	1.						
	2.						
	3.						
	4.						
	2.6	Provide scheduled or actual dates of completion for improvements.					
	Scheduled or Actual Dates of Completion for Improvements						
		Scheduled Improvement (from above)	Affected Outfalls (list outfall number)	Begin Construction (MM/DD/YYYY)	End Construction (MM/DD/YYYY)	Begin Discharge (MM/DD/YYYY)	Attainment of Operational Level (MM/DD/YYYY)
		1.					
	2.						
	3.						
	4.						
2.7	Have appropriate permits/clearances concerning other federal/state requirements been obtained? Briefly explain your response. ☐ Yes ☐ No ☐ None required or applicable						
Explanation:							

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa - West Jefferson
---------------------------	----------------------------------	---

Form Approved 03/05/19
OMB No. 2040-0004

SECTION 3. INFORMATION ON EFFLUENT DISCHARGES (40 CFR 122.21(j)(3) to (5))

Description of Outfalls	3.1	Provide the following information for each outfall. (Attach additional sheets if you have more than three outfalls.)			
		Outfall Number 0014		Outfall Number 0015	
		Outfall Number 0011			
	State	Alabama		Alabama	
	County	Bibb		Bibb	
	City or town	West Blocton		West Blocton	
	Distance from shore	0 ft.		0 ft.	
	Depth below surface	0 ft.		0 ft.	
	Average daily flow rate	0.200 mgd		0.400 mgd	
	Latitude	33° 14' 39" N		33° 14' 39" N	
Longitude	87° 03' 31" W		87° 03' 31" W		
Seasonal or Periodic Discharge Data	3.2	Do any of the outfalls described under Item 3.1 have seasonal or periodic discharges? ☐ Yes ☒ No → SKIP to Item 3.4.			
	3.3	If so, provide the following information for each applicable outfall.			
		Outfall Number _____		Outfall Number _____	
		Outfall Number _____		Outfall Number _____	
	Number of times per year discharge occurs				
	Average duration of each discharge (specify units)				
Average flow of each discharge	mgd		mgd		
Months in which discharge occurs					
Diffuser Type	3.4	Are any of the outfalls listed under Item 3.1 equipped with a diffuser? ☐ Yes ☒ No → SKIP to Item 3.6.			
	3.5	Briefly describe the diffuser type at each applicable outfall.			
		Outfall Number _____		Outfall Number _____	
Waters of the U.S.	3.6	Does the treatment works discharge or plan to discharge wastewater to waters of the United States from one or more discharge points? ☒ Yes ☐ No → SKIP to Section 6.			

RECEIVED

JUN 05 2025

MUNICIPAL SECTION

EPA Identification Number		NPDES Permit Number AL0068420		Facility Name East Tuscaloosa - West Jefferson		Form Approved 03/05/19 OMB No. 2040-0004	
Receiving Water Description	3.7	Provide the receiving water and related information (if known) for each outfall.					
		Outfall Number 0014		Outfall Number 0015		Outfall Number 0011	
	Receiving water name	Mud Creek		Mud Creek		Mud Creek	
	Name of watershed, river, or stream system	Cahaba River		Cahaba River		Cahaba River	
	U.S. Soil Conservation Service 14-digit watershed code						
	Name of state management/river basin						
	U.S. Geological Survey 8-digit hydrologic cataloging unit code						
	Critical low flow (acute)	cfs		cfs		cfs	
	Critical low flow (chronic)	cfs		cfs		cfs	
	Total hardness at critical low flow	mg/L of CaCO ₃		mg/L of CaCO ₃		mg/L of CaCO ₃	
Treatment Description	3.8	Provide the following information describing the treatment provided for discharges from each outfall.					
		Outfall Number 0014		Outfall Number 0015		Outfall Number 0011	
	Highest Level of Treatment (check all that apply per outfall)	☒ Primary ☐ Equivalent to secondary ☒ Secondary ☒ Advanced ☐ Other (specify) _____		☒ Primary ☐ Equivalent to secondary ☒ Secondary ☒ Advanced ☐ Other (specify) _____		☒ Primary ☐ Equivalent to secondary ☒ Secondary ☒ Advanced ☐ Other (specify) _____	
	Design Removal Rates by Outfall						
	BOD ₅ or CBOD ₅	85 %		85 %		85 %	
	TSS	85 %		85 %		85 %	
	Phosphorus	☐ Not applicable 95 %		☐ Not applicable 95 %		☐ Not applicable 95 %	
	Nitrogen	☒ Not applicable %		☒ Not applicable %		☒ Not applicable %	
	Other (specify) _____	☒ Not applicable %		☒ Not applicable %		☒ Not applicable %	

RECEIVED

JUN 05 2025

MUNICIPAL SECTI

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa - West Jefferson	Form Approved 03/05/19 OMB No. 2040-0004
---------------------------	----------------------------------	---	---




Effluent Testing Data Continued	3.19	Has the POTW conducted either (1) minimum of four quarterly WET tests for one year preceding this permit application or (2) at least four annual WET tests in the past 4.5 years? ☐ Yes ☐ No → Complete tests and Table E and SKIP to Item 3.26.				
	3.20	Have you previously submitted the results of the above tests to your NPDES permitting authority? ☐ Yes ☐ No → Provide results in Table E and SKIP to Item 3.26.				
	3.21	Indicate the dates the data were submitted to your NPDES permitting authority and provide a summary of the results. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 40%;">Date(s) Submitted (MM/DD/YYYY)</th> <th style="width: 60%;">Summary of Results</th> </tr> <tr> <td style="height: 50px;"></td> <td></td> </tr> </table>	Date(s) Submitted (MM/DD/YYYY)	Summary of Results		
	Date(s) Submitted (MM/DD/YYYY)	Summary of Results				
	3.22	Regardless of how you provided your WET testing data to the NPDES permitting authority, did any of the tests result in toxicity? ☐ Yes ☐ No → SKIP to Item 3.26.				
	3.23	Describe the cause(s) of the toxicity: 				
	3.24	Has the treatment works conducted a toxicity reduction evaluation? ☐ Yes ☐ No → SKIP to Item 3.26.				
	3.25	Provide details of any toxicity reduction evaluations conducted. 				
3.26	Have you completed Table E for all applicable outfalls and attached the results to the application package? ☐ Yes ☐ Not applicable because previously submitted information to the NPDES permitting authority.					
SECTION 4. INDUSTRIAL DISCHARGES AND HAZARDOUS WASTES (40 CFR 122.21(j)(6) and (7))						
Industrial Discharges and Hazardous Wastes	4.1	Does the POTW receive discharges from SIUs or NSCIUs? ☐ Yes ☒ No → SKIP to Item 4.7.				
	4.2	Indicate the number of SIUs and NSCIUs that discharge to the POTW. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 50%;">Number of SIUs</th> <th style="width: 50%;">Number of NSCIUs</th> </tr> <tr> <td style="height: 30px;"></td> <td></td> </tr> </table>	Number of SIUs	Number of NSCIUs		
	Number of SIUs	Number of NSCIUs				
	4.3	Does the POTW have an approved pretreatment program? ☐ Yes ☐ No				
	4.4	Have you submitted either of the following to the NPDES permitting authority that contains information substantially identical to that required in Table F: (1) a pretreatment program annual report submitted within one year of the application or (2) a pretreatment program? ☐ Yes ☐ No → SKIP to Item 4.6.				
4.5	Identify the title and date of the annual report or pretreatment program referenced in Item 4.4. SKIP to Item 4.7. 					
4.6	Have you completed and attached Table F to this application package? ☐ Yes ☐ No					

EPA Identification Number		NPDES Permit Number AL0068420		Facility Name East Tuscaloosa - West Jefferson		Form Approved 03/05/19 OMB No. 2040-0004	
Industrial Discharges and Hazardous Wastes Continued	4.7	Does the POTW receive, or has it been notified that it will receive, by truck, rail, or dedicated pipe, any wastes that are regulated as RCRA hazardous wastes pursuant to 40 CFR 261? ☐ Yes ☒ No → SKIP to Item 4.9.					
	4.8	If yes, provide the following information:					
		Hazardous Waste Number	Waste Transport Method (check all that apply)			Annual Amount of Waste Received	Units
			☐ Truck ☐ Dedicated pipe	☐ Rail ☐ Other (specify) _____			
			☐ Truck ☐ Dedicated pipe	☐ Rail ☐ Other (specify) _____			
			☐ Truck ☐ Dedicated pipe	☐ Rail ☐ Other (specify) _____			
4.9	Does the POTW receive, or has it been notified that it will receive, wastewaters that originate from remedial activities, including those undertaken pursuant to CERCLA and Sections 3004(7) or 3008(h) of RCRA? ☐ Yes ☒ No → SKIP to Section 5.						
4.10	Does the POTW receive (or expect to receive) less than 15 kilograms per month of non-acute hazardous wastes as specified in 40 CFR 261.30(d) and 261.33(e)? ☐ Yes → SKIP to Section 5. ☐ No						
4.11	Have you reported the following information in an attachment to this application: identification and description of the site(s) or facility(ies) at which the wastewater originates; the identities of the wastewater's hazardous constituents; and the extent of treatment, if any, the wastewater receives or will receive before entering the POTW? ☐ Yes ☐ No						
SECTION 5. COMBINED SEWER OVERFLOWS (40 CFR 122.21(j)(8))							
CSO Map and Diagram	5.1	Does the treatment works have a combined sewer system? ☐ Yes ☒ No → SKIP to Section 6.					
	5.2	Have you attached a CSO system map to this application? (See instructions for map requirements.) ☐ Yes ☐ No					
	5.3	Have you attached a CSO system diagram to this application? (See instructions for diagram requirements.) ☐ Yes ☐ No					

EPA Identification Number		NPDES Permit Number AL0068420		Facility Name East Tuscaloosa - West Jefferson		Form Approved 03/05/19 OMB No. 2040-0004	
CSO Outfall Description	5.4	For each CSO outfall, provide the following information. (Attach additional sheets as necessary.)					
		CSO Outfall Number _____		CSO Outfall Number _____		CSO Outfall Number _____	
	City or town						
	State and ZIP code						
	County						
	Latitude	° ' "		° ' "		° ' "	
	Longitude	° ' "		° ' "		° ' "	
	Distance from shore	ft.		ft.		ft.	
	Depth below surface	ft.		ft.		ft.	
CSO Monitoring	5.5	Did the POTW monitor any of the following items in the past year for its CSO outfalls?					
		CSO Outfall Number _____		CSO Outfall Number _____		CSO Outfall Number _____	
	Rainfall	☐ Yes ☐ No		☐ Yes ☐ No		☐ Yes ☐ No	
	CSO flow volume	☐ Yes ☐ No		☐ Yes ☐ No		☐ Yes ☐ No	
	CSO pollutant concentrations	☐ Yes ☐ No		☐ Yes ☐ No		☐ Yes ☐ No	
	Receiving water quality	☐ Yes ☐ No		☐ Yes ☐ No		☐ Yes ☐ No	
	CSO frequency	☐ Yes ☐ No		☐ Yes ☐ No		☐ Yes ☐ No	
	Number of storm events	☐ Yes ☐ No		☐ Yes ☐ No		☐ Yes ☐ No	
CSO Events in Past Year	5.6	Provide the following information for each of your CSO outfalls.					
		CSO Outfall Number _____		CSO Outfall Number _____		CSO Outfall Number _____	
	Number of CSO events in the past year	events		events		events	
	Average duration per event	hours ☐ Actual or ☐ Estimated		hours ☐ Actual or ☐ Estimated		hours ☐ Actual or ☐ Estimated	
	Average volume per event	million gallons ☐ Actual or ☐ Estimated		million gallons ☐ Actual or ☐ Estimated		million gallons ☐ Actual or ☐ Estimated	
	Minimum rainfall causing a CSO event in last year	inches of rainfall ☐ Actual or ☐ Estimated		inches of rainfall ☐ Actual or ☐ Estimated		inches of rainfall ☐ Actual or ☐ Estimated	

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa - West Jefferson	Form Approved 03/05/19 OMB No. 2040-0004
---------------------------	----------------------------------	---	---

CSO Receiving Waters	5.7	Provide the information in the table below for each of your CSO outfalls.		
		CSO Outfall Number ____	CSO Outfall Number ____	CSO Outfall Number ____
	Receiving water name			
	Name of watershed/ stream system			
	U.S. Soil Conservation Service 14-digit watershed code (if known)	☐ Unknown	☐ Unknown	☐ Unknown
	Name of state management/river basin			
	U.S. Geological Survey 8-Digit Hydrologic Unit Code (if known)	☐ Unknown	☐ Unknown	☐ Unknown
	Description of known water quality impacts on receiving stream by CSO (see instructions for examples)			

SECTION 6. CHECKLIST AND CERTIFICATION STATEMENT (40 CFR 122.22(a) and (d))															
6.1	In Column 1 below, mark the sections of Form 2A that you have completed and are submitting with your application. For each section, specify in Column 2 any attachments that you are enclosing to alert the permitting authority. Note that not all applicants are required to provide attachments. <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th style="width:40%; text-align: center;">Column 1</th> <th style="width:60%; text-align: center;">Column 2</th> </tr> </thead> <tbody> <tr> <td>☒ Section 1: Basic Application Information for All Applicants</td> <td> ☐ w/ variance request(s) ☐ w/ additional attachments </td> </tr> <tr> <td>☒ Section 2: Additional Information</td> <td> ☒ w/ topographic map ☒ w/ process flow diagram ☐ w/ additional attachments </td> </tr> <tr> <td>☒ Section 3: Information on Effluent Discharges</td> <td> ☒ w/ Table A ☐ w/ Table D ☒ w/ Table B ☐ w/ Table E ☐ w/ Table C ☐ w/ additional attachments </td> </tr> <tr> <td>☐ Section 4: Industrial Discharges and Hazardous Wastes</td> <td> ☐ w/ SIU and NSCIU attachments ☐ w/ Table F ☐ w/ additional attachments </td> </tr> <tr> <td>☐ Section 5: Combined Sewer Overflows</td> <td> ☐ w/ CSO map ☐ w/ additional attachments ☐ w/ CSO system diagram </td> </tr> <tr> <td>☒ Section 6: Checklist and Certification Statement</td> <td>☐ w/ attachments</td> </tr> </tbody> </table>	Column 1	Column 2	☒ Section 1: Basic Application Information for All Applicants	☐ w/ variance request(s) ☐ w/ additional attachments	☒ Section 2: Additional Information	☒ w/ topographic map ☒ w/ process flow diagram ☐ w/ additional attachments	☒ Section 3: Information on Effluent Discharges	☒ w/ Table A ☐ w/ Table D ☒ w/ Table B ☐ w/ Table E ☐ w/ Table C ☐ w/ additional attachments	☐ Section 4: Industrial Discharges and Hazardous Wastes	☐ w/ SIU and NSCIU attachments ☐ w/ Table F ☐ w/ additional attachments	☐ Section 5: Combined Sewer Overflows	☐ w/ CSO map ☐ w/ additional attachments ☐ w/ CSO system diagram	☒ Section 6: Checklist and Certification Statement	☐ w/ attachments
Column 1	Column 2														
☒ Section 1: Basic Application Information for All Applicants	☐ w/ variance request(s) ☐ w/ additional attachments														
☒ Section 2: Additional Information	☒ w/ topographic map ☒ w/ process flow diagram ☐ w/ additional attachments														
☒ Section 3: Information on Effluent Discharges	☒ w/ Table A ☐ w/ Table D ☒ w/ Table B ☐ w/ Table E ☐ w/ Table C ☐ w/ additional attachments														
☐ Section 4: Industrial Discharges and Hazardous Wastes	☐ w/ SIU and NSCIU attachments ☐ w/ Table F ☐ w/ additional attachments														
☐ Section 5: Combined Sewer Overflows	☐ w/ CSO map ☐ w/ additional attachments ☐ w/ CSO system diagram														
☒ Section 6: Checklist and Certification Statement	☐ w/ attachments														
6.2	Certification Statement <i>I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.</i> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:60%;">Name (print or type first and last name)</td> <td style="width:40%;">Official title</td> </tr> <tr> <td>Mary P. White</td> <td>President</td> </tr> <tr> <td>Signature</td> <td>Date signed</td> </tr> <tr> <td></td> <td>1-20-2025</td> </tr> </table>	Name (print or type first and last name)	Official title	Mary P. White	President	Signature	Date signed		1-20-2025						
Name (print or type first and last name)	Official title														
Mary P. White	President														
Signature	Date signed														
	1-20-2025														

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa - West Jefferson	Outfall Number 012
---------------------------	----------------------------------	---	-----------------------

Form Approved 03/05/19
OMB No. 2040-0004

TABLE A. EFFLUENT PARAMETERS FOR ALL POTWS							
Pollutant	Maximum Daily Discharge		Average Daily Discharge			Analytical Method ¹	ML or MDL (include units)
	Value	Units	Value	Units	Number of Samples		
Biochemical oxygen demand ☐ BOD ₅ or ☒ CBOD ₅ (report one)	4.3	mg/L	1.02	mg/L	12	5210B	2 ☐ ML ☒ MDL
Fecal coliform	200	col/100 ml	18	col/100 ml	12	1603 (1)	2 ☐ ML ☒ MDL
Design flow rate	0.233	MGD	0.200	MGD	12		
pH (minimum)	7.2	s.u.					
pH (maximum)	7.3	s.u.					
Temperature (winter)	16.4	Degrees Celsius	15.5	Degrees Celsius	12		
Temperature (summer)	22.6	Degrees Celsius	20.3	Degrees Celsius	12		
Total suspended solids (TSS)	17.0	mg/L	4.40	mg/L	12	2540D	1 ☐ ML ☒ MDL

¹ Sampling shall be conducted according to sufficiently sensitive test procedures (i.e., methods) approved under 40 CFR 136 for the analysis of pollutants or pollutant parameters or required under 40 CFR chapter I, subchapter N or O. See instructions and 40 CFR 122.21(e)(3).

This page intentionally left blank.

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa - West Jefferson	Outfall Number 012
---------------------------	----------------------------------	---	-----------------------

Form Approved 03/05/19
OMB No. 2040-0004

TABLE B. EFFLUENT PARAMETERS FOR ALL POTWS WITH A FLOW EQUAL TO OR GREATER THAN 0.1 MGD

Pollutant	Maximum Daily Discharge		Average Daily Discharge			Analytical Method ¹	ML or MDL (include units)
	Value	Units	Value	Units	Number of Samples		
Ammonia (as N)	2.82	mg/L	0.41	mg/L	12	4500NH3	0.1 ☐ ML ☒ MDL
Chlorine (total residual, TRC) ²	*B	mg/L	*B	mg/L	12	112	0.03 ☐ ML ☒ MDL
Dissolved oxygen	6.9	mg/L	6.8	mg/L	12	106	0.2 ☐ ML ☒ MDL
Nitrate/nitrite	2.72	mg/L	0.89	mg/L	7	300 (1)	0.03 ☐ ML ☒ MDL
Kjeldahl nitrogen	1.91	mg/L	1.07	mg/L	7	351.2 (1)	0.1 ☐ ML ☒ MDL
Oil and grease	1.4	mg/L	*B	mg/L	8	1664 B	5.0 ☐ ML ☐ MDL
Phosphorus	2.16	mg/L	0.43	mg/L	12	4500P (2)	0.1 ☐ ML ☒ MDL
Total dissolved solids	220	mg/L	81.5	mg/L	8	SM2540C	4.0 ☐ ML ☒ MDL

¹ Sampling shall be conducted according to sufficiently sensitive test procedures (i.e., methods) approved under 40 CFR 136 for the analysis of pollutants or pollutant parameters or required under 40 CFR chapter I, subchapter N or O. See instructions and 40 CFR 122.21(e)(3).

² Facilities that do not use chlorine for disinfection, do not use chlorine elsewhere in the treatment process, and have no reasonable potential to discharge chlorine in their effluent are not required to report data for chlorine.

RECEIVED

APR 15 2025

MUNICIPAL SECTION

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

Form 2S NPDES		U.S Environmental Protection Agency Application for NPDES Permit for Sewage Sludge Management NEW AND EXISTING TREATMENT WORKS TREATING DOMESTIC SEWAGE
---------------------	--	--

PRELIMINARY INFORMATION

Does your facility currently have an effective NPDES permit or have you been directed by your NPDES permitting authority to submit a full Form 2S permit application?

☒ Yes → Complete Part 2 of application package (begins p. 7). ☐ No → Complete Part 1 of application package (below).

Part 1 LIMITED BACKGROUND INFORMATION (40 CFR 122.21(c)(2)(ii))

Complete this part only if you are a "sludge-only" facility (i.e., a facility that does not currently have, and is not applying for, an NPDES permit for a direct discharge to a surface body of water).

PART 1, SECTION 1. FACILITY INFORMATION (40 CFR 122.21(C)(2)(II)(A))

Facility Information	<u>1.1</u>	Facility name		
		Mailing address (street or P.O. box)		
		City or town	State	ZIP code
		Contact name (first and last)	Title	Phone number Email address
		Location address (street, route number, or other specific identifier)		☐ Same as mailing address
		City or town	State	ZIP code
	<u>1.2</u>	Ownership Status		
	☐ Public—federal ☐ Public—state ☐ Other public (specify) _____ ☒ Private ☐ Other (specify) _____			

PART 1, SECTION 2. APPLICANT INFORMATION (40 CFR 122.21(C)(2)(II)(B))

Applicant Information	<u>2.1</u>	Is applicant different from entity listed under Item 1.1 above?		
		☐ Yes ☐ No → SKIP to Item 2.3 (Part 1, Section 2).		
	<u>2.2</u>	Applicant name		
		Applicant address (street or P.O. box)		
		City or town	State	ZIP code
	Contact name (first and last)	Title	Phone number	Email address
<u>2.3</u>	Is the applicant the facility's owner, operator, or both? (Check only one response.)			
	☐ Owner ☐ Operator ☐ Both			
<u>2.4</u>	To which entity should the NPDES permitting authority send correspondence? (Check only one response.)			
	☐ Facility ☐ Applicant ☐ Facility and applicant (they are one and the same)			

PART 1, SECTION 3. SEWAGE SLUDGE AMOUNT (40 CFR 122.21(C)(2)(II)(D))

Sewage Sludge Amount	<u>3.1</u>	Provide the total dry metric tons per the latest 365-day period of sewage sludge generated, treated, used, and disposed of:	
		Practice	Dry Metric Tons per 365-Day Period
		Amount generated at the facility	
		Amount treated at the facility	
		Amount used (i.e., received from offsite) at the facility	
		Amount disposed of at the facility	

EPA Identification Number	NPDES Permit Number	Facility Name
	AL0068420	East Tuscaloosa- West Jefferson

OMB No. 2040-0004
Expires 07/31/2026

PART 1. SECTION 4. POLLUTANT CONCENTRATIONS (40 CFR 122.21(C)(2)(II)(E))

Pollutant Concentrations	4.1	Using the table below or a separate attachment, provide existing sewage sludge monitoring data for the pollutants for which limits in sewage sludge have been established in 40 CFR 503 for your facility's expected use or disposal practices. If available, base data on three or more samples taken at least one month apart and no more than 4.5 years old. ☐ Check here if you have provided a separate attachment with this information.		

Page 3

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

PART 1, SECTION 7. USE AND DISPOSAL SITES (40 CFR 122.21(C)(2)(II)(C))

Use and Disposal Sites	Provide the following information for each site on which sewage sludge from this facility is used or disposed of. ☐ Check here if you have provided separate attachments with this information.				
	7.1	Site name or number			
		Mailing address (street or P.O. box)			
		City or town		State	ZIP code
		Contact name (first and last)	Title	Phone number	Email address
		Location address (street, route number, or other specific identifier)			☐ Same as mailing address
		City or town		State	ZIP code
		County		County code	☐ Not available
	7.2	Site type (check all that apply)			
	☐	Agricultural	☐	Lawn or home garden	☐
☐	Surface disposal	☐	Public contact	☐	Incineration
☐	Reclamation	☐	Municipal solid waste landfill	☐	Other (describe)

PART 1, SECTION 8. CHECKLIST AND CERTIFICATION STATEMENT (40 CFR 122.22(A) AND (D))

Checklist and Certification Statement	8.1	In Column 1 below, mark the sections of Form 2S, Part 1, that you have completed and are submitting with your application. For each section, specify in Column 2 any attachments that you are enclosing to alert the permitting authority. Note that not all applicants are required to provide attachments.	
		Column 1	Column 2
		☐ Section 1: Facility Information	☐ w/ attachments
		☐ Section 2: Applicant Information	☐ w/ attachments
		☐ Section 3: Sewage Sludge Amount	☐ w/ attachments
		☐ Section 4: Pollutant Concentrations	☐ w/ attachments
		☐ Section 5: Treatment Provided at Your Facility	☐ w/ attachments
		☐ Section 6: Sewage Sludge Sent to Other Facilities	☐ w/ attachments
		☐ Section 7: Use and Disposal Sites	☐ w/ attachments
		☐ Section 8: Checklist and Certification Statement	

EPA Identification Number		NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
Checklist and Certification Statement Continued	8.2	Provide the following certification. (See instructions to determine the appropriate person to submit the application.)		
		Certification Statement		
		<i>I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.</i>		
		Name (print or type first and last name)	Official title	Phone number
	Signature		Date signed	

PART 1 APPLICANTS STOP HERE.

Submit completed application package to your NPDES permitting authority.

This page intentionally left blank.

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West	OMB No. 2040-0004 Expires 07/31/2026
PART 2		PERMIT APPLICATION INFORMATION (40 CFR 122.21(q))	
Complete this part if you have an effective NPDES permit or have been directed by the NPDES permitting authority to submit a full permit application. In other words, complete this part if your facility has, or is applying for, an NPDES permit. Part 2 is divided into five sections. Section 1 pertains to all applicants. The applicability of Sections 2 to 5 depends on your facility's sewage sludge use or disposal practices. See the instructions to determine which sections you are required to complete.			
PART 2, SECTION 1. GENERAL INFORMATION (40 CFR 122.21(Q)(1 7) AND (Q)(13))			
General Information	All Part 2 applicants must complete this section.		
	Facility Information		
	1.1 Facility name East Tuscaloosa - West Jefferson WWTP		
	Mailing address (street or P.O. box) PO Box 679		
	City or town Leeds	State Alabama	ZIP code 35094
	Phone number (205) 699-5200		
	Contact name (first and last) Mary P. White	Title President	Email address pdw7110@gmail.com
	Location address (street, route number, or other specific identifier) 12874 Woodland Park Circle		☐ Same as mailing address
	City or town McCalla	State Alabama	ZIP code 35111
	1.2 Is this facility a Class I sludge management facility? ☐ Yes ☒ No		
	1.3 Facility Design Flow Rate	0.4 million gallons per day (mgd)	
	1.4 Total Population Served	2350	
	1.5 Ownership Status		
	☐ Public—federal ☐ Public—state ☐ Other public (specify) _____ ☒ Private ☐ Other (specify) _____		
	Applicant Information		
1.6 Is applicant different from entity listed under Item 1.1 above? ☒ Yes ☐ No → SKIP to Item 1.8 (Part 2, Section 1).			
1.7 Applicant name Knobloch, Inc.			
Applicant mailing address (street or P.O. box) PO Box 679			
City or town Leeds	State Alabama	ZIP code 35094	
Contact name (first and last) Mary P. White	Title President	Phone number (205) 699-5200	
Email address pdw7110@gmail.com			
1.8 Is the applicant the facility's owner, operator, or both? (Check only one response.) ☐ Operator ☒ Owner ☐ Both			
1.9 To which entity should the NPDES permitting authority send correspondence? (Check only one response.) ☐ Facility ☒ Applicant ☐ Facility and applicant (they are one and the same)			

RECEIVED

JUN 15 2025

MUNICIPAL SECTION

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

PART 2	PERMIT APPLICATION INFORMATION (40 CFR 122.21(q))			
Complete this part if you have an effective NPDES permit or have been directed by the NPDES permitting authority to submit a full permit application. In other words, complete this part if your facility has, or is applying for, an NPDES permit. Part 2 is divided into five sections. Section 1 pertains to all applicants. The applicability of Sections 2 to 5 depends on your facility's sewage sludge use or disposal practices. See the instructions to determine which sections you are required to complete.				
PART 2, SECTION 1. GENERAL INFORMATION (40 CFR 122.21(Q)(1-7) AND (Q)(13))				
General Information	All Part 2 applicants must complete this section.			
	Facility Information			
	1.1 Facility name East Tuscaloosa - West Jefferson WWTP			
	Mailing address (street or P.O. box) PO Box 679			
	City or town Leeds	State Alabama	ZIP code 35094	Phone number (205) 699-5200
	Contact name (first and last) Mary P. White	Title President	Email address pdw7110@gmail.com	
	Location address (street, route number, or other specific identifier) 12874 Woodland Park Circle			☐ Same as mailing address
	City or town McCalla	State Alabama	ZIP code 35111	
	1.2 Is this facility a Class I sludge management facility? ☐ Yes ☒ No			
	1.3 Facility Design Flow Rate		0.8 million gallons per day (mgd)	
	1.4 Total Population Served		4700	
	1.5 Ownership Status			
	☐ Public—federal ☐ Public—state ☐ Other public (specify) _____ ☒ Private ☐ Other (specify) _____			
	Applicant Information			
	1.6 Is applicant different from entity listed under Item 1.1 above? ☒ Yes ☐ No → SKIP to Item 1.8 (Part 2, Section 1).			
1.7 Applicant name Knobloch, Inc. Applicant mailing address (street or P.O. box) PO Box 679 City or town Leeds State Alabama ZIP code 35094 Contact name (first and last) Mary P. White Title President Phone number (205) 699-5200 Email address pdw7110@gmail.com				
1.8 Is the applicant the facility's owner, operator, or both? (Check only one response.) ☐ Operator ☒ Owner ☐ Both				
1.9 To which entity should the NPDES permitting authority send correspondence? (Check only one response.) ☐ Facility ☒ Applicant ☐ Facility and applicant (they are one and the same)				


MUNICIPAL SECTION

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

General Information Continued

Permit Information																													
1.10	Facility's NPDES permit number ☐ Check here if you do not have an NPDES permit but are otherwise required to submit Part 2 of Form 2S.																												
NPDES Permit Number																													
AL0068420																													
1.11	Indicate all other federal, state, and local permits or construction approvals received or applied for that regulate this facility's sewage sludge management practices below. ☐ Check here if you have provided a separate attachment with this information.																												
Existing Environment Permits (check all that apply and print or type the corresponding permit number for each)																													
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; padding: 5px;">☐ RCRA (hazardous wastes)</td> <td style="width: 33%; padding: 5px;">☐ Nonattainment program (CAA)</td> <td style="width: 33%; padding: 5px;">☐ NESHAPs (CAA)</td> </tr> <tr> <td style="padding: 5px;">☐ PSD (air emissions)</td> <td style="padding: 5px;">☐ Dredge or fill (CWA Section 404)</td> <td style="padding: 5px;">☐ Other (specify)</td> </tr> <tr> <td style="padding: 5px;">☐ Ocean dumping (MPRSA)</td> <td style="padding: 5px;">☐ UIC (underground injection of fluids)</td> <td style="padding: 5px;"></td> </tr> </table>		☐ RCRA (hazardous wastes)	☐ Nonattainment program (CAA)	☐ NESHAPs (CAA)	☐ PSD (air emissions)	☐ Dredge or fill (CWA Section 404)	☐ Other (specify)	☐ Ocean dumping (MPRSA)	☐ UIC (underground injection of fluids)																				
☐ RCRA (hazardous wastes)	☐ Nonattainment program (CAA)	☐ NESHAPs (CAA)																											
☐ PSD (air emissions)	☐ Dredge or fill (CWA Section 404)	☐ Other (specify)																											
☐ Ocean dumping (MPRSA)	☐ UIC (underground injection of fluids)																												
Indian Country																													
1.12	Does any generation, treatment, storage, application to land, or disposal of sewage sludge from this facility occur in Indian Country? ☐ Yes ☒ No → SKIP to Item 1.14 (Part 2, Section 1) below.																												
1.13	Provide a description of the generation, treatment, storage, land application, or disposal of sewage sludge that occurs.																												
Topographic Map																													
1.14	Have you attached a topographic map containing all required information to this application? (See instructions for specific requirements.) ☒ Yes																												
Line Drawing																													
1.15	Have you attached a line drawing and/or a narrative description that identifies all sewage sludge practices that will be employed during the term of the permit containing all the required information to this application? (See instructions for specific requirements.) ☒ Yes																												
Contractor Information																													
1.16	Do contractors have any operational or maintenance responsibilities related to sewage sludge generation, treatment, use, or disposal at the facility? ☒ Yes ☐ No → SKIP to Item 1.18 (Part 2, Section 1) below.																												
1.17	Provide the following information for each contractor. ☐ Check here if you have attached additional sheets to the application package. <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr> <th style="width: 35%;"></th> <th style="width: 20%;">Contractor 1</th> <th style="width: 20%;">Contractor 2</th> <th style="width: 25%;">Contractor 3</th> </tr> <tr> <td>Contractor company name</td> <td>Meeks Environmental</td> <td></td> <td></td> </tr> <tr> <td>Mailing address (street or P.O. box)</td> <td>1625 Holmes Drive</td> <td></td> <td></td> </tr> <tr> <td>City, state, and ZIP code</td> <td>Bessemer, AL, 35020</td> <td></td> <td></td> </tr> <tr> <td>Contact name (first and last)</td> <td>Jon Meeks</td> <td></td> <td></td> </tr> <tr> <td>Telephone number</td> <td>(205) 425-8303</td> <td></td> <td></td> </tr> <tr> <td>Email address</td> <td>info@meeksonsite.com</td> <td></td> <td></td> </tr> </table>		Contractor 1	Contractor 2	Contractor 3	Contractor company name	Meeks Environmental			Mailing address (street or P.O. box)	1625 Holmes Drive			City, state, and ZIP code	Bessemer, AL, 35020			Contact name (first and last)	Jon Meeks			Telephone number	(205) 425-8303			Email address	info@meeksonsite.com		
	Contractor 1	Contractor 2	Contractor 3																										
Contractor company name	Meeks Environmental																												
Mailing address (street or P.O. box)	1625 Holmes Drive																												
City, state, and ZIP code	Bessemer, AL, 35020																												
Contact name (first and last)	Jon Meeks																												
Telephone number	(205) 425-8303																												
Email address	info@meeksonsite.com																												

EPA Identification Number		NPDES Permit Number AL0068420		Facility Name East Tuscaloosa- West Jefferson		OMB No. 2040-0004 Expires 07/31/2026	
---------------------------	--	----------------------------------	--	--	--	---	--

General Information Continued	<u>1.17</u>		Contractor 1	Contractor 2	Contractor 3
	cont.	Responsibilities of contractor	Haul dried sludge to municipal landfill and haul wet sludge to 1A/M/T/D		
	Pollutant Concentrations				
	Using the table below or a separate attachment, provide sewage sludge monitoring data for the pollutants for which limits in sewage sludge have been established in 40 CFR 503 for this facility's expected use or disposal practices. All data must be based on three or more samples taken at least one month apart and must be no more than 4.5 years old.				
	☐ Check here if you have attached additional sheets to the application package.				
	<u>1.18</u>	Pollutant	Average Monthly Concentration (mg/kg dry weight)	Analytical Method	Detection Level
		Arsenic	NA		
		Cadmium	NA		
		Chromium	NA		
		Copper	NA		
	Lead	NA			
	Mercury	NA			
	Molybdenum	NA			
	Nickel	NA			
	Selenium	NA			
	Zinc	NA			
Checklist and Certification Statement					
	<u>1.19</u>	In Column 1 below, mark the sections of Form 2S, Part 2, that you have completed and are submitting with your application. For each section, specify in Column 2 any attachments that you are enclosing. Note that not all applicants are required to complete all sections or provide attachments. See Exhibit 2S-2 in the Instructions.			
		Column 1	Column 2		
		☒ Section 1 (General Information)	☒ w/ attachments		
		☒ Section 2 (Generation of Sewage Sludge or Preparation of a Material Derived from Sewage Sludge)	☐ w/ attachments		
		☐ Section 3 (Land Application of Bulk Sewage Sludge)	☐ w/ attachments		
		☐ Section 4 (Surface Disposal)	☐ w/ attachments		
		☐ Section 5 (Incineration)	☐ w/ attachments		
	<u>1.20</u>	Provide the following certification. (See instructions to determine the appropriate person to sign the application.)			
		Certification Statement			
		<i>I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.</i>			
		Name (print or type first and last name) Mary P. White		Official title President	
		Signature 		Date signed 1-20-2025	
		Telephone number (205) 699-5200			
Upon the request of the NPDES permitting authority, you must submit any other information the authority deems necessary to assess sewage sludge use or disposal practices at your facility and identify appropriate permitting requirements.					

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

PART 2, SECTION 2. GENERATION OF SEWAGE SLUDGE OR PREPARATION OF A MATERIAL DERIVED FROM SEWAGE SLUDGE (40 CFR 122.21(Q)(8) THROUGH (12))

Generation of Sewage Sludge or Preparation of a Material Derived from Sewage Sludge	<u>2.1</u>	Does your facility generate sewage sludge or derive a material from sewage sludge?		
	☒ Yes ☐ No → SKIP to Part 2, Section 3.			
	Amount Generated Onsite			
	<u>2.2</u>	Total dry metric tons per 365-day period generated at your facility:		27
	Amount Received from Offsite Facility			
	<u>2.3</u>	Does your facility receive sewage sludge from another facility for treatment use or disposal?		
	☐ Yes ☒ No → SKIP to Item 2.8 (Part 2, Section 2) below.			
	<u>2.4</u>	Indicate the total number of facilities from which you receive sewage sludge for treatment, use, or disposal:		
	Provide the following information for each of the facilities from which you receive sewage sludge. ☐ Check here if you have attached additional sheets to the application package.			
	<u>2.5</u>	Name of facility		
Mailing address (street or P.O. box)				
City or town		State	ZIP code	
Contact name (first and last)	Title	Phone number	Email address	
Location address (street, route number, or other specific identifier)			☐ Same as mailing address	
City or town		State	ZIP code	
County		County code	☐ Not available	
<u>2.6</u>	Indicate the amount of sewage sludge received, the applicable pathogen class and reduction alternative, and the applicable vector reduction option provided at the offsite facility.			
Amount (dry metric tons)		Vector Attraction Reduction Option		
		☐ Not applicable ☐ Class A, Alternative 1 ☐ Class A, Alternative 2 ☐ Class A, Alternative 3 ☐ Class A, Alternative 4 ☐ Class A, Alternative 5 ☐ Class A, Alternative 6 ☐ Class B, Alternative 1 ☐ Class B, Alternative 2 ☐ Class B, Alternative 3 ☐ Class B, Alternative 4 ☐ Domestic septage, pH adjustment		
		☐ Not applicable ☐ Option 1 ☐ Option 2 ☐ Option 3 ☐ Option 4 ☐ Option 5 ☐ Option 6 ☐ Option 7 ☐ Option 8 ☐ Option 9 ☐ Option 10 ☐ Option 11		
<u>2.7</u>	Identify the treatment process(es) that are known to occur at the offsite facility, including blending activities and treatment to reduce pathogens or vector attraction properties. (Check all that apply.)			
☐ Preliminary operations (e.g., sludge grinding and degritting)			☐ Thickening (concentration)	
☐ Stabilization			☐ Anaerobic digestion	
☐ Composting			☐ Conditioning	
☐ Disinfection (e.g., beta ray irradiation, gamma ray irradiation, pasteurization)			☐ Dewatering (e.g., centrifugation, sludge drying beds, sludge lagoons)	
☐ Heat drying			☐ Thermal reduction	
☐ Methane or biogas capture and recovery			☐ Other (specify) _____	

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

Generation of Sewage Sludge or Preparation of a Material Derived from Sewage Sludge Continued

2.8	For each sewage sludge use or disposal practice, indicate the applicable pathogen class and reduction alternative and the applicable vector attraction reduction option provided at your facility. Attach additional pages, as necessary. <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 35%;">Use or Disposal Practice (check one)</th> <th style="width: 35%;">Pathogen Class and Reduction Alternative</th> <th style="width: 30%;">Vector Attraction Reduction Option</th> </tr> </thead> <tbody> <tr> <td>☐ Land application of bulk sewage</td> <td>☒ Not applicable</td> <td>☒ Not applicable</td> </tr> <tr> <td>☐ Land application of biosolids (bulk)</td> <td>☐ Class A, Alternative 1</td> <td>☐ Option 1</td> </tr> <tr> <td>☐ Land application of biosolids (bags)</td> <td>☐ Class A, Alternative 2</td> <td>☐ Option 2</td> </tr> <tr> <td>☐ Disposal in a landfill</td> <td>☐ Class A, Alternative 3</td> <td>☐ Option 3</td> </tr> <tr> <td>☐ Surface disposal</td> <td>☐ Class A, Alternative 4</td> <td>☐ Option 4</td> </tr> <tr> <td>☐ Incineration</td> <td>☐ Class A, Alternative 5</td> <td>☐ Option 5</td> </tr> <tr> <td></td> <td>☐ Class A, Alternative 6</td> <td>☐ Option 6</td> </tr> <tr> <td></td> <td>☐ Class B, Alternative 1</td> <td>☐ Option 7</td> </tr> <tr> <td></td> <td>☐ Class B, Alternative 2</td> <td>☐ Option 8</td> </tr> <tr> <td></td> <td>☐ Class B, Alternative 3</td> <td>☐ Option 9</td> </tr> <tr> <td></td> <td>☐ Class B, Alternative 4</td> <td>☐ Option 10</td> </tr> <tr> <td></td> <td>☐ Domestic septage, pH adjustment</td> <td>☐ Option 11</td> </tr> </tbody> </table>	Use or Disposal Practice (check one)	Pathogen Class and Reduction Alternative	Vector Attraction Reduction Option	☐ Land application of bulk sewage	☒ Not applicable	☒ Not applicable	☐ Land application of biosolids (bulk)	☐ Class A, Alternative 1	☐ Option 1	☐ Land application of biosolids (bags)	☐ Class A, Alternative 2	☐ Option 2	☐ Disposal in a landfill	☐ Class A, Alternative 3	☐ Option 3	☐ Surface disposal	☐ Class A, Alternative 4	☐ Option 4	☐ Incineration	☐ Class A, Alternative 5	☐ Option 5		☐ Class A, Alternative 6	☐ Option 6		☐ Class B, Alternative 1	☐ Option 7		☐ Class B, Alternative 2	☐ Option 8		☐ Class B, Alternative 3	☐ Option 9		☐ Class B, Alternative 4	☐ Option 10		☐ Domestic septage, pH adjustment	☐ Option 11
Use or Disposal Practice (check one)	Pathogen Class and Reduction Alternative	Vector Attraction Reduction Option																																						
☐ Land application of bulk sewage	☒ Not applicable	☒ Not applicable																																						
☐ Land application of biosolids (bulk)	☐ Class A, Alternative 1	☐ Option 1																																						
☐ Land application of biosolids (bags)	☐ Class A, Alternative 2	☐ Option 2																																						
☐ Disposal in a landfill	☐ Class A, Alternative 3	☐ Option 3																																						
☐ Surface disposal	☐ Class A, Alternative 4	☐ Option 4																																						
☐ Incineration	☐ Class A, Alternative 5	☐ Option 5																																						
	☐ Class A, Alternative 6	☐ Option 6																																						
	☐ Class B, Alternative 1	☐ Option 7																																						
	☐ Class B, Alternative 2	☐ Option 8																																						
	☐ Class B, Alternative 3	☐ Option 9																																						
	☐ Class B, Alternative 4	☐ Option 10																																						
	☐ Domestic septage, pH adjustment	☐ Option 11																																						
2.9	Identify the treatment process(es) used at your facility to reduce pathogens in sewage sludge or reduce the vector attraction properties of sewage sludge? (Check all that apply.) <table style="width: 100%;"> <tr> <td>☐ Preliminary operations (e.g., sludge grinding and dewatering)</td> <td>☒ Thickening (concentration)</td> </tr> <tr> <td>☐ Stabilization</td> <td>☐ Anaerobic digestion</td> </tr> <tr> <td>☐ Composting</td> <td>☐ Conditioning</td> </tr> <tr> <td>☐ Disinfection (e.g., beta ray irradiation, gamma ray irradiation, pasteurization)</td> <td>☐ Dewatering (e.g., centrifugation, sludge drying beds, sludge lagoons)</td> </tr> <tr> <td>☐ Heat drying</td> <td>☐ Thermal reduction</td> </tr> <tr> <td>☐ Methane or biogas capture and recovery</td> <td></td> </tr> </table>	☐ Preliminary operations (e.g., sludge grinding and dewatering)	☒ Thickening (concentration)	☐ Stabilization	☐ Anaerobic digestion	☐ Composting	☐ Conditioning	☐ Disinfection (e.g., beta ray irradiation, gamma ray irradiation, pasteurization)	☐ Dewatering (e.g., centrifugation, sludge drying beds, sludge lagoons)	☐ Heat drying	☐ Thermal reduction	☐ Methane or biogas capture and recovery																												
☐ Preliminary operations (e.g., sludge grinding and dewatering)	☒ Thickening (concentration)																																							
☐ Stabilization	☐ Anaerobic digestion																																							
☐ Composting	☐ Conditioning																																							
☐ Disinfection (e.g., beta ray irradiation, gamma ray irradiation, pasteurization)	☐ Dewatering (e.g., centrifugation, sludge drying beds, sludge lagoons)																																							
☐ Heat drying	☐ Thermal reduction																																							
☐ Methane or biogas capture and recovery																																								
2.10	Describe any other sewage sludge treatment or blending activities not identified in Items 2.8 and 2.9 (Part 2, Section 2) above. ☐ Check here if you have attached the description to the application package.																																							
Preparation of Sewage Sludge Meeting Ceiling and Pollutant Concentrations, Class A Pathogen Requirements, and One of Vector Attraction Reduction Options 1 to 8																																								
2.11	Does the sewage sludge from your facility meet the ceiling concentrations in Table 1 of 40 CFR 503.13, the pollutant concentrations in Table 3 of 40 CFR 503.13, Class A pathogen reduction requirements at 40 CFR 503.32(a), and one of the vector attraction reduction requirements at 40 CFR 503.33(b)(1)-(8) and is it land applied? ☐ Yes ☒ No → SKIP to Item 2.14 (Part 2, Section 2) below.																																							
2.12	Total dry metric tons per 365-day period of sewage sludge subject to this subsection that is applied to the land:																																							
2.13	Is sewage sludge subject to this subsection placed in bags or other containers for sale or give-away for application to the land? ☐ Yes ☐ No																																							
☐ Check here once you have completed Items 2.11 to 2.13, then → SKIP to Item 2.32 (Part 2, Section 2) below.																																								

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

Generation of Sewage Sludge or Preparation of a Material Derived from Sewage Sludge Continued

Sale or Give-Away in a Bag or Other Container for Application to the Land

2.14 Do you place sewage sludge in a bag or other container for sale or give-away for land application?
☐ Yes ☒ No → SKIP to Item 2.17 (Part 2, Section 2) below.

2.15 Total dry metric tons per 365-day period of sewage sludge placed in a bag or other container at your facility for sale or give-away for application to the land:

2.16 Attach a copy of all labels or notices that accompany the sewage sludge being sold or given away in a bag or other container for application to the land.
☐ Check here to indicate that you have attached all labels or notices to this application package.

☐ Check here once you have completed Items 2.14 to 2.16, then → SKIP to Part 2, Section 2, Item 2.32.

Shipment Offsite for Treatment or Blending

2.17 Does another facility provide treatment or blending of your facility's sewage sludge? (This question does not pertain to dewatered sludge sent directly to a land application or surface disposal site.)
☒ Yes ☐ No → SKIP to Item 2.27 (Part 2, Section 2) below.

2.18 Indicate the total number of facilities that provide treatment or blending of your facility's sewage sludge. Provide the information in Items 2.19 to 2.26 (Part 2, Section 2) below for each facility.
☐ Check here if you have attached additional sheets to the application package. 1

2.19 Name of receiving facility
Jefferson County - Village Creek WWTP

Mailing address (street or P.O. box)
1440 Pleasant Hill Road

City or town Birmingham	State AL	ZIP code 35224
----------------------------	-------------	-------------------

Contact name (first and last) Daniel White	Title Assistant Director	Phone number (205) 791-6405	Email address daniel.white@jcdh.org
---	-----------------------------	--------------------------------	--

Location address (street, route number, or other specific identifier) ☒ Same as mailing address

City or town	State	ZIP code
--------------	-------	----------

2.20 Total dry metric tons per 365-day period of sewage sludge provided to receiving facility. 13

2.21 Does the receiving facility provide additional treatment to reduce pathogens in sewage sludge from your facility or reduce the vector attraction properties of sewage sludge from your facility?
☒ Yes ☐ No → SKIP to Item 2.24 (Part 2, Section 2) below.

2.22 Indicate the pathogen class and reduction alternative and the vector attraction reduction option met for the sewage sludge at the receiving facility.

Pathogen Class and Reduction Alternative	Vector Attraction Reduction Option
☒ Not applicable	☒ Not applicable
☐ Class A, Alternative 1	☐ Option 1
☐ Class A, Alternative 2	☐ Option 2
☐ Class A, Alternative 3	☐ Option 3
☐ Class A, Alternative 4	☐ Option 4
☐ Class A, Alternative 5	☐ Option 5
☐ Class A, Alternative 6	☐ Option 6
☐ Class B, Alternative 1	☐ Option 7
☐ Class B, Alternative 2	☐ Option 8
☐ Class B, Alternative 3	☐ Option 9
☐ Class B, Alternative 4	☐ Option 10
☐ Domestic septage, pH adjustment	☐ Option 11

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

Generation of Sewage Sludge or Preparation of a Material Derived from Sewage Sludge Continued	2.23	Which treatment process(es) are used at the receiving facility to reduce pathogens in sewage sludge or reduce the vector attraction properties of sewage sludge from your facility? (Check all that apply.)	
		☐ Preliminary operations (e.g., sludge grinding and dewatering)	☒ Thickening (concentration)
		☐ Stabilization	☐ Anaerobic digestion
		☐ Composting	☐ Conditioning
		☐ Disinfection (e.g., beta ray irradiation, gamma ray irradiation, pasteurization)	☒ Dewatering (e.g., centrifugation, sludge drying beds, sludge lagoons)
		☐ Heat drying	☐ Thermal reduction
		☐ Methane or biogas capture and recovery	☐ Other (specify) _____
	2.24	Attach a copy of any information you provide the receiving facility to comply with the "notice and necessary information" requirement of 40 CFR 503.12(g). ☐ Check here to indicate that you have attached material.	
	2.25	Does the receiving facility place sewage sludge from your facility in a bag or other container for sale or give-away for application to the land? ☐ Yes ☒ No → SKIP to Item 2.32 (Part 2, Section 2) below.	
	2.26	Attach a copy of all labels or notices that accompany the product being sold or given away. ☐ Check here to indicate that you have attached material.	
	☒ Check here once you have completed Items 2.17 to 2.26 (Part 2, Section 2), then → SKIP to Item 2.32 (Part 2, Section 2) below.		
	Land Application of Bulk Sewage Sludge		
	2.27	Is sewage sludge from your facility applied to the land? ☐ Yes ☒ No → SKIP to Item 2.32 (Part 2, Section 2) below.	
	2.28	Total dry metric tons per 365-day period of sewage sludge applied to all land application sites:	
2.29	Did you identify all land application sites in Part 2, Section 3 of this application? ☐ Yes ☐ No → Submit a copy of the land application plan with your application.		
2.30	Are any land application sites located in states other than the state where you generate sewage sludge or derive a material from sewage sludge? ☐ Yes ☐ No → SKIP to Item 2.32 (Part 2, Section 2) below.		
2.31	Describe how you notify the NPDES permitting authority for the states where the land application sites are located. Attach a copy of the notification. ☐ Check here if you have attached the explanation to the application package. ☐ Check here if you have attached the notification to the application package.		
Surface Disposal			
2.32	Is sewage sludge from your facility placed on a surface disposal site? ☐ Yes ☒ No → SKIP to Item 2.39 (Part 2, Section 2) below.		
2.33	Total dry metric tons of sewage sludge from your facility placed on all surface disposal sites per 365-day period:		
2.34	Do you own or operate all surface disposal sites to which you send sewage sludge for disposal? ☐ Yes → SKIP to Item 2.39 (Part 2, Section 2) below. ☐ No		
2.35	Indicate the total number of surface disposal sites to which you send your sewage sludge. (Provide the information in Items 2.36 to 2.38 of Part 2, Section 2, for each facility.) ☐ Check here if you have attached additional sheets to the application package.		

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson		OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	--	---

Generation of Sewage Sludge or Preparation of a Material Derived from Sewage Sludge Continued	<u>2.36</u>	Site name or number of surface disposal site you do not own or operate		
		Mailing address (street or P.O. box)		
		City or town	State	ZIP code
		Contact name (first and last)	Title	Phone number Email address
	<u>2.37</u>	Site contact (check all that apply) ☐ Owner ☐ Operator		
	<u>2.38</u>	Total dry metric tons of sewage sludge from your facility placed on this surface disposal site per 365-day period:		
	Incineration			
	<u>2.39</u>	Is sewage sludge from your facility fired in a sewage sludge incinerator? ☐ Yes ☒ No → SKIP to Item 2.46 (Part 2, Section 2) below.		
	<u>2.40</u>	Total dry metric tons of sewage sludge from your facility fired in all sewage sludge incinerators per 365-day period:		
	<u>2.41</u>	Do you own or operate all sewage sludge incinerators in which sewage sludge from your facility is fired? ☐ Yes → SKIP to Item 2.46 (Part 2, Section 2) below. ☐ No		
	<u>2.42</u>	Indicate the total number of sewage sludge incinerators that you use but do not own or operate. (Provide the information in Items 2.43 to 2.45 directly below for each facility.) ☐ Check here if you have attached additional sheets to the application package.		
	<u>2.43</u>	Incinerator name or number		
		Mailing address (street or P.O. box)		
		City or town	State	ZIP code
		Contact name (first and last)	Title	Phone number Email address
	Location address (street, route number, or other specific identifier)		☐ Same as mailing address	
	City or town	State	ZIP code	
<u>2.44</u>	Contact (check all that apply) ☐ Incinerator owner ☐ Incinerator operator			
<u>2.45</u>	Total dry metric tons of sewage sludge from your facility fired in this sewage sludge incinerator per 365-day period:			
Disposal in a Municipal Solid Waste Landfill				
<u>2.46</u>	Is sewage sludge from your facility placed on a municipal solid waste landfill? ☒ Yes ☐ No → SKIP to Part 2, Section 3.			
<u>2.47</u>	Indicate the total number of municipal solid waste landfills used. (Provide the information in Items 2.48 to 2.52 directly below for each facility.) ☐ Check here if you have attached additional sheets to the application package.		1	
Generation of Sewage Sludge or Preparation of a Material Derived	<u>2.48</u>	Name of landfill Big Sky Environmental		
		Mailing address (street or P.O. box) PO Box 567		
		City or town Graysville	State Alabama	ZIP code 35073
		Contact name (first and last) John Click	Title Vice President	Phone number Email address (205) 743-0080 jclick@bigskyenv.com

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
Location address (street, route number, or other specific identifier)		☒ Same as mailing address	
County	County code ☐ Not available		
City or town	State	ZIP code	
2.49	Total dry metric tons of sewage sludge from your facility placed in this municipal solid waste landfill per 365-day period:		14
2.50	List the numbers of all other federal, state, and local permits that regulate the operation of this municipal solid waste landfill.		
	Permit Number	Type of Permit	
	37-48	Solid Waste	
2.51	Attach information to determine whether the sewage sludge meets applicable requirements for disposal of sewage sludge in a municipal solid waste landfill (e.g., results of paint filter liquids test and TCLP test). ☐ Check here to indicate you have attached the requested information.		
2.52	Does the municipal solid waste landfill comply with applicable criteria set forth in 40 CFR 258? ☒ Yes ☐ No		

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

PART 2, SECTION 3 LAND APPLICATION OF BULK SEWAGE SLUDGE (40 CFR 122.21(Q)(9))

Land Application of Bulk Sewage Sludge	<u>3.1</u>	Does your facility apply sewage sludge to land? ☐ Yes ☒ No → SKIP to Part 2, Section 4.
	<u>3.2</u>	Do any of the following conditions apply? - The sewage sludge meets the ceiling concentrations in Table 1 of 40 CFR 503.12, the pollutant concentrations in Table 3 of 40 CFR 503.13, Class A pathogen reduction requirements at 40 CFR 503.32(a), and one of the vector attraction reduction requirements at 40 CFR 503.33(b)(1)–(8); - The sewage sludge is sold or given away in a bag or other container for application to the land; or - You provide the sewage sludge to another facility for treatment or blending. ☐ Yes → SKIP to Part 2, Section 4. ☐ No
	<u>3.3</u>	Complete Section 3 for every site on which the sewage sludge is applied. ☐ Check here if you have attached sheets to the application package for one or more land application sites.
	Identification of Land Application Site	
	<u>3.4</u>	Site name or number
	Location address (street, route number, or other specific identifier) ☐ Same as mailing address	
	County ☐ County code ☐ Not available	
	City or town State ZIP code	
	Latitude/Longitude of Land Application Site (see instructions)	
	Latitude Longitude	
	Method of Determination	
	☐ USGS map ☐ Field survey ☐ Other (specify) _____	
	<u>3.5</u>	Provide a topographic map (or other appropriate map if a topographic map is unavailable) that shows the site location. ☐ Check here to indicate you have attached a topographic map for this site.
	Owner Information	
	<u>3.6</u>	Are you the owner of this land application site? ☐ Yes → SKIP to Item 3.8 (Part 2, Section 3) below. ☐ No
<u>3.7</u>	Owner name	
Mailing address (street or P.O. box)		
City or town State ZIP code		
Contact name (first and last) Title Phone number Email address		
Applier Information		
<u>3.8</u>	Are you the person who applies, or who is responsible for application of, sewage sludge to this land application site? ☐ Yes → SKIP to Item 3.10 (Part 2, Section 3) below. ☐ No	
<u>3.9</u>	Applier's name	
Mailing address (street or P.O. box)		
City or town State ZIP code		
Contact name (first and last) Title Phone number Email address		

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

Land Application of Bulk Sewage Sludge Continued

Site Type

3.10 Type of land application:

☐ Agricultural land	☐ Forest
☐ Reclamation site	☐ Public contact site
☐ Other (describe)	

Crop or Other Vegetation Grown Onsite

3.11 What type of crop or other vegetation is grown on this site?

3.12 What is the nitrogen requirement for this crop or vegetation?

Vector Attraction Reduction

3.13 Are the vector attraction reduction requirements at 40 CFR 503.33(b)(9) and (b)(10) met when sewage sludge is applied to the land application site?

☐ Yes	☐ No → SKIP to Item 3.16 (Part 2, Section 3) below.
------------------------------	--

3.14 Indicate which vector attraction reduction option is met. (Check only one response.)

☐ Option 9 (injection below land surface)	☐ Option 10 (incorporation into soil within 6 hours)
--	---

3.15 Describe any treatment processes used at the land application site to reduce vector attraction properties of sewage sludge.

☐ Check here if you have attached your description to the application package.

Cumulative Loadings and Remaining Allotments

3.16 Is the sewage sludge applied to this site since July 20, 1993, subject to the cumulative pollutant loading rates (CPLRs) in 40 CFR 503.13(b)(2)?

☐ Yes	☐ No → SKIP to Part 2, Section 4.
------------------------------	--

3.17 Have you contacted the NPDES permitting authority in the state where the bulk sewage sludge subject to CPLRs will be applied to ascertain whether bulk sewage sludge subject to CPLRs has been applied to this site on or since July 20, 1993?

☐ Yes	☐ No → Sewage sludge subject to CPLRs may not be applied to this site. SKIP to Part 2, Section 4.
------------------------------	--

3.18 Provide the following information about your NPDES permitting authority:

NPDES permitting authority name	
Contact person	
Telephone number	
Email address	

3.19 Based on your inquiry, has bulk sewage sludge subject to CPLRs been applied to this site since July 20, 1993?

☐ Yes	☐ No → SKIP to Part 2, Section 4.
------------------------------	--

3.20 Provide the following information for every facility other than yours that is sending, or has sent, bulk sewage sludge subject to CPLRs to this site since July 20, 1993. If more than one such facility sends sewage sludge to this site, attach additional pages as necessary.

☐ Check here to indicate that additional pages are attached.

Facility name			
Mailing address (street or P.O. box)			
City or town		State	ZIP code
Contact name (first and last)	Title	Phone number	Email address

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

PART 2, SECTION 4 SURFACE DISPOSAL (40 CFR 122.21(Q)(10))				
Surface Disposal	<u>4.1</u>	Do you own or operate a surface disposal site? ☐ Yes ☒ No → SKIP to Part 2, Section 5.		
	<u>4.2</u>	Complete all items in Section 4 for each active sewage sludge unit that you own or operate. ☐ Check here to indicate that you have attached material to the application package for one or more active sewage sludge units.		
	Information on Active Sewage Sludge Units			
	<u>4.3</u>	Unit name or number		
		Mailing address (street or P.O. box)		
		City or town	State	ZIP code
		Contact name (first and last)	Title	Phone number Email address
		Location address (street, route number, or other specific identifier)		☐ Same as mailing address
		County	County code	☐ Not available
		City or town	State	ZIP code
		Latitude/Longitude of Active Sewage Sludge Unit (see instructions)		
		Latitude	Longitude	
		Method of Determination ☐ USGS map ☐ Field survey ☐ Other (specify) _____		
	<u>4.4</u>	Provide a topographic map (or other appropriate map if a topographic map is unavailable) that shows the site location. ☐ Check here to indicate that you have completed and attached a topographic map.		
<u>4.5</u>	Total dry metric tons of sewage sludge placed on the active sewage sludge unit per 365-day period:			
<u>4.6</u>	Total dry metric tons of sewage sludge placed on the active sewage sludge unit over the life of the unit:			
<u>4.7</u>	Does the active sewage sludge unit have a liner with a maximum permeability of 1×10^{-7} centimeters per second (cm/sec)? ☐ Yes ☐ No → SKIP to Item 4.9 (Part 2, Section 4) below.			
<u>4.8</u>	Describe the liner. ☐ Check here to indicate that you have attached a description to the application package.			
<u>4.9</u>	Does the active sewage sludge unit have a leachate collection system? ☐ Yes ☐ No → SKIP to Item 4.11 (Part 2, Section 4) below.			
<u>4.10</u>	Describe the leachate collection system and the method used for leachate disposal and provide the numbers of any federal, state, or local permit(s) for leachate disposal. ☐ Check here to indicate that you have attached the description to the application package.			

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

Surface Disposal Continued

4.11	Is the boundary of the active sewage sludge unit less than 150 meters from the property line of the surface disposal site? ☐ Yes ☐ No → SKIP to Item 4.13 (Part 2, Section 4) below.																
4.12	Provide the actual distance in meters: _____ meters																
4.13	Remaining capacity of active sewage sludge unit in dry metric tons: _____ dry metric tons																
4.14	Anticipated closure date for active sewage sludge unit, if known (MM/DD/YYYY): _____																
4.15	Attach a copy of any closure plan that has been developed for this active sewage sludge unit. ☐ Check here to indicate that you have attached a copy of the closure plan to the application package.																
Sewage Sludge from Other Facilities																	
4.16	Is sewage sludge sent to this active sewage sludge unit from any facilities other than your facility? ☐ Yes ☐ No → SKIP to Item 4.21 (Part 2, Section 4) below.																
4.17	Indicate the total number of facilities (other than your facility) that send sewage sludge to this active sewage sludge unit. (Complete Items 4.18 to 4.20 directly below for each such facility.) ☐ Check here to indicate that you have attached responses for each facility to the application package.																
4.18	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="4">Facility name</td> </tr> <tr> <td colspan="4">Mailing address (street or P.O. box)</td> </tr> <tr> <td colspan="2">City or town</td> <td>State</td> <td>ZIP code</td> </tr> <tr> <td>Contact name (first and last)</td> <td>Title</td> <td>Phone number</td> <td>Email address</td> </tr> </table>	Facility name				Mailing address (street or P.O. box)				City or town		State	ZIP code	Contact name (first and last)	Title	Phone number	Email address
Facility name																	
Mailing address (street or P.O. box)																	
City or town		State	ZIP code														
Contact name (first and last)	Title	Phone number	Email address														
4.19	Indicate the pathogen class and reduction alternative and the vector attraction reduction option met for the sewage sludge before it leaves the other facility. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 50%;">Pathogen Class and Reduction Alternative</th> <th style="width: 50%;">Vector Attraction Reduction Option</th> </tr> <tr> <td> ☐ Not applicable ☐ Class A, Alternative 1 ☐ Class A, Alternative 2 ☐ Class A, Alternative 3 ☐ Class A, Alternative 4 ☐ Class A, Alternative 5 ☐ Class A, Alternative 6 ☐ Class B, Alternative 1 ☐ Class B, Alternative 2 ☐ Class B, Alternative 3 ☐ Class B, Alternative 4 ☐ Domestic septage, pH adjustment </td> <td> ☐ Not applicable ☐ Option 1 ☐ Option 2 ☐ Option 3 ☐ Option 4 ☐ Option 5 ☐ Option 6 ☐ Option 7 ☐ Option 8 ☐ Option 9 ☐ Option 10 ☐ Option 11 </td> </tr> </table>	Pathogen Class and Reduction Alternative	Vector Attraction Reduction Option	☐ Not applicable ☐ Class A, Alternative 1 ☐ Class A, Alternative 2 ☐ Class A, Alternative 3 ☐ Class A, Alternative 4 ☐ Class A, Alternative 5 ☐ Class A, Alternative 6 ☐ Class B, Alternative 1 ☐ Class B, Alternative 2 ☐ Class B, Alternative 3 ☐ Class B, Alternative 4 ☐ Domestic septage, pH adjustment	☐ Not applicable ☐ Option 1 ☐ Option 2 ☐ Option 3 ☐ Option 4 ☐ Option 5 ☐ Option 6 ☐ Option 7 ☐ Option 8 ☐ Option 9 ☐ Option 10 ☐ Option 11												
Pathogen Class and Reduction Alternative	Vector Attraction Reduction Option																
☐ Not applicable ☐ Class A, Alternative 1 ☐ Class A, Alternative 2 ☐ Class A, Alternative 3 ☐ Class A, Alternative 4 ☐ Class A, Alternative 5 ☐ Class A, Alternative 6 ☐ Class B, Alternative 1 ☐ Class B, Alternative 2 ☐ Class B, Alternative 3 ☐ Class B, Alternative 4 ☐ Domestic septage, pH adjustment	☐ Not applicable ☐ Option 1 ☐ Option 2 ☐ Option 3 ☐ Option 4 ☐ Option 5 ☐ Option 6 ☐ Option 7 ☐ Option 8 ☐ Option 9 ☐ Option 10 ☐ Option 11																
4.20	Which treatment process(es) are used at the other facility to reduce pathogens in sewage sludge or reduce the vector attraction properties of sewage sludge before it leaves that facility? (Check all that apply.) <table style="width: 100%;"> <tr> <td style="vertical-align: top;"> ☐ Preliminary operations (e.g., sludge grinding and degritting) ☐ Stabilization ☐ Composting ☐ Disinfection (e.g., beta ray irradiation, gamma ray irradiation, pasteurization) ☐ Heat drying ☐ Methane or biogas capture and recovery </td> <td style="vertical-align: top;"> ☐ Thickening (concentration) ☐ Anaerobic digestion ☐ Conditioning ☐ Dewatering (e.g., centrifugation, sludge drying beds, sludge lagoons) ☐ Thermal reduction ☐ Other (specify) _____ </td> </tr> </table>	☐ Preliminary operations (e.g., sludge grinding and degritting) ☐ Stabilization ☐ Composting ☐ Disinfection (e.g., beta ray irradiation, gamma ray irradiation, pasteurization) ☐ Heat drying ☐ Methane or biogas capture and recovery	☐ Thickening (concentration) ☐ Anaerobic digestion ☐ Conditioning ☐ Dewatering (e.g., centrifugation, sludge drying beds, sludge lagoons) ☐ Thermal reduction ☐ Other (specify) _____														
☐ Preliminary operations (e.g., sludge grinding and degritting) ☐ Stabilization ☐ Composting ☐ Disinfection (e.g., beta ray irradiation, gamma ray irradiation, pasteurization) ☐ Heat drying ☐ Methane or biogas capture and recovery	☐ Thickening (concentration) ☐ Anaerobic digestion ☐ Conditioning ☐ Dewatering (e.g., centrifugation, sludge drying beds, sludge lagoons) ☐ Thermal reduction ☐ Other (specify) _____																

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

Surface Disposal Continued	Vector Attraction Reduction		
	<u>4.21</u>	Which vector attraction reduction option, if any, is met when sewage sludge is placed on this active sewage sludge unit?	
		☐ Option 9 (injection below and surface)	☐ Option 11 (covering active sewage sludge unit daily)
		☐ Option 10 (incorporation into soil within 6 hours)	☐ None
	<u>4.22</u>	Describe any treatment processes used at the active sewage sludge unit to reduce vector attraction properties of sewage sludge.	
		☐ Check here if you have attached your description to the application package.	
	Groundwater Monitoring		
	<u>4.23</u>	Is groundwater monitoring currently conducted at this active sewage sludge unit, or are groundwater monitoring data otherwise available for this active sewage sludge unit?	
		☐ Yes	☐ No → SKIP to Item 4.26 (Part 2, Section 4) below.
	<u>4.24</u>	Provide a copy of available groundwater monitoring data.	
		☐ Check here to indicate you have attached the monitoring data.	
	<u>4.25</u>	Describe the well locations, the approximate depth to groundwater, and the groundwater monitoring procedures used to obtain these data.	
		☐ Check here if you have attached your description to the application package.	
	<u>4.26</u>	Has a groundwater monitoring program been prepared for this active sewage sludge unit?	
	☐ Yes	☐ No → SKIP to Item 4.28 (Part 2, Section 4) below.	
<u>4.27</u>	Submit a copy of the groundwater monitoring program with this permit application.		
	☐ Check here to indicate you have attached the monitoring program.		
<u>4.28</u>	Have you obtained a certification from a qualified groundwater scientist that the aquifer below the active sewage sludge unit has not been contaminated?		
	☐ Yes	☐ No → SKIP to Item 4.30 (Part 2, Section 4) below.	
<u>4.29</u>	Submit a copy of the certification with this permit application.		
	☐ Check here to indicate you have attached the certification to the application package.		
Site-Specific Limits			
<u>4.30</u>	Are you seeking site-specific pollutant limits for the sewage sludge placed on the active sewage sludge unit?		
	☐ Yes	☐ No → SKIP to Part 2, Section 5.	
<u>4.31</u>	Submit information to support the request for site-specific pollutant limits with this application.		
	☐ Check here to indicate you have attached the requested information.		

Page 21

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

Incineration Continued

Dispersion Factor

5.13 Dispersion factor in micrograms/cubic meter per gram/second:

5.14 Name and type of dispersion model:

5.15 Submit a copy of the modeling results and supporting documentation.
☐ Check here to indicate that you have attached this information.

Control Efficiency

5.16 Provide the control efficiency, in hundredths, for each of the pollutants listed below.

Pollutant	Control Efficiency, in Hundredths
Arsenic	
Cadmium	
Chromium	
Lead	
Nickel	

5.17 Attach a copy of the results or performance testing and supporting documentation (including testing dates).
☐ Check here to indicate that you have attached this information.

Risk-Specific Concentration for Chromium

5.18 Provide the risk-specific concentration (RSC) used for chromium in micrograms per cubic meter:

5.19 Was the RSC determined via Table 2 in 40 CFR 503.43?
☐ Yes ☐ No → SKIP to Item 5.21 (Part 2, Section 5) below.

5.20 Identify the type of incinerator used as the basis.
☐ Fluidized bed with wet scrubber ☐ Other types with wet scrubber
☐ Fluidized bed with wet scrubber and wet electrostatic precipitator ☐ Other types with wet scrubber and wet electrostatic precipitator

5.21 Was the RSC determined via Table 6 in 40 CFR 503.43 (site-specific determination)?
☐ Yes ☐ No → SKIP to Item 5.23 (Part 2, Section 5) below.

5.22 Provide the decimal fraction of hexavalent chromium concentration to total chromium concentration in stack exit gas:

5.23 Attach the results of incinerator stack tests for hexavalent and total chromium concentrations, including the date(s) of any test(s), with this application.
☐ Check here to indicate that you have attached this information. ☐ Not applicable

Incinerator Parameters

5.24 Do you monitor total hydrocarbons (THC) in the exit gas of the sewage sludge incinerator?
☐ Yes ☐ No

5.25 Do you monitor carbon monoxide (CO) in the exit gas of the sewage sludge incinerator?
☐ Yes ☐ No

5.26 Indicate the type of sewage sludge incinerator.

5.27 Incinerator stack height in meters:

5.28 Indicate whether the value submitted in Item 5.27 is (check only one response):
☐ Actual stack height ☐ Creditable stack height

EPA Identification Number	NPDES Permit Number AL0068420	Facility Name East Tuscaloosa- West Jefferson	OMB No. 2040-0004 Expires 07/31/2026
---------------------------	----------------------------------	--	---

Incineration Continued

Performance Test Operating Parameters

<u>5.29</u>	Maximum performance test combustion temperature:	
<u>5.30</u>	Performance test sewage sludge feed rate, in dry metric tons/day	
<u>5.31</u>	Indicate whether value submitted in Item 5.30 is (check only one response): ☐ Average use ☐ Maximum design	
<u>5.32</u>	Attach supporting documents describing how the feed rate was calculated. ☐ Check here to indicate that you have attached this information.	
<u>5.33</u>	Submit information documenting the performance test operating parameters for the air pollution control device(s) used for this sewage sludge incinerator. ☐ Check here to indicate that you have attached this information.	

Monitoring Equipment

<u>5.34</u>	List the equipment in place to monitor the listed parameters.	
	Parameter	Equipment in Place for Monitoring
	Total hydrocarbons or carbon monoxide	
	Percent oxygen	
	Percent moisture	
	Combustion temperature	
	Other (describe)	

Air Pollution Control Equipment

<u>5.35</u>	List all air pollution control equipment used with this sewage sludge incinerator. ☐ Check here if you have attached the list to the application package for the noted incinerator.
-------------	---

END of PART 2

Submit completed application package to your NPDES permitting authority.