

KAY IVEY
GOVERNOR

Alabama Department of Environmental Management adem.alabama.gov

MAR 1 9 2021

Jon Stevens NAL Vice President Rogers Group, Inc. 520 Three Mile Lane Tuscumbia, AL 35764 1400 Coliseum Blvd. 36110-2400 Post Office Box 301463
Montgomery, Alabama 36130-1463
(334) 271-7700 FAX (334) 271-7950

RE:

Draft Permit

MouIton Quarry

NPDES Permit No. AL0066991 Lawrence County (079)

Dear Mr. Stevens:

Transmitted herein is a draft of the above referenced permit. Please review the enclosed draft permit carefully. If previously permitted, the draft may contain additions/revisions to the language in your current permit. Please submit any comments on the draft permit to the Department within 30 days from the date of receipt of this letter.

Since the Department has made a tentative decision to reissue the above referenced permit, ADEM Admin. Code r. 335-6-6-.21 requires a public notice of the draft permit followed by a period of at least 30 days for public comment before the permit can be issued. The United States Environmental Protection Agency will also receive the draft permit for review during the 30-day public comment period.

Any mining, processing, construction, land disturbance, or other regulated activity proposed to be authorized by this draft permit is prohibited prior to the effective date of the formal permit. Any mining or processing activity within the drainage basin associated with each permitted outfall which is conducted prior to Departmental receipt of certification from a professional engineer licensed to practice in the State of Alabama, that the Pollution Abatement/Prevention Plan was implemented according to the design plan, or notification from the Alabama Surface Mining Commission that the sediment control structures have been certified, is prohibited.

Please be aware that Part I.D of your permit requires that you apply for participation in the Department's web-based Electronic Environmental (E2) Reporting System Program for submittal of DMRs upon issuance of this permit unless valid justification as to why you cannot participate is submitted in writing. The E2 Program allows ADEM to electronically validate, acknowledge receipt, and upload data to the state's central wastewater database. This improves the accuracy of reported compliance data and reduces costs to both the regulated community and ADEM. The Permittee Participation Package may be downloaded online at https://e2.adem.alabama.gov/npdes or you may obtain a hard copy by submitting a written request or by emailing e2admin@adem.alabama.gov.

Should you have any questions concerning this matter, please contact David Hearn by email at david.hearn@adem.alabama.gov or by phone at (334) 274-4231.

Sincerely,

Catherine A. McNeill, Chief Mining and Natural Resource Section Stormwater Management Branch

Water Division

CAM/dnh

File: DPER/10431

Enclosure

cc: David Hearn, ADEM

Environmental Protection Agency Region IV
Alabama Department of Conservation and Natural Resources
U.S. Fish and Wildlife Service
Alabama Historical Commission
Advisory Council on Historic Preservation







NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM INDIVIDUAL PERMIT

PERMITTEE:

Rogers Group, Inc.

421 Great Circle Road Nashville, TN 37228

FACILITY LOCATION:

Moulton Quarry

15160 County Road 7 Moulton, AL 35650 Lawrence County T7S, R8W, S8 and 9

PERMIT NUMBER:

AL0066991

DSN & RECEIVING STREAM:

001-1 Borden Creek 002-1 Borden Creek

In accordance with and subject to the provisions of the Federal Water Pollution Control Act, as amended, 33 U.S.C. §§1251-1388 (the "FWPCA"), the Alabama Water Pollution Control Act, as amended, Code of Alabama 1975, §§ 22-22-1 to 22-22-14 (the "AWPCA"), the Alabama Environmental Management Act, as amended, Code of Alabama 1975, §§22-22A-1 to 22-22A-17, and rules and regulations adopted thereunder, and subject further to the terms and conditions set forth in this permit, the Permittee is hereby authorized to discharge into the above-named receiving waters.

ISSUANCE DATE:		
EFFECTIVE DATE:		
EXPIRATION DATE:		

** DRAFT **



MINING AND NATURAL RESOURCE SECTION NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) PERMIT

TABLE OF CONTENTS

PART I	DISCHARGE LIMITATIONS, CONDITIONS, AND REQUIREMENTS	
	A. DISCHARGE LIMITATIONS AND MONITORING REQUIREMENTS	4
	B. REQUIREMENTS TO ACTIVATE A PROPOSED MINING OUTFALL	4
	C. DISCHARGE MONITORING AND RECORD KEEPING REQUIREMENTS 1. Sampling Schedule and Frequency	
	2. Measurement Frequency	
	3. Monitoring Schedule	
	4. Sampling Location	
	5. Representative Sampling	
	6. Test Procedures	
	7. Recording of Results	
	8. Routine Inspection by Permittee	
	9. Records Retention and Production10. Monitoring Equipment and Instrumentation	
	D. DISCHARGE REPORTING REQUIREMENTS	
	Requirements for Reporting of Monitoring Noncompliance Notification	
	3. Reduction, Suspension, or Termination of Monitoring and/or Reporting	
	E. OTHER REPORTING AND NOTIFICATION REQUIREMENTS	
	Anticipated Noncompliance Termination of Discharge	
	3. Updating Information	
	4. Duty to Provide Information	
	F. SCHEDULE OF COMPLIANCE	
PART II	OTHER REQUIREMENTS, RESPONSIBILITIES, AND DUTIES	13
	A. OPERATIONAL AND MANAGEMENT REQUIREMENTS	14
	1. Facilities Operation and Management	14
	2. Pollution Abatement and/or Prevention Plan	
	3. Best Management Practices (BMPs)	
	4. Biocide Additives	
	5. Facility Identification 6. Removed Substances	
	7. Loss or Failure of Treatment Facilities	
	8. Duty to Mitigate	
	B. BYPASS AND UPSET	16
	1. Bypass	
	2. Upset	
	C. PERMIT CONDITIONS AND RESTRICTIONS	18
	Prohibition against Discharge from Facilities Not Certified	
	2. Permit Modification, Suspension, Termination, and Revocation	
	3. Automatic Expiration of Permits for New or Increased Discharges	
	4. Transfer of Permit	
	5. Groundwater	
	6. Property and Other Rights	20

DRAFT

	D.	RESPONSIBILITIES	20
		1. Duty to Comply	20
		2. Change in Discharge	
		3. Compliance with Toxic or Other Pollutant Effluent Standard or Prohibition	21
		4. Compliance with Water Quality Standards and Other Provisions	22
		5. Compliance with Statutes and Rules	22
		6. Right of Entry and Inspection	22
		7. Duty to Reapply or Notify of Intent to Cease Discharge	23
PART III	ADI	DITIONAL REQUIREMENTS, CONDITIONS, AND LIMITATIONS	
	A.	CIVIL AND CRIMINAL LIABILITY	24
		1. Tampering	24
		2. False Statements	24
		3. Permit Enforcement	24
		4. Relief From Liability	24
	B.	OIL AND HAZARDOUS SUBSTANCE LIABILITY	24
	C.	AVAILABILITY OF REPORTS	24
	D.	DEFINITIONS	24
	E.	SEVERABILITY	29
	F.	PROHIBITIONS AND ACTIVIES NOT AUTHORIZED	29
	G.	DISCHARGES TO IMPAIRED WATERS	29



PART I DISCHARGE LIMITATIONS, CONDITIONS, AND REQUIREMENTS

A. DISCHARGE LIMITATIONS AND MONITORING REQUIREMENTS

During the period beginning on the effective date of this Permit and lasting through the expiration date of this Permit, the Permittee is authorized to discharge from each point source identified on Page 1 of this Permit and described more fully in the Permittee's application, if the outfalls have been constructed and certified. Discharges shall be limited and monitored by the Permittee as specified below:

Do no moton	Discharge Limitations			Monitoring Requirements		
Parameter	Daily Minimum	Monthly Average	Daily Maximum	Sample Type	Measurement Frequency ¹	
pН	6.0		8.5	Grab	2/Month	
00400	s.u.		s.u.	Glab	2/1 V1011111	
Solids, Total Suspended		25.0	45.0	Grab	2/Month	
00530		mg/L	mg/L	Grab	2/Month	
Flow, In Conduit or Thru Treatment Plant ² 50050		Report MGD	Report MGD	Instantaneous	2/Month	

B. REQUIREMENTS TO ACTIVATE A PROPOSED MINING OUTFALL

- 1. Discharge from any point source identified on Page 1 of this Permit which is a proposed outfall is not authorized by this Permit until the outfall has been constructed and certification received by the Department from a professional engineer, registered in the State of Alabama, certifying that such facility has been constructed according to good engineering practices and in accordance with the Pollution Abatement and/or Prevention (PAP) Plan.
- 2. Certification required by Part I.B.1. shall be submitted on a completed ADEM Form 432. The certification shall include the latitude and longitude of the constructed and certified outfall.
- 3. Discharge monitoring and Discharge Monitoring Report (DMR) reporting requirements described in Part I.C. of this Permit do not apply to point sources that have not been constructed and certified.
- 4. Upon submittal of the certification required by Part I.B.1. to the Department, all monitoring and DMR submittal requirements shall apply to the constructed and certified outfall.

C. DISCHARGE MONITORING AND RECORD KEEPING REQUIREMENTS

1. Sampling Schedule and Frequency

a. The Permittee shall collect at least one grab sample of the discharge to surface waters from each constructed and certified point source identified on Page 1 of this Permit and described more fully in the Permittee's application twice per month at a rate of at least every other week if a discharge occurs at any time during the two week period, but need not collect more than two samples per calendar month. Each sample collected shall be analyzed for each parameter specified in Part I.A. of this Permit.

See Part I.C.2. for further measurement frequency requirements.

Flow must be determined at the time of sample collection by direct measurement, calculation, or other method acceptable to the Department.



- b. If the final effluent is pumped in order to discharge (e.g. from incised ponds, old highwall cuts, old pit areas or depressions, etc.), the Permittee shall collect at least one grab sample of the discharge from each point source identified on Page 1 of this Permit and described more fully in the Permittee's application each quarterly (three month) monitoring period if a discharge occurs at any time during the quarterly monitoring period which results from direct pumped drainage. Each sample collected shall be analyzed for each parameter specified in Part I.A. of this Permit.
- c. The Permittee may increase the frequency of sampling listed in Parts I.C.1.a and I.C.1.b; however, all sampling results must be reported to the Department and included in any calculated results submitted to the Department in accordance with this Permit.

2. Measurement Frequency

Measurement frequency requirements found in Part I.A. shall mean:

- a. A measurement frequency of one day per week shall mean sample collection on any day of discharge which occurs every calendar week.
- b. A measurement frequency of two days per month shall mean sample collection on any day of discharge which occurs every other week, but need not exceed two sample days per month.
- c. A measurement frequency of one day per month shall mean sample collection on any day of discharge which occurs during each calendar month.
- d. A measurement frequency of one day per quarter shall mean sample collection on any day of discharge which occurs during each calendar quarter.
- e. A measurement frequency of one day per six months shall mean sample collection on any day of discharge which occurs during the period of January through June and during the period of July through December.
- f. A measurement frequency of one day per year shall mean sample collection on any day of discharge which occurs during each calendar year.

3. Monitoring Schedule

The Permittee shall conduct the monitoring required by Part I.A. in accordance with the following schedule:

- a. MONITORING REQUIRED MORE FREQUENTLY THAN MONTHLY AND MONTHLY shall be conducted during the first full month following the effective date of coverage under this Permit and every month thereafter. More frequently than monthly and monthly monitoring may be done anytime during the month, unless restricted elsewhere in this Permit, but the results should be reported on the last Discharge Monitoring Report (DMR) due for the quarter (i.e., with the March, June, September, and December DMRs).
- b. QUARTERLY MONITORING shall be conducted at least once during each calendar quarter. Calendar quarters are the periods of January through March, April through June, July through September, and October through December. The Permittee shall conduct the quarterly monitoring during the first complete calendar quarter following the effective date of this Permit and is then required to monitor once during each quarter thereafter. Quarterly monitoring may be done anytime during the quarter, unless restricted elsewhere



in this Permit, but the results should be reported on the last DMR due for the quarter (i.e., with the March, June, September, and December DMRs).

- c. SEMIANNUAL MONITORING shall be conducted at least once during the period of January through June and at least once during the period of July through December. The Permittee shall conduct the semiannual monitoring during the first complete semiannual calendar period following the effective date of this Permit and is then required to monitor once during each semiannual period thereafter. Semiannual monitoring may be done anytime during the semiannual period, unless restricted elsewhere in this Permit, but it should be reported on the last DMR due for the month of the semiannual period (i.e., with the June and December DMRs).
- d. ANNUAL MONITORING shall be conducted at least once during the period of January through December. The Permittee shall conduct the annual monitoring during the first complete calendar annual period following the effective date of this Permit and is then required to monitor once during each annual period thereafter. Annual monitoring may be done anytime during the year, unless restricted elsewhere in this Permit, but it should be reported on the December DMR.

4. Sampling Location

Unless restricted elsewhere in this Permit, samples collected to comply with the monitoring requirements specified in Part I.A. shall be collected at the nearest accessible location just prior to discharge and after final treatment, or at an alternate location approved in writing by the Department.

5. Representative Sampling

Sample collection and measurement actions taken as required herein shall be representative of the volume and nature of the monitored discharge and shall be in accordance with the provisions of this Permit.

6. Test Procedures

For the purpose of reporting and compliance, Permittees shall use one of the following procedures:

- a. For parameters with an EPA established Minimum Level (ML), report the measured value if the analytical result is at or above the ML and report "0" for values below the ML. Test procedures for the analysis of pollutants shall conform to 40 CFR Part 136, guidelines published pursuant to Section 304(h) of the FWPCA, 33 U.S.C. Section 1314(h), and ADEM Standard Operating Procedures. If more than one method for analysis of a substance is approved for use, a method having a minimum level lower than the permit limit shall be used. If the minimum level of all methods is higher than the permit limit, the method having the lowest minimum level shall be used and a report of less than the minimum level shall be reported as zero and will constitute compliance, however should EPA approve a method with a lower minimum level during the term of this Permit the Permittee shall use the newly approved method.
- b. For pollutant parameters without an established ML, an interim ML may be utilized. The interim ML shall be calculated as 3.18 times the Method Detection Level (MDL) calculated pursuant to 40 CFR Part 136, Appendix B.

Permittees may develop an effluent matrix-specific ML, where an effluent matrix prevents attainment of the established ML. However, a matrix specific ML shall be based upon proper laboratory method and technique. Matrix-specific MLs must be approved by



the Department, and may be developed by the Permittee during permit issuance, reissuance, modification, or during compliance schedule.

In either case the measured value should be reported if the analytical result is at or above the ML and "0" reported for values below the ML.

c. For parameters without an EPA established ML, interim ML, or matrix-specific ML, a report of less than the detection limit shall constitute compliance if the detection limit of all analytical methods is higher than the permit limit using the most sensitive EPA approved method. For the purpose of calculating a monthly average, "0" shall be used for values reported less than the detection limit.

The Minimum Level utilized for procedures identified in Parts I.C.6.a. and b. shall be reported on the Permittee's DMR. When an EPA approved test procedure for analysis of a pollutant does not exist, the Director shall approve the procedure to be used.

7. Recording of Results

For each measurement or sample taken pursuant to the requirements of this Permit, the Permittee shall record the following information:

- The facility name and location, point source number, date, time, and exact place of sampling or measurements;
- b. The name(s) of person(s) who obtained the samples or measurements;
- c. The dates and times the analyses were performed;
- d. The name(s) of the person(s) who performed the analyses;
- e. The analytical techniques or methods used including source of method and method number; and
- f. The results of all required analyses.

8. Routine Inspection by Permittee

- a. The Permittee shall inspect all point sources identified on Page 1 of this Permit and described more fully in the Permittee's application and all treatment or control facilities or systems used by the Permittee to achieve compliance with the terms and conditions of this Permit at least as often as the applicable sampling frequency specified in Part I.C.1 of this Permit.
- b. If required by the Director, the Permittee shall maintain a written log for each point source identified on Page 1 of this Permit and described more fully in the Permittee's application in which the Permittee shall record the following information:
 - (1) The date and time the point source and any associated treatment or control facilities or systems were inspected by the Permittee;
 - (2) Whether there was a discharge from the point source at the time of inspection by the Permittee;
 - (3) Whether a sample of the discharge from the point source was collected at the time of inspection by the Permittee;

- (4) Whether all associated treatment or control facilities or systems appeared to be in good working order and operating as efficiently as possible, and if not, a description of the problems or deficiencies; and
- (5) The name and signature of the person performing the inspection of the point source and associated treatment or control facilities or systems.

9. Records Retention and Production

- a. The Permittee shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this Permit, and records of all data used to complete the above reports or the application for this Permit, for a period of at least three (3) years from the date of the sample collection, measurement, report, or application. This period may be extended by request of the Director at any time. If litigation or other enforcement action, under the AWPCA, AEMA, and/or the FWPCA, is ongoing which involves any of the above records, the records shall be kept until the litigation is resolved. Upon the written request of the Director, the Permittee shall provide the Director with a copy of any record required to be retained by this paragraph. Copies of these records should not be submitted unless requested.
- b. All records required to be kept for a period of three (3) years shall be kept at the permitted facility or an alternate location approved by the Department in writing and shall be available for inspection.

10. Monitoring Equipment and Instrumentation

All equipment and instrumentation used to determine compliance with the requirements of this Permit shall be installed, maintained, and calibrated in accordance with the manufacturer's instructions or, in the absence of manufacturer's instructions, in accordance with accepted practices. The Permittee shall develop and maintain quality assurance procedures to ensure proper operation and maintenance of all equipment and instrumentation. The quality assurance procedures shall include the proper use, maintenance, and installation, when appropriate, of monitoring equipment at the plant site.

D. DISCHARGE REPORTING REQUIREMENTS

1. Requirements for Reporting of Monitoring

- a. Monitoring results obtained during the previous three (3) months shall be summarized for each month on a Discharge Monitoring Report (DMR) Form approved by the Department, and submitted to the Department so that it is received by the Director no later than the 28th day of the month following the quarterly reporting period (i.e., on the 28th day of January, April, July, and October of each year).
- b. The Department utilizes a web-based electronic environmental (E2) reporting system for submittal of DMRs. Except as allowed by Part I.D.1.c. or d., the Permittee shall submit all DMRs required by Part I.D.1.a. by utilizing the E2 reporting system. The E2 reporting system Permittee Participation Package may be downloaded online at https://e2.adem.alabama.gov/npdes.

- c. If the electronic environmental (E2) reporting system is down (i.e. electronic submittal of DMR data is unable to be completed due to technical problems originating with the Department's system; this could include entry/submittal issues with an entire set of DMRs or individual parameters), permittees are not relieved of their obligation to submit DMR data to the Department by the required submittal date. However, if the E2 system is down on the 28th day of the month or is down for an extended period of time as determined by the Department when a DMR is required to be submitted, the facility may submit the data in an alternate manner and format acceptable to the Department. Preapproved alternate acceptable methods include faxing, e-mailing, mailing, or hand-delivery of data such that they are received by the required reporting date. Within five calendar days of the E2 system resuming operation, the Permittee shall enter the data into the E2 reporting system unless an alternate timeframe is approved by the Department. An attachment should be included with the E2 DMR submittal verifying the original submittal date (date of the fax, copy of dated e-mail, or hand-delivery stamped date).
- d. The permittee may submit a request to the Department for a temporary electronic reporting waiver for DMR submittals. The waiver request should include the permit number; permittee name; facility/site name; facility address; name, address, and contact information for the responsible official or duly authorized representative; a detailed statement regarding the basis for requesting such a waiver; and the duration for which the waiver is requested. Approved electronic reporting waivers are not transferrable. Permittees with an approved electronic reporting waiver for DMRs may submit hard copy DMRs for the period that the approved electronic reporting waiver request is effective. The Permittee shall submit the Department-approved DMR forms to the address listed in Part I.D.1.j.
- e. If the Permittee, using approved analytical methods as specified in Part I.C.6., monitors any discharge from a point source identified on Page 1 of this Permit and describe more fully in the Permittee's application more frequently than required by this Permit; the results of such monitoring shall be included in the calculation and reporting of values on the DMR Form, and the increased frequency shall be indicated on the DMR Form.
- f. In the event no discharge from a point source identified on Page 1 of this Permit and described more fully in the Permittee's application occurs during a monitoring period, the Permittee shall report "No Discharge" for such period on the appropriate DMR Form.
- g. The Permittee shall report "No Discharge During Quarterly Monitoring Period" on the appropriate DMR Form for each point source receiving pumped discharges pursuant to Part I.C.1.b. provided that no discharge has occurred at <u>any</u> time during the entire quarterly (three month) monitoring period.
- h. Each DMR Form submitted by the Permittee to the Department in accordance with Part I.D.1. must be legible and bear an original signature or electronic signature. Photo and electronic copies of the signature are not acceptable and shall not satisfy the reporting requirements of this Permit.
- i. All reports and forms required to be submitted by this Permit, the AWPCA, and the Department's rules and regulations, shall be signed by a "responsible official" of the Permittee as defined in ADEM Admin. Code r. 335-6-6-.09 or a "duly authorized representative" of such official as defined in ADEM Admin. Code r. 335-6-6-.09 and shall bear the following certification:

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who



manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

j. All DMRs, reports, and forms required to be submitted by this Permit, the AWPCA and the Department's rules and regulations, shall be addressed to:

Alabama Department of Environmental Management Water Division, Mining and Natural Resource Section Post Office Box 301463 Montgomery, Alabama 36130-1463

Certified and Registered Mail shall be addressed to:

Alabama Department of Environmental Management Water Division, Mining and Natural Resource Section 1400 Coliseum Boulevard Montgomery, Alabama 36110-2059

- k. Unless authorized in writing by the Department, approved reporting forms required by this Permit or the Department are not to be altered, and if copied or reproduced, must be consistent in format and identical in content to the ADEM approved form. Unauthorized alteration, falsification, or use of incorrectly reproduced forms constitutes noncompliance with the requirements of this Permit and may significantly delay processing of any request, result in denial of the request, result in permit termination, revocation, suspension, modification, or denial of a permit renewal application, or result in other enforcement action.
- 1. If this Permit is a reissuance, then the Permittee shall continue to submit DMRs in accordance with the requirements of their previous permit until such time as DMRs are due as discussed in Part I.D.1.

2. Noncompliance Notification

- a. The Permittee must notify the Department if, for any reason, the Permittee's discharge:
 - (1) Potentially threatens human health or welfare;
 - (2) Potentially threatens fish or aquatic life;
 - (3) Causes an in-stream water quality criterion to be exceeded;
 - (4) Does not comply with an applicable toxic pollutant effluent standard or prohibition established under Section 307(a) of the FWPCA, 33 U.S.C. §1317(a);
 - (5) Contains a quantity of a hazardous substance which has been determined may be harmful to the public health or welfare under Section 311(b)(4) of the FWPCA, 33 U.S.C. §1321(b)(4); or
 - (6) Exceeds any discharge limitation for an effluent parameter as a result of an unanticipated bypass or upset.



The Permittee shall orally or electronically report any of the above occurrences, describing the circumstances and potential effects of such discharge to the Director within 24-hours after the Permittee becomes aware of the occurrence of such discharge. In addition to the oral or electronic report, the Permittee shall submit to the Director a written report as provided in Part I.D.2.c., no later than five (5) days after becoming aware of the occurrence of such discharge.

- b. If for any reason, the Permittee's discharge does not comply with any limitation of this Permit, the Permittee shall submit a written report to the Director as provided in Part I.D.2.c. This report must be submitted with the next Discharge Monitoring Report required to be submitted by Part I.D.1. of this Permit after becoming aware of the occurrence of such noncompliance.
- c. Any written report required to be submitted to the Director in accordance with Parts I.D.2.c. shall be submitted using a Noncompliance Notification Form (ADEM Form 421) available on the Department's website (http://adem.alabama.gov/DeptForms/Form421.pdf) and include the following information:
 - (1) A description of the discharge and cause of noncompliance;
 - (2) The period of noncompliance, including exact dates and times, or if not corrected, the anticipated time the noncompliance is expected to continue; and
 - (3) A description of the steps taken and/or being taken to reduce or eliminate the noncomplying discharge and to prevent its recurrence.

3. Reduction, Suspension, or Termination of Monitoring and/or Reporting

- a. The Director may, with respect to any point source identified on Page 1 of this Permit and described more fully in the Permittee's application, authorize the Permittee to reduce, suspend, or terminate the monitoring and/or reporting required by this Permit upon the submission of a written request for such reduction, suspension, or termination by the Permittee provided:
 - (1) All mining, processing, or disturbance in the drainage basin(s) associated with the discharge has ceased and site access is adequately restricted or controlled to preclude unpermitted and unauthorized mining, processing, transportation, or associated operations/activity;
 - (2) Permanent, perennial vegetation has been re-established on all areas mined or disturbed for at least one year since mining has ceased in the drainage basin(s) associated with the surface discharge, or all areas have been permanently graded such that all drainage is directed back into the mined pit to preclude all surface discharges;
 - (3) Unless waived in writing by the Department, the Permittee has been granted, in writing, a 100% Bond Release, if applicable, by the Alabama Department of Industrial Relations and, if applicable, by the Surface Mining Commission for all areas mined or disturbed in the drainage basin(s) associated with the discharge;
 - (4) Unless waived in writing by the Department, the Permittee has submitted inspection reports prepared and certified by a Professional Engineer (PE) registered in the State of Alabama or a qualified professional under the PE's direction which certify that the facility has been fully reclaimed or that water

quality remediation has been achieved. The first inspection must be conducted approximately one year prior to and the second inspection must be conducted within thirty days of the Permittee's request for termination of monitoring and reporting requirements;

- (5) All surface effects of the mining activity such as fuel or chemical tanks, preparation plants or equipment, old tools or equipment, junk or debris, etc., must be removed and disposed of according to applicable state and federal regulations;
- (6) The Permittee's request for termination of monitoring and reporting requirements contained in this Permit has been supported by monitoring data covering a period of at least six consecutive months or such longer period as is necessary to assure that the data reflect discharges occurring during varying seasonal climatological conditions;
- (7) The Permittee has stated in its request that the samples collected and reported in the monitoring data submitted in support of the Permittee's request for monitoring termination or suspension are representative of the discharge and were collected in accordance with all Permit terms and conditions respecting sampling times (e.g., rainfall events) and methods and were analyzed in accordance with all Permit terms and conditions respecting analytical methods and procedures;
- (8) The Permittee has certified that during the entire period covered by the monitoring data submitted, no chemical treatment of the discharge was provided;
- (9) The Permittee's request has included the certification required by Part I.D.1.e. of this Permit; and
- (10) The Permittee has certified to the Director in writing as part of the request, its compliance with (1) through (9) above.
- b. It remains the responsibility of the Permittee to comply with the monitoring and reporting requirements of this Permit until written authorization to reduce, suspend, or terminate such monitoring and/or reporting is received by the Permittee from the Director.

E. OTHER REPORTING AND NOTIFICATION REQUIREMENTS

1. Anticipated Noncompliance

The Permittee shall give the Director written advance notice of any planned changes or other circumstances regarding a facility which may result in noncompliance with permit requirements.

2. Termination of Discharge

The Permittee shall notify the Director, in writing, when all discharges from any point source(s) identified on Page 1 of this Permit and described more fully in the Permittee's application have permanently ceased.

3. Updating Information

a. The Permittee shall inform the Director of any change in the Permittee's mailing address or telephone number or in the Permittee's designation of a facility contact or officer(s)



having the authority and responsibility to prevent and abate violations of the AWPCA, the AEMA, the Department's rules and regulations, and the terms and conditions of this Permit, in writing, no later than ten (10) days after such change. Upon request of the Director, the Permittee shall furnish the Director with an update of any information provided in the permit application.

b. If the Permittee becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application or in any report to the Director, it shall promptly submit such facts or information with a written explanation for the mistake and/or omission.

4. **Duty to Provide Information**

- a. The Permittee shall furnish to the Director, within a reasonable time, any information which the Director may request to determine whether cause exists for modifying, suspending, terminating, or revoking and reissuing this Permit, in whole or in part, or to determine compliance with this Permit. The Permittee shall also furnish to the Director upon request, copies of records required to be maintained by this Permit.
- b. The Permittee shall furnish to the Director upon request, within a reasonable time, available information (name, phone number, address, and site location) which identifies offsite sources of material or natural resources (mineral, ore, or other material such as iron, coal, coke, dirt, chert, shale, clay, sand, gravel, bauxite, rock, stone, etc.) used in its operation or stored at the facility.

F. SCHEDULE OF COMPLIANCE

The Permittee shall achieve compliance with the discharge limitations specified in Part I.A. of this Permit in accordance with the following schedule:

Compliance must be achieved by the effective date of this Permit.

PART II OTHER REQUIREMENTS, RESPONSIBILITIES, AND DUTIES

A. OPERATIONAL AND MANAGEMENT REQUIREMENTS

1. Facilities Operation and Management

The Permittee shall at all times operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the Permittee to achieve compliance with the conditions of this Permit. Proper operation and maintenance includes effective performance, adequate funding, adequate operator staffing and training, and adequate laboratory and process controls, including appropriate quality assurance procedures. This provision requires the operation of backup or auxiliary facilities only when necessary to achieve compliance with the conditions of this Permit.

2. Pollution Abatement and/or Prevention Plan

The Pollution Abatement and/or Prevention (PAP) Plan shall be prepared and certified by a registered Professional Engineer (PE), licensed to practice in the State of Alabama, and shall include at a minimum, the information indicated in ADEM Admin. Code r. 335-6-9-.03 and ADEM Admin. Code ch. 335-6-9 Appendices A and B. The PAP Plan shall become a part of this Permit and all requirements of the PAP Plan shall become requirements of this Permit pursuant to ADEM Admin. Code r. 335-6-9-.05(2).

3. Best Management Practices (BMPs)

- a. Unless otherwise authorized in writing by the Director, the Permittee shall provide a means of subsurface withdrawal for any discharge from each point source identified on Page 1 of this Permit and described more fully in the Permittee's application. Notwithstanding the above provision, a means of subsurface withdrawal need not be provided for any discharge caused by a 24-hour precipitation event greater than a 10-year, 24-hour precipitation event.
- b. Dilution water shall not be added to achieve compliance with discharge limitations except when the Director has granted prior written authorization for dilution to meet water quality requirements.
- c. The Permittee shall minimize the contact of water with overburden, including but not limited to stabilizing disturbed areas through grading, diverting runoff, achieving quick growing stands of temporary vegetation, sealing acid-forming and toxic-forming materials, and maximizing placement of waste materials in back-fill areas.
- d. The Permittee shall prepare, submit to the Department for approval, and implement a Best Management Practices (BMPs) Plan for containment of any or all process liquids or solids, in a manner such that these materials do not present a potential for discharge, if so required by the Director. When submitted and approved, the BMP Plan shall become a part of this Permit and all requirements of the BMP Plan shall become requirements of this Permit.

e. Spill Prevention, Control, and Management

The Permittee shall prepare, implement, and maintain a Spill Prevention, Control and Countermeasures (SPCC) Plan acceptable to the Department that is prepared and certified by a Professional Engineer (PE), registered in the State of Alabama, for all onsite petroleum product or other pollutant storage tanks or containers as required by applicable state (ADEM Admin. Code r. 335-6-6-.12(r)) and federal (40 C.F.R. §§112.1-.7)

regulations. The Permittee shall implement appropriate structural and/or non-structural spill prevention, control, and/or management sufficient to prevent any spills of pollutants from entering a ground or surface water of the State or a publicly or privately owned treatment works. Careful consideration should be applied for tanks or containers located near treatment ponds, water bodies, or high traffic areas. In most situations this would require construction of a containment system if the cumulative storage capacity of petroleum products or other pollutants at the facility is greater than 1320 gallons. Any containment system used to implement this requirement shall be constructed of materials compatible with the substance(s) contained and shall prevent the contamination of groundwater. Such containment systems shall be capable of retaining a volume equal to 110 percent of the capacity of the largest tank for which containment is provided. The applicant shall maintain onsite or have readily available flotation booms to contain, and sufficient material to absorb, fuel and chemical spills and leaks. Soil contaminated by chemical spills, oil spills, etc., must be immediately cleaned up or be removed and disposed of in an approved manner.

- f. All surface drainage and storm water runoff which originate within or enters the Permittee's premises and which contains any pollutants or other wastes shall be discharged, if at all, from a point source identified on Page I of this Permit and described more fully in the Permittee's application.
- g. The Permittee shall take all reasonable precautions to prevent any surface drainage or storm water runoff which originates outside the Permittee's premises and which contains any pollutants or other wastes from entering the Permittee's premises. At no time shall the Permittee discharge any such surface drainage or storm water runoff which enters the Permittee's premises if, either alone or in combination with the Permittee's effluent, the discharge would exceed any applicable discharge limitation specified in Part I.A. of this Permit.

4. Biocide Additives

- a. The Permittee shall notify the Director in writing not later than sixty (60) days prior to instituting the use of any biocide corrosion inhibitor or chemical additive in any cooling or boiler system(s) regulated by this Permit. Notification is not required for additives that should not reasonably be expected to cause the cooling water or boiler water to exhibit toxicity as determined by analysis of manufacturer's data or testing by the Permittee. Such notification shall include:
 - (a) Name and general composition of biocide or chemical;
 - (b) 96-hour median tolerance limit data for organisms representative of the biota of the water(s) which the discharge(s) enter(s);
 - (c) Quantities to be used;
 - (d) Frequencies of use;
 - (e) Proposed discharge concentrations; and
 - (f) EPA registration number, if applicable.
- b. The use of any biocide or chemical additive containing tributyl tin, tributyl tin oxide, zinc, chromium, or related compounds in any cooling or boiler system(s) regulated by the Permit is prohibited except as exempted below. The use of a biocide or additive containing zinc, chromium or related compounds may be used in special circumstances if (1) the permit contains limits for these substances, or (2) the applicant demonstrates

during the application process that the use of zinc, chromium or related compounds as a biocide or additive will not pose a reasonable potential to violate the applicable State water quality standards for these substances. The use of any additive, not identified in this Permit or in the application for this Permit or not exempted from notification under this Permit is prohibited, prior to a determination by the Department that permit modification to control discharge of the additive is not required or prior to issuance of a permit modification controlling discharge of the additive.

5. Facility Identification

The Permittee shall clearly display prior to commencement of any regulated activity and until permit coverage is properly terminated, the name of the Permittee, entire NPDES permit number, facility or site name, and other descriptive information deemed appropriate by the Permittee at an easily accessible location(s) to adequately identify the site, unless approved otherwise in writing by the Department. The Permittee shall repair or replace the sign(s) as necessary upon becoming aware that the identification is missing or is unreadable due to age, vandalism, theft, weather, or other reason.

6. Removed Substances

Solids, sludges, filter backwash, or any other pollutants or other wastes removed in the course of treatment or control of wastewaters shall be disposed of in a manner that complies with all applicable Department rules and regulations.

7. Loss or Failure of Treatment Facilities

Upon the loss or failure of any treatment facility, including but not limited to the loss or failure of the primary source of power of the treatment facility, the Permittee shall, where necessary to maintain compliance with the discharge limitations specified in Part I.A. of this Permit or any other terms or conditions of this Permit, cease, reduce, or otherwise control production and/or discharges until treatment is restored.

8. Duty to Mitigate

The Permittee shall promptly take all reasonable steps to minimize or prevent any violation of this Permit or to mitigate and minimize any adverse impact to waters resulting from noncompliance with any discharge limitation specified in Part I.A. of this Permit, including such accelerated or additional monitoring of the discharge and/or the receiving waterbody as is necessary to determine the nature and impact of the noncomplying discharge.

B. BYPASS AND UPSET


1. Bypass

- a. Any bypass is prohibited except as provided in Parts II.B.1.b. and c.
- b. A bypass is not prohibited if:
 - (1) It does not cause any applicable discharge limitation specified in Part I.A. of this Permit to be exceeded;
 - (2) The discharge resulting from such bypass enters the same receiving water as the discharge from the permitted outfall;

- (3) It is necessary for essential maintenance of a treatment or control facility or system to assure efficient operation of such facility or system; and
- (4) The Permittee monitors the discharge resulting from such bypass at a frequency, at least daily, sufficient to prove compliance with the discharge limitations specified in Part I.A. of this Permit.
- A bypass is not prohibited and need not meet the discharge limitations specified in Part I.A. of this Permit if:
 - (1) It is unavoidable to prevent loss of life, personal injury, or severe property damage;
 - (2) There are no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime. This condition is not satisfied if the Permittee could have installed adequate backup equipment to prevent a bypass which occurred during normal periods of equipment downtime or preventive maintenance; and
 - (3) The Permittee submits a written request for authorization to bypass to the Director at least ten (10) days, if possible, prior to the anticipated bypass or within 24 hours of an unanticipated bypass, the Permittee is granted such authorization, and Permittee complies with any conditions imposed by the Director to minimize any adverse impact to waters resulting from the bypass.
- d. The Permittee has the burden of establishing that each of the conditions of Parts II.B.1.b. or c. have been met to qualify for an exception to the general prohibition against bypassing contained in Part II.B.1.a. and an exemption, where applicable, from the discharge limitations specified in Part I.A. of this Permit.

2. Upset

- a. Except as provided in Parts II.B.2.b. and c., a discharge which results from an upset need not meet the applicable discharge limitations specified in Part I.A. of this Permit if:
 - (1) No later than 24-hours after becoming aware of the occurrence of the upset, the Permittee orally reports the occurrence and circumstances of the upset to the Director; and
 - (2) No later than five (5) days after becoming aware of the occurrence of the upset, the Permittee furnishes the Director with evidence, including properly signed, contemporaneous operating logs, design drawings, construction certification, maintenance records, weir flow measurements, dated photographs, rain gauge measurements, or other relevant evidence, demonstrating that:
 - (i) An upset occurred;
 - (ii) The Permittee can identify the specific cause(s) of the upset;
 - (iii) The Permittee's treatment facility was being properly operated at the time of the upset; and
 - (iv) The Permittee promptly took all reasonable steps to minimize any adverse impact to waters resulting from the upset.



- b. Notwithstanding the provisions of Part II.B.2.a., a discharge which is an overflow from a treatment facility or system, or an excess discharge from a point source associated with a treatment facility or system and which results from a 24-hour precipitation event larger than a 10-year, 24-hour precipitation event is not exempted from the discharge limitations specified in Part I.A. of this Permit unless:
 - (1) The treatment facility or system is designed, constructed, and maintained to contain the maximum volume of wastewater which would be generated by the facility during a 24-hour period without an increase in volume from precipitation and the maximum volume of wastewater resulting from a 10-year, 24-hour precipitation event or to treat the maximum flow associated with these volumes.

In computing the maximum volume of wastewater which would result from a 10-year, 24-hour precipitation event, the volume which would result from all areas contributing runoff to the individual treatment facility must be included (i.e., all runoff that is not diverted from the mining area and runoff which is not diverted from the preparation plant area); and

- (2) The Permittee takes all reasonable steps to maintain treatment of the wastewater and minimize the amount of overflow or excess discharge.
- c. The Permittee has the burden of establishing that each of the conditions of Parts II.B.2.a. and b. have been met to qualify for an exemption from the discharge limitations specified in Part I.A. of this Permit.

C. PERMIT CONDITIONS AND RESTRICTIONS

1. Prohibition against Discharge from Facilities Not Certified

- a. Notwithstanding any other provisions of this Permit, if the permitted facility has not obtained or is not required to obtain a permit from the Alabama Surface Mining Commission, any discharge(s) from any point or nonpoint source(s) from the permitted facility which was not certified to the Department on a form approved by the Department by a professional engineer, registered in the State of Alabama, as being designed, constructed, and in accordance with plans and specifications reviewed by the Department is prohibited; or
- b. Notwithstanding any other provisions of this Permit, if the permitted facility has obtained or is required to obtain a permit from the Alabama Surface Mining Commission, any discharge(s) from any point or nonpoint source(s) from the permitted facility which is associated with a treatment facility which was not constructed and certified to the Alabama Surface Mining Commission pursuant to applicable provisions of said Commission's regulations, is prohibited until the Permittee submits to the Alabama Surface Mining Commission, certification by a professional engineer, registered in the State of Alabama, certifying that such facility has been constructed in accordance with plans and specifications approved by the Alabama Surface Mining Commission. This requirement shall not apply to pumped discharges from the underground works of underground coal mines where no surface structure is required by the Alabama Surface Mining Commission, provided the Department is notified in writing of the completion or installation of such facilities, and the pumped discharges will meet permit effluent limits without treatment.



2. Permit Modification, Suspension, Termination, and Revocation

- a. This Permit may be modified, suspended, terminated, or revoked and reissued, in whole or in part, during its term for cause, including but not limited to, the following:
 - (1) The violation of any term or condition of this Permit;
 - (2) The obtaining of this Permit by misrepresentation or the failure to disclose fully all relevant facts;
 - (3) The submission of materially false or inaccurate statements or information in the permit application or reports required by the Permit;
 - (4) The need for a change in any condition that requires either a temporary or permanent reduction or elimination of the permitted discharge;
 - (5) The existence of any typographical or clerical errors or of any errors in the calculation of discharge limitations;
 - (6) The existence of material and substantial alterations or additions to the facility or activity generating wastewater which occurred after permit issuance which justify the application of permit conditions that are different or absent in the existing permit;
 - (7) The threat of the Permittee's discharge on human health or welfare; or
 - (8) Any other cause allowed by ADEM Admin. Code ch. 335-6-6.
- b. The filing of a request by the Permittee for modification, suspension, termination, or revocation and reissuance of this Permit, in whole or in part, does not stay any Permit term or condition of this Permit.

3. Automatic Expiration of Permits for New or Increased Discharges

- a. Except as provided by ADEM Admin. Code r. 335-6-6-.02(h) and 335-6-6-.05, if this Permit was issued for a new discharger or new source, it shall expire eighteen months after the issuance date if construction has not begun during that eighteen month period.
- b. Except as provided by ADEM Admin. Code r. 335-6-6-.02(h) and 335-6-6-.05, if any portion of this Permit was issued or modified to authorize the discharge of increased quantities of pollutants to accommodate the modification of an existing facility, that portion of this Permit shall expire eighteen months after this Permit's issuance if construction of the modification has not begun within eighteen month period.
- c. Construction has begun when the owner or operator has:
 - (1) Begun, or caused to begin as part of a continuous on-site construction program:
 - (i) Any placement, assembly, or installation of facilities or equipment; or
 - (ii) Significant site preparation work including clearing, excavation, or removal of existing buildings, structures, or facilities which is necessary for the placement, assembly, or installation of new source facilities or equipment; or

- (2) Entered into a binding contractual obligation for the purpose of placement, assembly, or installation of facilities or equipment which are intended to be used in its operation within a reasonable time. Options to purchase or contracts which can be terminated or modified without substantial loss, and contracts for feasibility, engineering, and design studies do not constitute a contractual obligation under the paragraph. The entering into a lease with the State of Alabama for exploration and production of hydrocarbons shall also be considered beginning construction.
- d. The automatic expiration of this Permit for new or increased discharges if construction has not begun within the eighteen month period after the issuance of this Permit may be tolled by administrative or judicial stay.

4. Transfer of Permit

This Permit may not be transferred or the name of the Permittee changed without notice to the Director and subsequent modification or revocation and reissuance of this Permit to identify the new Permittee and to incorporate any other changes as may be required under the FWPCA or AWPCA. In the case of a change in name, ownership, or control of the Permittee's premises only, a request for permit modification in a format acceptable to the Director is required at least 30 days prior to the change. In the case of a change in name, ownership, or control of the Permittee's premises accompanied by a change or proposed change in effluent characteristics, a complete permit application is required to be submitted to the Director at least 180 days prior to the change. Whenever the Director is notified of a change in name, ownership, or control, he may decide not to modify the existing Permit and require the submission of a new permit application.

5. Groundwater

Unless authorized on page 1 of this Permit, this Permit does not authorize any discharge to groundwater. Should a threat of groundwater contamination occur, the Director may require groundwater monitoring to properly assess the degree of the problem, and the Director may require that the Permittee undertake measures to abate any such discharge and/or contamination.

6. Property and Other Rights

This Permit does not convey any property rights in either real or personal property, or any exclusive privileges, nor does it authorize any injury to persons or property or invasion of other private rights, trespass, or any infringement of Federal, State, or local laws or regulations, nor does it authorize or approve the construction of any physical structures or facilities or the undertaking of any work in any waters of the State or of the United States.

D. RESPONSIBILITIES

1. Duty to Comply

- a. The Permittee must comply with all terms and conditions of this Permit. Any permit noncompliance constitutes a violation of the AWPCA, AEMA, and the FWPCA and is grounds for enforcement action, for permit termination, revocation and reissuance, suspension, modification, or denial of a permit renewal application.
- b. The Permittee shall comply with effluent standards or prohibitions established under Section 307(a) of the FWPCA for toxic pollutants within the time provided in the regulations that establish these standards or prohibitions, even if this Permit has not yet been modified to incorporate the effluent standard, prohibition or requirement.

- c. For any violation(s) of this Permit, the Permittee is subject to a civil penalty as authorized by the AWPCA, the AEMA, the FWPCA, and <u>Code of Alabama</u> 1975, §\$22-22A-1 <u>et</u>. <u>seq</u>., as amended, and/or a criminal penalty as authorized by <u>Code of Alabama</u> 1975, §22-22-1 <u>et</u>. <u>seq</u>., as amended.
- d. The necessity to halt or reduce production or other activities in order to maintain compliance with the conditions of this Permit shall not be a defense for a Permittee in an enforcement action.
- e. Nothing in this Permit shall be construed to preclude or negate the Permittee's responsibility or liability to apply for, obtain, or comply with other ADEM, federal, state, or local government permits, certifications, licenses, or other approvals.
- f. The discharge of a pollutant from a source not specifically identified in the permit application for this Permit and not specifically included in the description of an outfall in this Permit is not authorized and shall constitute noncompliance with this Permit.
- g. The Permittee shall take all reasonable steps, including cessation of production or other activities, to minimize or prevent any violation of this Permit or to minimize or prevent any adverse impact of any permit violation.

2. Change in Discharge

- a. The Permittee shall apply for a permit modification at least 180 days in advance of any facility expansion, production increase, process change, or other action that could result in the discharge of additional pollutants, increase the quantity of a discharged pollutant, or that could result in an additional discharge point. This requirement also applies to pollutants that are not subject to discharge limitations in this Permit. No new or increased discharge may begin until the Director has authorized it by issuance of a permit modification or a reissued permit.
- b. The Permittee shall notify the Director as soon as it knows or has reason to believe that it has begun or expects to begin to discharge any pollutant listed as a toxic pollutant pursuant to Section 307(a) of the FWPCA, 33 U.S.C. §1317(a), any substance designated as a hazardous substance pursuant to Section 311(b)(2) of the FWPCA, 33 U.S.C. §1321(b)(2), any waste listed as a hazardous waste pursuant to Code of Alabama 1975, §22-30-10, or any other pollutants or other wastes which is not subject to any discharge limitations specified in Part I.A. of this Permit and was not reported in the Permittee's application, was reported in the Permittee's application in concentrations or mass rates lower than that which the Permittee expects to begin to be discharged, or has reason to believe has begun to be discharged.

3. Compliance with Toxic or Other Pollutant Effluent Standard or Prohibition

If any applicable effluent standard or prohibition (including any schedule of compliance specified in such effluent standard or prohibition) is established under Sections 301(b)(2)(C),(D),(E) and (F) of the FWPCA, 33 U.S.C. §1311(b)(2)(C),(D),(E), and (F); 304(b)(2) of the FWPCA, 33 U.S.C. §1314(b)(2); or 307(a) of the FWPCA, 33 U.S.C. §1317(a), for a toxic or other pollutant discharged by the Permittee, and such standard or prohibition is more stringent than any discharge limitation on the pollutant specified in Part I.A. of this Permit or controls a pollutant not limited in Part I.A. of this Permit, this Permit shall be modified to conform to the toxic or other pollutant effluent standard or prohibition and the Permittee shall be notified of such modification. If this Permit has not been modified to conform to the toxic or other pollutant effluent standard or prohibition before the effective date of such standard or prohibition, the authorization to discharge in this Permit shall be void to the extent that any discharge limitation on such pollutant in Part I.A.



of this Permit exceeds or is inconsistent with the established toxic or other pollutant effluent standard or prohibition.

4. Compliance with Water Quality Standards and Other Provisions

- a. On the basis of the Permittee's application, plans, or other available information, the Department has determined that compliance with the terms and conditions of this Permit will assure compliance with applicable water quality standards. However, this Permit does not relieve the Permittee from compliance with applicable State water quality standards established in ADEM Admin. Code ch. 335-6-10, and does not preclude the Department from taking action as appropriate to address the potential for contravention of applicable State water quality standards which could result from discharges of pollutants from the permitted facility.
- b. Compliance with Permit terms and conditions notwithstanding, if the Permittee's discharge(s) from point source(s) identified on Page 1 of this Permit cause(s) or contribute(s) to a condition in contravention of State water quality standards, the Department may require abatement action to be taken by the Permittee, modify the Permit pursuant to the Department's rules and regulations, or both.
- c. If the Department determines, on the basis of a notice provided pursuant to Part II.C.2. of this Permit or any investigation, inspection, or sampling, that a modification of this Permit is necessary to assure maintenance of water quality standards or compliance with other provisions of the AWPCA or FWPCA, the Department may require such modification and, in cases of emergency, the Director may prohibit the noticed act until the Permit has been modified.

5. Compliance with Statutes and Rules

- a. This Permit has been issued under ADEM Admin. Code div. 335-6. All provisions of this division, that are applicable to this Permit, are hereby made a part of this Permit. A copy of this division may be obtained for a small charge from the Office of General Counsel, Alabama Department of Environmental Management, 1400 Coliseum Blvd., Montgomery, AL 36110-2059.
- b. This Permit does not authorize the noncompliance with or violation of any Laws of the State of Alabama or the United States of America or any regulations or rules implementing such laws. FWPCA, 33 U.S.C. Section 1319, and Code of Alabama 1975, Section 22-22-14.

6. Right of Entry and Inspection

The Permittee shall allow the Director, or an authorized representative, upon the presentation of credentials and other documents as may be required by law to:

- a. Enter upon the Permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of the Permit;
- b. Have access to and copy, at reasonable times, any records that must be kept under the conditions of this Permit;
- c. Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this Permit; and
- d. Sample or monitor at reasonable times, for the purposes of assuring Permit compliance or as otherwise authorized by the AWPCA, any substances or parameters at any location.

7. Duty to Reapply or Notify of Intent to Cease Discharge

- a. If the Permittee intends to continue to discharge beyond the expiration date of this Permit, the Permittee shall file with the Department a complete permit application for reissuance of this Permit at least 180 days prior to its expiration.
- b. If the Permittee does not desire to continue the discharge(s) allowed by this Permit, the Permittee shall notify the Department at least 180 days prior to expiration of this Permit of the Permittee's intention not to request reissuance of this Permit. This notification must include the information required in Part I.D.4.a. and be signed by an individual meeting the signatory requirements for a permit application as set forth in ADEM Admin. Code r. 335-6-6-.09.
- c. Failure of the Permittee to submit to the Department a complete application for reissuance of this Permit at least 180 days prior to the expiration date of this Permit will void the automatic continuation of this Permit provided by ADEM Admin. Code r. 335-6-6-06; and should this Permit not be reissued for any reason, any discharge after the expiration of this Permit will be an unpermitted discharge.



PART III ADDITIONAL REQUIREMENTS, CONDITIONS, AND LIMITATIONS

A. CIVIL AND CRIMINAL LIABILITY

1. Tampering

Any person who falsifies, tampers with, or knowingly renders inaccurate any monitoring device or method required to be maintained or performed under this Permit shall, upon conviction, be subject to penalties and/or imprisonment as provided by the AWPCA and/or the AEMA.

2. False Statements

Any person who knowingly makes any false statement, representation, or certification in any record or other document submitted or required to be maintained under this Permit, including monitoring reports or reports of compliance or noncompliance shall, upon conviction, be punished as provided by applicable State and Federal law.

3. Permit Enforcement

This NPDES Permit is a Permit for the purpose of the AWPCA, the AEMA, and the FWPCA, and as such all terms, conditions, or limitations of this Permit are enforceable under State and Federal law.

4. Relief From Liability

Except as provided in Part II.B.1. (Bypass) and Part II.B.2. (Upset), nothing in this Permit shall be construed to relieve the Permittee of civil or criminal liability under the AWPCA, AEMA, or FWPCA for noncompliance with any term or condition of this Permit.

B. OIL AND HAZARDOUS SUBSTANCE LIABILITY

Nothing in this Permit shall be construed to preclude the institution of any legal action or relieve the Permittee from any responsibilities, liabilities, or penalties to which the Permittee is or may be subject to under Section 311 of the FWPCA, 33 U.S.C. §1321.

C. AVAILABILITY OF REPORTS

Except for data determined to be confidential under <u>Code of Alabama</u> 1975, §22-22-9(c), all reports prepared in accordance with the terms of this Permit shall be available for public inspection at the offices of the Department. Effluent data shall not be considered confidential. Knowingly making any false statement in any such report may result in the imposition of criminal penalties as provided for in Section 309 of the FWPCA, 33 U.S.C. §1319, and <u>Code of Alabama</u> 1975, §22-22-14.

D. **DEFINITIONS**

- 1. Alabama Environmental Management Act (AEMA) means <u>Code of Alabama</u> 1975, §§22-22A-1 <u>et</u>. <u>seq</u>., as amended.
- 2. Alabama Water Pollution Control Act (AWPCA) means <u>Code of Alabama</u> 1975, §§22-22-1 <u>et</u>. <u>seq</u>., as amended.
- 3. Average monthly discharge limitation means the highest allowable average of "daily discharges" over a calendar month, calculated as the sum of all "daily discharges" measured during a calendar

month divided by the number of "daily discharges" measured during that month (zero discharge days shall not be included in the number of "daily discharges" measured and a less than detectable test result shall be treated as a concentration of zero if the most sensitive EPA approved method was used).

- 4. Arithmetic Mean means the summation of the individual values of any set of values divided by the number of individual values.
- 5. BOD means the five-day measure of the pollutant parameter biochemical oxygen demand
- 6. Bypass means the intentional diversion of waste streams from any portion of a treatment facility.
- CBOD means the five-day measure of the pollutant parameter carbonaceous biochemical oxygen demand.
- 8. Controlled Surface Mine Drainage means any surface mine drainage that is pumped or siphoned from the active mining area.
- 9. Crushed stone mine means an area on or beneath land which is mined, quarried, or otherwise disturbed in activity related to the extraction, removal, or recovery of stone from natural or artificial deposits, including active mining, reclamation, and mineral storage areas, for production of crushed stone.
- Daily discharge means the discharge of a pollutant measured during any consecutive 24-hour period in accordance with the sample type and analytical methodology specified by the discharge permit.
- 11. Daily maximum means the highest value of any individual sample result obtained during a day.
- 12. Daily minimum means the lowest value of any individual sample result obtained during a day.
- 13. Day means any consecutive 24-hour period.
- Department means the Alabama Department of Environmental Management.
- 15. Director means the Director of the Department or his authorized representative or designee.
- 16. Discharge means "[t]he addition, introduction, leaking, spilling or emitting of any sewage, industrial waste, pollutant or other waste into waters of the state." Code of Alabama 1975, §22-22-1(b)(8).
- 17. Discharge monitoring report (DMR) means the form approved by the Director to accomplish monitoring report requirements of an NPDES Permit.
- 18. DO means dissolved oxygen.
- 19. E. coli means the pollutant parameter Escherichia coli.
- 20. 8HC means 8-hour composite sample, including any of the following:
 - a. The mixing of at least 5 equal volume samples collected at constant time intervals of not more than 2 hours over a period of not less than 8 hours between the hours of 6:00 a.m. and 6:00 p.m. If the sampling period exceeds 8 hours, sampling may be conducted beyond the 6:00 a.m. to 6:00 p.m. period.



- b. A sample continuously collected at a constant rate over period of not less than 8 hours between the hours of 6:00 a.m. and 6:00 p.m. If the sampling period exceeds 8 hours, sampling may be conducted beyond the 6:00 a.m. to 6:00 p.m. period.
- 21. EPA means the United States Environmental Protection Agency.
- 22. Federal Water Pollution Control Act (FWPCA) means 33 U.S.C. §§1251 et. seq., as amended.
- 23. Flow means the total volume of discharge in a 24-hour period.
- 24. Geometric Mean means the Nth root of the product of the individual values of any set of values where N is equal to the number of individual values. The geometric mean is equivalent to the antilog of the arithmetic mean of the logarithms of the individual values. For purposes of calculating the geometric mean, values of zero (0) shall be considered one (1).
- 25. Grab Sample means a single influent or effluent portion which is not a composite sample. The sample(s) shall be collected at the period(s) most representative of the discharge.
- 26. Indirect Discharger means a nondomestic discharger who discharges pollutants to a publicly owned treatment works or a privately owned treatment facility operated by another person.
- 27. Industrial User means those industries identified in the Standard Industrial Classification manual, Bureau of the Budget 1967, as amended and supplemented, under the category "Division D Manufacturing" and such other classes of significant waste producers as, by regulation, the Director deems appropriate.
- 28. mg/L means milligrams per liter of discharge.
- 29. MGD means million gallons per day.
- 30. Monthly Average means, other than for E. coli bacteria, the arithmetic mean of all the composite or grab samples taken for the daily discharges collected in one month period. The monthly average for E. coli bacteria is the geometric mean of daily discharge samples collected in a one month period. The monthly average for flow is the arithmetic mean of all flow measurements taken in a one month period. (Zero discharges shall not be included in the calculation of monthly averages.)
- 31. New Discharger means a person owning or operating any building, structure, facility or installation:
 - a. From which there is or may be a discharge of pollutants;
 - b. From which the discharge of pollutants did not commence prior to August 13, 1979, and which is not a new source; and
 - c. Which has never received a final effective NPDES Permit for dischargers at that site.
- 32. New Source means:
 - a. A new source as defined for coal mines by 40 CFR Part 434.11 (1994); and
 - b. Any building, structure, facility, or installation from which there is or may be a discharge of pollutants, the construction of which commenced:
 - (1) After promulgation of standards of performance under Section 306 of FWPCA which are applicable to such source; or

- (2) After proposal of standards of performance in accordance with Section 306 of the FWPCA which are applicable to such source, but only if the standards are promulgated in accordance with Section 206 within 120 days of their proposal.
- 33. NH3-N - means the pollutant parameter ammonia, measured as nitrogen.
- 34. 1-year, 24-hour precipitation event - means the maximum 24-hour precipitation event with a probable recurrence interval of once in one year as defined by the National Weather Service and Technical Paper No. 40, "Rainfall Frequency Atlas of the U.S.," May 1961, or equivalent regional or rainfall probability information developed therefrom.
- 35. Permit application - means forms and additional information that are required by ADEM Admin. Code r. 335-6-6-.08 and applicable permit fees.
- 36. Point Source - means "any discernible, confined and discrete conveyance, including but not limited to any pipe, channel, ditch, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation, or vessel or other floating craft from which pollutants are or may be discharged." Section 502(14) of the FWPCA, 33 U.S.C. §1362(14).
- 37. Pollutant - includes for purposes of this Permit, but is not limited to, those pollutants specified in Code of Alabama 1975, §22-22-1(b)(3) and those effluent characteristics, excluding flow, specified in Part I.A. of this Permit.
- 38. Pollutant of Concern - means those pollutants for which a water body is listed as impaired or which contribute to the listed impairment.
- 39. Pollution Abatement and/or Prevention Plan (PAP Plan) - mining operations plan developed to minimize impacts on water quality to avoid a contravention of the applicable water quality standards as defined in ADEM Admin. Code r. 335-6-9-.03
- 40. Preparation, Dry - means a dry preparation facility within which the mineral/material is cleaned, separated, or otherwise processed without use of water or chemical additives before it is shipped to the customer or otherwise utilized. A dry preparation plant includes all ancillary operations and structures necessary to clean, separate, or otherwise process the mineral/material, such as storage areas and loading facilities. Dry preparation also includes minor water spray(s) used solely for dust suppression on equipment and roads to minimize dust emissions.
- 41. Preparation, Wet - means a wet preparation facility within which the mineral/material is cleaned, separated, or otherwise processed using water or chemical additives before it is shipped to the customer or otherwise utilized. A wet preparation plant includes all ancillary operations and structures necessary to clean, separate, or otherwise process the mineral/material, such as storage areas and loading facilities. Wet preparation also includes mineral extraction/processing by dredging, slurry pumping, etc.
- 42. Privately Owned Treatment Works - means any devices or system which is used to treat wastes from any facility whose operator is not the operator of the treatment works, and which is not a "POTW".
- 43. Publicly Owned Treatment Works (POTW) - means a wastewater collection and treatment facility owned by the State, municipality, regional entity composed of two or more municipalities, or another entity created by the State or local authority for the purpose of collecting and treating municipal wastewater.
- 44. Receiving Stream - means the "waters" receiving a "discharge" from a "point source".



- 45. Severe property damage means substantial physical damage to property, damage to the treatment facilities which causes them to become inoperable, or substantial and permanent loss of natural resources which can reasonably be expected to occur in the absence of a bypass. Severe property damage does not mean economic loss caused by delays in production.
- 46. 10-year, 24-hour precipitation event means that amount of precipitation which occurs during the maximum 24-hour precipitation event with a probable recurrence interval of once in ten years as defined by the National Weather Service and Technical Paper No. 40, "Rainfall Frequency Atlas of the U.S.," May 1961, or equivalent regional or rainfall probability information developed therefrom.
- 47. TKN means the pollutant parameter Total Kjeldahl Nitrogen.
- 48. TON means the pollutant parameter Total Organic Nitrogen.
- 49. TRC means Total Residual Chlorine.
- 50. TSS means the pollutant parameter Total Suspended Solids
- Treatment facility and treatment system means all structures which contain, convey, and as necessary, chemically or physically treat mine and/or associated preparation plant drainage, which remove pollutants limited by this Permit from such drainage or wastewater. This includes all pipes, channels, ponds, tanks, and all other equipment serving such structures.
- 52. 24HC means 24-hour composite sample, including any of the following:
 - a. The mixing of at least 12 equal volume samples collected at constant time intervals of not more than 2 hours over a period of 24 hours;
 - b. A sample collected over a consecutive 24-hour period using an automatic sampler composite to one sample. As a minimum, samples shall be collected hourly and each shall be no more than one twenty-fourth (1/24) of the total sample volume collected; or
 - c. A sample collected over a consecutive 24-hour period using an automatic composite sampler composited proportional to flow.
- 53. 24-hour precipitation event means that amount of precipitation which occurs within any 24-hour period.
- 54. 2-year, 24-hour precipitation event means the maximum 24-hour precipitation event with a probable recurrence interval of once in two years as defined by the National Weather Service and Technical Paper No. 40, "Rainfall Frequency Atlas of the U.S.," May 1961, or equivalent regional or rainfall probability information developed therefrom.
- 55. Upset means an exceptional incident in which there is an unintentional and temporary noncompliance with technology-based permit discharge limitations because of factors beyond the control of the Permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate facilities, lack of preventive maintenance, or careless or improper operation.
- Waters means "[a]ll waters of any river, stream, watercourse, pond, lake, coastal, ground or surface water, wholly or partially within the State, natural or artificial. This does not include waters which are entirely confined and retained completely upon the property of a single individual, partnership, or corporation unless such waters are used in interstate commerce." Code of Alabama 1975, §22-22-1(b)(2). "Waters" include all "navigable waters" as defined in §502(7) of the FWPCA, 33 U.S.C. §1362(7), which are within the State of Alabama.

- 57. Week means the period beginning at twelve midnight Saturday and ending at twelve midnight the following Saturday.
- Weekly (7-day and calendar week) Average is the arithmetic mean of all samples collected during a consecutive 7-day period or calendar week, whichever is applicable. The calendar week is defined as beginning on Sunday and ending on Saturday. Weekly averages shall be calculated for all calendar weeks with Saturdays in the month. If a calendar week overlaps two months (i.e., the Sunday is in one month and the Saturday in the following month), the weekly average calculated for the calendar week shall be included in the data for the month that contains the Saturday.

E. SEVERABILITY

The provisions of this Permit are severable, and if any provision of this Permit or the application of any provision of this Permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of this Permit, shall not be affected thereby.

F. PROHIBITIONS AND ACTIVIES NOT AUTHORIZED

- 1. Discharges from disposal or landfill activities as described in ADEM Admin. Code div. 335-13 are not authorized by this Permit unless specifically approved by the Department.
- 2. Relocation, diversion, or other alteration of a water of the State is not authorized by this Permit unless specifically approved by the Department.
- 3. Lime or cement manufacturing or production and discharge of process waters from such manufacturing or production is not authorized by this Permit unless specifically approved by the Department.
- 4. Concrete or asphalt manufacturing or production and discharge of process waters from such manufacturing or production is not authorized by this Permit unless specifically approved by the Department.
- 5. The discharge of wastewater, generated by any process, facility, or by any other means not under the operational control of the Permittee or not identified in the application for this Permit or not identified specifically in the description of an outfall in this Permit is not authorized by this Permit.

G. DISCHARGES TO IMPAIRED WATERS

- 1. This Permit does not authorize new sources or new discharges of pollutants of concern to impaired waters unless consistent with an EPA-approved or EPA-established Total Maximum Daily Load (TMDL) and applicable State law, or unless compliance with the limitations and requirements of the Permit ensure that the discharge will not contribute to further degradation of the receiving stream. Impaired waters are those that do not meet applicable water quality standards and are identified on the State of Alabama's §303(d) list or on an EPA-approved or EPA-established TMDL. Pollutants of concern are those pollutants for which the receiving water is listed as impaired or contribute to the listed impairment.
- 2. Facilities that discharge into a receiving stream which is listed on the State of Alabama's §303(d) list of impaired waters, and with discharges that contain the pollutant(s) for which the waters are impaired, must within six (6) months of the Final §303(d) list approval, document in its BMP plan how the BMPs will control the discharge of the pollutant(s) of concern, and must ensure that there



will be no increase of the pollutants of concern. A monitoring plan to assess the effectiveness of the BMPs in achieving the allocations must also be included in the BMP plan.

3. If the facility discharges to impaired waters as described above, it must determine whether a TMDL has been developed and approved or established by EPA for the listed waters. If a TMDL is approved or established during this Permit cycle by EPA for any waters into which the facility discharges, the facility must review the applicable TMDL to see if it includes requirements for control of any water discharged by the Permittee. Within six (6) months of the date of TMDL approval or establishment, the facility must notify the Department on how it will modify its BMP plan to include best management practices specifically targeted to achieve the allocations prescribed by the TMDL, if necessary. Any revised BMP plans must be submitted to the Department for review. The facility must include in the BMP plan a monitoring component to assess the effectiveness of the BMPs in achieving the allocations.



ALABAMA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT WATER DIVISION

NPDES INDIVIDUAL PERMIT RATIONALE

Company Name:

Rogers Group, Inc.

Facility Name:

Moulton Quarry

County:

Lawrence

Permit Number:

AL0066991

Prepared by:

David Hearn

Date:

January 8, 2021

Receiving Waters:

Borden Creek

Permit Coverage:

Limestone Quarry Operation, Wet Preparation, Transportation and Storage, and

Associated Areas

SIC Code:

1422

The Department has made a tentative determination that the available information is adequate to support reissuance of this permit.

This proposed permit covers a limestone quarry operation, wet preparation, transportation and storage, and associated areas which discharge to surface waters of the state.

The proposed permit authorizes treated discharges into Borden Creek classified as Fish & Wildlife (F&W) per ADEM Admin. Code ch. 335-6-11. If the requirements of the proposed permit are fully implemented, the facility will not discharge pollutants at levels that will cause or contribute to a violation of the F&W classification.

Full compliance with the proposed permit terms and conditions is expected to be protective of instream water quality and ensure consistency with applicable instream State water quality standards (WQS) for the receiving stream.

Technology Based Effluent Limits (TBELs) for crushed stone mining facilities can be found in 40 CFR 436.22(1) and (2) for facilities that recycle waste water for use in processing and mine dewatering, respectively. The TBELs were promulgated for existing dischargers using the Best Practicable Control Technology Available (BPT). New Source Performance Standards (NSPS) have not yet been developed by the EPA for the Crushed Stone Subcategory.

Information provided in the Permittee's application indicated that Outfalls 001 and 002 could discharge chronically when the discharge/stream flow ratio may be high; therefore, discharge limitations for pH of 6.0 - 8.5 s.u. are proposed for both Outfalls per ADEM Admin Code r. 335-6-10-.09. The instream WQS for pH, for streams classified as F&W, are 6.0 - 8.5 s.u per ADEM Admin Code r. 335-6-10-.09.

The TBELs for 40 CFR 436 Subpart B do not include limitations for Total Suspended Solids (TSS). TSS is classified as a conventional pollutant in 40 CFR 401.16 and is expected to be discharged from this type of facility. Therefore, monthly average and daily maximum effluent limitations for TSS are those proposed by the EPA for crushed stone mine drainage in the Development Document for Effluent Limitations Guidelines and New Source Performance Standards for the Mineral Mining and Processing Pont Source Category (July 1979).

The applicant has requested, in accordance with 40 CFR Part 122.21 and their NPDES permit application, a waiver from testing for the Part A, B, and C pollutants listed in the EPA Form 2C and 2D that are not addressed in their application. They have also certified that due to the processes involved in their mining activity these pollutants are believed to be not present in the waste stream.

Rogers Group, Inc. - Moulton Quarry NPDES Permit No. AL0066991



The Pollution Abatement/Prevention (PAP) plan for this facility has been prepared by a professional engineer (PE) registered in the State of Alabama and is designed to ensure reduction of pollutants in the waste stream to a level that, if operated properly, the discharge will not contribute to or cause a violation of applicable State WQS. The proposed permit terms and conditions are predicated on the basis of ensuring a reduction of pollutants in the discharge to a level that reduces the potential of contributing to or causing a violation of applicable State WQS.

In accordance with ADEM Admin. Code r. 335-6-3-.07 the design PE, as evidenced by their seal and/or signature on the application, has accepted full responsibility for the effectiveness of the waste treatment facility to treat the Permittee's effluent to meet NPDES permit limitations and requirements, and to fully comply with Alabama's WQS, when such treatment facilities are properly operated.

If there is a reasonable potential that a pollutant present in the treated discharges from a facility could cause or contribute to a contravention of applicable State WQS above numeric or narrative criteria, 40 CFR Part 122 requires the Department to establish effluent limits using calculated water quality criterion, establish effluent limits on a case-by-case basis using criteria established by EPA, or establish effluent limits based on an indicator parameter. Based on available information, potential pollutants discharged from this facility, if discharged within the concentrations allowed by this permit, would not have a reasonable potential to cause or contribute to a contravention of applicable State WQS.

Pursuant to ADEM Admin. Code r. 335-6-6-.12(r) this permit requires the Permittee to design and implement a Spill Prevention Control and Countermeasures (SPCC) plan for all stored chemicals, fuels and/or stored pollutants that have the potential to discharge to a water of the State. This plan must meet the minimum engineering requirements as defined in 40 CFR Part 112 and must provide for secondary containment adequate to control a potential spill.

The applicant is not proposing discharges of pollutants to a water of the State with an approved Total Maximum Daily Load (TMDL).

The applicant is not proposing discharges into a stream segment or other State water that is included on Alabama's current CWA §303(d) list.

The applicant is not proposing new discharges of pollutant(s) to an ADEM identified Tier I water.

The proposed permit does not authorize new or increased discharges of pollutants to a Tier II water. Therefore, the Antidegradation Policy (ADEM Admin. Code 335-6-10-.04) does not apply to this permit.



October 28, 2020

David Hearn 1400 Coliseum Boulevard Montgomery, AL 36130-1463 Attn: Permit Compliance Unit

RE: Rogers Group, Inc. - Moulton Quarry

> NPDES # AL0066991 **Permit Renewal**

Dear Director:

Enclosed are one original and two copies of the NPDES Permit application for the renewal of the above referenced facility. RGI is requesting the permit for this facility to be renewed based on the currently approved plans as Rogers is not proposing any modifications to this facility.

Rogers Group, Inc. will provide a check once the fee is determined. If you have any questions or need any additional information, please do not hesitate to contact myself at (615) 780-5719.

Sincerely,

Erik Knowles

Environmental Manager

Rogers Group, Inc.

NPDES PERMIT RENEWAL APPLICATION

ROGERS GROUP, INC. P.O. Box 25250 Nashville, TN 37202

MOULTON QUARRY LAWRENCE COUNTY ALABAMA

> LAT 34° 27' 04" LONG 87° 22' 40" T7S, R8W, S9

> > October 2020

TABLE OF CONTENTS

	Section
Title Page	1
Table of Contents	2
USGS 7- ½' Quad Map	3
ADEM Individual NPDES Permit Application	4
Pollution Abatement Plan	5
Spill Prevention Control Countermeasure Plan	6
Air Abatement Plan	7
Hydraulic Calculations	8
Drawings	9

ADEM NPDES FORM

ALABAMA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT (ADEM) NPDES INDIVIDUAL PERMIT APPLICATION (MINING OPERATIONS)

Instructions: This form should be used to submit an application for an NPDES individual permit to authorize discharges from surface & underground mineral, ore, or mineral product mining, quarrying, excavation, borrowing, hydraulic mining, storage, processing, preparation, recovery, handling, loading, storing, or disposing activities, and associated areas including pre-mining site development, construction, excavation, clearing, disturbance, and reclamation. Please complete all questions. Respond with "N/A" as appropriate. Incomplete or incorrect answers or missing signatures will delay processing. Attach additional comments or information as needed. If space is insufficient, continue on an attached sheet(s) as necessary. Commencement of activities applied for as detailed in this application are not authorized until permit coverage has been issued by the Department. Please type or print legibly in blue or black ink.

coverage has been issued by the D				o detailed in this ap		or addio	
	6 N P W F		THIS APPLICATION	45 (5 G 314)			
☐ Initial Permit Application☐ Modification of Existing F		☐ Initial Permit Applic ☐ Reissuance of Existi				ion Existing Permit	
Reissuance & Transfer of			•	-		DAISTING I CHILL	
		_	5				
I. GENERAL INFORMATI	ION			RU .	R	ECEIVED	
NPDES Permit Number (No	ot applicable if initi	al permit application):	County(s) in which F	acility is Located:			
AL_0066991			Lawrence			2524	
						TORM WATER	
Company/Permittee Name:	V		Facility Name (e.g., N	Mine Name, Pit Na	ame, etc.):	AGEMENT BRANCH	
Rogers Group,	Inc.		Moulton Qua	arry	MILITAL	AGENERI BIANTON	
Mailing Address of Compan	ny/Permittee:		Physical Address of Facility (as near as possible to entrance):				
421 Great Circle	e Road		15160 County Road 7				
City:	State:	Zip:	City:	Sta		Zip:	
Nashville	TN	37228	Moulton	A	\L	35650	
Permittee Phone Number:		Permittee Fax Nun	nber:	I .	_	of entrance:	
615-780-5781				34.45	1235, -	87.380941	
Responsible Official (as des	cribed on page 12	of this application):	Responsible Official	Title:			
Jon Stevens			NAL V.P.				
Mailing Address of Respons			Physical Address of Responsible Official:				
520 Three Mile	Lane		Same as Ma	ailing			
City:	State:	Zip:	City:	Sta	te:	Zip:	
Tuscumbia	AL	35674					
Phone Number of Responsib	ole Official:	Fax Number of Re	sponsible Official:			onsible Official:	
256-383-1645				jon.stev	ens@rog	gersgroupinc.com	
Facility Contact:			Facility Contact Title				
Del Huckaba			Plant Manag		1.00		
Physical Address of Facility			Phone Number of Fac	- 1	Fax Number	of Facility Contact:	
15160 County F	Road		256-974-496				
City:	State:	Zip:	Email Address of Fac	•			
Moulton	AL	35650	del.huckaba@rogersgroupinc.com				

Page 1 of 12

II. MEMBER INFORMATION

A.	partner, LLC member, investor, direct	ctor, or person performing a fund more of any class of voting sto	ction similar to a director, of the	dress of every officer, general partner, LLP applicant, and each person who is the record responsible official(s) of the applicant with						
	ame:	Title/Position:	Physical Address of Residence (P.O. Box is Not Acceptable)							
R	lichard Rechter	Owner	890 Woodcrest Dr.,Bloc							
S	am Rechter	Owner	1906 Decatur, Louisville	e, KY						
В	en R. Rechter	Owner	540 Jackson Blvd., Nas	shville, TN						
В.	B. Other than the "Company/Permittee" listed in Part I., identify the name of each corporation, partnership, association, and single proprietorship for which any individual identified in Part II.A. is or was an officer, general partner, LLP partner, LLC member, investor, director, or individual performing a function similar to a director, or principal (10% or more) stockholder, that had an Alabama NPDES permit at any time during the five year (60 month) period immediately preceding the date on which this form is signed:									
As	ame of Corporation, Partnership, ssociation, or Single Proprietorship:	Name of Individua	al from Part II.A.:	Title/Position in Corporation, Partnership, Association, or Single Proprietorship:						
<u>N</u>	I/A									
_										
III.	LEGAL STRUCTURE OF APPLI	CANT								
A.	Indicate the legal structure of the "Co		t I:							
	■ Corporation □ Association	n 🗌 Individual 🔲 S	Single Proprietorship	artnership						
	Government Agency:									
В.	If not an individual or single proprie									
	standing with the Alabama Secretary	of State's Office? (If the answer	er is "No," attach a letter of expl							
C.	Parent Corporation and Subsidiary C	orporations of Applicant, if any	. <u>N/A</u>							
D.	Land Owner(s): Harold Rutherf		lGI							
E.	Mining Sub-contractor(s)/Operator(s	s), if known: None								
IV.	COMPLIANCE HISTORY									
A.	Has the applicant ever had any of the	e following:								
	(1) An Alabama NPDES, SID, or Ul	IC permit suspended or terminal	Yes No ted? 🔲 🗵							
	(2) An Alabama license to mine susp	pended or revoked?	×							
	(3) An Alabama or federal mining p		X							
	(4) A reclamation bond, or similar so	ecurity deposited in lieu of a bo	nd, or portion thereof, forfeited?	Yes No						
	(5) A bond or similar security depose with any requirement of the Alab Management, forfeited?	pama Water Improvement Comm		of Environmental						
	`		•							
В.	subsidiary, general partner, LLP partner	ner, or LLC member and filed by	y ADEM or EPA during the three	issued to the applicant, parent corporation, e year (36 months) period preceding the date tions (if any) to abate alleged violations, and						
	None			***						

ADEM Form 315 10/17 m5 Page 2 of 12

V. OTHER PERMITS/AUTHORIZATIONS						
A. List any other NPDES or other environmental permits (including permit numbers), authorizations, or certifications that have been applied for or issued within the State by ADEM, EPA, Alabama Surface Mining Commission_(ASMC), Alabama Department of Labor (ADOL), US Army Corp of Engineers (USACE), or other agency, to the applicant, parent corporation, subsidiary, or LLC member for this facility whether presently effective, expired, suspended, revoked, or terminated:						
N/A						
B. List any other NPDES or other ADEM permits (including permit numbers), authorizations, or certifications that have been applied for or issued within the State by ADEM, EPA, ASMC, ADOL or USACE, to the applicant, parent corporation, subsidiary, or LLC member <u>for other facilities</u> whether presently effective, expired, suspended, revoked, or terminated:						
West Huntsville Quarry (AL0083089) Limestone Co. Quarry (AL0072338) Tuscumbia Quarry (AL0024384) Laceys Spring Quarry (AL0077810) South Limestone Quarry (AL0079146)						
VI. PROPOSED SCHEDULE						
Anticipated Activity Commencement Date: January 2005 Anticipated Activity Completion Date: January 2050						
VII. ACTIVITY DESCRIPTION & INFORMATION						
A. Proposed Total Area of the Permitted Site: 180.2 acres Proposed Total Disturbed Area of the Permitted Site: 81.7 acres						
B. Township(s), Range(s), Section(s): 7S, 8W, 8 & 9						
C. Detailed Directions to Site: Highway 24 turn south on County Road 7, two miles on the left						

D. Is/ will this facility: an existing facility which currently results in discharges to State waters? a proposed facility which will result in a discharge to State waters? be located within any 100-year flood plain? (3) discharge to Municipal Separate Storm Sewer? (4) (5) discharge to waters of or be located in the Coastal Zone? need/have ADEM UIC permit coverage? be located on Indian/ historically significant lands? (7) (8) need/have ADEM SID permit coverage? (9) need/have ASMC permit coverage? (10) need/have ADOL permit coverage? (11) generate, treat, store, or dispose of hazardous or toxic waste? (If "Yes," attach a detailed explanation.) (12) be located in or discharge to a Public Water Supply (PWS) watershed or be located within ½ mile of any PWS well?

VIII. MATERIAL TO BE REMOVED, PROCESSED, OR TRANSLOADED									
List relative percentages of the mineral(s) or mineral product(s) that are proposed to be and/or are currently mined, quarried, recovered, processed, handled, transloaded, or disposed at the facility. If more than one mineral is to be mined, list the relative percentages of each mineral by tonnage for the life of the mine.									
Dirt &/or ChertSand &/or Gravel	Chalk	Talc	Crushed rock (other)						
BentoniteIndustrial Sand	Marble	Shale &/or Common Clay	Sandstone						
CoalKaolin	Coal fines/refuse recovery	Coal product, coke	Slag, Red Rock						
Fire clayIron ore	Dimension stone	Phosphate rock	Granite						
Bauxitic ClayBauxite Ore	Limestone, crushed limest	one and dolomite							
Gold, other trace minerals:		Other:							
Other:		Other:							
Other:	_	Other:							

Page 3 of 12 ADEM Form 315 10/17 m5

IX.	PROPOSED ACTIVITY TO	BE CONDUCTED			
Α.	Type(s) of activity presently con		facility or proposed to be con	nducted at facility (che	ck all that apply):
		Underground mining		Auger mining	☐ Hydraulic mining
		Solution mining		Lime production	☐ Cement production
	☐ Synthetic fuel production ☐		_	-	■ Mineral wet preparation
	Other beneficiation & manu	•		Chemical processing	
	☐ Construction related tempor		■ Mineral transportation _		_
	Preparation plant waste reco	•	☐ Hydraulic mining, dredg		
	Grading, clearing, grubbing.	-	☐ Pre-construction ponded	_	☐ Excavation
	☐ Pre-mining logging or land		☐ Waterbody relocation or	other alteration	☐ Creek/stream crossings
	_	r equipment storage/disposal	_		posal
	Reclamation of disturbed ar	, .	_		nent (coagulant, biocide, etc.)
	Adjacent/associated asphalt	concrete plant(s)	Low volume sewage trea	atment package plant	
	Other:				
В.	Primary SIC Code: 1422		212312 Description	on: Crushed and	Broken Limestone
	Secondary SIC Codc(s):	NAICS Code:	Description	on:	
	Narrative Description of the Ac				
C.	aggregate for sale to ge		7		9 9
	aggregate for sale to ge	Tierai public.			
X.	FUEL CHEMICAL HANDLE				
	FUEL - CHEMICAL HANDL	ING, STORAGE & SPILL 1	PREVENTION CONTROL	& COUNTERMEAS	SURES (SPCC) PLAN
A.	Will fuels, chemicals, compoun			& COUNTERMEAS	SURES (SPCC) PLAN Yes No
A. B.		ds, or liquid waste be used <u>or</u>	stored onsite?		
	Will fuels, chemicals, compoun	ds, or liquid waste be used <u>or</u> nicals, compounds, or liquid w	stored onsite?		
	Will fuels, chemicals, compoun If "Yes," identify the fuel, chem Volume Content	ds, or liquid waste be used <u>or</u> nicals, compounds, or liquid w ts Volume	stored onsite? vaste and indicate the volume Contents	of each: Volume	■ Yes □ No
	Will fuels, chemicals, compound If "Yes," identify the fuel, chemicals, compound Volume Content 10,000 gallons Diesel	ds, or liquid waste be used <u>or</u> nicals, compounds, or liquid w ts Volume (3) 560 gall	vaste and indicate the volume Contents Oil	of each: Volume 500 gallons	■ Yes □ No Contents
В.	Will fuels, chemicals, compound If "Yes," identify the fuel, chemicals, compound Volume Content 10,000 gallons Diesel gallons	ds, or liquid waste be used <u>or</u> nicals, compounds, or liquid w ts Volume (3) 560 gall	vaste and indicate the volume Contents Oil ons	of each: Volume 500 gallons gallons	Yes No Contents Waste Oil
	Will fuels, chemicals, compound If "Yes," identify the fuel, chemicals, compound Volume Content 10,000 gallons Diesel gallons If "Yes," a detailed SPCC Plant Admin. Code R. 335-6-612(r)	ds, or liquid waste be used or nicals, compounds, compounds	vaste and indicate the volume Contents Oil ons intent, including diagrams, musty the Department on a program	of each: Volume 500 gallons gallons st be attached to applic mmatic, categorical, or	
В.	Will fuels, chemicals, compound If "Yes," identify the fuel, chemicals, compound Volume Content 10,000 gallons Diesel gallons If "Yes," a detailed SPCC Plant Admin. Code R. 335-6-612(r)	ds, or liquid waste be used or nicals, compounds, compounds	vaste and indicate the volume Contents Oil ons intent, including diagrams, musty the Department on a program	of each: Volume 500 gallons gallons st be attached to applic mmatic, categorical, or	Pyes □ No Contents Waste Oil ation in accordance with ADEM individual compound/chemical
В.	Will fuels, chemicals, compound If "Yes," identify the fuel, chemicals, compound Volume Content 10,000 gallons Diesel gallons If "Yes," a detailed SPCC Plant Admin. Code R. 335-6-6-12(r), basis, Material Safety Data She	ds, or liquid waste be used or nicals, compounds, compounds	vaste and indicate the volume Contents Oil ons intent, including diagrams, musty the Department on a program	of each: Volume 500 gallons gallons st be attached to applic mmatic, categorical, or	Yes No Contents Waste Oil ation in accordance with ADEM
В.	Will fuels, chemicals, compound If "Yes," identify the fuel, chemicals, compound Volume Content 10,000 gallons Diesel gallons If "Yes," a detailed SPCC Plan of Admin. Code R. 335-6-612(r), basis, Material Safety Data She Plan submittal.	ds, or liquid waste be used or nicals, compounds, or liquid waste be used or nicals, compounds, or liquid wastes Volume (3) 560 gall—gall—gall—with acceptable format and control of the compound of the compo	vaste and indicate the volume Contents Oil ons Intent, including diagrams, musy the Department on a program mpounds used or proposed to	of each: Volume 500 gallons gallons st be attached to applic mmatic, categorical, or	
B. C.	Will fuels, chemicals, compound If "Yes," identify the fuel, chemicals, compound the fuel of the fuel	ds, or liquid waste be used or nicals, compounds, or liquid waste be used or nicals, compounds, or liquid wastes Volume (3) 560 gall—gall—gall—with acceptable format and control Unless waived in writing by ets (MSDS) for chemicals/co	vaste and indicate the volume Contents Oil ons Intent, including diagrams, musy the Department on a program mpounds used or proposed to	of each: Volume 500 gallons gallons st be attached to applic mmatic, categorical, or be used at the facility	Tyes □ No Contents Waste Oil ation in accordance with ADEM individual compound/chemical must be included in the SPCC
В.	Will fuels, chemicals, compound If "Yes," identify the fuel, chemicals, compound Volume Content 10,000 gallons Diesel gallons If "Yes," a detailed SPCC Plan of Admin. Code R. 335-6-612(r), basis, Material Safety Data She Plan submittal.	ds, or liquid waste be used or nicals, compounds, or liquid waste be used or nicals, compounds, or liquid wastes Volume (3) 560 gall—gall—gall—with acceptable format and cont. Unless waived in writing by ets (MSDS) for chemicals/co	vaste and indicate the volume Contents Oil ons Intent, including diagrams, musy the Department on a program mpounds used or proposed to	of each: Volume 500 gallons gallons st be attached to applic mmatic, categorical, or be used at the facility	Pyes □ No Contents Waste Oil ation in accordance with ADEM individual compound/chemical
B. C.	Will fuels, chemicals, compound If "Yes," identify the fuel, chemicals, compound Volume Content 10,000 gallons Diesel gallons If "Yes," a detailed SPCC Plant Admin. Code R. 335-6-612(r). basis, Material Safety Data She Plan submittal. POLLUTION ABATEMENT of the plant of	ds, or liquid waste be used or nicals, compounds, or liquid waste be used or nicals, compounds, or liquid waste be volume (3) 560 gall—gall—with acceptable format and control Unless waived in writing by tets (MSDS) for chemicals/co & PREVENTION (PAP) PL PAP Plan in accordance with the of this application.	vaste and indicate the volume Contents Oil ons Intent, including diagrams, musy the Department on a program mpounds used or proposed to the AN AN ADEM Admin. Code r. 335	of each: Volume 500 gallons gallons st be attached to applic mmatic, categorical, or be used at the facility	Contents Waste Oil ation in accordance with ADEM individual compound/chemical must be included in the SPCC
B. C.	Will fuels, chemicals, compound If "Yes," identify the fuel, chemicals, compound Volume Content 10,000 gallons Diesel gallons If "Yes," a detailed SPCC Planty Admin. Code R. 335-6-612(r). basis, Material Safety Data She Plan submittal. POLLUTION ABATEMENT of For non-coal mining facilities, a	ds, or liquid waste be used or nicals, compounds, or liquid waste be used or nicals, compounds, or liquid waste be volume (3) 560 gall—gall—with acceptable format and control Unless waived in writing by tets (MSDS) for chemicals/co & PREVENTION (PAP) PL PAP Plan in accordance with the of this application.	vaste and indicate the volume Contents Oil ons Intent, including diagrams, musy the Department on a program mpounds used or proposed to the AN AN ADEM Admin. Code r. 335	of each: Volume 500 gallons gallons st be attached to applic mmatic, categorical, or be used at the facility	Tyes □ No Contents Waste Oil ation in accordance with ADEM individual compound/chemical must be included in the SPCC
B. C.	Will fuels, chemicals, compound If "Yes," identify the fuel, chemicals, compound If "Yes," identify the fuel, chemicals of the fuel of the	ds, or liquid waste be used or nicals, compounds, or liquid waste be used or nicals, compounds, or liquid wastes Volume (3) 560 gall—gall—with acceptable format and control Unless waived in writing by ets (MSDS) for chemicals/control (PAP) PLO PAP Plan in accordance with the of this application.	vaste and indicate the volume Contents Oil ons Intent, including diagrams, musy the Department on a program mpounds used or proposed to the AN AN ADEM Admin. Code r. 335	of each: Volume 500 gallons gallons st be attached to applic mmatic, categorical, or be used at the facility -6-903 has been	Tes No Contents Waste Oil ation in accordance with ADEM individual compound/chemical must be included in the SPCC ■ Yes No □ Yes No

XII. ASMC REGULATED ENTITIES

A. Is this coal mining operation regulated by ASMC?

B. If "Yes", provide copies as part of this application of any pre-mining hydrologic sampling reports and Hydrologic Monitoring Reports which have been submitted to ASMC within the 36 months prior to submittal of this application.

ADEM Form 315 10/17 m5 Page 4 of 12

XIII. TOPOGRAPHIC MAP SUBMITTAL

Attach to this application a 7.5 minute series U.S.G.S. topographic map(s) or equivalent map(s) no larger than, or folded to a size of 8.5 by 11 inches (several pages may be necessary), of the area extending to at least one mile beyond property boundaries. The topographic or equivalent map(s) must include a caption indicating the name of the topographic map, name of the applicant, facility name, county, and township, range, & section(s) where the facility is located. Unless approved in advance by the Department, the topographic or equivalent map(s), at a minimum, must show:

- An accurate outline of the area to be covered by the permit
- (b) An outline of the facility

- (i) All surrounding unimproved/improved roads
- (c) All existing and proposed disturbed areas
- High-tension power lines and railroad tracks (i)

(d) Location of discharge areas

- (k) Buildings and structures, including fuel/water tanks
- (e) Proposed and existing discharge points
- Contour lines, township-range-section lines **(1)**
- (f)Perennial, intermittent, and ephemeral streams
- (m) Drainage patterns, swales, washes
- Lakes, springs, water wells, wetlands (g)
- (n) All drainage conveyance/treatment structures (ditches, berms, etc.)
- All known facility dirt/improved access/haul roads (o) Any other pertinent or significant feature

XIV. DETAILED FACILITY MAP SUBMITTAL

Attach to this application a 1:500 scale or better, detailed auto-CAD map(s) or equivalent map(s) no larger than, or folded to a size of 8.5 by 11 inches (several pages may be necessary), of the facility. The facility map(s) must include a caption indicating the name of the facility, name of the applicant, facility name, county, and township, range, & section(s) where the facility is located. Unless approved in advance by the Department, the facility or equivalent map(s), at a minimum, must show:

- Information listed in Item XII (a) (o) above
- (e) Location of mining or pond cleanout waste storage/disposal areas
- (b) If noncoal, detailed, planned mining progression
- (f) Other information relevant to facility or operation
- (c) If noncoal, location of topsoil storage areas
- (g) Location of facility sign showing Permittee name, facility name, and NPDES Number
- (d) Location of ASMC bonded increments (if applicable)

XV. RECEIVING WATERS

List the requested permit action for each outfall (issue, reissue, add, delete, move, etc.), outfall designation including denoting "E" for existing and "P" for proposed outfalls, name of receiving water(s), whether or not the stream is included in a TMDL, latitude and longitude (to seconds) of location(s) of each discharge point, distance of receiving water from outfall in feet, number of disturbed acres, the number of drainage acres which will drain through each treatment system, outfall, or BMP, and if the outfall discharges to an ADEM listed CWA Section 303(d) waterbody segment at the time of application submittal.

Outfall E/P	Receiving Water	Latitude	Longitude	Distance to Rec. Water	Disturbed Acres	Drainage Acres	ADEM WUC	303(d) Segment (Y/N)	TMDL Segment
001E	Borden Creek	34.451526	-87.378959	<10 ft	13.2	13.2	F&W	N	N
002E	Borden Creek	34.451919	-87.378963	<10 ft	62.5	62.5	F&W	N	N
	E/P 001E	001E Borden Creek	E/P 001E Borden Creek 34.451526	E/P 001E Borden Creek 34.451526 -87.378959	E/P to Rec. Water 001E Borden Creek 34.451526 -87.378959 <10 ft	E/P to Rec. Water Acres 001E Borden Creek 34.451526 -87.378959 <10 ft	E/P to Rec. Water Acres Acres 001E Borden Creek 34.451526 -87.378959 <10 ft	E/P to Rec. Water Acres Acres WUC 001E Borden Creek 34.451526 -87.378959 <10 ft	E/P to Rec. Water Acres Acres WUC Segment (Y/N) 001E Borden Creek 34.451526 -87.378959 <10 ft

*If a TMDL Compliance Schedule is requested, the following should be attached as supporting documentation: (1) Justification for the requested Compliance Schedule (e.g. time for design and installation of control equipment, etc.); (2) Monitoring results for the pollutant(s) of concern which have not previously been submitted to the Department (sample collection dates, analytical results (mass and concentration), methods utilized, MDL/ML, etc. should be reported as available); (3) Requested interim limitations, if applicable; (4) Date of final compliance with the TMDL limitations; and (5) Any other additional information available to support the requested compliance schedule.

Page 5 of 12 ADEM Form 315 10/17 m5

XVI. DISCHARGE CHARACTERIZATION

11 11 10	is chimon c	711.114.10.11												
A. EPA	A. EPA Form 2C, EPA Form 2D, and/or Modified EPA Form 2C Submittal													
2C cate	Yes, pursuant to 40 CFR 122.21, the applicant requests a waiver for completion of EPA Form 2C, EPA Form 2D, and the modified EPA Form 2C and certifies that the operating facility will discharge treated stormwater only, unless waived in writing by the Department on a programmatic, categorical, or individual compound/chemical basis that chemical/compound additives are not used, and that there are no process, manufacturing, or other industrial operations or wastewaters, including but not limited to lime or cement production, synfuel operations, etc., and that coal and coal products are not mined nor stored onsite.													
☐ No,	No, the applicant does not request a waiver and a complete EPA Form 2C, EPA Form 2D, and/or modified EPA Form 2C is attached.													
average do	pplicant is requally discharge for the discharge for the following properties of the properties of the following p	flow rate in o	cfs and c(C), a	gpd, freq verage pl	quency (I in sta	of discharg indard units	ge in ho s, avera	ours per da	y and	days per	month, avera	ige summer	and winter te	mperature
Outfall E/P	Information Source - # of Samples	Flow cfs	Flow gpd	Freque hours		Frequenc days/mon		um/Win emp, °C	pH s.u.	BOD lbs/da		Tot Fe Ibs/day	Tot Mn Ibs/day	Tot Al lbs/day
001E	No Discharge													
002E	No Discharge													
							\perp							
				ļ						ļ				
										ļ				
										ļ				
				ļ						ļ				
				ļ						ļ				
	-			<u> </u>						ļ				
				l						<u> </u>				
list expect	pplicant is required average dails, & C that are r	ly discharge	in pour	nds per di	ay of a r	ny other po	ilutant	(s) listed i	n EPA	Form 20	C, Item $V - I$	ntake And E	ffluent Chara	acteristics,
Outfall	Reason	Informatio	n											
E/P	Believed	Source - #	_											
	Present	Samples	l	lbs/day	lbs/c	lay lbs	s/day	lbs/day	11	bs/day	lbs/day	lbs/day	lbs/day	lbs/day
001E	None		-						-					
002E	None	-	\rightarrow						+	-				
			_											
									-					
									-	-				
			$-\!\!\!\!\!-$											
			$-\!\!\!\!+\!\!\!\!-$						_					
			_		l									
1			1		1				1					

ADEM Form 315 10/17 m5 Page 6 of 12

XVII. DISCHARGE STRUCTURE DESCRIPTION & POLLUTANT SOURCE

The applicant is required to supply outfall number(s) as it appears on the map(s) required by this application [if this application is for a modification to an existing permit do not change the numbering sequence of the permitted outfalls], describe each, (e.g., pipe, spillway, channel, tunnel, conduit, well, discrete fissure, or container), and identify the origin of pollutants. The response must be precise for each outfall. If the discharge of pollutants from any outfall is the result of commingling of waste streams from different origins, each origin must be completely described.

Outfall	Discharge structure Description	Description of Origin Of pollutants	Surface Discharge	Groundwater Discharge	Wet Prep -Other Production Plant	Pumped or Controlled Discharge	Low Volume STP	Other
001E	Pipe	(8)	Х		Х	X		
002E	Pipe	(7)	X			Х		
		(*)						
1.11.11								
			 					
							[
						***		***************************************
			 					
			 					
							ļ	
							ļ	
				-				

Origin of Pollutants – typical examples: (1) Discharge of drainage from the underground workings of an underground coal mine, (2) Discharge of drainage from a coal surface mine, (3) Discharge of drainage from a coal preparation plant and associated areas, (4) Discharge of process wastewater from a gravel-washing plant, (5) Discharge of various attention and existing source coal preparation plant, (6) Discharge of drainage from a sand and gravel pit, (7) Pumped discharge from a limestone coarry, (8) Controlled surface mine drainage (pumped or siphoned), (9) Discharge of drainage from mine reclamation, (10) Other:

XVIII. PROPOSED NEW OR INCREASED DISCHARGES

A.	Pursuant to ADEM Admin. Code Chapter 335-6-10-,12(9), responses to the following questions must be provided by the applicant requesting NPDES permit coverage for new or expanded discharges of pollutant(s) to Tier 2 waters (except discharges eligible for coverage under general permits). As part of the permit application review process, the Department is required to consider, based on the applicant's demonstration, whether the proposed new or increased discharge to Tier 2 waters is necessary for important economic or social development in the area in which the waters are located.
	Yes. New/increased discharges of pollutant(s) or discharge locations to Tier 2 waters are proposed.
	No. New/increased discharges of pollutants(s) or discharge locations to Tier 2 waters are not proposed.
В.	If "Yes," complete Items 1 through 6 of this Part (XVII.B.), ADEM Form 311-Alternative Analysis, and either ADEM Form 312 or ADEM Form 313-Calculation of Total Annualized Project Costs (Public-Section or Private-Sector, whichever is applicable). ADEM Form 312 or ADEM Form 313, whichever, is applicable, should be completed for each technically feasible alternative evaluated on ADEM Form 311. ADEM Forms can be found on the Department's website of a wavedem.alabama.gov/DeptForms. Attach additional sheets/documentation and supporting information as needed.
	(1) What environmental or public health problem will the discharge be correcting?
	(2) How much will the discharger be increasing employment (at its existing facility or as a result of locating a new facility)?
	(3) How much reduction in employment will the discharger be avoiding?
	(4) How much additional state or local taxes will the discharger be paying?
	·
	(5) What public service to the community will the discharger be providing?
	(5) What public service to the community with the discharger be providing:
	(6) What economic or social benefit will the discharger be providing to the community?

ADEM Form 315 10/17 m5 Page 8 of 12

XIX. POLLUTION ABATEMENT & PREVENTION (PAP) PLAN SUMMARY (must be completed for all outfalls)

Y	N	N/A	Outfall(s):001E & 002E						
Х			Runoff from all areas of disturbance is controlled						
х			Drainage from pit area, stockpiles, and spoil areas directed to a sedimentation pond						
х			Sedimentation basin at least 0.25 acre/feet for every acre of disturbed drainage						
х			Sedimentation basin cleaned out when sediment accumulation is 60% of design capacity						
х			Trees, boulders, and other obstructions removed from pond during initial construction						
х			Width of top of dam greater than 12'						
х			Side slopes of dam no steeper than 3:1						
		X1	Cutoff trench at least 8' wide						
		X1	Side slopes of cutoff trench no less than 1:1						
\neg		X1	Cutoff trench located along the centerline of the dam						
		X1	Cutoff trench extends at least 2' into bedrock or impervious soil						
		X1	Cutoff trench filled with impercious material						
\dashv		X1	Embankments and cutoff trench 95% compaction standard proctor ASTM						
-		X1	Embankment free of roots, tree debris, stones >6" diameter, etc.						
		X1	Embankment constructed in lifts no greater than 12"						
x			Spillpipe sized to carry peak flow from a one year storm event						
x			Spillpipe will not chemically react with effluent						
$\frac{}{x}$			Subsurface withdrawal						
$\stackrel{\sim}{\rightarrow}$		V4	Anti-seep collars extend radially at least 2' from each joint in spillpipe						
. 		X1							
X			Splashpad at the end of the spillpipe						
×			Emergency Spillway sized for peak flow from 25-yr 24-hr event if discharge not into PWS classified stream						
\rightarrow		X2	Emergency spillway sized for peak flow from 50-yr 24-hr event if discharge is into PWS classified stream						
X			Emergency overflow at least . Mong						
X			Side slopes of emergency spillway no steeper than 2:1						
X			Emergency spillway lined with Cprap or concrete						
X			Minimum of 1.5' of freeboard between normal overflow and emergency overflow						
X			Minimum of 1.5' of freeboard between max, design flow of emergency spillway and top of dam						
		Х3	All emergency overflows are sized to handle entire drainage area for ponds in series						
X_			Dam stabilized with permanent vegetation						
X			Sustained grade of haul road of the a						
Х			Maximum grade of haul row 1 1 1 1 1 1 for no more than 300'						
X]		Outer slopes of haul road no steer on than 2:1						
X			Outer slopes of haul road veget and or otherwise stabilized						
X			Detail drawings supplied for all stream crossings						
Х			Short-Term Stabilization/Guadhar And Temporary Vegetative Cover Plans						
x			Long-Term Stabilization/Ground And Permanent Reclamation or Water Quality Remediation Plans						
			PROVIDE DETAILED ENPLANATION FOR ANY "N" OR "N/A" RESPONSE(s):						
(1	- Al	l entr	ries with cutoff trendingen bankments of cutoff trench, lifts, and anti-seep collars are						
us	pec	ted t	o be true but unce and due to the fact that construction was done before these						
eq	ulat	ions	were established.						
-			ency spillway does and discharge to a PWS						
			nds in series						
	- 1/1/								

ADEM Form 315 10/17 m5 Page 9 of 12

XX. POLLUTION ABATEMENT & PREVENTION (PAP) PLAN REVIEW CHECKLIST

			NADATEMENT & FREVENCION (FAF) FLAN REVIEW CHECKLIST
Y	N	N/A	
X			PE Seal with License #
X			Name and Address of Operator
X			Legal Description of Facility
			General Information:
X			Name of Company
Х			Number of Employees
X			Products to be Mined
Х			Hours of Operation
X			Water Supply and Disposition
			Topographic Map:
Х			Mine Location
Х			Location of Prep Plant
Х			Location of Treatment Basins
Х			Location of Discharge Points
Х			Location of Adjacent Streams
			1"-500' or Equivalent Facility Map:
Х			Drainage Patterns
X			Mining Details
X			All Roads, Structures Detailed
Х			All Treatment Structures Detailed
			Detailed Design Diagrams:
X			Plan Views
Х			Cross-section Views
Х			Method of Diverting Runoti to Treatment Basins
			Narrative of Operations:
х			Raw Materials Defined
Х			Processes Defined
Х			Products Defined
			Schematic Diagram:
Х			Points of Waste Origin
X			Collection System
Х			Disposal System
			Post Treatment Quantity and Quality of Effluent:
х			Flow
Х			Suspended Solids
Х			Iron Concentration
X			plI
			Description of Waste Treatment Facility:
X			Pre-Treatment Measures
×			Recovery System
×			Expected Life of Treatment Basin
×			Schedule of Cleaning and/or abundonment
			Other:
×			Precipitation/Volume Calculations/Diagram Attached
Х			BMP Plan for Haul Roads
×			Measures for Minimizing Impacts to Adjacent Stream i.e., Buffer Strips, Berms, etc.
×			Methods for Mainizing Nonpoint Source Discharges
×			Facility Closure Plans
×			PE Rationale(s) For Alternate Standards, Designs or Plans
DEN	TIFY	AND	PROVIDE DETAILED EXPLANATION FOR ANY "N" OR "N/A" RESPONSE(s):

ADEM Form 315 10/17 m5 Page 10 of 12

XXI. INFORMATION

Contact the Department prior to submittal with any questions or to request acceptable alternate content/format. Be advised that you are not authorized to commence regulated activity until this application can be processed, publicly noticed, and approval to proceed is received in writing from the Department.

EPA Form(s) I and 2F need not be submitted unless specifically required by the Department. EPA Form(s) 2C and/or 2D are required to be submitted unless the applicant is eligible for a waiver and the Department grants a waiver, or unless the relevant information required by EPA Form(s) 2C and/or 2D are submitted to the Department in an alternative format acceptable to the Department.

Planned/proposed mining sites that are greater than 5 acres, that mine/process coal or metallic mineral/ore, or that have wet or chemical processing, must apply for and obtain coverage under an Individual NPDES Permit prior to commencement of any land disturbance. Such coverage may be requested via this ADEM Form 315.

The applicant is advised to contact:

- (1) The Alabama Surface Mining Commission (ASMC) if coal, coal fines, coal refuse, or other coal related materials are mined, transloaded, processed, etc.;
- The Alabama Department of Labor (ADOL) if conducting non-coal mining operations;
- (3) The Alabama Historical Commission for requirements related to any potential historic or culturally significant sites;
- (4) The Alabama Department of Conservation and Natural Resources (ADCNR) for requirements related to potential presence of threatened/endangered species; and
- (5) The US Army Corps of Engineers, Mobile or Nashville Districts, if this project could cause fill to be placed in federal waters or could interfere with navigation.

The Department must be in receipt of a completed version of this form, including any supporting documentation, and the appropriate processing fee [including Green field Fee and Biomonitoring & Toxicity Limits fee(s), if applicable], prior to development of a draft NPDES permit. The completed form, supporting documentation, and the appropriate fees must be submitted to:

Water Division

Alabama Department of Environmental Management Post Office Box 301463 N' intgomery, Alabama 36130-1463 Phone: (334) 271-7823

Fax: (334) 279-3051 h2omail@adem.alabama.gov www.adem.alabama.gov

XXII. PROFESSIONAL ENGINEER (PE) CERTIFICATION

A detailed, comprehensive Pollution Abatement & Pre	ention (PAP) Plan must be prepared, sign	ed, and certified by a professional engineer (PE)
registered in the State of Alabama, and the PE near cor	'v as follows:	•

disphere limitations and other normit requirements. It is applicant has been advised that and

"I certify on behalf of the applicant, that I have completed an evaluation of discharge alternatives (Item XVIII) for any proposed new or increased discharges of pollutant(s) to Tier 2 waters and reached e conclusions indicated. I certify under penalty of law that technical information and data contained in this application, and a comprehensive PAP i an including any attached SPCC plan, maps, engineering designs, etc. acceptable to ADEM, for the prevention and minimization of all sources of polition in stormwater and authorized related process wastewater runoff has been prepared under my supervision for this facility utilizing effective, good ingineering and pollution control practices and in accordance with the provisions of ADEM Admin. Code Division 335-6, including Chapter 335-6 and Appendices A & B. If the PAP Plan is properly implemented and maintained by the Permittee, discharges of pollutants can reasonably be exceed to be effectively minimized to the maximum extent practicable and according to permit

structural & nonstructural management practices or Department approved equivalent management practices as detailed	
implemented and regularly maintain at as needed in the 1 offity in accordance with good sediment, crossion, and other poll	
requirements, and other ADEM requirements to the time to the tion of groundwater and surface water quality."	
Address 149 Parks Chapel Rd. Lacey's Spring AL 35754 PE Registration # 212	-35
Name and Title (type or print) W. David Leeks Assaud Jacquer Phone Number 156.2	75. 6629
Signature W. D. Kely Date Signed 10/27	12020
No. 21235 PROFESSIONAL	
ANGINEE LE	
ADEM Form 315 10/17 m5 DAVIDANIA DAVIDANIA	Page 11 of 12

XXIII. RESPONSEBLE OFFICIAL SIGNATURES

This application must be signed by a Responsible Oil, itsif of the applicant pursuent to ADEM Admin. Code Falls 315-6-6-128 was had one responsibility for the operation of the finishing.

"I coredy under penalty of hew that if it decoment, including according information and data, the PAP Flow, including any EPCC plan, mayor and indesigns, and all other amulaneous were propored under my direction or supervision in accordance with a system designed to assure that spail in personal property gathered and evolutioned the information information. Based on my limiting of the FE and other person or persons under my super-initia.

The information pulsaries of those persons directly despite the fact of the information, the information substitute is, as the best of my knowledge. and belief, true, accurate, and complete. I am avera than from me significant parallels the automitting this in formation including the possibility of that pe imprintment for knowing violations.

subject the Perpotine to appropriate enforcement lichten.

"A comprehensive PAP Flux to provide and minimize the harper of publishes to the maximum values practicable has been prepared at my discussive by . FT for this facility utilizing effective, guest emiliorating and pullwine control practices and in accordance with the pervening of ADS M April. Code Devision 3356, including Chapter 555-6-9 and Appen loca A & B, and information command in this application, including any amorphosism. understand that regular impositions must be performed it for motor the direct supervision of a FE and all appropriate pollution abancounters region facilities and structural & constructional commencement from success of Department approved applications consequences practices disconfined by the FE must be fully implemented grice as and dominated with permission of regulated activities and regularly majoration as account to facility in accordance with proof sellinent, artefully, and arter perfection control of actions and ADCM requirements. I understood that the FAR Famous he faitly implemented and required so that the Particular country in appearance of the Particular country in appearance of the Particular country provided to be effected by intended to the maximum country provided and according to provide distinct and control of a point country and for the particular section of a point country and for the particular of a point country of a point of the particular country. I are decided that failure to failty implement and organizate maint is a unit. I'm magazinest practices the the parametrics of pround some and organizate want quality may

"I carriefy that this form has not been alleged, and of cogline or oppositional in sequence in the national an ocuracy to the ADEM approved from

If durber earlies that the discharges described in this profit in an investment or evaluated the this presence of non-increased discharge and any turn-mining associated beneficial instrument of the of wine accomplism have been faile infaire lines from

Name (type or print) it

TON STEVENS

omening VP/GM


Dent Styred 10/29/12020

Signature _

335-4-4-49 Signatorics to Provide Artification.

- (1). The application for an hilling power of all to greatly a responsible official as indicated below.
 - (a) In the case of a congruencian, by a principal executive of fine of all assessments of a manager and plant or designed as secondaries with congruence of a constraint of differential admitted in writing if required by the Department, who is requisible of manufacturing, product and constraint of a milker and to make managerine deplicate which grows the operation of the constraint of the CHARLING BORNOLESSE
 - (No in the case of a marin when her a second to restor
 - Call the name of a strike owner strandible." SECTION AND SECTIO
 - office to the case of a militarial, made control property and street an executive property includes a property of the street and the street of the street and the street of the street

USGS 7-1/2' QUAD MAP

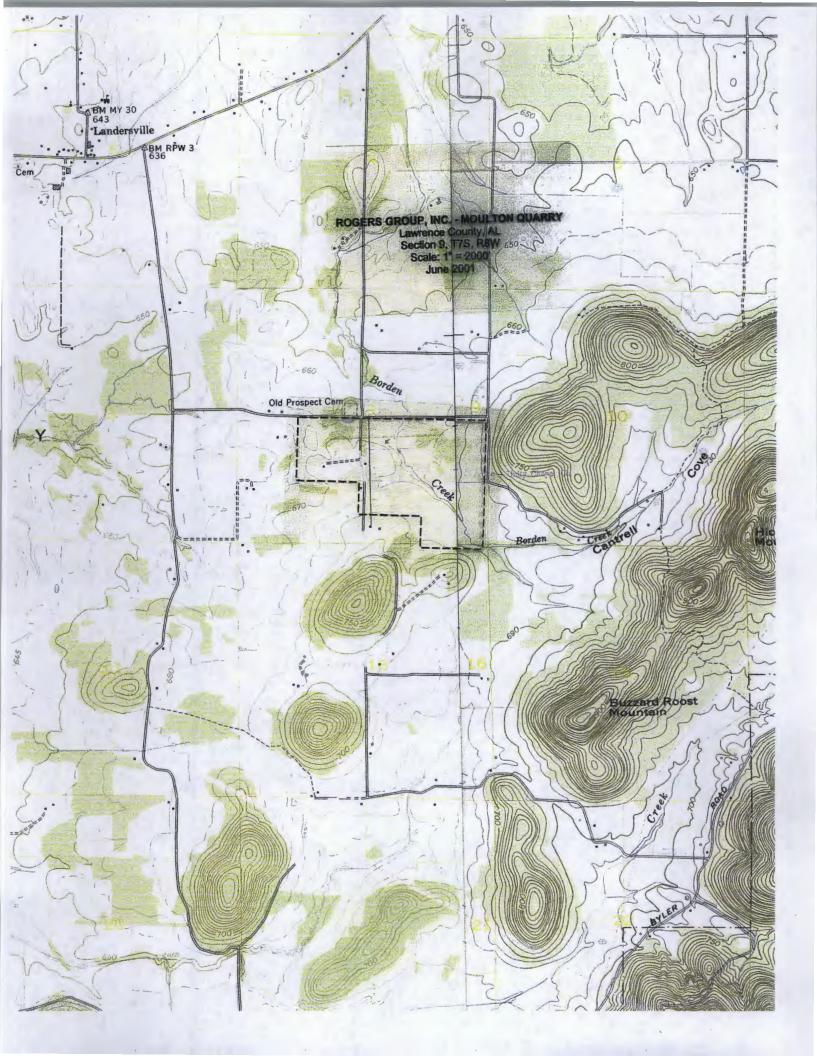

POLLUTION ABATEMENT PLAN

POLLUTION ABATEMENT PLAN

Rogers Group, Inc. – Moulton Quarry Lawrence Co., Alabama

INTRODUCTION

This document is an application by Rogers Group, Inc. (herein referred to as RGI) to reissue NPDES Permit Al0066991 at its Moulton Quarry. The application is being prepared in accordance with the rules and regulations of the Alabama Department of Environmental Management. A thorough field review has been accomplished preceding the submittal of this renewal application. Field checks were made of the entire sedimentation basin system to determine compliance with ADEM rules and regulations. RGI's Moulton Quarry is located in Section 9, T-7-S, R-8-W, Lawrence County, Alabama. A total of 80.3 acres of the total property will be affected by the quarrying operation. The total property is approximately 181.0 acres with approximately 140.6 acres on the east side of County Road 7 with approximately 40.4 acres leased on the west side of this road.

This "Pollution Abatement Plan" is intended to address the format as outlined by the ADEM Water Division - Water Quality and Control Program, Rules and Regulations, as well as present the basics for designs as further detailed in this "Pollution Abatement Plan". Drawings, referred to in the "Pollution Abatement Plan," were derived from rules and regulations of the ADEM as well as from other generally accepted design data sources primarily from the U.S. Department of Agriculture Soil Conservation Service. Generally the narrative will follow the outline of Chapter 335-6-9-.03, Surface Mining Rules and Regulations from the ADEM Rules and Regulations.

OPERATOR

The operator of the Moulton Quarry is Rogers Group, Inc., which has its corporate business address as follows:

P.O. Box 25250 Nashville, TN 37202

The Moulton Quarry is located off Highway 24, south on County Road 7, near the city of Moulton in Lawrence County, Alabama, on property leased by RGI. The active guarry and crushing operations lie within the following boundaries:

The south half of the north half of the southeast quarter of Section 9, T-7-S, R-8-W, Lawrence County, Alabama.

Future advancement of the quarry will encompass the southeast quarter of Section 9, T-7-S, R-8-W, Lawrence County, Alabama.

Additional property from the abandoned crushing operation and shop facilities lie within the following boundaries:

The northeast quarter of the southwest quarter of Section 9, T-7-S, R-8-W, Lawrence County, Alabama.

GENERAL INFORMATION

RGI's Moulton Quarry quarries limestone and processes it for sale as stone aggregate to the public. An inactive asphalt plant is located adjacent to the permitted area. A total of 80.3 acres of the total property will be affected by the quarrying operation. The total property of the site is 181.0 acres. Approximately 15 individuals are employed from the Lawrence County area will be employed by the operation. The Moulton operation will limit its operating hours to 2,000 per year.

The entire permitted area lies in a relatively flat area. The surface water from the crushing plant and stockpile areas will be directed to sediment Pond A, which discharges through Outfall 001E to Borden Creek. Surface water from the areas surrounding the quarry is directed to the quarry sump. After settling time in the sump, water is pumped from the sump to Borden Creek as Outfall 002E. Drawing No. NPDES20, entitled "TOPOGRAPHIC MAP FOR NPDES PERMIT", depicts the plan view of the site and locations of the quarry sump and Pond A, as well as other details.

TOPOGRAPHIC MAP

Design plans submitted with this document provide an existing topographic map. The "TOPOGRAPHIC MAP FOR NPDES PERMIT" shows the planned general layout of the mining, crushing plant, and stockpile areas, sedimentation pond, and all runoff locations.

METHOD OF DIVERTING SURFACE WATER RUNOFF

Drawing No. NPDES20 details the storm water and process water flow direction for the proposed facility. The entire affected area (80.3 acres) will be divided into two (3) distinct drainage areas. A description of each drainage area runoff pattern and proposed treatment follows.

Area A comprises 13.2 - acres and is made up of the crushing plant and stockpile areas, along with the office and scales. The storm water runoff in this area is directed to sediment Pond A. The discharge water from Pond A enters Borden Creek through Outfall 001E.

Area B is 62.5 - acres in size. Area 2 is basically the entire quarry and the surrounding areas. All of the storm water runoff in this area enters the quarry sump. The quarry sump is very large and allows plenty of settling time for any fines that may be in the runoff water. The storm water collected here is pumped to Borden Creek through Outfall 002E or to pond A to discharge to Outfall 001E.

Area C is 4.6 acres and is made up of primarily stockpile area. The stormwater runoff in this area is treated by site BMP's and all stormwater that leaves the site from this area does so via non-point discharge.

Storm water runoff from all other areas not affected by the quarry operation drain to the abandoned pit. All disturbed areas drain back to a sedimentation pond or the quarry sump. Best Management Practices are in place at locations where needed. Spoils piles are located so any silt carried by drainage will be treated prior to leaving the permitted area.

A Water Flow Schematic of the Moulton Quarry is depicted Drawing No. NPDES20 Map.

RAW MATERIALS, PROCESSES AND PRODUCTS

Limestone is the only raw material mined at the Moulton Quarry. The limestone is drilled, blasted, crushed and stockpiled. The main waste product that results from the processing of the limestone is fines. The silt will be carried back to the previously mined area or mixed with sellable products.

Specific products, which are produced at the Moulton Quarry, are as follows:

Riprap - 8" stone Agg Lime
2" stone 89's
Base stone - 1-1/4 inch minus 67's
1-1/2 inch stone 78's

#8 Stone Block Material

QUALITY AND CHARACTERISTICS OF THE WASTE

The only waste products, which are a by-product of the limestone crushing process, are fines. Storm runoff will contain clays. Clays and silt will settle into the sediment pond and the quarry sump. The sediment treatment structure will be cleaned out as needed to provide adequate sedimentation area and retention time for incoming materials to be treated. The pH of the treated water is

expected to be within 6.0 and 9.0 SU. No iron or other contaminants are believed present in the discharge water. Suspended solids levels in the discharge will not exceed limitations specified by the State.

WASTE TREATMENT FACILITIES

As previously discussed, the treatment process for water quality control is to be one sedimentation pond and a quarry sump. Details are presented in Drawing No. RGI-QAMO-NPDES20.

Removal of solids should be accomplished where the sediment accumulation reaches 60% of the design capacity of the sediment treatment pond. However, with the amount of material being constantly removed from the mined pond, this should never occur; however, it will be necessary to periodically remove sediment from the constructed sedimentation pond. As previously mentioned, this sediment material will be mixed back in with product and/or mixed with material to be placed in the spoils areas.

Sedimentation Pond A has a flood storage capacity of 144,045 cubic feet (CF). Details of Pond A are included in the attached drawings.

LOCATION OF ALL STREAMS ADJACENT TO PLANT AREA

Included with this NPDES application is a drawing which has been reproduced from to USGS quad sheets (Landersville and Moulton Quadrangle) at a 1" = 2000' scale showing the adjacent streams and the location of Outfall 001E and Outfall 002E. The receiving stream for both Outfalls 001E and 002E is Borden Creek.

NON-POINT SOURCE POLLUTION

By virtue of the fact that all disturbed areas are graded such that the drainage will carry yard dust to the ponds or filter zone areas, untreated non-point sources of pollution will be non-existent at the Moulton Quarry.

PUBLIC WATER SUPPLY IMPOUNDMENT

The two existing outfalls discharge from the Moulton Plant to Borden Creek. All discharges will meet effluent limitations due to settling time available in the retention basins. Borden Creek is not in a public water source watershed but is a tributary to a public water supply watershed.

GENERAL QUARRY OPERATION

The Moulton Quarry consists of drilling and blasting limestone from a quarry and crushing, sizing, conveying and stockpiling of the crushed limestone. The

blasted material will be loaded into haul trucks, which will haul the raw stone to a stone crushing plant on haul roads. These haul roads are graded and vegetated as necessary. The stone will then be further sized with crushers and segregated with screens. Belt conveyors will stockpile the different size material in stockpiles for sale to the general public and state transportation department. All silt and clay material will be diverted into Sediment Pond A and the quarry sump as is all surface runoff water. Washing of crushed limestone is also conducted at the Moulton Quarry. The water from the washing plant and the fines material in the water is pumped to an abandoned pit. The abandoned pit has a current volume of water of approximately 460 acre-feet. The current average water level in the pit is 60 feet deep. Due to the size of the abandoned pit, no discharges from the pit are anticipated, since the water level has remained constant with time.

LONG-TERM SITE STABILIZATION AND CLOSURE

Treatment basins will be maintained the life of the quarry operation. If the mining and associated activities are terminated by RGI on this site in the future and the sediment ponds are not required for any land used subsequent to the mining activity, the sediment pond structure will be removed or reconditioned to best engineering and management practices so that there is no potential for non-compliance discharge of waters. The site will also be reclaimed. Where it is necessary to stabilize the soil, the area will be seeded and fertilized according to current engineering practices and recommendations for re-vegetation of mine spoils from the United States Department of Agriculture, Soil Conservation Service. When quarrying ends, the quarry itself will be allowed to fill with water.

SPILL PREVENTION CONTROL COUNTERMEASURE PLAN (SPCC)

ABOVEGROUND FUEL TANKS

Spill Prevention Control and Countermeasure Plan Rogers Group, Inc. – Moulton Quarry

Plant Location: Township 7S, Range 8W, Section 9

Prevention Measures

Spill Containment Structures

All aboveground fuel tanks will include spill containment structures with a capacity to retain 110% of the volume of the fuel tanks. These containment structures will include dikes constructed of impervious soils, fabricated steel, concrete, or other acceptable materials. Manual gate valves will be installed on all pipelines used to drain liquids impounded within the containment structure. The manual gate valves on the drain lines will be opened only under direct RGI management supervision. If pollutants are present in rainwater trapped within the containment structure, the pollutants will be separated from the rainwater and properly disposed of through accepted practices.

Unloading Fuel Transport Vehicles

All unloading of fuel from transport vehicles to storage tanks will comply with all requirements and regulations established by the Department of Transportation. The RGI superintendent will make periodic inspections of the fuel unloading area to detect signs of minor spills. If spillage is evident the polluted soils will be removed and disposed of through accepted practices.

Dispensing Fuel

All fuel dispensing procedures will comply with all local, state, federal, and RGI requirements and regulations. The RGI superintendent will make periodic inspections of the fuel dispensing area to detect signs of minor spills. If spillage is evident, the polluted soils will be removed and disposed of through accepted practices.

Spill Countermeasures

1. Contain the Spill - if a spill occurs outside the containment structures or breaches the containment structures the RGI superintendent will immediately utilize on site equipment and personnel to contain the spill by constructing temporary berms.

2. Contact in order listed to report a spill:

- A. Local RGI Operations Manager
- B. RGI Manager for Northern Alabama Region
- C. Local Fire Department
- D. RGI Corporate Production Services 1 (615) 780-5684
- E. National Response Center 1 (800) 424-8802
- F. Alabama EMA 1 (800) 843-0699
- G. ADEM Water Division 1 (334) 271-2700 or 1 (334) 242-4378
- H. Field Operations Decatur **1 (256) 353-1713** (*During work hours, contact Alabama EMA after hours).

Report as much of the following information as possible:

- A. Location of the RGI facility
- B. On-site location of the spill
- C. Type of material spilled
- D. Amount of material spilled
- E. Name of person reporting the spill
- F. Is or can spill be contained?
- G. Is a nearby stream or lake in immediate danger of contamination?
- **3. Spill Cleanup** RGI Corporate Production Services will approve all procedures for cleanup of each spill occurrence. All local, state, and federal requirements and regulations for remediation of the spill will be followed.
- **4. Material Inventory** Currently, the following material is stored for use in the daily operation of the quarry:
 - 1-10,000 gallon diesel tank.
 - 1-500 used oil tank.
 - 2- 1,000 gallon single-wall hydraulic oil tanks.
 - 8-10 55-gallon drums containing hydraulic oils

AIR ABATEMENT PLAN

AIR ABATEMENT PLAN

Rogers Group, Inc. – Moulton Quarry Lawrence County, Alabama

The limestone quarried on this site will be processed for use as construction aggregates. During dry weather conditions, the immediate working area of the excavation equipment in the pit, the customer loading area, and all active haul roads on site will be wetted to avoid the generation of airborne particulate matter. Airborne emissions from the crushing and screening operation will be controlled by wet suppression. An Air Permit Application has been obtained from ADEM-Air Division to operate under the present air pollution regulations of the State of Alabama.

HYDRAULIC CALCULATIONS

JOB:	MOULTON QUAI	RRY		VDM
DRAINAGE AREA NAME:	AREA A	16-Oct-20		
		GROUP	CN from	AREA
COVER DESCRIPTION	SOIL NAME	A,B,C,D?	TABLE 2-2	(In acres)
CRUSHED STONE		D	91	13.20 Ac.
	<u> </u>	4554.5	LIDTOTALO	42.00 4 -
			UBTOTALS:	13.20 Ac.
2-Yr 24 Hr Rainfall = 4.2 In	Surface Cover Cross Section	Manning 'n	Flow Length Avg Velocity	Slope Tt (Hrs)
Sheet Flow	impervious	'n'=0.01		0.10%
Silection	inpervious			0.10 Hrs
	ta ta ta ta ta ta ta ta fa fa fa fa ta ta ta ta ta ta fa			
Shallow Flow	UNPAVED		200 Ft.	0.10%
			0.51 F.P.S.	0.11 Hrs.
Channel Flow				
Total Arca in Asses	13.20 Ac.	Total Sheet	Total Shallov	Total Channel
Total Area in Acres = Weighted CN =	13.20 AC. 91	Flow=	Flow=	Flow =
Time Of Concentration =	0.21 Hrs.	0.10 Hrs.	0.11 Hrs.	0.00 Hrs.
Pond Factor =	1		LL TYPE II	0.001113.
Tona Tacion –	Precipitation	Runoff	Qp, PEAK	TOTAL STORM
STORM	(P) inches	(Q)	DISCHARGE	
1 Year	3.6 In.	2.6 ln.	42.7 CFS	126,758 Cu. Ft.
2 Year	4.2 ln.	3.2 In.	51.4 CFS	152,389 Cu. Ft.
5 Year	5.1 ln.	4.1 In.	66 CFS	194,529 Cu. Ft.
10 Year	5.9 ln.	4.8 ln.	78 CFS	230,967 Cu. Ft.
25 Year	7.0 In.	5.9 ln.	95 CFS	282,675 Cu. Ft.
50 Year	7.8 In.	6.8 In.	109 CFS	323,751 Cu. Ft.
100 Year	8.7 ln.	7.6 In.	123 CFS	365,414 Cu. Ft.


10/16/202		JME ESTIMATES:	DOND 2		
OTA OF				OUDALII ATIVE	1445
STAGE/	CONTOUR	AREA	INCREMENT.	CUMULATIVE	MAP
ELEV. 0 FT.	INCHES	SQ. FEET	STORAGE	STORAGE	SCALE
and the standard of the standa	0533	0.533	0	0	1 INCH =
660.0	9533	9,533	10.046	0	1 FT.
2 FT.		40.040	19,846	10.010	SEDIMENT
662.0	10313	10,313	04 404	19,846	Perm. WATE
4 FT.		44.404	21,434	44.000	INITIAL
664.0	11121	11,121	00.070	41,280	STORAGE
6 FT.		44.050	23,079	04.050	0
666.0	11958	11,958	0.4.700	64,359	CU. FT.
8 FT.		40.004	24,782	20.444	Basin Stage
668.0	12824	12,824		89,141	0.0 FT.
10 FT.	ini linankeken erasa seria (1404 da keninasa s		26,543		STORAGE T
670.0	13719	13,719		115,684	Max. Elev.
12 FT.			28,361		1,077,457
672.0	14642	14,642		144,045	GALLONS
on bound with the description of the control of the	nto subglichia desarrationalisti svistici dales se s			F	LOOD STORA
					144,045 CuF
otes:		een entered above	, Rows 20-28 and	in the Quick	
	Estimate Table, Ro	ows 5-10.			
TAGE/STORAG					
STAG	STORAGE	STAGE		Linear Regression	on
	0 0	NATURAL LOG	ARITHMS	Function	
	2 19,846	0.693147181	9.895757754	b	In Ks
	4 41,280	1.386294361	10.6281334	1.1043	9.1121
(64,359	1.791759469	11.07223206	1/b	Ks
	8 89,141	2.079441542	11.39797466	0.9056	9064.3388
1	0 115,684	2.302585093	11.65861761	To Calculate Line	ar Regression,

Regression

Transfer

10/16/2020	Moulton Quar POND I	ry			Top of Dam= El. 672.00						Spillway Width=15 Ft.	
torm volume by SCS:		T		1				70711	10.40	1	lo :::	
r=(P-0.2S)^2/(P+0.8S)	Time	OVERLAND		INCREMENTAL		Stage	Elevation	TOTAL	Outflow:	Max.Outflow:	Spillway Inv.	
(Q*/12)*(Ac.*43560), in Cu.Ft.	(minutes)	FLOW	INFLOW	Storage-CuFt	Storage CuFt	Feet	222.22	OUTFLOW	Riser/Barrel	CMP-Barrel	El. 669.00	
atershed Area =	0.0	0	0	0	0	0.00	660.00	0.00	0.00	0.00	0.00	
13.20 Acres	3.0	2	2	297	0	0.00	660.00	0.00	0.00	0.00	0.00	
#VALUE!	6.0	6	6	1,166	297	0.05	660.05	0.00	0.00	0.00	0.00	
5.90 in.	9.0	14	14	2,547	1,462	0.19	660.19	0.00	0.00	0.00	0.00	
Year Storm Volume =	12.0	24	24	4,344	4,009	0.48	660.48	0.00	0.00	0.00	0.00	
282,704 Cu. Ft.	15.0	36	36	6,434	8,353	0.93	660.93	0.00	0.00	0.00	0.00	
Year Qp by Scs in CFS =	18.0	48	48	8,670	14,787	1.56	661.56	0.00	0.00	0.00	0.00	
95.0 C.F.S.	21.0	61	61	10,898	23,457	2.37	662.37	0.00 0.00	0.00 0.00	0.00 0.00	0.00	
=Vol/(1.39Qp*60) in min	24.0	72	72	12,963	34,355	3.34	663.34	0.00	0.00	0.00	0.00	
35.68 Minutes	27.0	82	82	14,722	47,317	4.47	664.47 665.71	0.00	0.00	0.00	0.00	
E INCR IN SECONDS and MINUTES	30.0	89	89	16,052	62,039	5.71		l	0.00	0.00	0.00	
180 Seconds	33.0	94	94	16,863	78,091	7.03	667.03	0.00			0.00	
3.0 Minutes	36.0	95	95	15,621	94,954	8.39	668.39	8.20	8.20	8.20		
	39.0	93	93	9,653	110,575	9.63	669.63	39.36	16.75	16.75	22.61 73.78	
ge-Storage Function:	42.0	88	88	-1,118	120,228	10.39	670.39	94.05	20.27	20.27	66.92	
S=KsZ^b	45.0	76	76	-2,033	119,110	10.30	670.30 670.14	86.82	19.89	19.89	55.03	
Z=(S/Ks)^1/b	48.0	67	67	-1,296	117,077	10.14	670.14	74.22	19.19	19.19	1	
Ks=	51.0	59	59	-1,279	115,782	10.04	670.04	66.59	18.73	18.73	47.85	
9064.3388	54.0	53	53	-1,184	114,503	9.94	669.94	59.37	18.27	18.27	41.10	
b	57.0	47	47	-1,103	113,319	9.85	669.85	52.98	17.82	17.82 17.40	35.15 29.90	
1.1043	60.0	42	42	-1,029	112,215	9.76	669.76	47.29	17.40		1	
1/b	63.0	37	37	-962	111,186	9.68	669.68	42.24	16.99	16.99	25.25	
0.9056	66.0	33	33	-901	110,224	9.60	669.60	37.75	16.61	16.61	21.14	
Stage (Z) = 0 at Elev	69.0	29	29	-846	109,323	9.53	669.53	33.76	16.23	16.23	17.52	
660.0	72.0	26	26	-796	108,478	9.47	669.47	30.21	15.88	15.88	14.34	
	75.0	23	23	-752	107,682	9.40	669.40	27.07	15.53	15.53	11.54	
iting.Time increment =	78.0	20	20	-714	106,929	9.34	669.34	24.28	15.20	15.20	9.08 6.94	
3.0 Minutes	81.0	18	18	-682	106,215	9.29	669.29	21.81	14.88	14.88	5.08	
off Calculation (fr. Rainfall)	84.0	16	16	-655	105,534	9.23	669.23	19.64	14.56	14.56	3.48	
Enter watershed's weighted CN below:	87.0	14	14	-636	104,878	9.18	669.18	17.73	14.25	14.25 13.94	2.14	
91	90.0	13	13	-626	104,242	9.13	669.13	16.08	13.94		1.05	
Enter 24 Hr. rainfall for storm event:	93.0	11	11	-629	103,616	9.08	669.08	14.68	13.63	13.63	0.25	
7.0 in.	96.0	10	10	-656	102,986	9.03	669.03	13.57	13.31	13.31 12.97	0.00	
S= 23456.88	99.0	9	9	-750	102,330	8.98	668.98	12.97	12.97		0.00	
Runoff = 1168.91 In.	102.0	8	8	-856	101,580	8.92	668.92	12.57	12.57	12.57	0.00	
	105.0	7	7	-929	100,724	8.85	668.85	12.10	12.10	12.10	0.00	
CK REFERENCE	108.0	6	6	-973	99,795	8.78	668.78	11.56	11.56 10.97	11.56 10.97	0.00	
Jse SAVE.AS to create a copy of the	111.0	5	5	-991	98,822	8.70	668.70	10.97			1	
nal template.	114.0	5	5	-987	97,831	8.62	668.62	10.33	10.33	10.33	0.00	
select entire Column A; Press Enter	117.0	4	4	-963	96,843	8.54	668.54	9.65	9.65	9.65 8.94	0.00	
to input data in each cell Excel jumps	120.0	4	4	-922	95,880	8.47	668.47	8.94	8.94		0.00	
Repeat till all input is entered	123.0	3	3	-867	94,958	8.39	668.39	8.20	8.20	8.20	0.00	
Select entire Rows 3:6, (drag across	126.0	3	3	-798	94,091	8.32	668.32	7.44	7.44	7.4 4	1	
#'s); Press Enter to input required	129.0	3	3	-719		8.26	668.26	6.66	6.66 5.87	6.66 5.87	0.00	
in selected cells.	132.0	2	2	-630	92,575	8.20	668.20	5.87	5.87	5.87	0.00	
Press Command -= for Manual	135.0	2	2	-535		8.15	668.15	5.08	5.08	5.08	0.00	
culation.	138.0	2	2	-436		8.11	668.11	4.29	4.29	4.29	0.00	
Review maximum values on Row 73.	141.0	2	2	-335		8.07	668.07	3.52	3.52	3.52	0.00	
ck for emergency spillway flow.	144.0	1	1	-236		8.05	668.05	2.78	2.78	2.78	0.00	
st input as required and recalculate.	147.0	1	1	-146		8.03	668.03	2.11	2.11	2.11	0.00	
Macs may be set to automatic	150.0	1	1	-74			668.01	1.57	1.57	1.57	0.00	
culation.	153.0	1	1	-31		8.01	668.01	1.20	1.20	1.20	0.00	
	156.0	1 1	1	-17		8.01	668.01	1.00	1.00	1.00	0.00	
e Setup is now set to cut off bottom of	159.0	1	1	-13		8.00	668.00	0.88	0.88	0.88	0.00	
e at ROW 61 (Time 147 Minutes) Use	162.0	1 1	1	-10		8.00	668.00	0.77	0.77	0.77	0.00	
area for explanatory notes after	165.0	1	1	-8		8.00	668.00	0.68	0.68	0.68	0.00	
aring these notes. For Cleaner Output,	168.0	1	1	-6		8.00	668.00	0.60	0.60	0.60	0.00	
nk out cells A 37 & A38 above, unless	171.0	1	1	-4		8.00	668.00	0.53	0.53	0.53	0.00	
ell A39 is not empty.	174.0	0	0	-3		8.00	668.00	0.46	0.46	0.46	0.00	
	177.0	0	0	-3		8.00	668.00	0.41	0.41	0.41	0.00	
MAXIMUM VALUES>>	180.0	95	95	16,863	120,228	10.39	670.39	94.05	20.27	20.27	73.78	

ROGERS GROUP, INC.

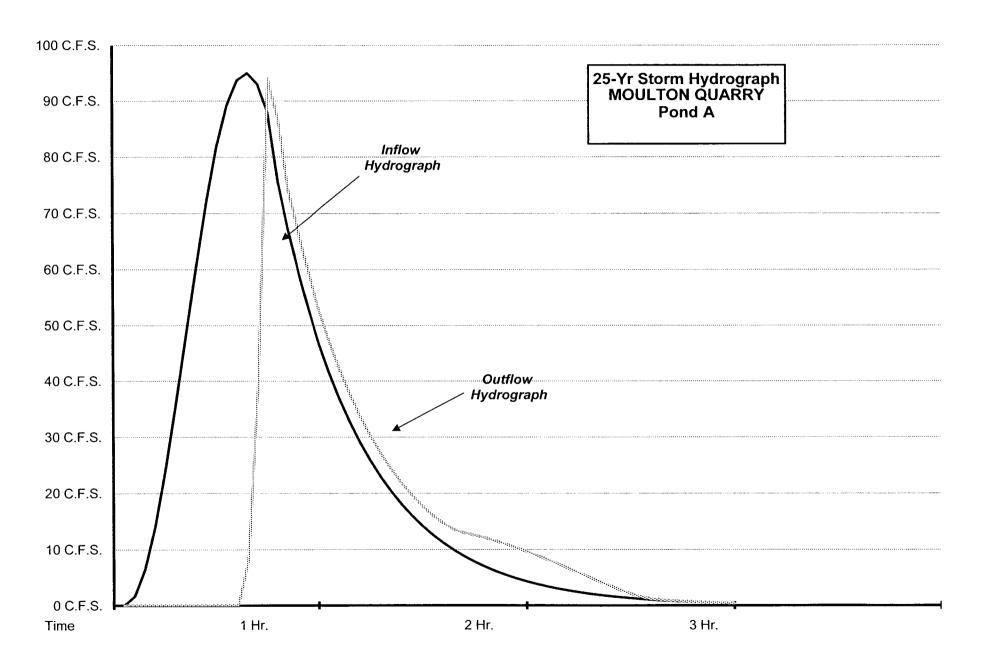



JOB:	MOULTON QUA	RRY		VDM					
DRAINAGE AREA NAME:	RAINAGE AREA NAME: AREA B								
		GROUP	CN from	AREA					
COVER DESCRIPTION	SOIL NAME	A,B,C,D?	TABLE 2-2	(In acres)					
CRUSHED STONE		D	91	43.00 Ac.					
ODOU O WEOFTATED				10.00					
SPOILS (VEGETATED		D	77	16.20 Ac.					
			UBTOTALS:	62.50 Ac.					
2-Yr 24 Hr Rainfall = 4.2 ln	Surface Cover Cross Section	Manning 'n	Flow Length Avg Velocity	Slope Tt (Hrs)					
Sheet Flow	impervious	'n'=0.01		0.10%					
0.1100111011	, and portioned			0.10 Hrs					
Shallow Flow	UNPAVED		200 Ft.	0.10%					
			0.51 F.P.S.	0.11 Hrs.					
Channel Flow									
Total Area in Acres =	62.50 Ac.	1	Total Shallov						
Weighted CN =	87	Flow=	Flow=	Flow =					
Time Of Concentration =	0.21 Hrs.	0.10 Hrs.	0.11 Hrs.	0.00 Hrs.					
Pond Factor =	1 		LL TYPE II	TOTALLOTORS					
STORM	Precipitation (P) inches	Runoff (Q)	Qp, PEAK DISCHARGE	TOTAL STORM Volumes					
1 Year	3.6 In.	2.3 ln.	174.6 CFS	517,624 Cu. Ft.					
2 Year	4.2 ln.	2.3 III. 2.8 In.	213.7 CFS	633,672 Cu. Ft.					
5 Year	5.1 ln.	3.6 ln.	279 CFS	826,437 Cu. Ft.					
10 Year	5.9 In.	4.4 ln.	335 CFS	994,475 Cu. Ft.					
25 Year	7.0 ln.	5.4 ln.	416 CFS	#######################################					
50 Year	7.8 ln.	6.3 In.	481 CFS	#############################					
100 Year	8.7 ln.	7.1 ln.	546 CFS	################					


JOB:	MOULTON QUAI	RRY		VDM
DRAINAGE AREA NAME:	AREA C			16-Oct-20
		GROUP	CN from	AREA
COVER DESCRIPTION	SOIL NAME	A,B,C,D?	TABLE 2-2	(In acres)
CRUSHED STONE		D	91	4.60 Ac.
SPOILS (VEGETATED		D	77	
		ADEAG	UBTOTALS:	4.60 Ac.
	Surface Cover		Flow Length	
2-Yr 24 Hr Rainfall = 4.2 In	Cross Section		Avg Velocity	
Sheet Flow	impervious	'n'=0.01	200 Ft.	0.10%
		raturarananan hababaran	ananananahahahahananananahaha	0.10 Hrs
Shallow Flow	UNPAVED		200 Ft.	0.10%
		 	0.51 F.P.S.	0.11 Hrs.
Channel Flow				
	 -		41-191-191-191-191-191-191-191-	
				jantada ja da
Total Area in Acres =	4.60 Ac. 91	Total Sheet	Γotal Shallov Flow≔	Total Channel Flow =
Weighted CN = Time Of Concentration =	0.21 Hrs.	0.10 Hrs.	0.11 Hrs.	0.00 Hrs.
Pond Factor =	1		LL TYPE II	0.001113.
	Precipitation	Runoff	Qp, PEAK	TOTAL STORM
STORM	(P) inches	(Q)	DISCHARGE	Volumes
1 Year	3.6 ln.	2.6 ln.	14.9 CFS	44,173 Cu. Ft.
2 Year	4.2 ln.	3.2 ln.	17.9 CFS	53,105 Cu. Ft.
5 Year	5.1 ln.	4.1 ln.	23 CFS	67,790 Cu. Ft.
10 Year	5.9 ln. 7.0 ln.	4.8 ln. 5.9 ln.	27 CFS 33 CFS	80,489 Cu. Ft. 98,508 Cu. Ft.
25 Year 50 Year	7.0 in. 7.8 ln.	6.8 ln.	38 CFS	112,822 Cu. Ft.
100 Year	8.7 In.	7.6 ln.	43 CFS	127,341 Cu. Ft.

DRAWINGS

POND 'A' PLAN VIEW
POND 'A' CROSS-SECTIONS
STREAM CROSSING CROSS-SECTION
NPDES PERMIT MAP

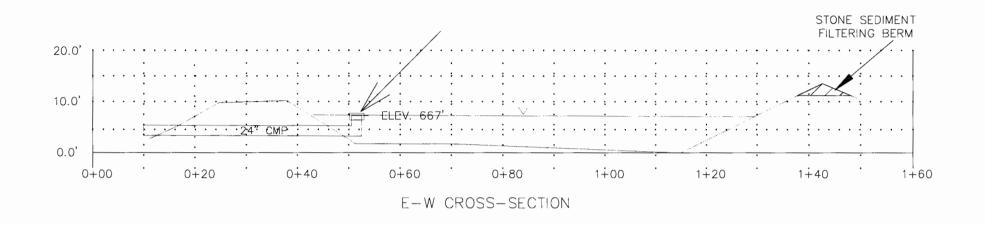

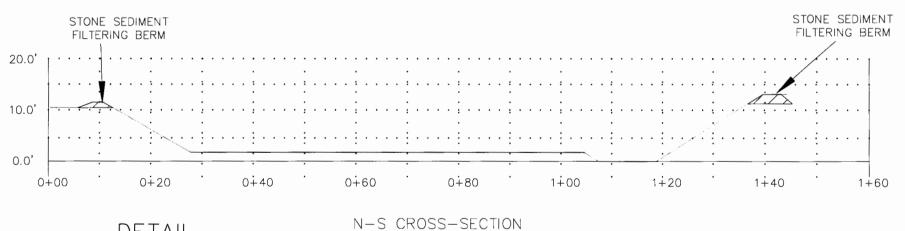



				ROGER	RS GRO	DUP, INC.
		2044	4/15/99 1"= 20'	PRODUCTIO MOULT	ON QUARR	
		i	DLL	POND CROSS	"A" S-SECTIONS	
 spenie	-	ŧ	JPT		- L	RGI-OAMO-PA

