Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P012.D
Acq On : 13 Jan 2022 4:25 pm
Operator : BDE
Sample : ICAL 3
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 6 Sample Multiplier: 1

Quant Time: Jan 14 10:05:59 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

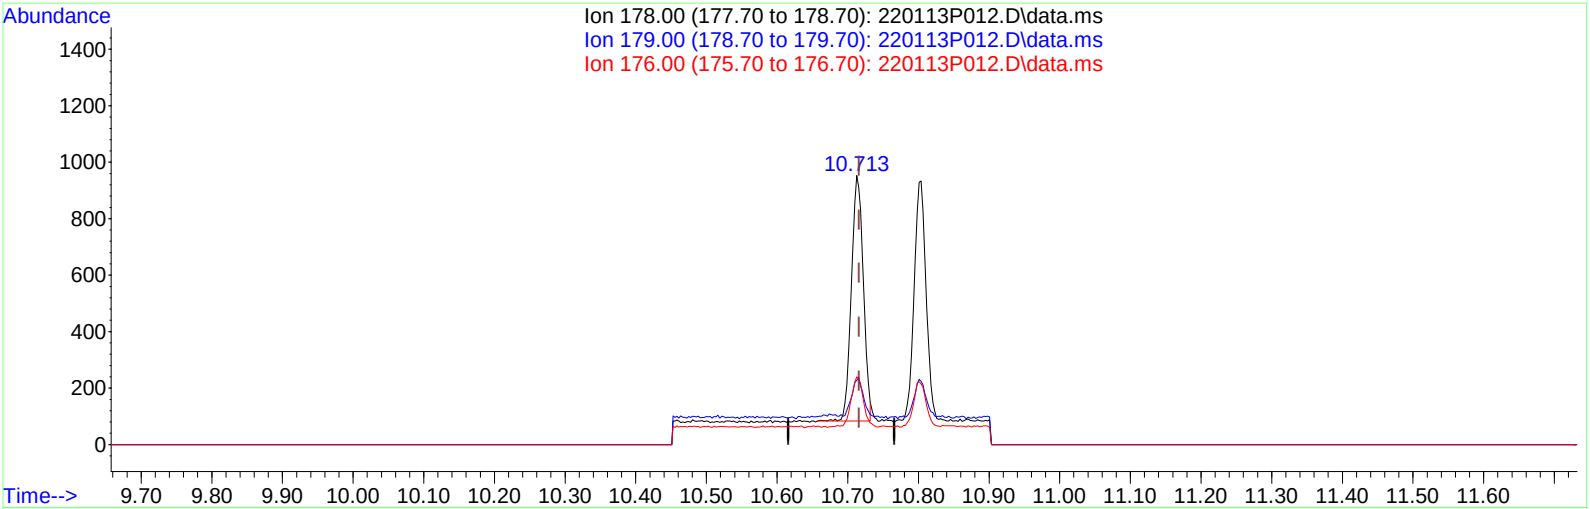

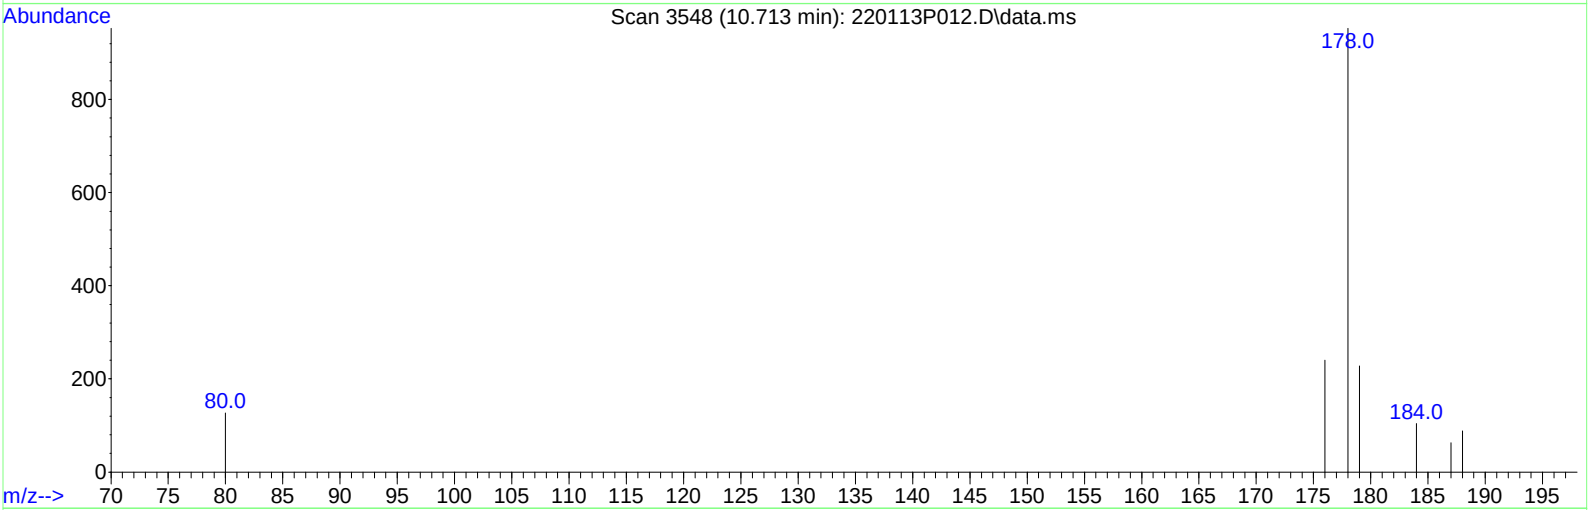

TIC: 220113P012.D\data.ms

(14) Phenanthrene (T)

10.713min (-0.003) 0.223 ug/ml

response 1022

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.90	17.22
176.00	18.90	20.16
0.00	0.00	0.00

Manual Integration Reasons

1. Incomplete Integration

Date: 01/14/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P012.D
Acq On : 13 Jan 2022 4:25 pm
Operator : BDE
Sample : ICAL 3
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 6 Sample Multiplier: 1

Quant Time: Jan 14 10:05:59 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

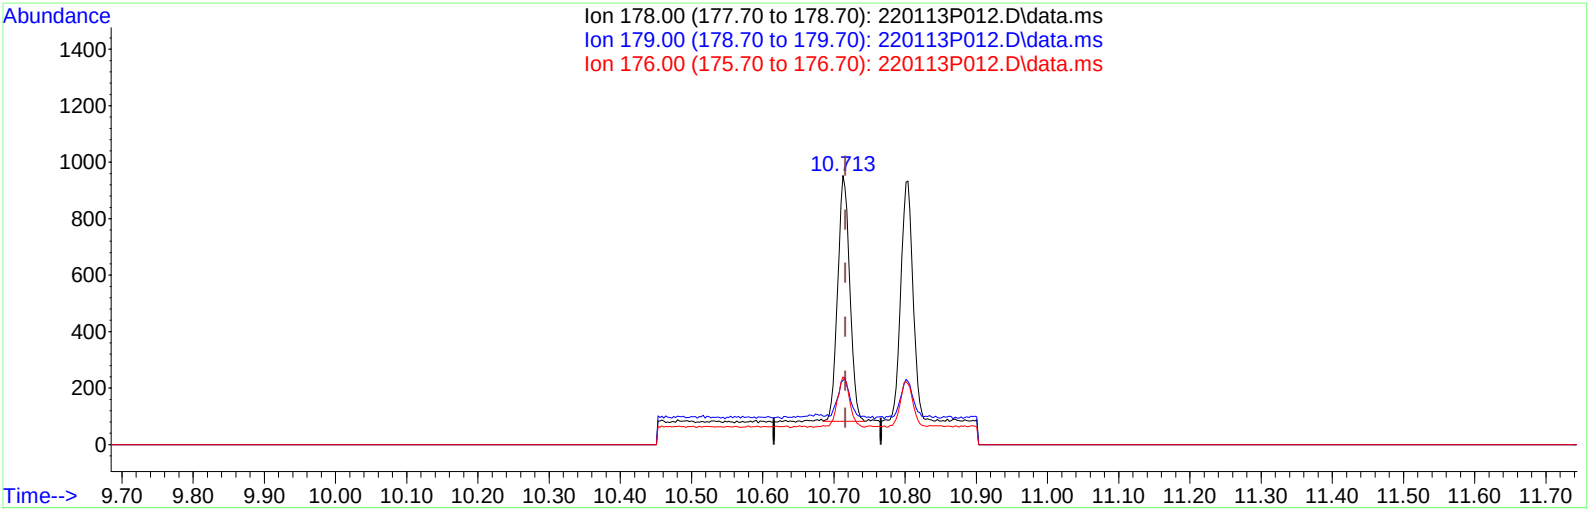

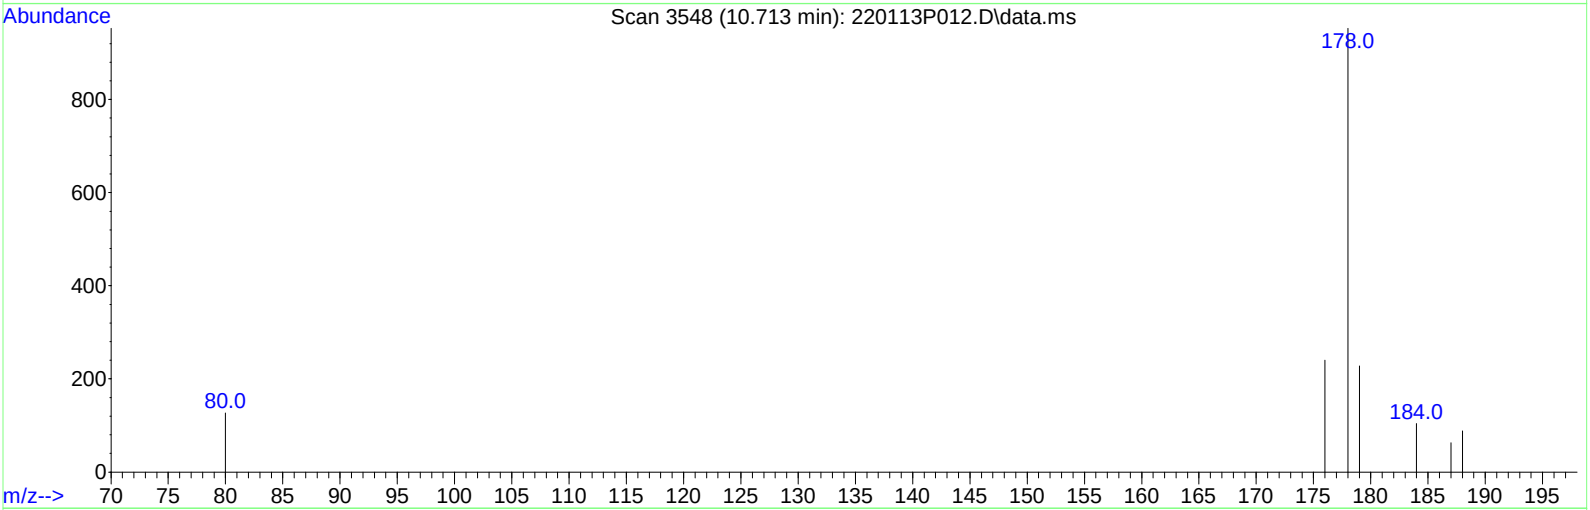

TIC: 220113P012.D\data.ms

(14) Phenanthrene (T)

10.713min (-0.003) 0.224 ug/ml m

response 1030

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.90	17.09
176.00	18.90	20.00
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P012.D
Acq On : 13 Jan 2022 4:25 pm
Operator : BDE
Sample : ICAL 3
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 6 Sample Multiplier: 1

Quant Time: Jan 14 10:05:59 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

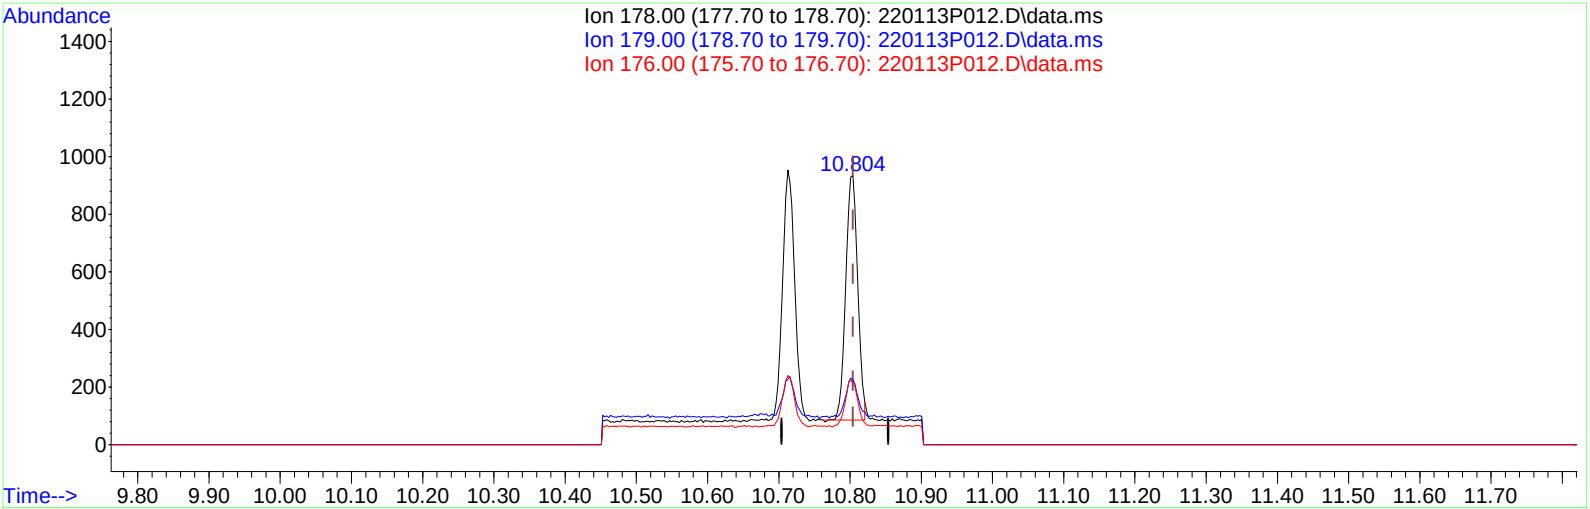

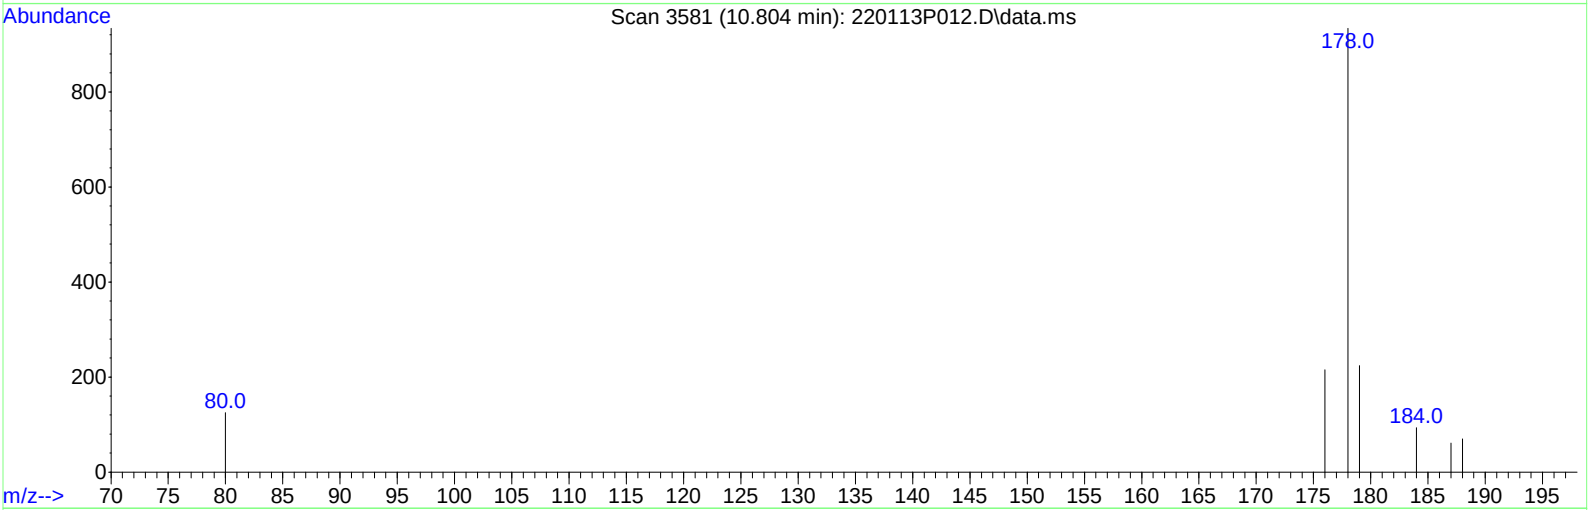

TIC: 220113P012.D\data.ms

(15) Anthracene (T)

10.804min (-0.000) 0.223 ug/ml

response 991

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.80	16.85
176.00	18.20	19.17
0.00	0.00	0.00

Manual Integration Reasons

1. Incomplete Integration

Date: 01/14/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P012.D
Acq On : 13 Jan 2022 4:25 pm
Operator : BDE
Sample : ICAL 3
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 6 Sample Multiplier: 1

Quant Time: Jan 14 10:05:59 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

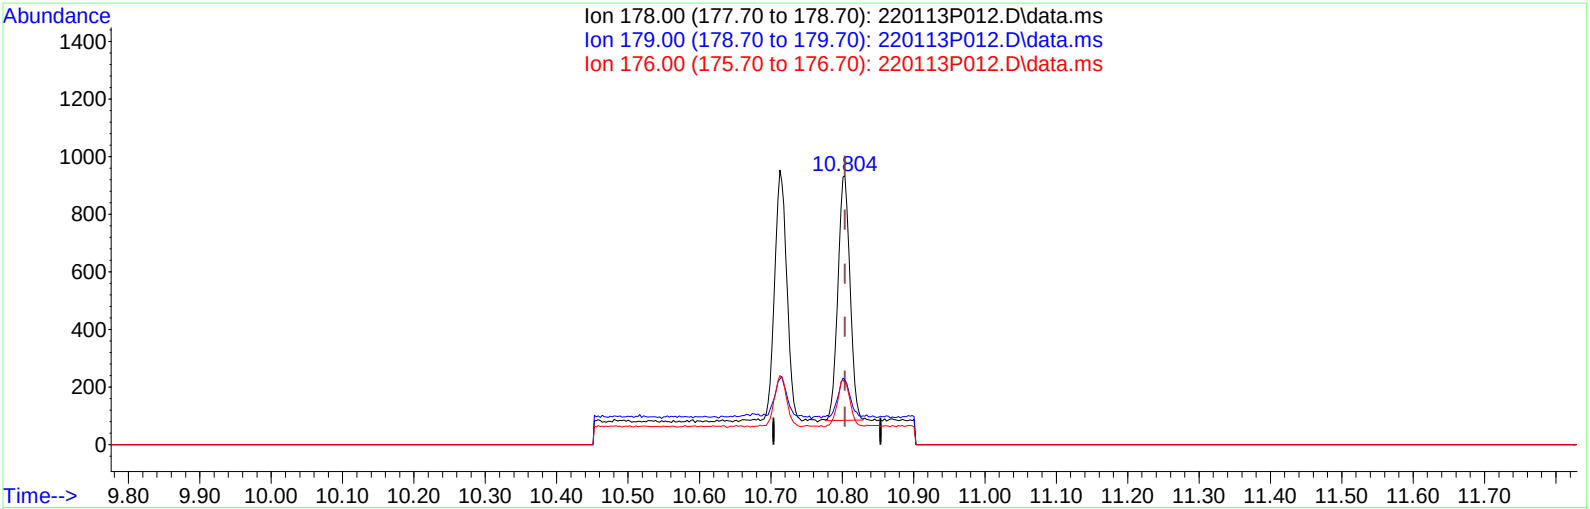

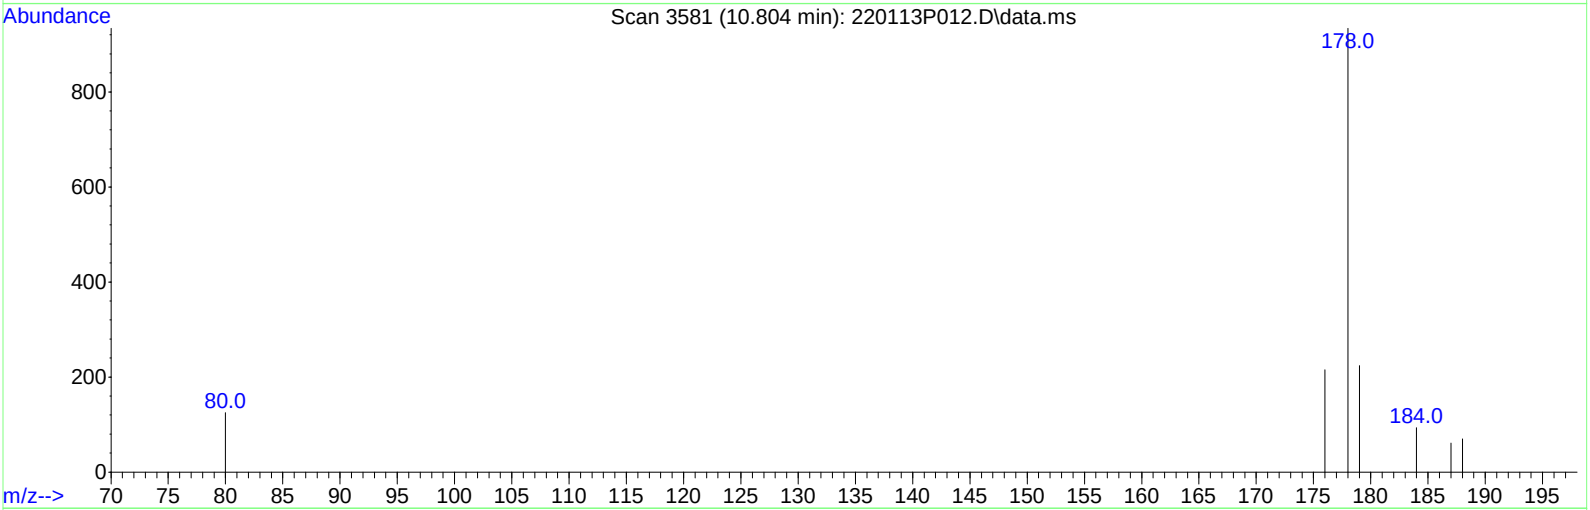

TIC: 220113P012.D\data.ms

(15) Anthracene (T)

10.804min (-0.000) 0.225 ug/ml m

response 1001

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.80	16.68
176.00	18.20	18.98
0.00	0.00	0.00

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P013.D
Acq On : 13 Jan 2022 4:52 pm
Operator : BDE
Sample : ICAL 4
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 7 Sample Multiplier: 1

Quant Time: Jan 14 10:06:04 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

Compound	R.T.	QIon	Response	Conc	Units	Dev(Min)
Internal Standards						
1) Naphthalene-d8 (IS)	4.105	136	20363	4.000	ug/ml	0.00
7) Acenaphthene-d10 (IS)	7.948	164	10538m	4.000	ug/ml	0.00
13) Phenanthrene-d10 (IS)	10.676	188	20603	4.000	ug/ml	0.00
19) Chrysene-d12 (IS)	15.076	240	19062	4.000	ug/ml	0.00
24) Perylene-d12 (IS)	17.495	264	21142	4.000	ug/ml	0.00
System Monitoring Compounds						
2) Nitrobenzene-d5	2.839	82	618	0.484	ug/ml	0.00
4) 2-Methylnaphthalene-d10	5.669	152	1288	0.485	ug/ml	0.00
8) 2-Fluorobiphenyl	6.596	172	1764	0.490	ug/ml	0.00
17) Fluoranthene-d10	12.688	212	2368	0.501	ug/ml	0.00
21) p-Terphenyl-d14	13.401	244	1981	0.485	ug/ml	0.00
Target Compounds						Qvalue
3) Naphthalene	4.156	128	2240	0.485	ug/ml	98
5) 2-Methylnaphthalene	5.744	142	1463	0.491	ug/ml	97
6) 1-Methylnaphthalene	5.960	142	1399	0.489	ug/ml	94
9) Acenaphthylene	7.652	152	2473	0.480	ug/ml	96
10) Acenaphthene	8.011	154	1281m	0.491	ug/ml	
11) Dibenzofuran	8.358	168	2071	0.484	ug/ml#	100
12) Fluorene	9.008	166	1634	0.487	ug/ml	97
14) Phenanthrene	10.714	178	2422m	0.492	ug/ml	
15) Anthracene	10.803	178	2348m	0.493	ug/ml	
16) Carbazole	11.105	167	2362	0.496	ug/ml	100
18) Fluoranthene	12.714	202	2867	0.496	ug/ml	99
20) Pyrene	13.080	202	2982	0.476	ug/ml	99
22) Benzo[a]anthracene	15.062	228	2867	0.483	ug/ml	98
23) Chrysene	15.117	228	2673	0.481	ug/ml	98
25) Benzo[b]fluoranthene	16.826	252	3066	0.492	ug/ml	97
26) Benzo[k]fluoranthene	16.873	252	3079	0.496	ug/ml	97
27) Benzo[a]pyrene	17.390	252	2932	0.482	ug/ml	100
28) Indeno(1,2,3-cd)pyrene	19.825	276	2847	0.485	ug/ml	98
29) Dibenzo[a,h]anthracene	19.912	278	2792	0.486	ug/ml	98
30) Benzo[g,h,i]perylene	20.512	276	3065	0.482	ug/ml	98

(#) = qualifier out of range (m) = manual integration (+) = signals summed

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P013.D
Acq On : 13 Jan 2022 4:52 pm
Operator : BDE
Sample : ICAL 4
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 7 Sample Multiplier: 1

Quant Time: Jan 14 10:06:04 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

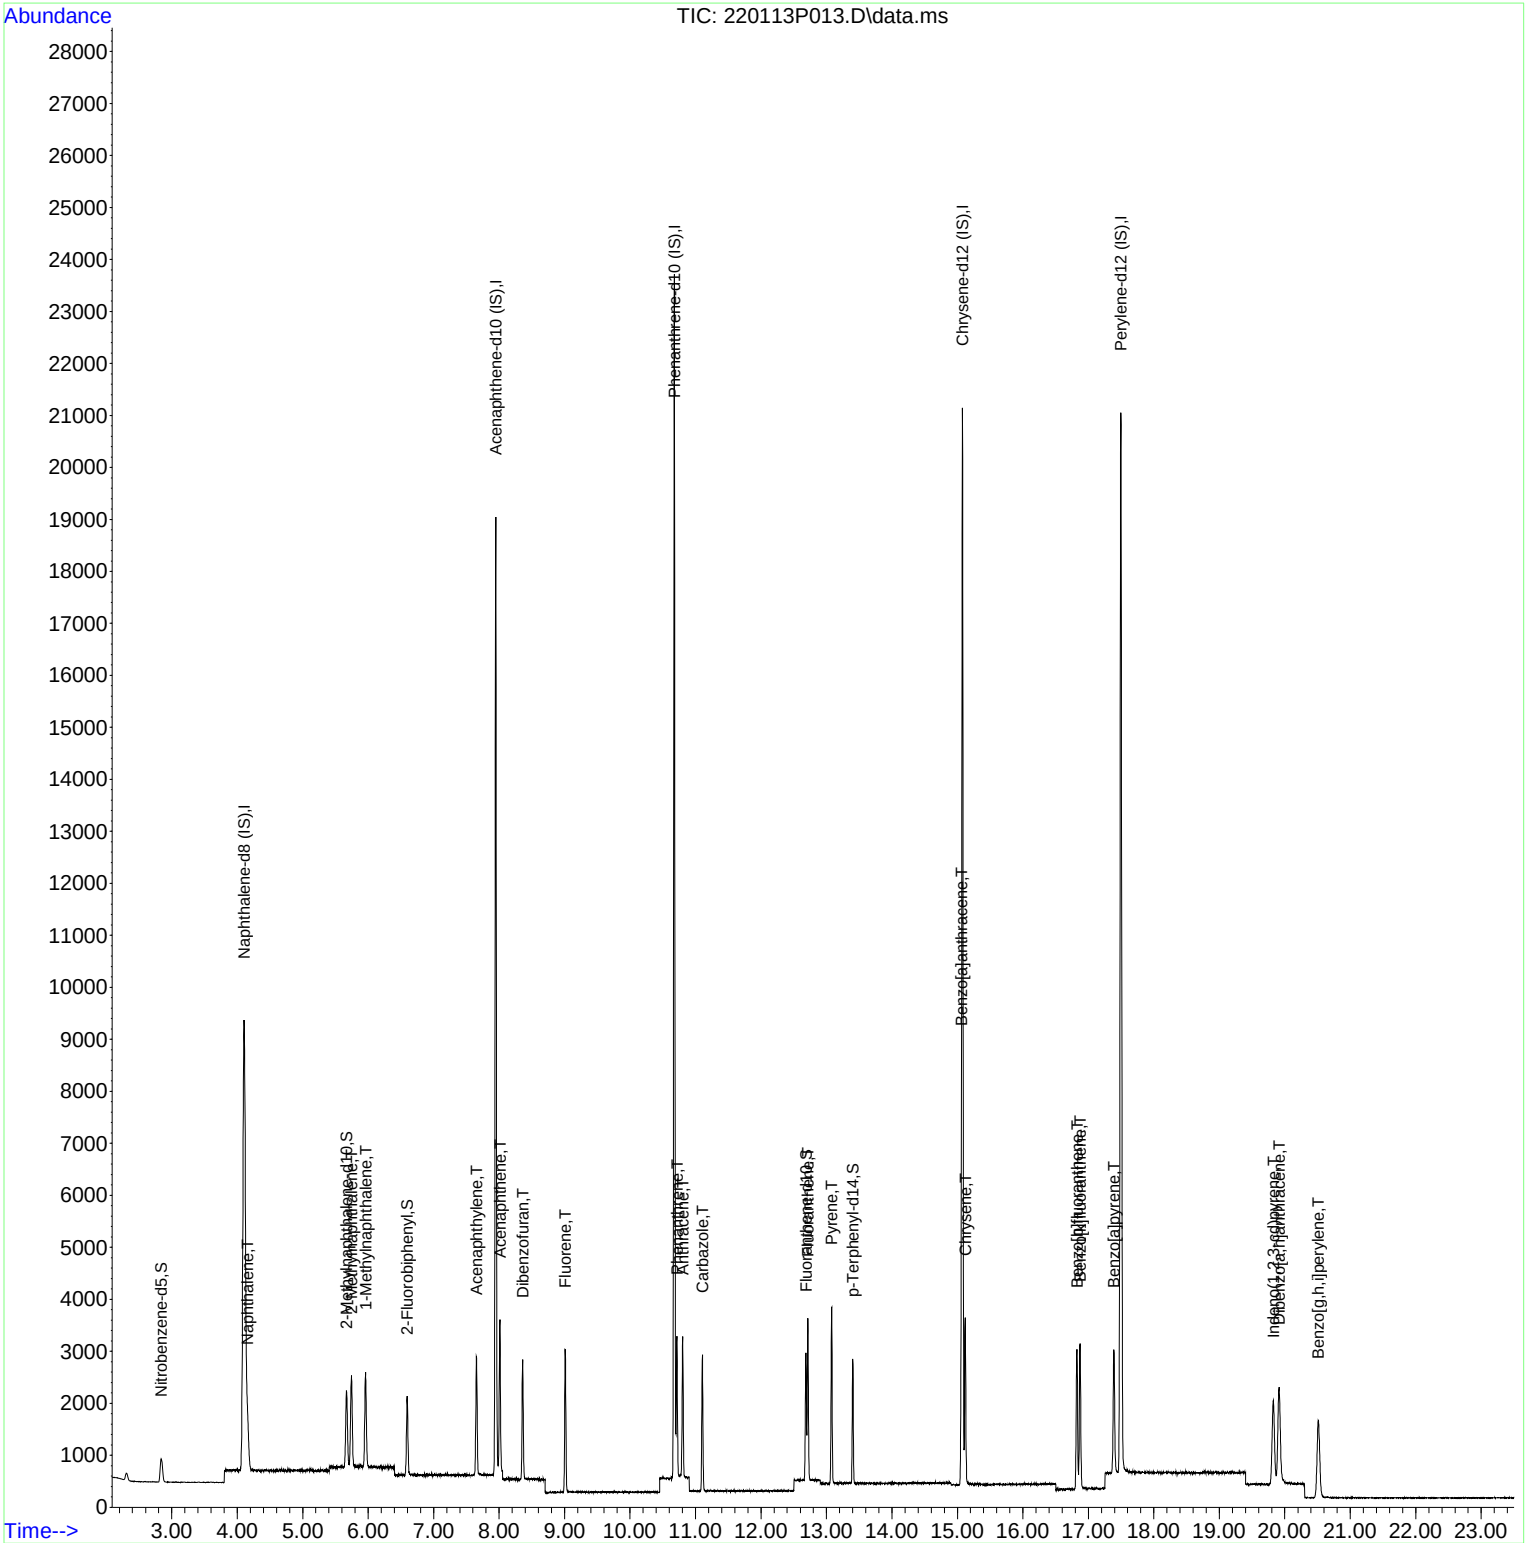

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P014.D
Acq On : 13 Jan 2022 5:19 pm
Operator : BDE
Sample : ICAL 5
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 8 Sample Multiplier: 1

Quant Time: Jan 14 10:06:07 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

Compound	R.T.	QIon	Response	Conc	Units	Dev(Min)
Internal Standards						
1) Naphthalene-d8 (IS)	4.105	136	18839	4.000	ug/ml	0.00
7) Acenaphthene-d10 (IS)	7.951	164	9737m	4.000	ug/ml	0.00
13) Phenanthrene-d10 (IS)	10.676	188	19413	4.000	ug/ml	0.00
19) Chrysene-d12 (IS)	15.076	240	17929	4.000	ug/ml	0.00
24) Perylene-d12 (IS)	17.495	264	19962	4.000	ug/ml	0.00
System Monitoring Compounds						
2) Nitrobenzene-d5	2.833	82	1047	0.886	ug/ml	0.00
4) 2-Methylnaphthalene-d10	5.669	152	2209	0.900	ug/ml	0.00
8) 2-Fluorobiphenyl	6.594	172	3113	0.935	ug/ml	0.00
17) Fluoranthene-d10	12.685	212	4130	0.928	ug/ml	0.00
21) p-Terphenyl-d14	13.401	244	3438	0.895	ug/ml	0.00
Target Compounds						Qvalue
3) Naphthalene	4.154	128	3917	0.917	ug/ml	100
5) 2-Methylnaphthalene	5.743	142	2536	0.920	ug/ml	97
6) 1-Methylnaphthalene	5.960	142	2443	0.923	ug/ml	95
9) Acenaphthylene	7.655	152	4336	0.911	ug/ml	98
10) Acenaphthene	8.011	154	2221m	0.920	ug/ml	
11) Dibenzofuran	8.360	168	3632	0.919	ug/ml#	100
12) Fluorene	9.010	166	2868	0.925	ug/ml	98
14) Phenanthrene	10.714	178	4217m	0.910	ug/ml	
15) Anthracene	10.803	178	4105m	0.915	ug/ml	
16) Carbazole	11.105	167	4091	0.911	ug/ml	100
18) Fluoranthene	12.717	202	4996	0.918	ug/ml	98
20) Pyrene	13.077	202	5169	0.877	ug/ml	99
22) Benzo[a]anthracene	15.062	228	4990	0.905	ug/ml	98
23) Chrysene	15.117	228	4732	0.905	ug/ml	98
25) Benzo[b]fluoranthene	16.825	252	5384	0.924	ug/ml	98
26) Benzo[k]fluoranthene	16.872	252	5358	0.914	ug/ml	97
27) Benzo[a]pyrene	17.387	252	5160	0.898	ug/ml	100
28) Indeno(1,2,3-cd)pyrene	19.822	276	5084	0.918	ug/ml	98
29) Dibenzo[a,h]anthracene	19.915	278	4939	0.911	ug/ml	97
30) Benzo[g,h,i]perylene	20.508	276	5489	0.914	ug/ml	97

(#) = qualifier out of range (m) = manual integration (+) = signals summed

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P014.D
Acq On : 13 Jan 2022 5:19 pm
Operator : BDE
Sample : ICAL 5
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 8 Sample Multiplier: 1

Quant Time: Jan 14 10:06:07 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

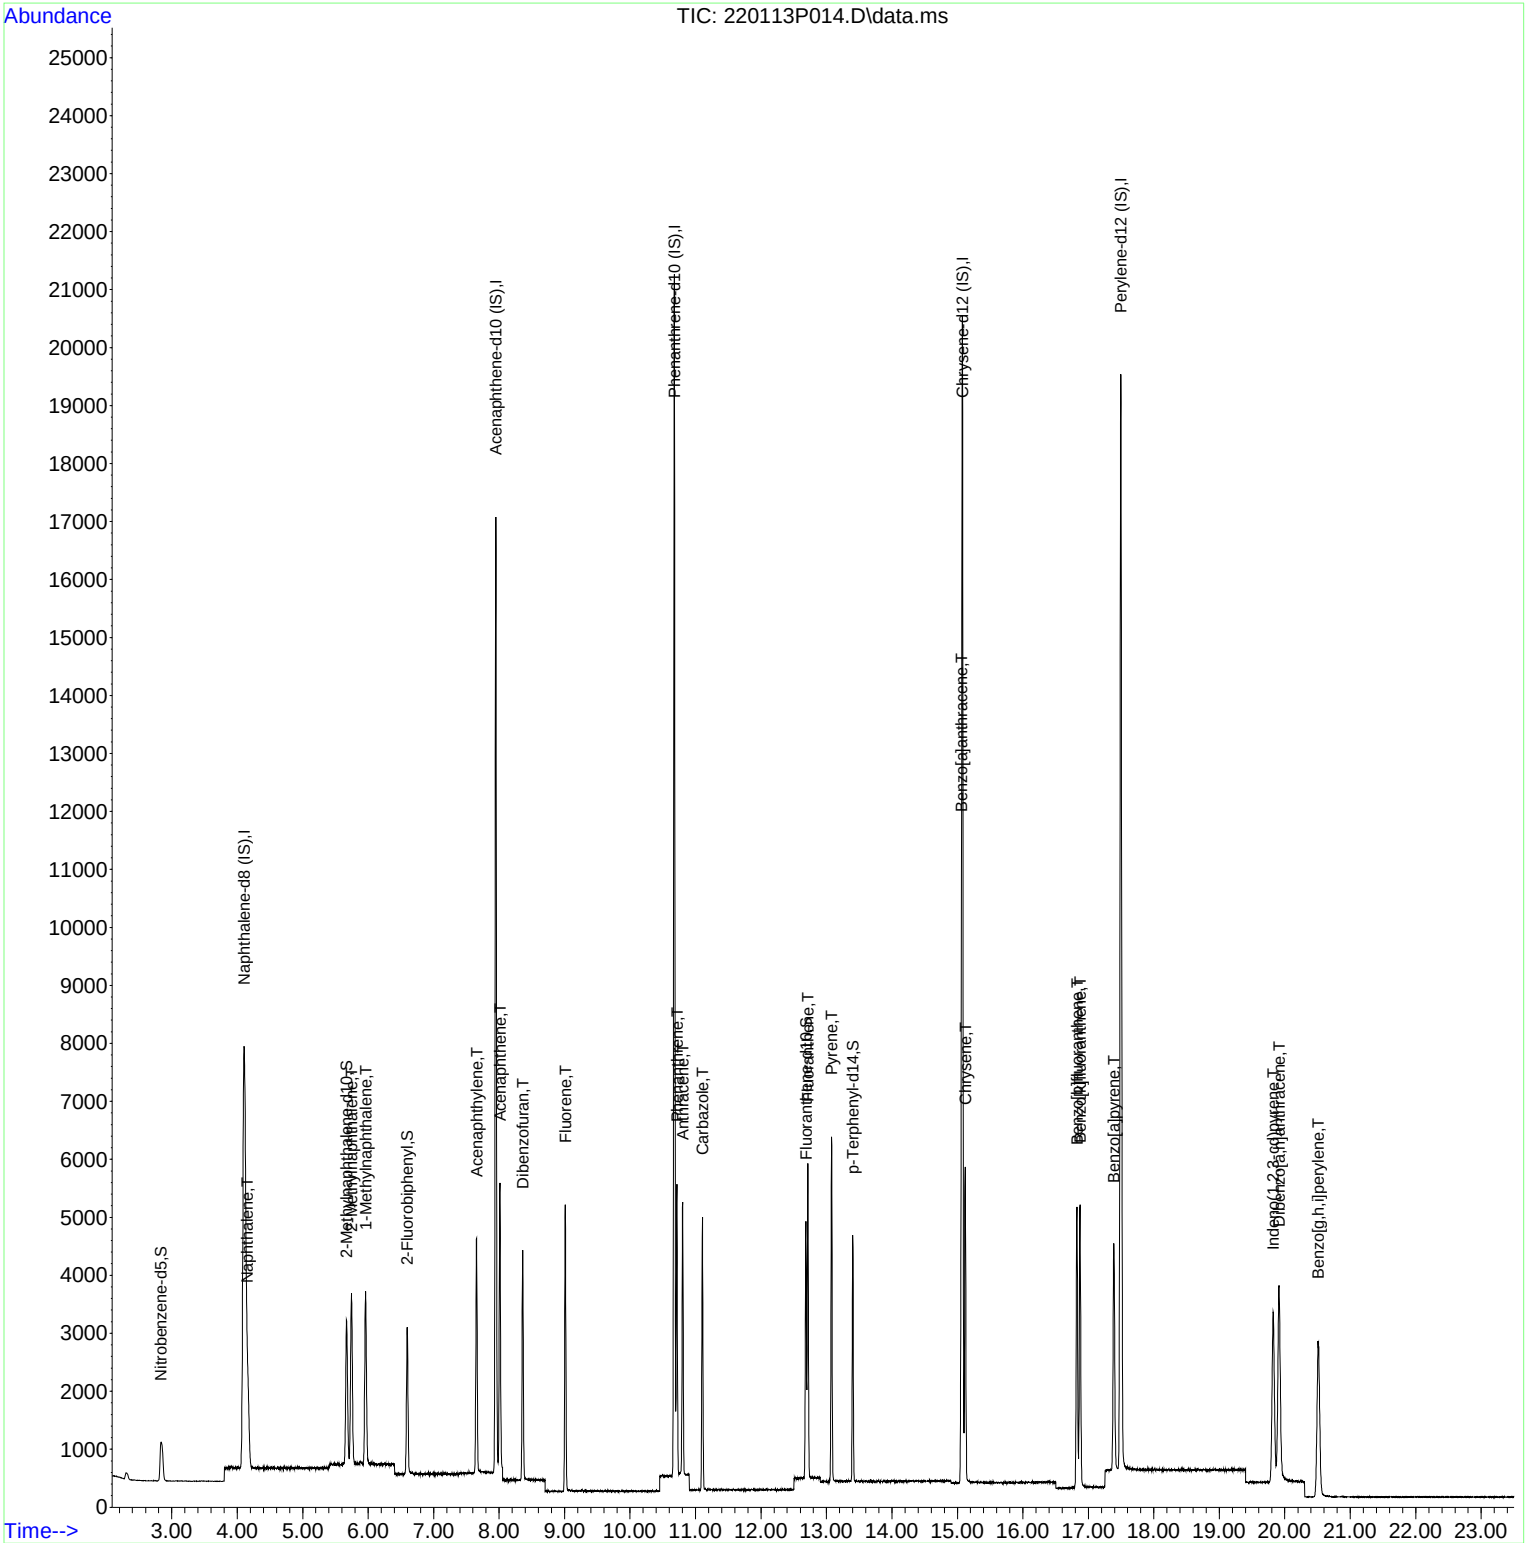

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P015.D
Acq On : 13 Jan 2022 5:46 pm
Operator : BDE
Sample : ICAL 6
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 9 Sample Multiplier: 1

Quant Time: Jan 14 10:06:10 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

Compound	R.T.	QIon	Response	Conc	Units	Dev(Min)
Internal Standards						
1) Naphthalene-d8 (IS)	4.105	136	19736	4.000	ug/ml	0.00
7) Acenaphthene-d10 (IS)	7.948	164	10167m	4.000	ug/ml	0.00
13) Phenanthrene-d10 (IS)	10.676	188	20233	4.000	ug/ml	0.00
19) Chrysene-d12 (IS)	15.074	240	18201	4.000	ug/ml	0.00
24) Perylene-d12 (IS)	17.495	264	20244	4.000	ug/ml	0.00
System Monitoring Compounds						
2) Nitrobenzene-d5	2.839	82	2377	1.920	ug/ml	0.00
4) 2-Methylnaphthalene-d10	5.671	152	4953	1.926	ug/ml	0.00
8) 2-Fluorobiphenyl	6.594	172	7006	2.016	ug/ml	0.00
17) Fluoranthene-d10	12.685	212	9031	1.946	ug/ml	0.00
21) p-Terphenyl-d14	13.401	244	7603	1.951	ug/ml	0.00
Target Compounds						Qvalue
3) Naphthalene	4.156	128	8888	1.987	ug/ml	100
5) 2-Methylnaphthalene	5.744	142	5760	1.994	ug/ml	96
6) 1-Methylnaphthalene	5.960	142	5510	1.987	ug/ml	97
9) Acenaphthylene	7.655	152	9627	1.937	ug/ml	99
10) Acenaphthene	8.011	154	4954m	1.966	ug/ml	
11) Dibenzofuran	8.360	168	8176	1.982	ug/ml#	100
12) Fluorene	9.010	166	6361	1.964	ug/ml	97
14) Phenanthrene	10.714	178	9431m	1.953	ug/ml	
15) Anthracene	10.803	178	9117m	1.950	ug/ml	
16) Carbazole	11.103	167	9089	1.942	ug/ml	99
18) Fluoranthene	12.717	202	10987	1.937	ug/ml	99
20) Pyrene	13.077	202	11397	1.905	ug/ml	99
22) Benzo[a]anthracene	15.059	228	10803	1.946	ug/ml	98
23) Chrysene	15.118	228	10352	1.950	ug/ml	98
25) Benzo[b]fluoranthene	16.826	252	11461	1.952	ug/ml	98
26) Benzo[k]fluoranthene	16.873	252	11574	1.948	ug/ml	98
27) Benzo[a]pyrene	17.390	252	11256	1.931	ug/ml	100
28) Indeno(1,2,3-cd)pyrene	19.820	276	11051	1.967	ug/ml	98
29) Dibenzo[a,h]anthracene	19.912	278	10751	1.955	ug/ml	98
30) Benzo[g,h,i]perylene	20.514	276	11806	1.939	ug/ml	97

(#) = qualifier out of range (m) = manual integration (+) = signals summed

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P015.D
Acq On : 13 Jan 2022 5:46 pm
Operator : BDE
Sample : ICAL 6
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 9 Sample Multiplier: 1

Quant Time: Jan 14 10:06:10 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

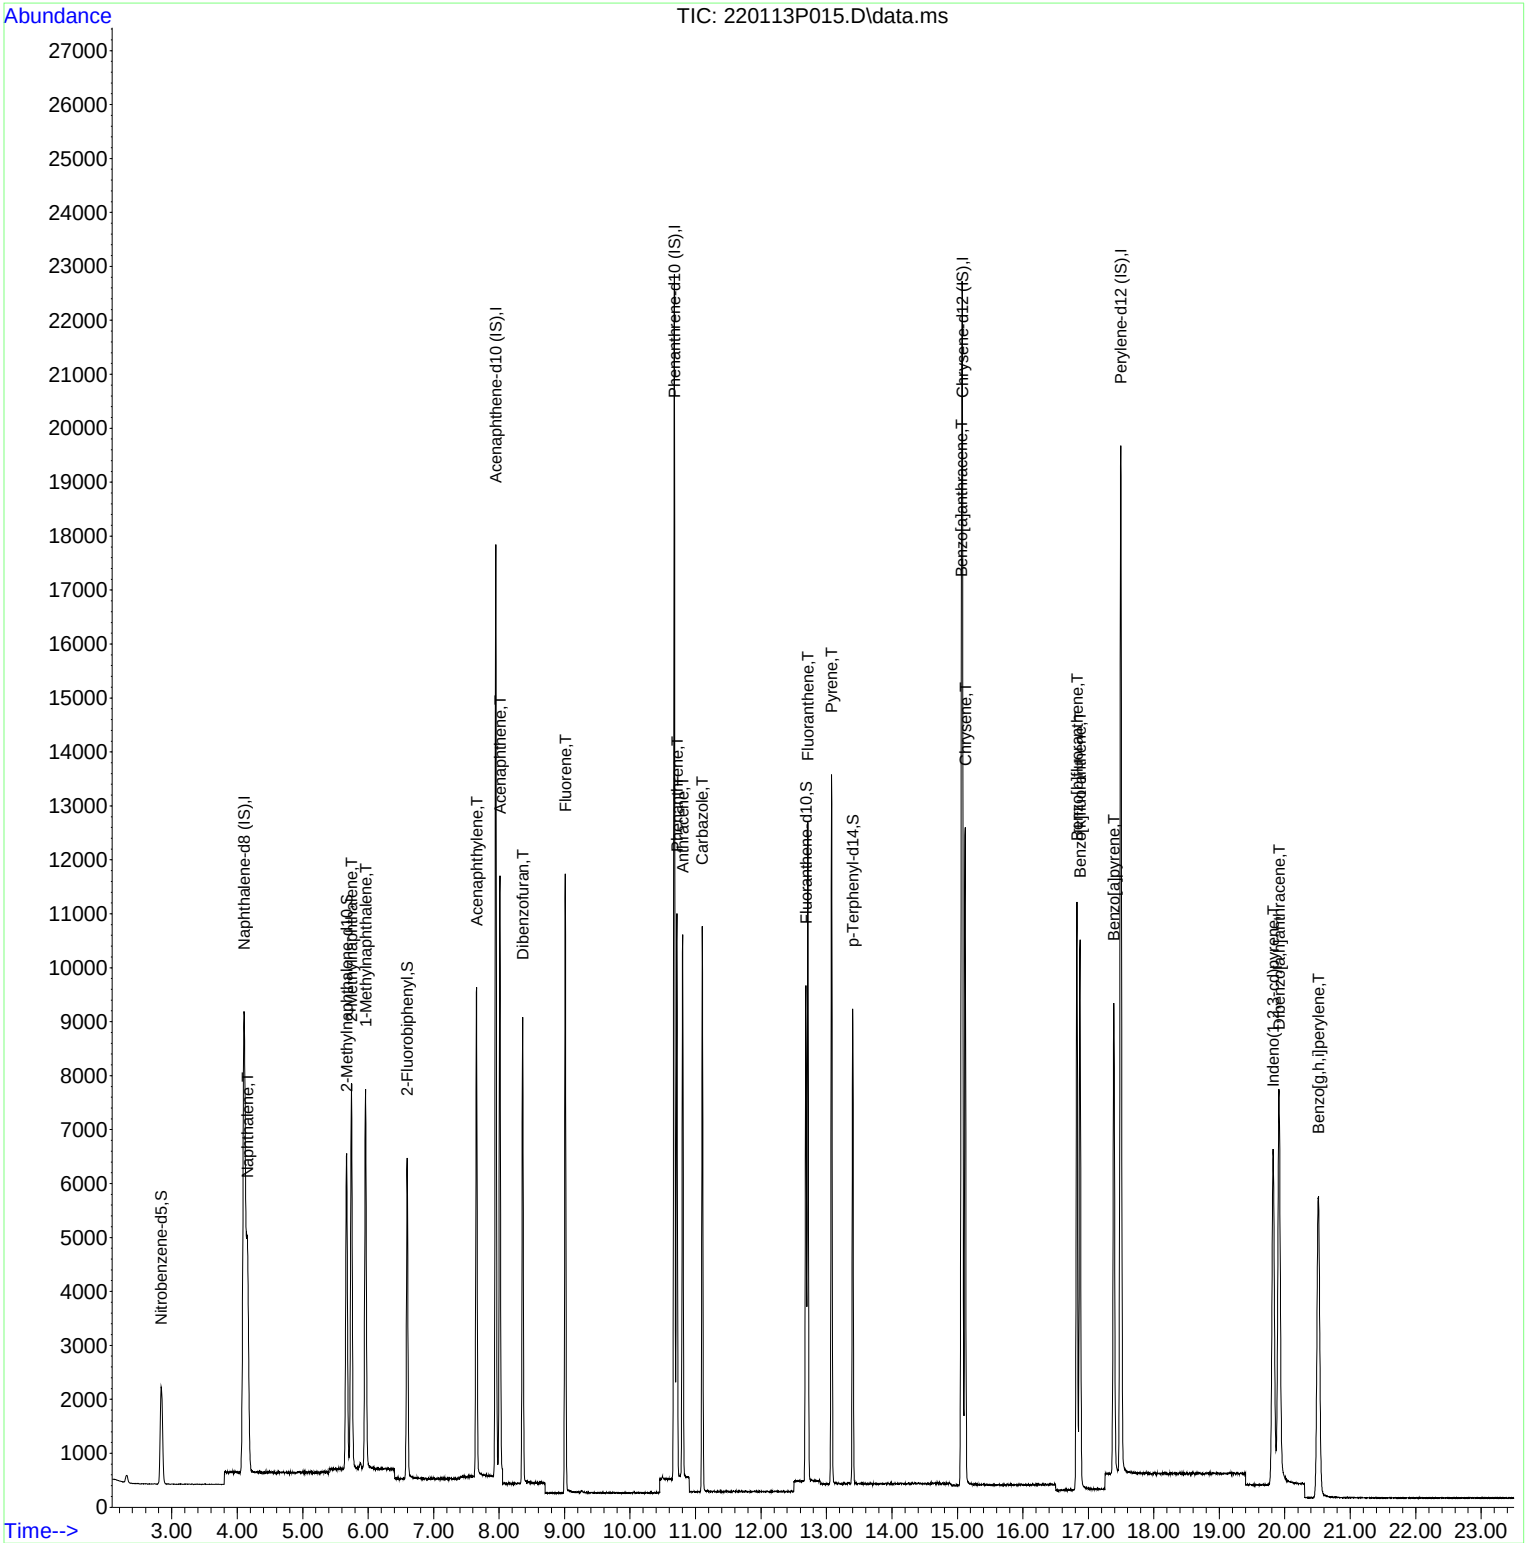

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P016.D
Acq On : 13 Jan 2022 6:13 pm
Operator : BDE
Sample : ICAL 7
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 10 Sample Multiplier: 1

Quant Time: Jan 14 10:06:13 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

Compound	R.T.	QIon	Response	Conc	Units	Dev(Min)
Internal Standards						
1) Naphthalene-d8 (IS)	4.120	136	18683	4.000	ug/ml	0.01
7) Acenaphthene-d10 (IS)	7.951	164	9648m	4.000	ug/ml	0.00
13) Phenanthrene-d10 (IS)	10.677	188	19218	4.000	ug/ml	0.00
19) Chrysene-d12 (IS)	15.076	240	17421	4.000	ug/ml	0.00
24) Perylene-d12 (IS)	17.495	264	19277	4.000	ug/ml	0.00
System Monitoring Compounds						
2) Nitrobenzene-d5	2.855	82	5702	4.866	ug/ml	0.02
4) 2-Methylnaphthalene-d10	5.676	152	11835	4.860	ug/ml	0.00
8) 2-Fluorobiphenyl	6.600	172	16628	5.042	ug/ml	0.00
17) Fluoranthene-d10	12.685	212	21794	4.944	ug/ml	0.00
21) p-Terphenyl-d14	13.402	244	18140	4.862	ug/ml	0.00
Target Compounds						Qvalue
3) Naphthalene	4.168	128	21128	4.990	ug/ml	100
5) 2-Methylnaphthalene	5.749	142	13641	4.989	ug/ml	97
6) 1-Methylnaphthalene	5.965	142	13120	4.997	ug/ml	97
9) Acenaphthylene	7.655	152	23372	4.956	ug/ml	99
10) Acenaphthene	8.014	154	11823m	4.945	ug/ml	
11) Dibenzofuran	8.360	168	19522	4.986	ug/ml#	100
12) Fluorene	9.010	166	15174	4.937	ug/ml	97
14) Phenanthrene	10.715	178	22655m	4.939	ug/ml	
15) Anthracene	10.801	178	21811m	4.911	ug/ml	
16) Carbazole	11.103	167	21656	4.871	ug/ml	99
18) Fluoranthene	12.717	202	26087	4.843	ug/ml	99
20) Pyrene	13.077	202	27076	4.729	ug/ml	98
22) Benzo[a]anthracene	15.060	228	26162	4.945	ug/ml	98
23) Chrysene	15.120	228	24831	4.888	ug/ml	98
25) Benzo[b]fluoranthene	16.826	252	27469	4.934	ug/ml	98
26) Benzo[k]fluoranthene	16.873	252	27817	4.915	ug/ml	98
27) Benzo[a]pyrene	17.390	252	27471	4.949	ug/ml	100
28) Indeno(1,2,3-cd)pyrene	19.823	276	27274	5.099	ug/ml	98
29) Dibenzo[a,h]anthracene	19.915	278	26534	5.067	ug/ml	98
30) Benzo[g,h,i]perylene	20.512	276	29004	5.002	ug/ml	97

(#) = qualifier out of range (m) = manual integration (+) = signals summed

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P016.D
Acq On : 13 Jan 2022 6:13 pm
Operator : BDE
Sample : ICAL 7
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 10 Sample Multiplier: 1

Quant Time: Jan 14 10:06:13 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

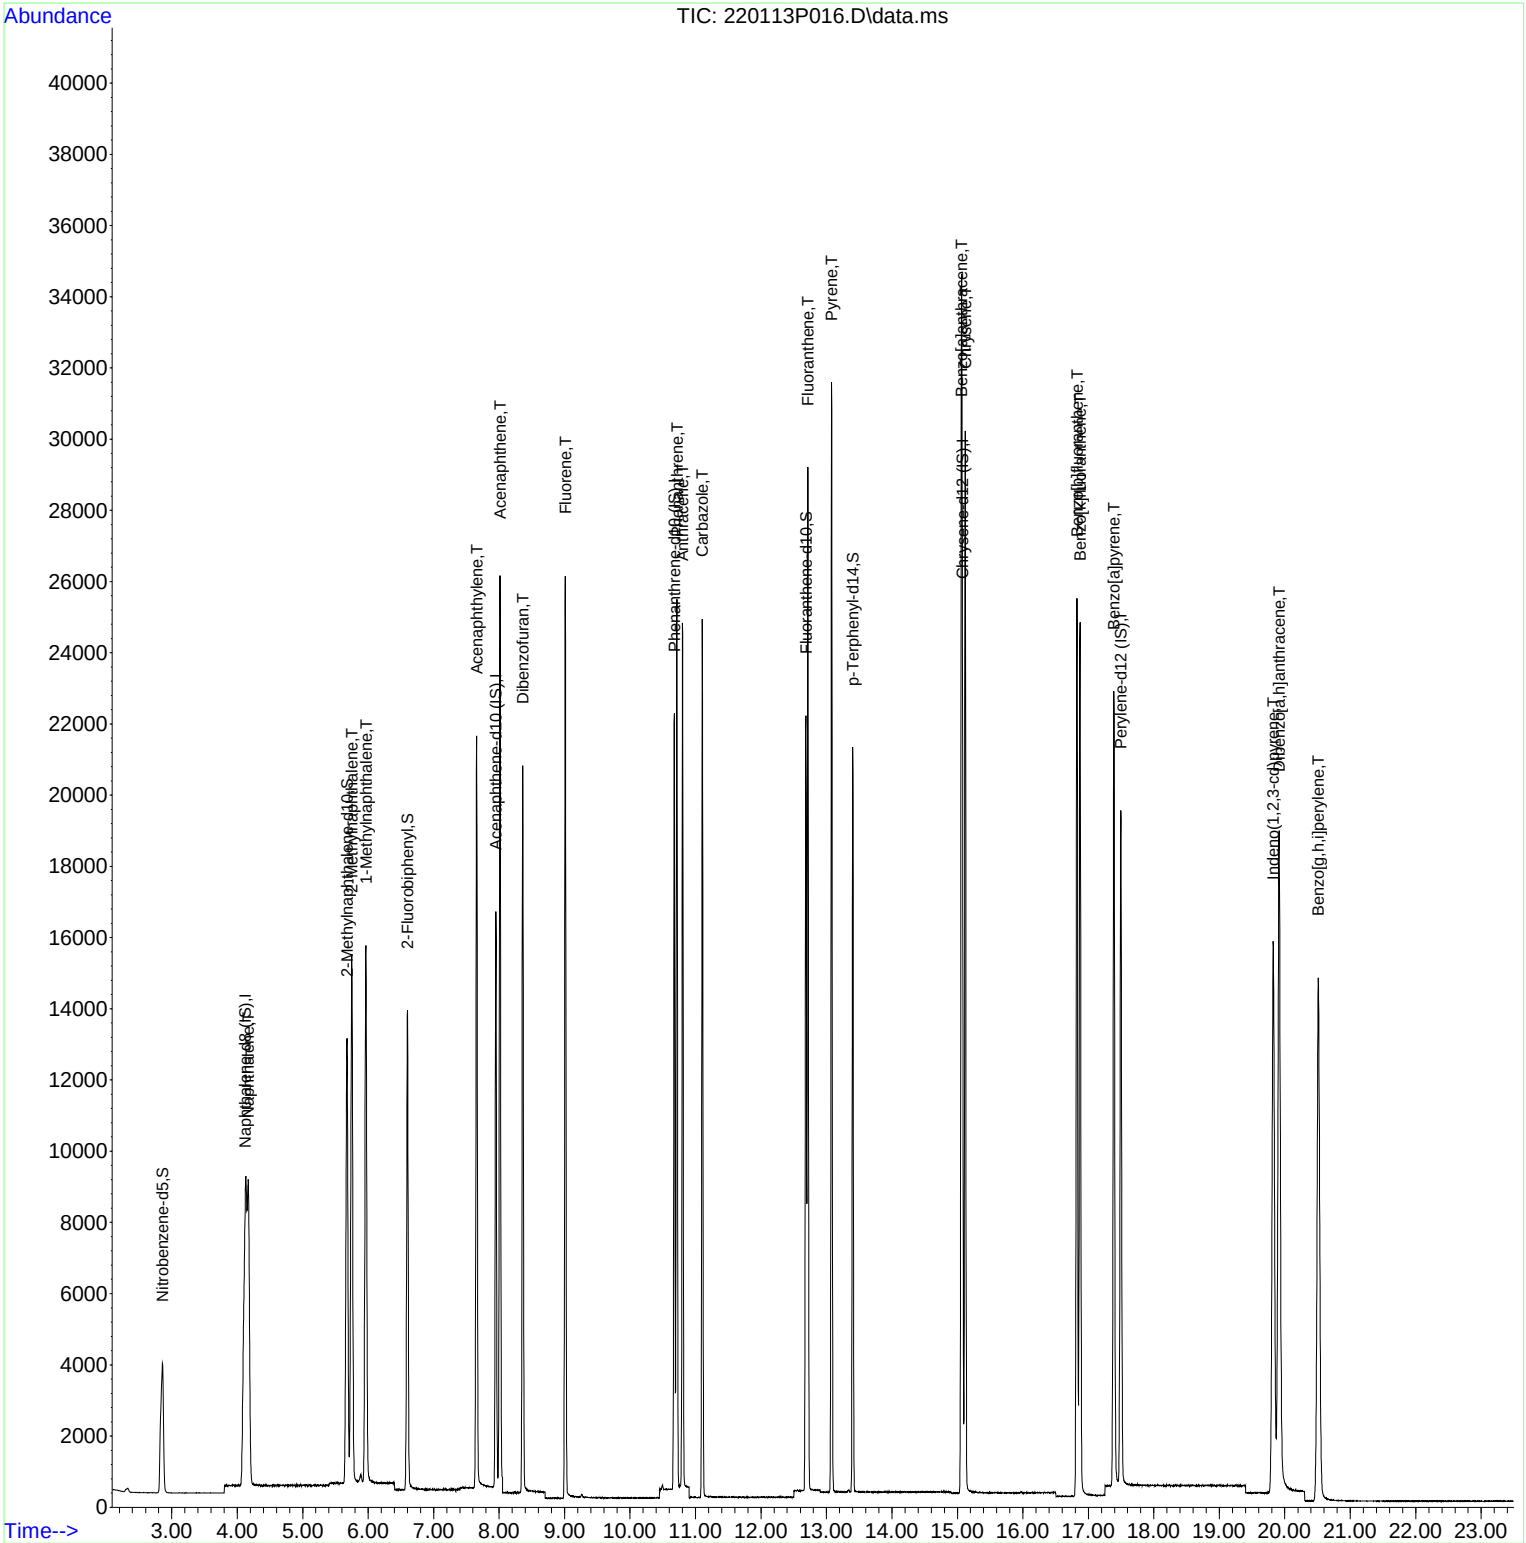

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P017.D
Acq On : 13 Jan 2022 6:40 pm
Operator : BDE
Sample : ICAL 8
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 11 Sample Multiplier: 1

Quant Time: Jan 14 10:06:19 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

Compound	R.T.	QIon	Response	Conc	Units	Dev(Min)
Internal Standards						
1) Naphthalene-d8 (IS)	4.108	136	19091	4.000	ug/ml	0.00
7) Acenaphthene-d10 (IS)	7.951	164	9886m	4.000	ug/ml	0.00
13) Phenanthrene-d10 (IS)	10.677	188	19969	4.000	ug/ml	0.00
19) Chrysene-d12 (IS)	15.079	240	17479	4.000	ug/ml	0.00
24) Perylene-d12 (IS)	17.497	264	19951	4.000	ug/ml	0.00
System Monitoring Compounds						
2) Nitrobenzene-d5	2.839	82	57979	48.419	ug/ml	0.00
4) 2-Methylnaphthalene-d10	5.674	152	116140	46.677	ug/ml	0.00
8) 2-Fluorobiphenyl	6.596	172	163382	48.346	ug/ml	0.00
17) Fluoranthene-d10	12.688	212	215967	47.151	ug/ml	0.00
21) p-Terphenyl-d14	13.404	244	182956	48.877	ug/ml	0.00
Target Compounds						Qvalue
3) Naphthalene	4.159	128	210073	48.552	ug/ml	100
5) 2-Methylnaphthalene	5.746	142	134665	48.200	ug/ml	97
6) 1-Methylnaphthalene	5.963	142	131382	48.971	ug/ml	97
9) Acenaphthylene	7.655	152	237626	49.175	ug/ml	99
10) Acenaphthene	8.012	154	119138m	48.630	ug/ml	
11) Dibenzofuran	8.360	168	199063	49.617	ug/ml#	100
12) Fluorene	9.012	166	152783	48.512	ug/ml	98
14) Phenanthrene	10.716	178	227477m	47.725	ug/ml	
15) Anthracene	10.804	178	216315m	46.875	ug/ml	
16) Carbazole	11.107	167	216766	46.925	ug/ml	99
18) Fluoranthene	12.719	202	262366	46.874	ug/ml	98
20) Pyrene	13.080	202	275051	47.885	ug/ml	98
22) Benzo[a]anthracene	15.064	228	264755	50.315	ug/ml	98
23) Chrysene	15.122	228	253691	49.773	ug/ml	98
25) Benzo[b]fluoranthene	16.832	252	280008	49.514	ug/ml	98
26) Benzo[k]fluoranthene	16.879	252	282758m	48.277	ug/ml	
27) Benzo[a]pyrene	17.397	252	286709	49.908	ug/ml	100
28) Indeno(1,2,3-cd)pyrene	19.839	276	279299	50.455	ug/ml	98
29) Dibenzo[a,h]anthracene	19.926	278	272265	50.235	ug/ml	98
30) Benzo[g,h,i]perylene	20.532	276	290941	48.476	ug/ml	97

(#) = qualifier out of range (m) = manual integration (+) = signals summed

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P017.D
Acq On : 13 Jan 2022 6:40 pm
Operator : BDE
Sample : ICAL 8
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 11 Sample Multiplier: 1

Quant Time: Jan 14 10:06:19 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

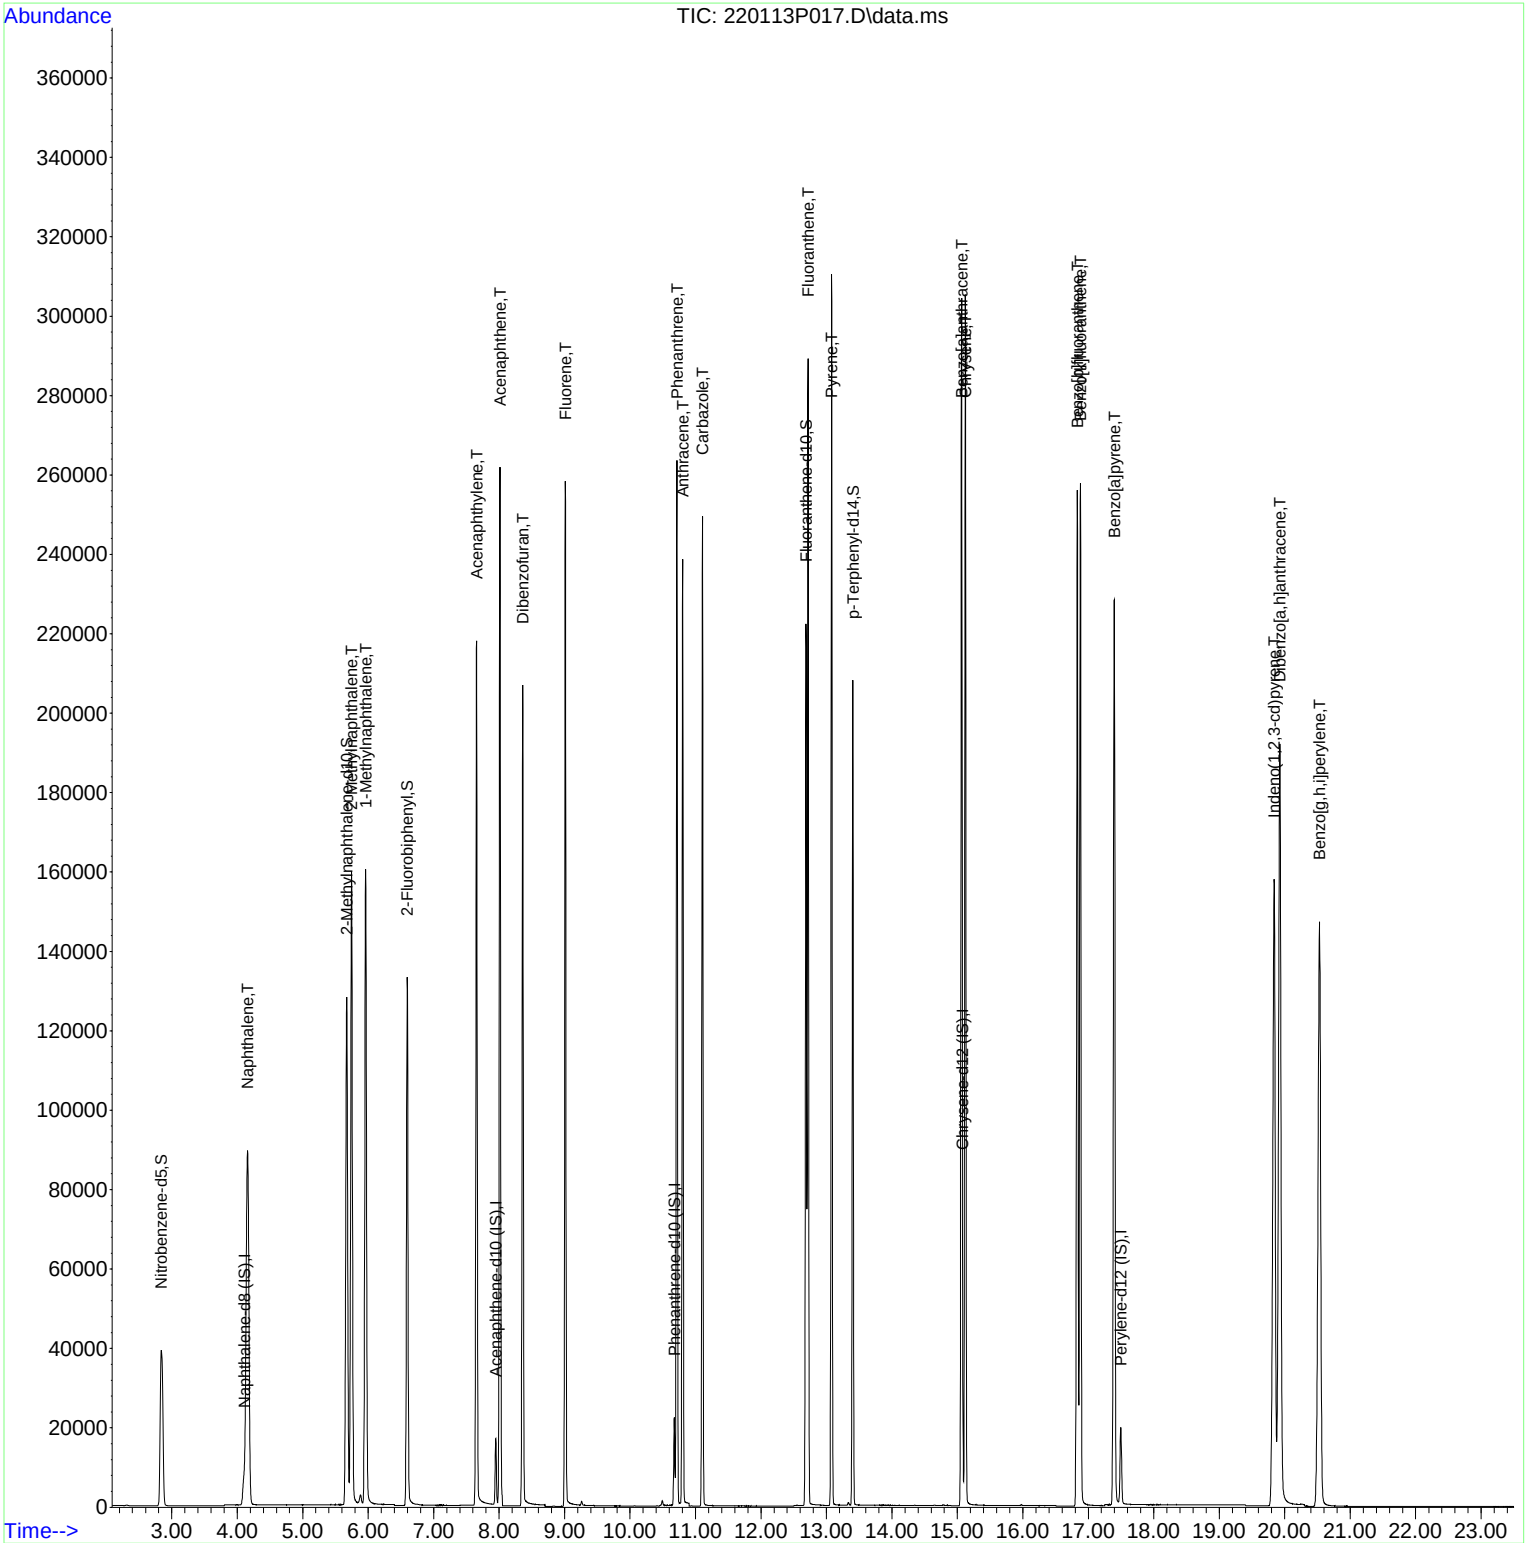

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P017.D
Acq On : 13 Jan 2022 6:40 pm
Operator : BDE
Sample : ICAL 8
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 11 Sample Multiplier: 1

Quant Time: Jan 14 10:06:19 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

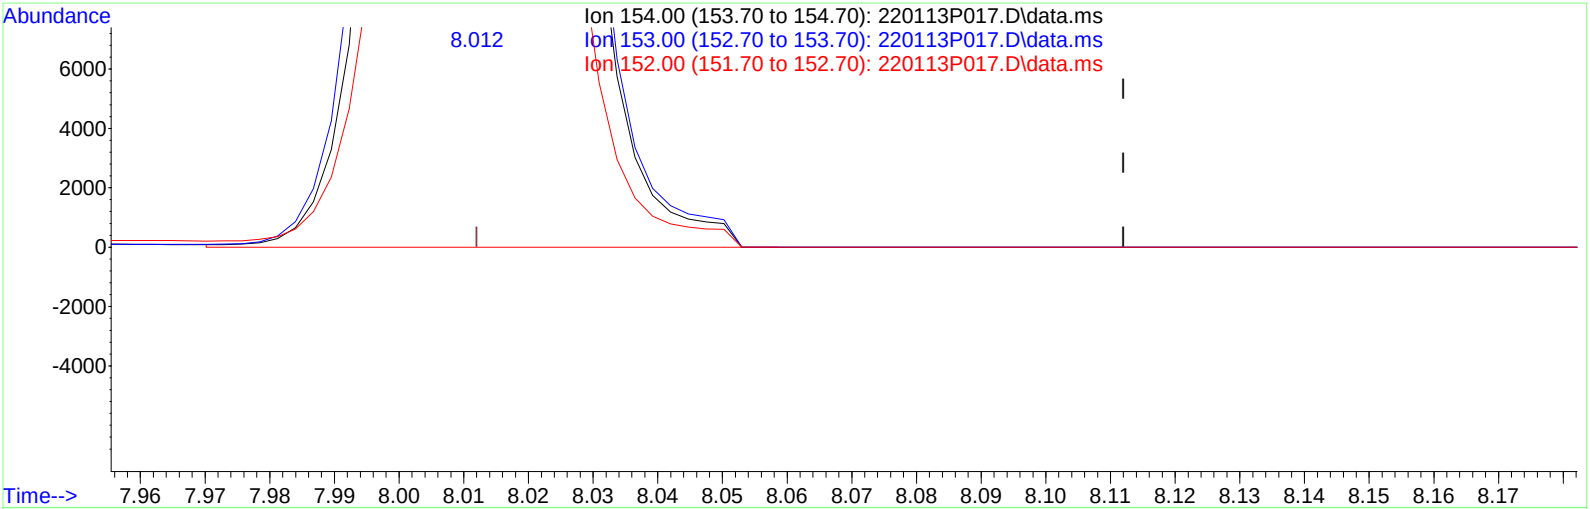

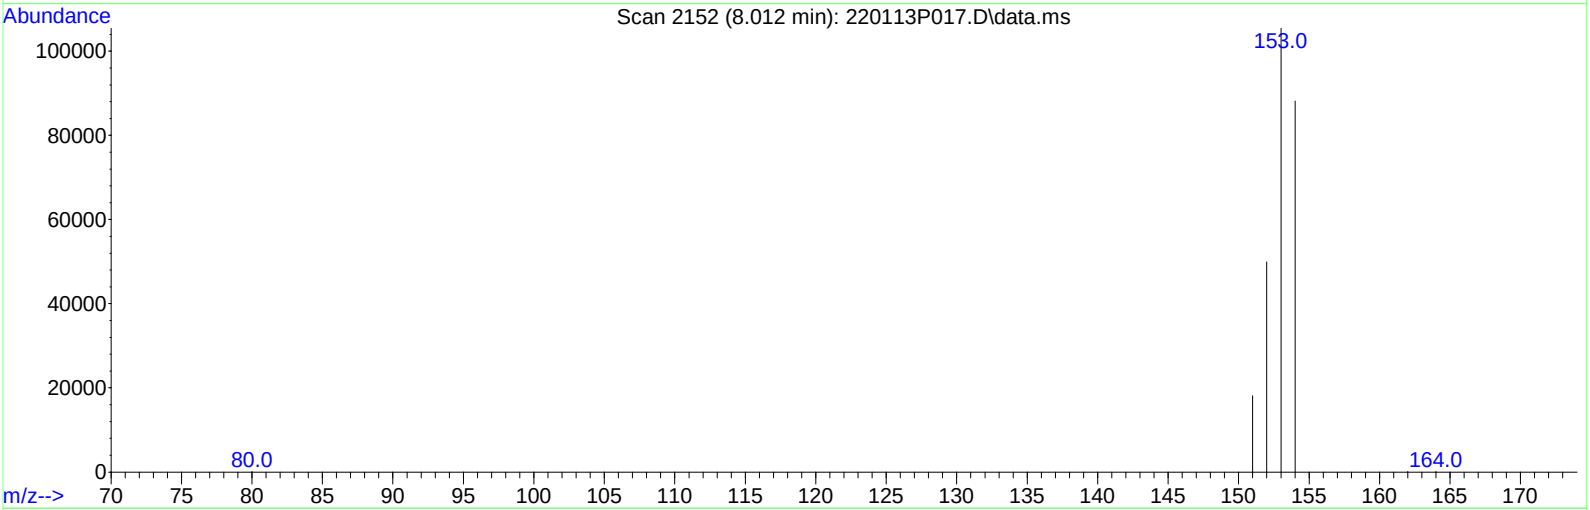

TIC: 220113P017.D\data.ms

(10) Acenaphthene (T)

8.012min (-0.000) 47.582 ug/ml

response 116572

Ion	Exp%	Act%
154.00	100.00	100.00
153.00	115.60	120.13
152.00	53.40	56.94
0.00	0.00	0.00

Manual Integration Reasons

1. BaseLine Smoothing

Date: 01/14/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P017.D
Acq On : 13 Jan 2022 6:40 pm
Operator : BDE
Sample : ICAL 8
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 11 Sample Multiplier: 1

Quant Time: Jan 14 10:06:19 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

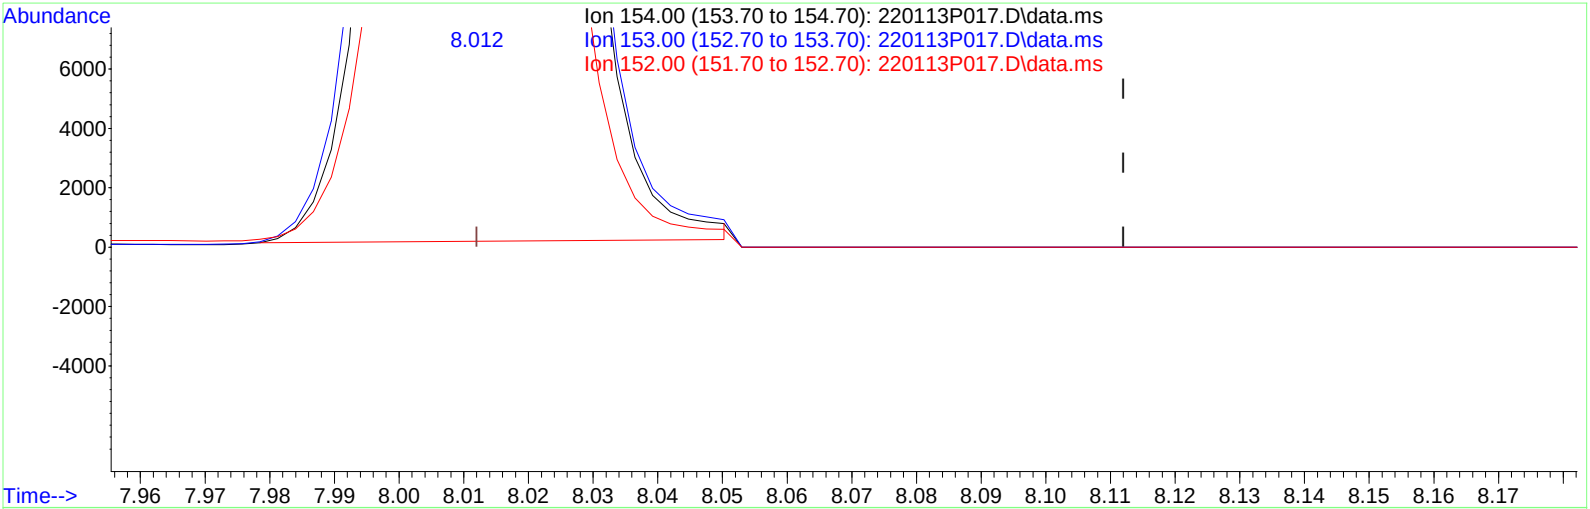

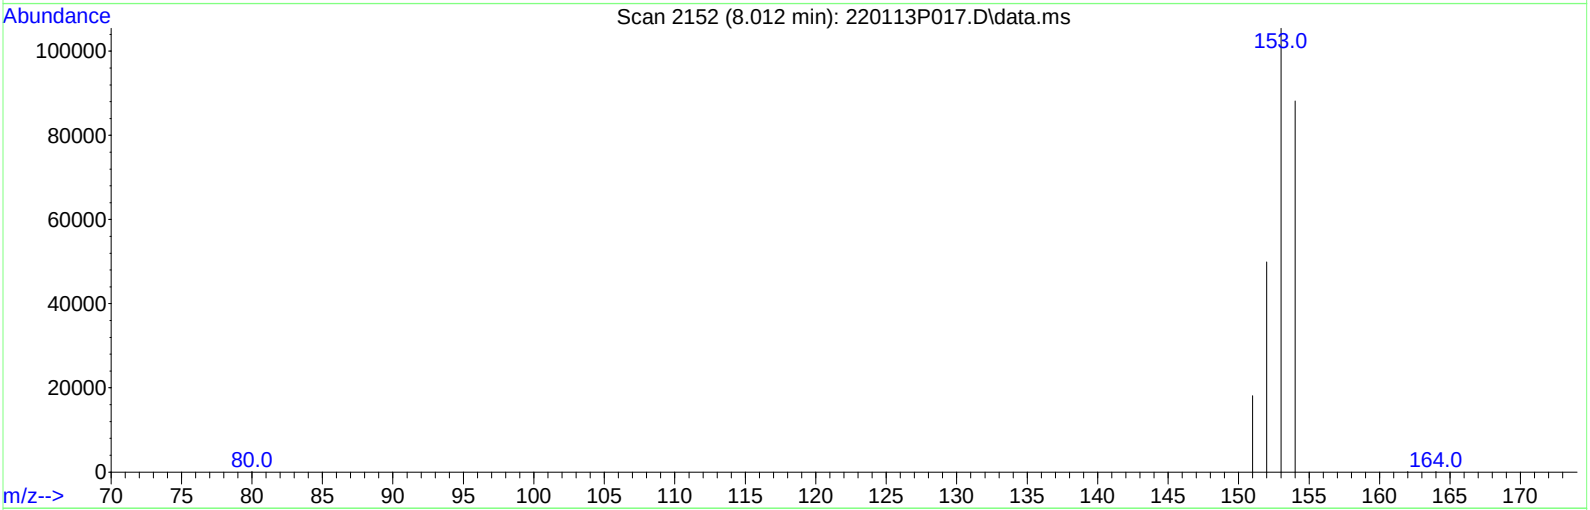

TIC: 220113P017.D\data.ms

(10) Acenaphthene (T)

8.012min (-0.000) 48.630 ug/ml m

response 119138

Ion	Exp%	Act%
154.00	100.00	100.00
153.00	115.60	117.54
152.00	53.40	55.71
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P017.D
Acq On : 13 Jan 2022 6:40 pm
Operator : BDE
Sample : ICAL 8
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 11 Sample Multiplier: 1

Quant Time: Jan 14 10:06:19 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

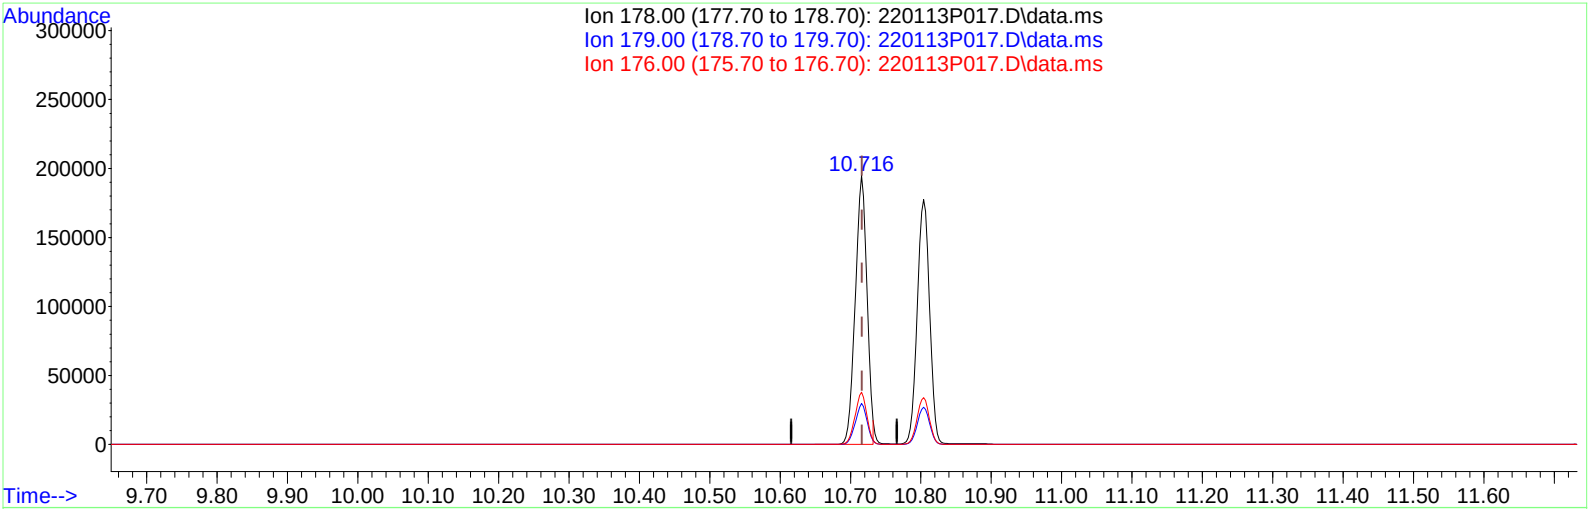

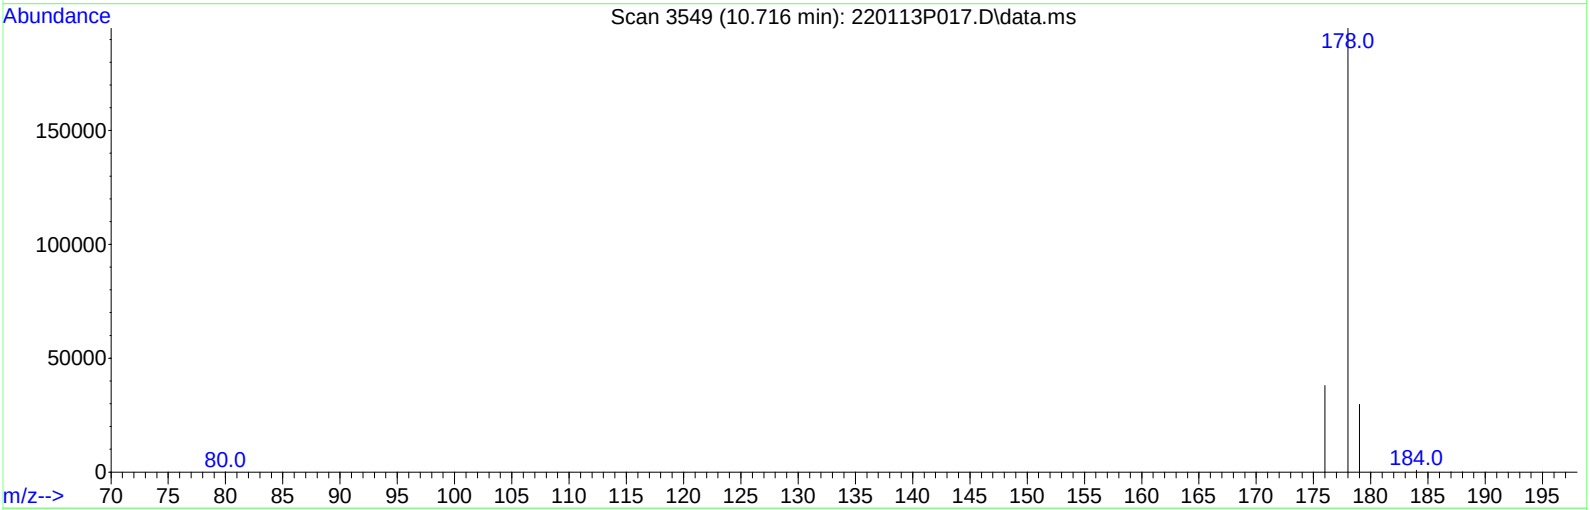

TIC: 220113P017.D\data.ms

(14) Phenanthrene (T)

10.716min (-0.000) 47.269 ug/ml

response 225303

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.90	15.17
176.00	18.90	19.51
0.00	0.00	0.00

Manual Integration Reasons

1. Incomplete Integration

Date: 01/14/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P017.D
Acq On : 13 Jan 2022 6:40 pm
Operator : BDE
Sample : ICAL 8
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 11 Sample Multiplier: 1

Quant Time: Jan 14 10:06:19 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

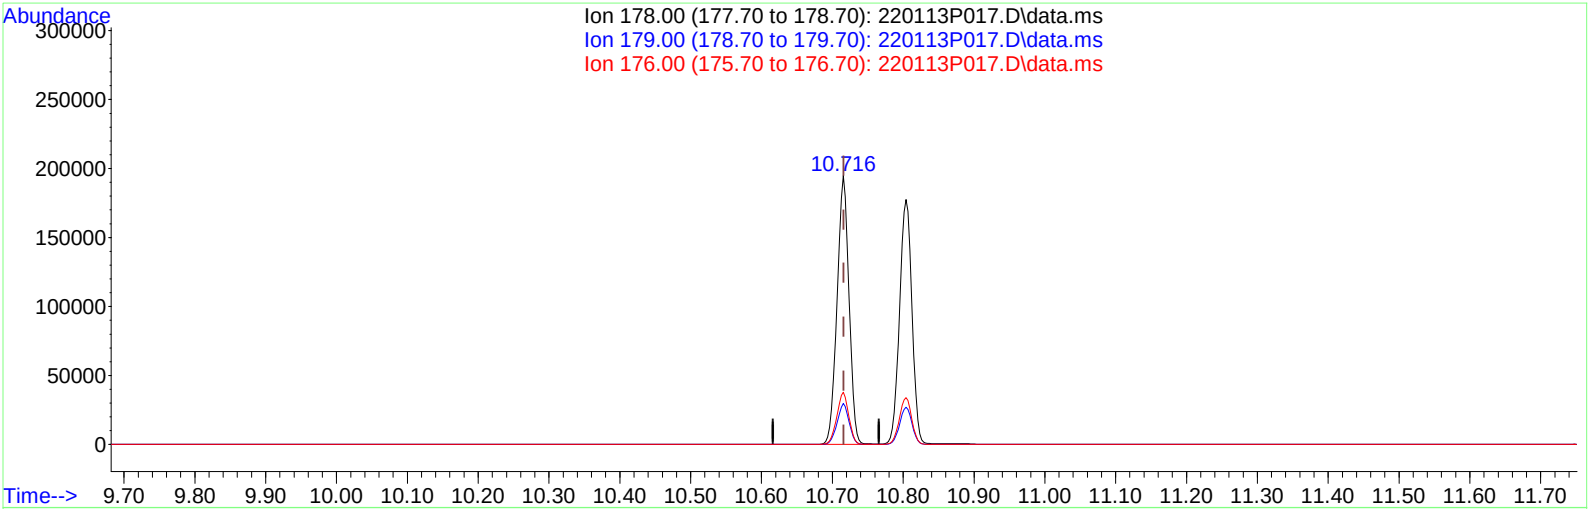

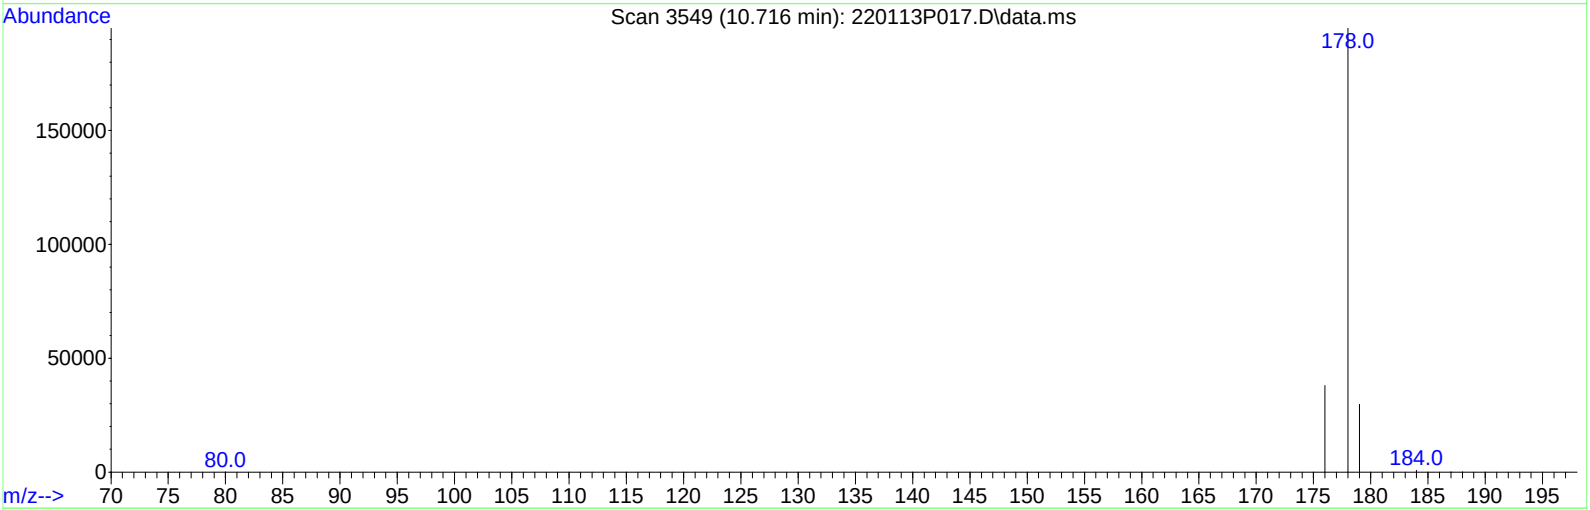

TIC: 220113P017.D\data.ms

(14) Phenanthrene (T)

10.716min (-0.000) 47.725 ug/ml m

response 227477

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.90	15.03
176.00	18.90	19.32
0.00	0.00	0.00

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P017.D
Acq On : 13 Jan 2022 6:40 pm
Operator : BDE
Sample : ICAL 8
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 11 Sample Multiplier: 1

Quant Time: Jan 14 10:06:19 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

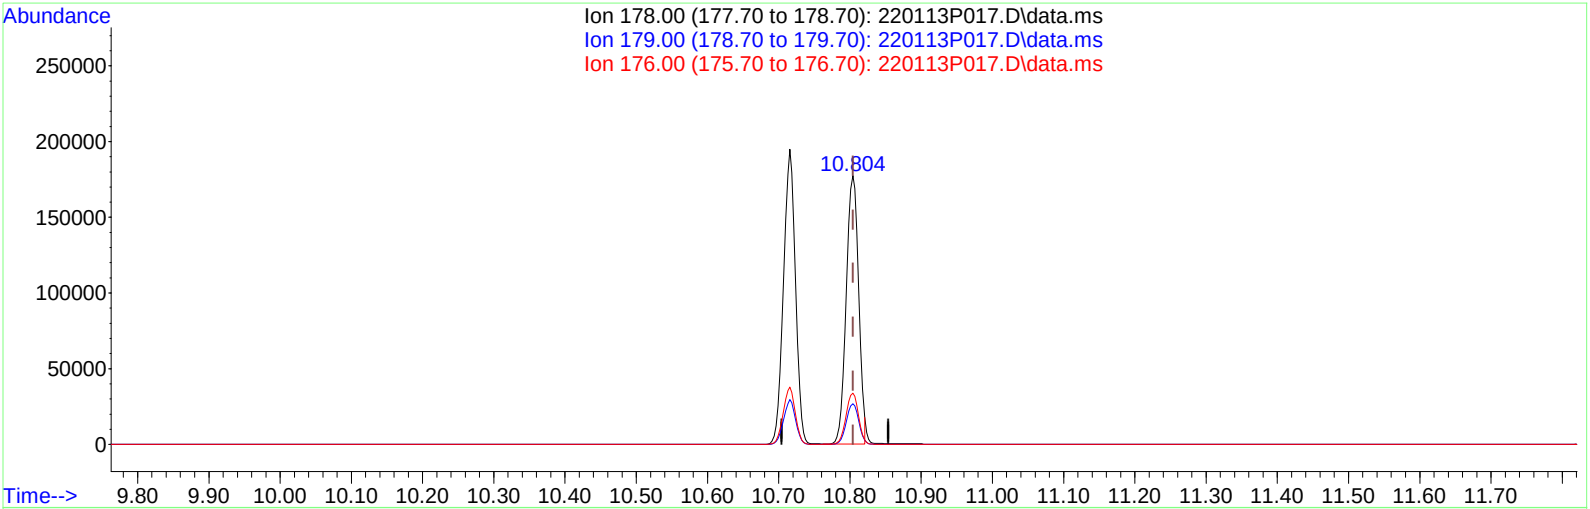

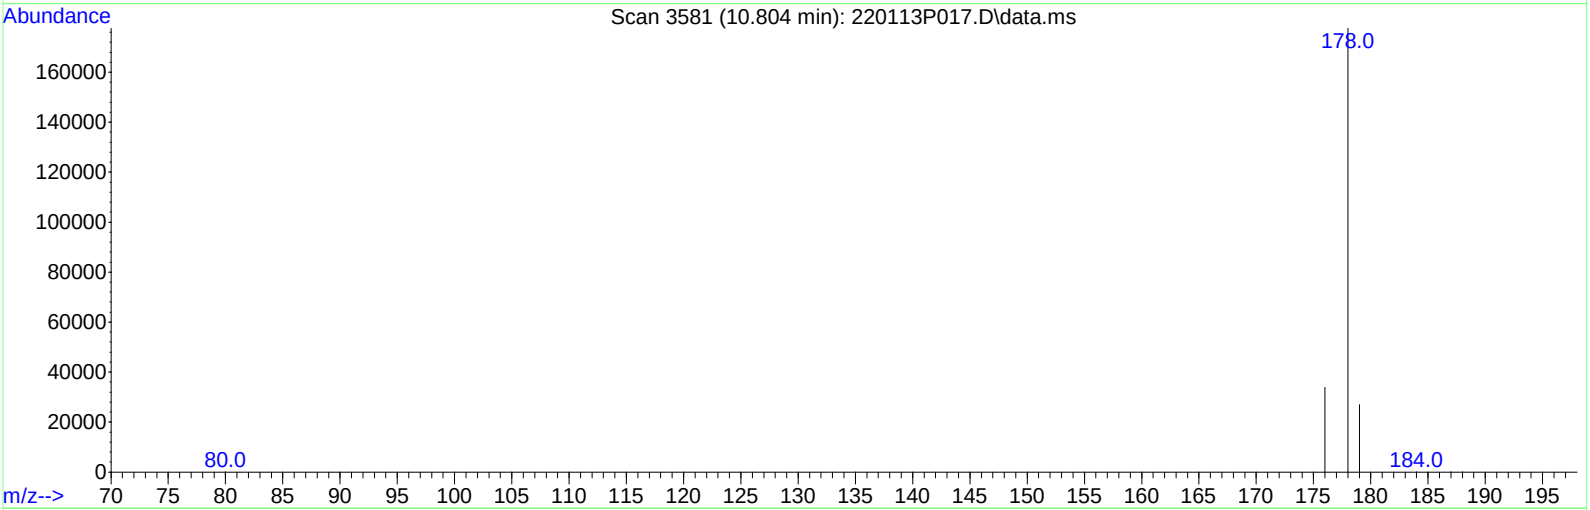

TIC: 220113P017.D\data.ms

(15) Anthracene (T)

10.804min (-0.000) 46.345 ug/ml

response 213871

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.80	15.12
176.00	18.20	19.06
0.00	0.00	0.00

Manual Integration Reasons

1. Incomplete Integration

Date: 01/14/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P017.D
Acq On : 13 Jan 2022 6:40 pm
Operator : BDE
Sample : ICAL 8
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 11 Sample Multiplier: 1

Quant Time: Jan 14 10:06:19 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

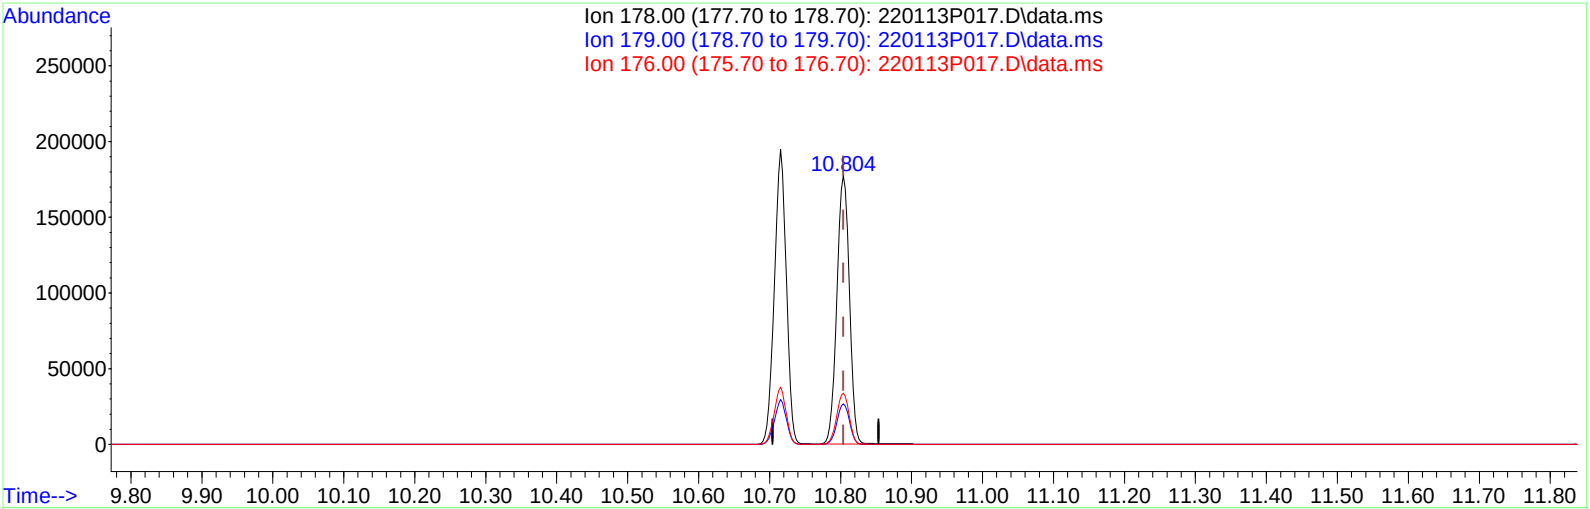

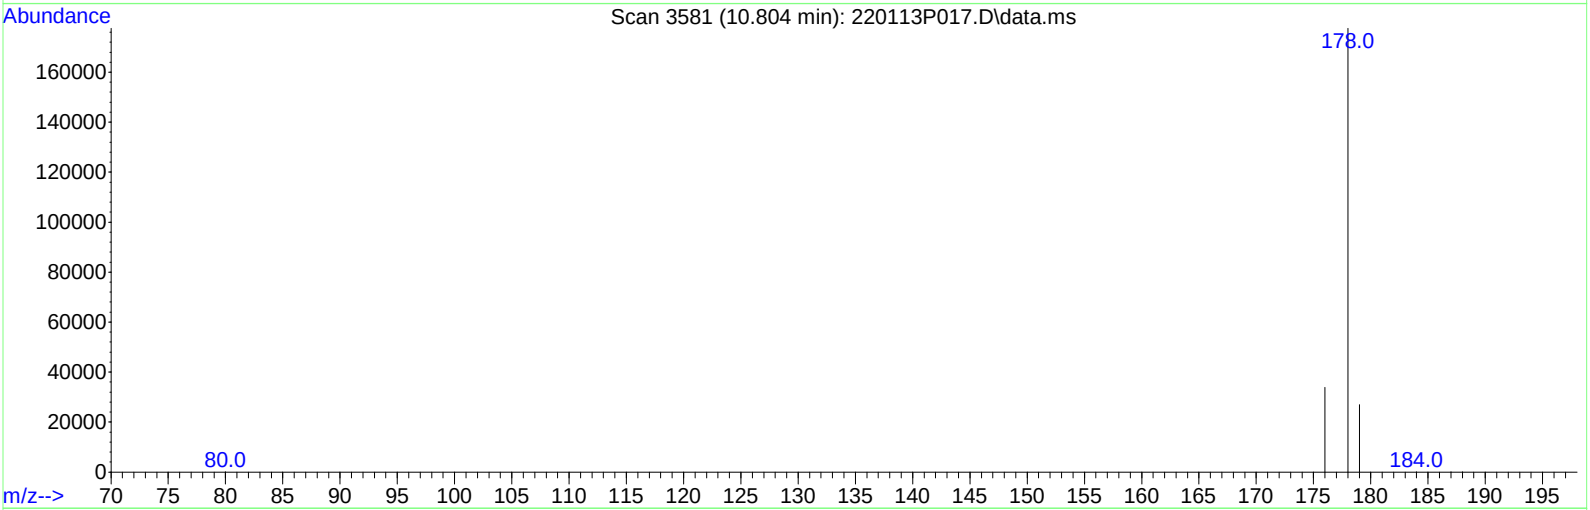

TIC: 220113P017.D\data.ms

(15) Anthracene (T)

10.804min (-0.000) 46.875 ug/ml m

response 216315

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.80	14.95
176.00	18.20	18.84
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P017.D
Acq On : 13 Jan 2022 6:40 pm
Operator : BDE
Sample : ICAL 8
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 11 Sample Multiplier: 1

Quant Time: Jan 14 10:06:19 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

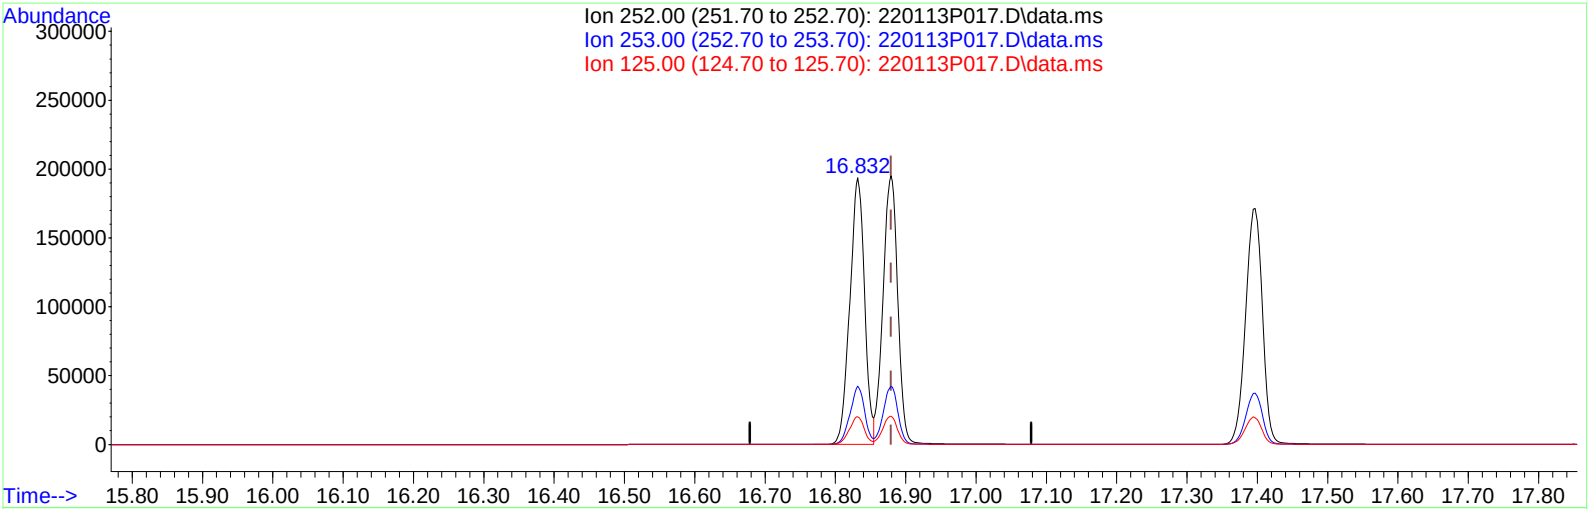

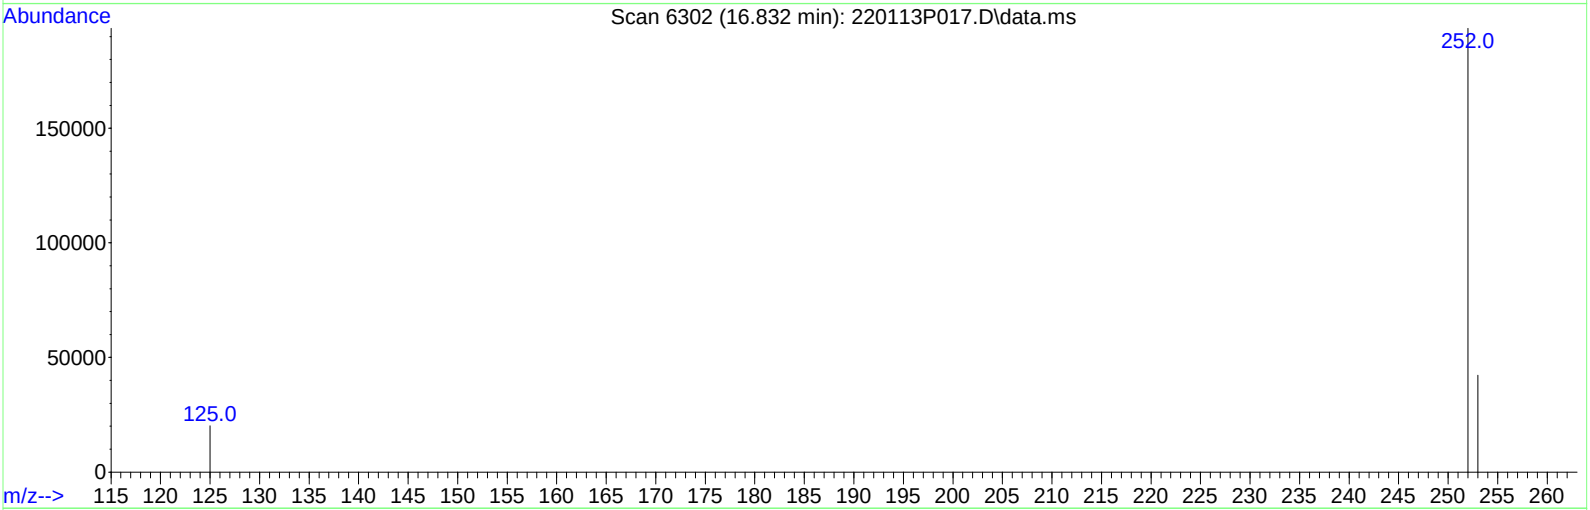

TIC: 220113P017.D\data.ms

(26) Benzo[k]fluoranthene (T)

16.832min (-0.047) 48.182 ug/ml

response 282201

Ion	Exp%	Act%
252.00	100.00	100.00
253.00	23.00	21.59
125.00	9.90	10.47
0.00	0.00	0.00

Manual Integration Reasons

1. Wrong Peak

Date: 01/14/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P017.D
Acq On : 13 Jan 2022 6:40 pm
Operator : BDE
Sample : ICAL 8
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 11 Sample Multiplier: 1

Quant Time: Jan 14 10:06:19 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

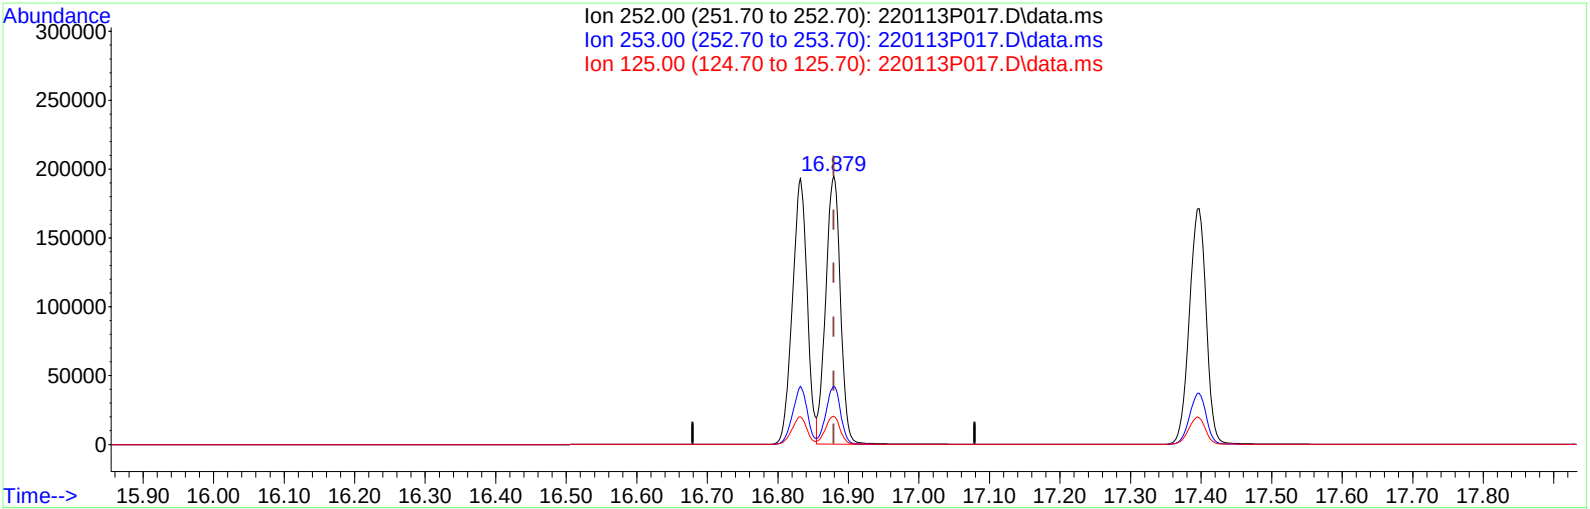

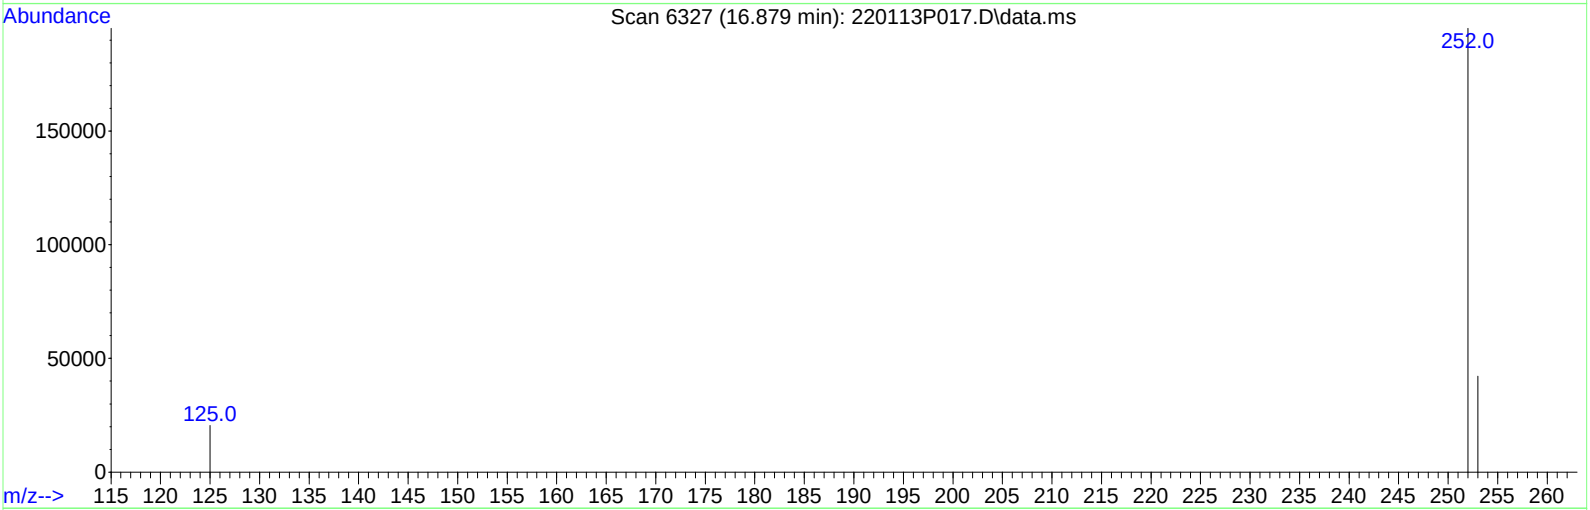

TIC: 220113P017.D\data.ms

(26) Benzo[k]fluoranthene (T)

16.879min (-0.000) 48.277 ug/ml m

response 282758

Ion	Exp%	Act%
252.00	100.00	100.00
253.00	23.00	21.55
125.00	9.90	10.45
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P017.D
Acq On : 13 Jan 2022 6:40 pm
Operator : BDE
Sample : ICAL 8
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 11 Sample Multiplier: 1

Quant Time: Jan 14 10:06:19 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

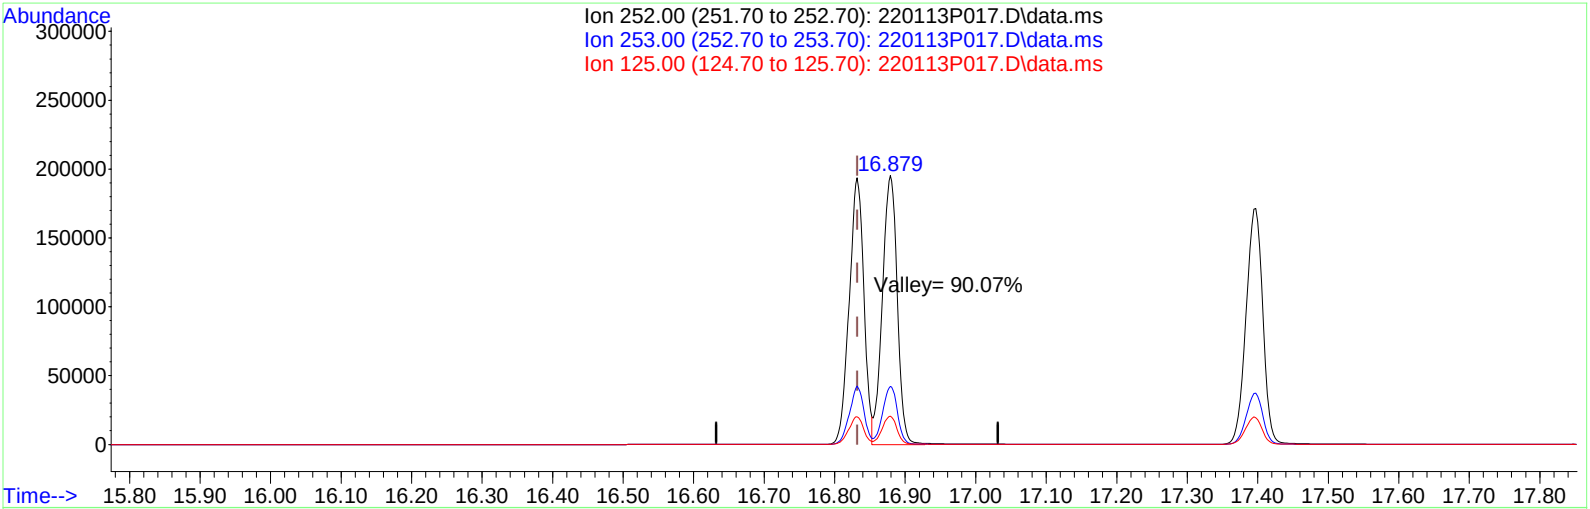

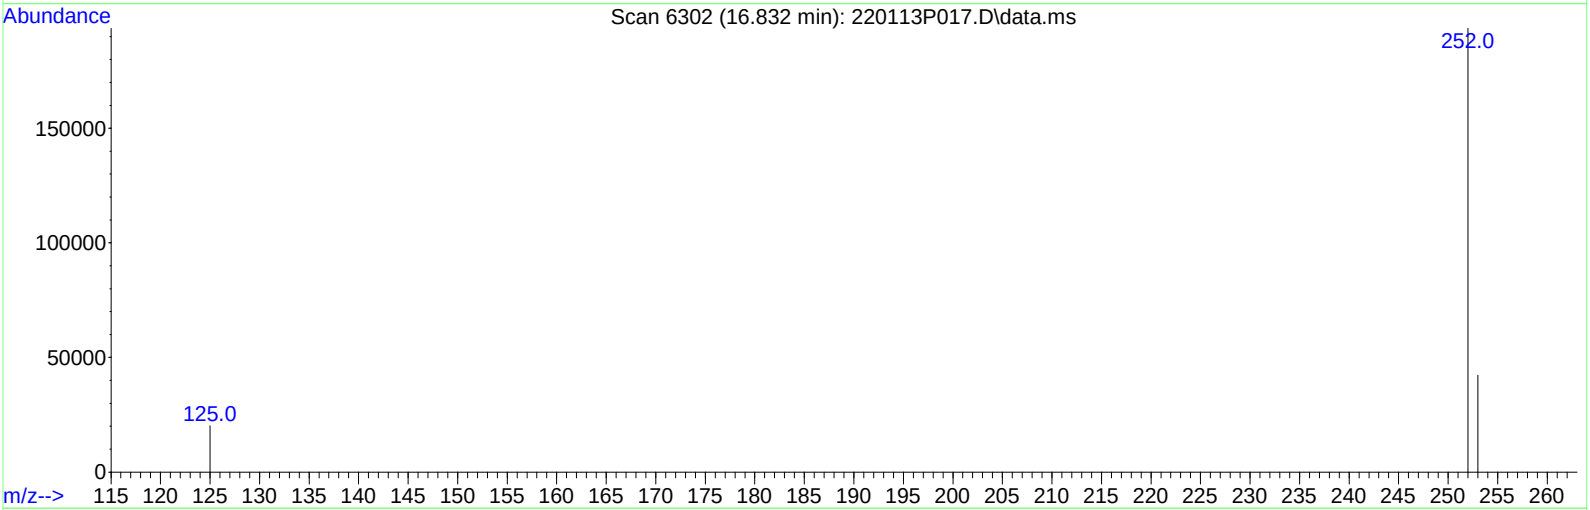

TIC: 220113P017.D\data.ms

(25) Benzo[b]fluoranthene (T)

16.832min (-0.000) 49.514 ug/ml

response 280008

Ion	Exp%	Act%
252.00	100.00	100.00
253.00	23.00	21.59
125.00	9.90	10.47
0.00	0.00	0.00

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P018.D
Acq On : 13 Jan 2022 7:07 pm
Operator : BDE
Sample : ICAL 9
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 12 Sample Multiplier: 1

Quant Time: Jan 14 10:06:22 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

Compound	R.T.	QIon	Response	Conc	Units	Dev(Min)
Internal Standards						
1) Naphthalene-d8 (IS)	4.113	136	20527	4.000	ug/ml	0.00
7) Acenaphthene-d10 (IS)	7.951	164	10540m	4.000	ug/ml	0.00
13) Phenanthrene-d10 (IS)	10.676	188	21186	4.000	ug/ml	0.00
19) Chrysene-d12 (IS)	15.084	240	18234	4.000	ug/ml	0.00
24) Perylene-d12 (IS)	17.501	264	20496	4.000	ug/ml	0.00
System Monitoring Compounds						
2) Nitrobenzene-d5	2.844	82	122896	95.453	ug/ml	0.00
4) 2-Methylnaphthalene-d10	5.676	152	243469	91.005	ug/ml	0.00
8) 2-Fluorobiphenyl	6.598	172	345843	95.988	ug/ml	0.00
17) Fluoranthene-d10	12.692	212	445922	91.763	ug/ml	0.00
21) p-Terphenyl-d14	13.406	244	374007	95.779	ug/ml	0.00
Target Compounds						Qvalue
3) Naphthalene	4.161	128	441693	94.943	ug/ml	100
5) 2-Methylnaphthalene	5.748	142	286517	95.377	ug/ml	97
6) 1-Methylnaphthalene	5.965	142	278151	96.425	ug/ml	97
9) Acenaphthylene	7.658	152	495921	96.259	ug/ml	99
10) Acenaphthene	8.017	154	251935m	96.454	ug/ml	
11) Dibenzofuran	8.362	168	418372	97.810	ug/ml#	100
12) Fluorene	9.014	166	325684	96.996	ug/ml	98
14) Phenanthrene	10.717	178	474869m	93.904	ug/ml	
15) Anthracene	10.808	178	454772m	92.887	ug/ml	
16) Carbazole	11.109	167	458609	93.576	ug/ml	99
18) Fluoranthene	12.724	202	553749	93.248	ug/ml	99
20) Pyrene	13.084	202	572966	95.620	ug/ml	98
22) Benzo[a]anthracene	15.069	228	543956	99.810	ug/ml	98
23) Chrysene	15.127	228	525738	98.877	ug/ml	98
25) Benzo[b]fluoranthene	16.837	252	568767	99.816	ug/ml	98
26) Benzo[k]fluoranthene	16.888	252	585603	97.325	ug/ml	98
27) Benzo[a]pyrene	17.401	252	578351m	97.998	ug/ml	
28) Indeno(1,2,3-cd)pyrene	19.852	276	565097	99.370	ug/ml	98
29) Dibenzo[a,h]anthracene	19.939	278	553308	99.375	ug/ml	98
30) Benzo[g,h,i]perylene	20.552	276	585871	95.020	ug/ml	97

(#) = qualifier out of range (m) = manual integration (+) = signals summed

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P018.D
Acq On : 13 Jan 2022 7:07 pm
Operator : BDE
Sample : ICAL 9
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 12 Sample Multiplier: 1

Quant Time: Jan 14 10:06:22 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

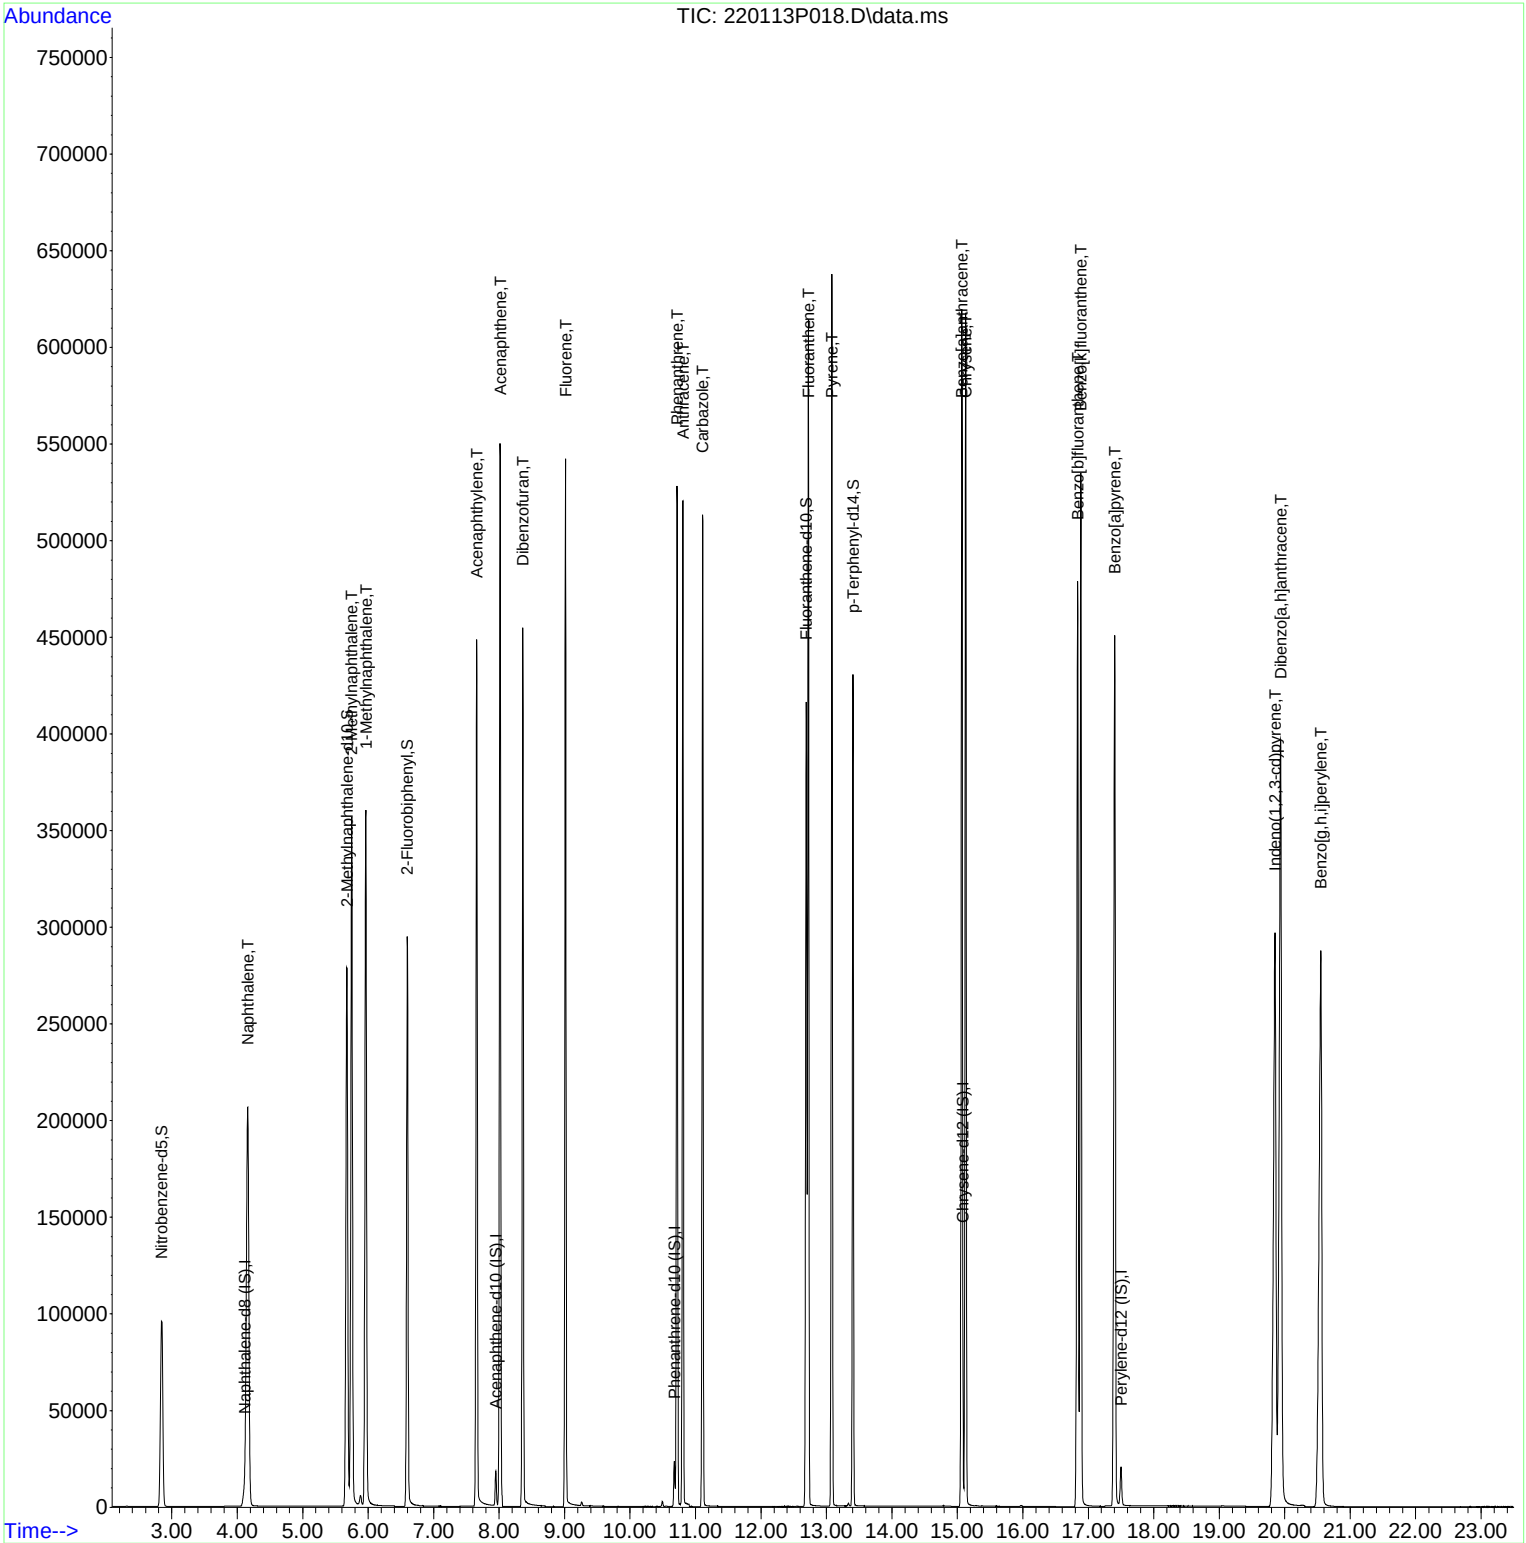

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P018.D
Acq On : 13 Jan 2022 7:07 pm
Operator : BDE
Sample : ICAL 9
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 12 Sample Multiplier: 1

Quant Time: Jan 14 10:06:22 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

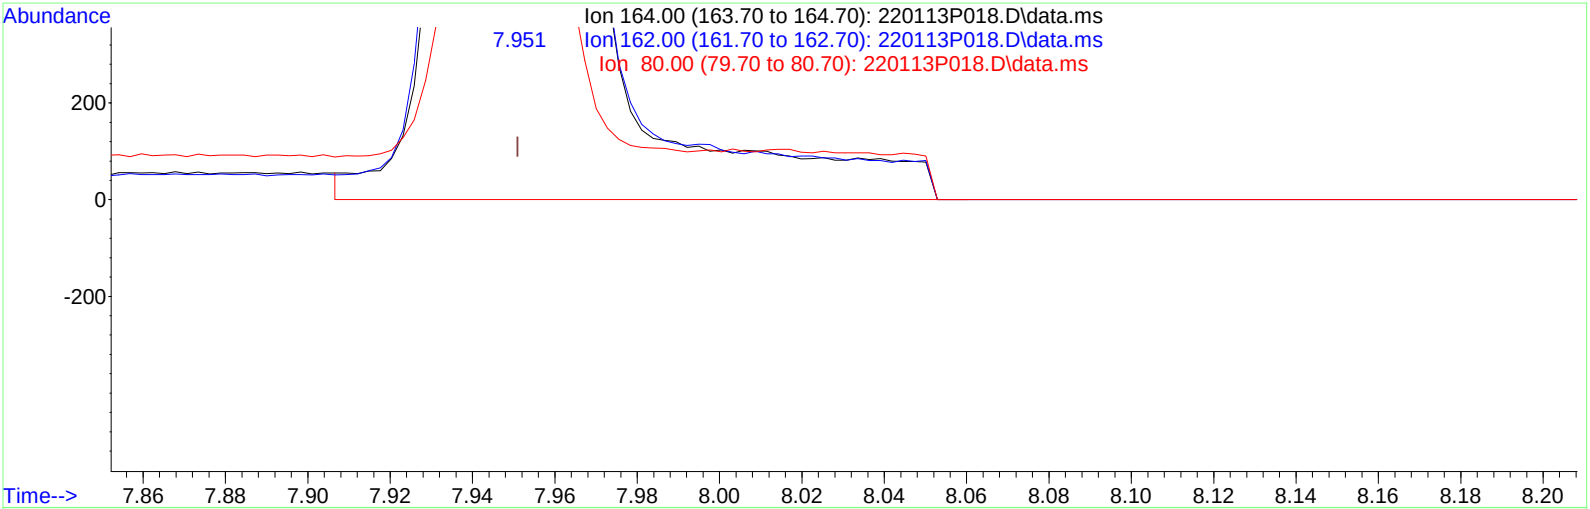

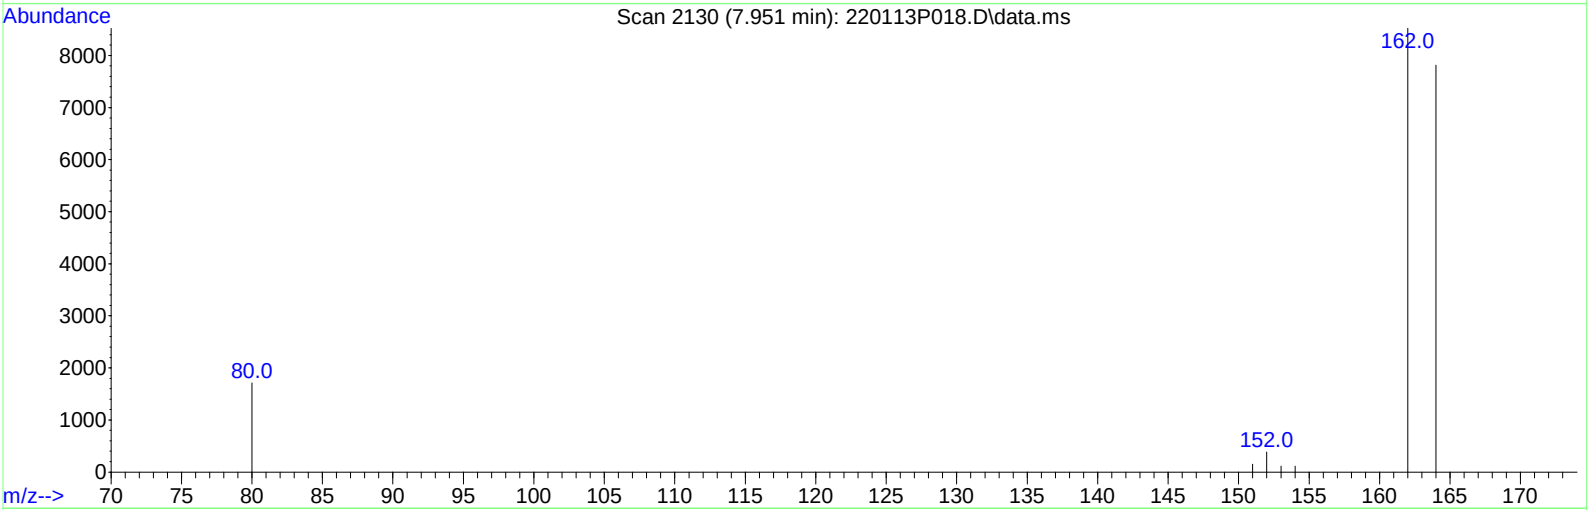

TIC: 220113P018.D\data.ms

(7) Acenaphthene-d10 (IS) (I)

7.951min (-0.000) 4.000 ug/ml

response 10806

Ion	Exp%	Act%
164.00	100.00	100.00
162.00	106.70	109.12
80.00	22.00	28.42
0.00	0.00	0.00

Manual Integration Reasons

1. BaseLine Smoothing

Date: 01/14/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P018.D
Acq On : 13 Jan 2022 7:07 pm
Operator : BDE
Sample : ICAL 9
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 12 Sample Multiplier: 1

Quant Time: Jan 14 10:06:22 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

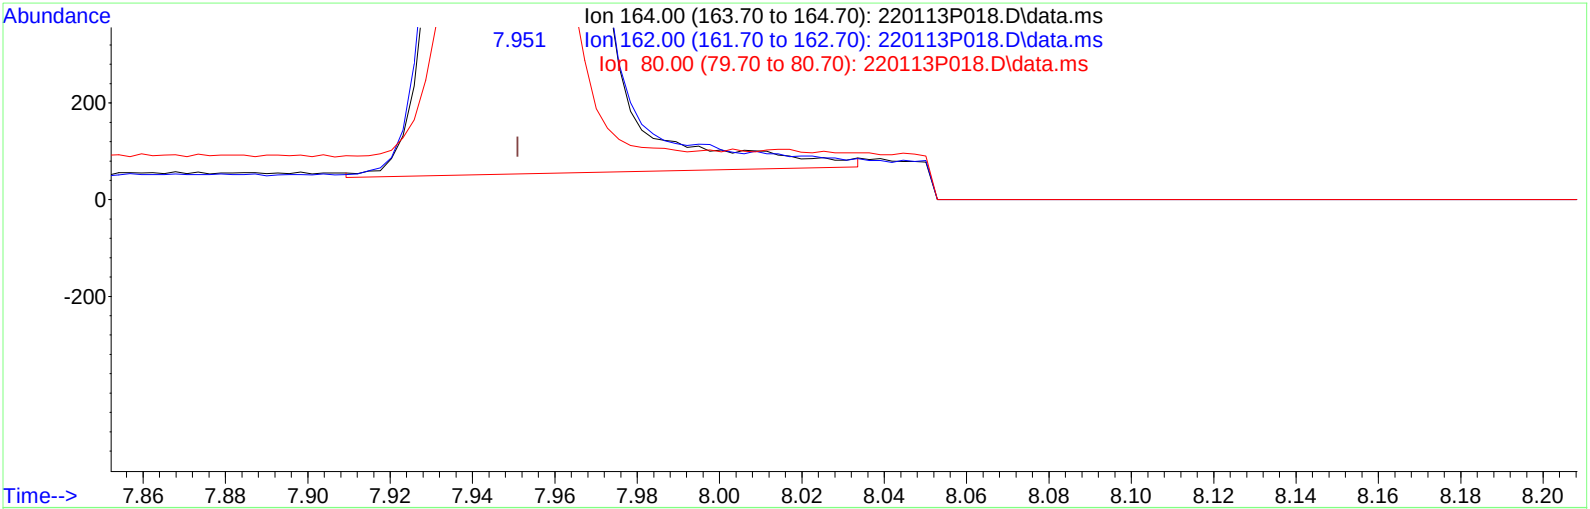

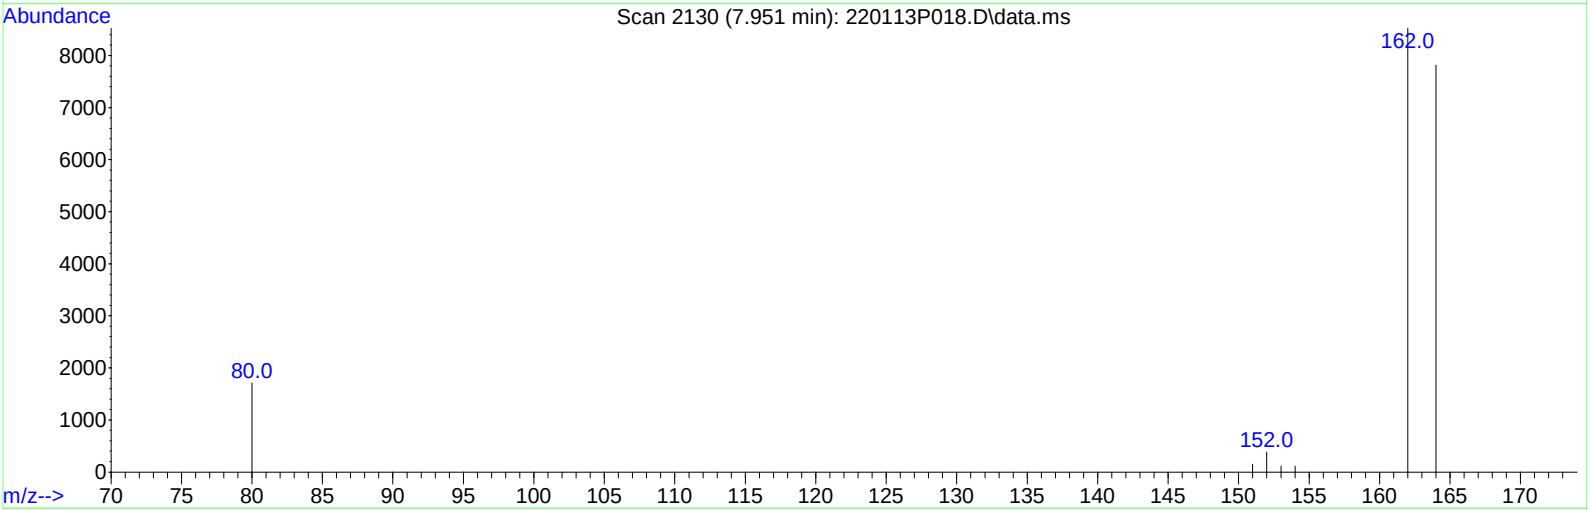

TIC: 220113P018.D\data.ms

(7) Acenaphthene-d10 (IS) (I)

7.951min (-0.000) 4.000 ug/ml m

response 10540

Ion	Exp%	Act%
164.00	100.00	100.00
162.00	106.70	111.88
80.00	22.00	29.14
0.00	0.00	0.00

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P018.D
Acq On : 13 Jan 2022 7:07 pm
Operator : BDE
Sample : ICAL 9
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 12 Sample Multiplier: 1

Quant Time: Jan 14 10:06:22 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

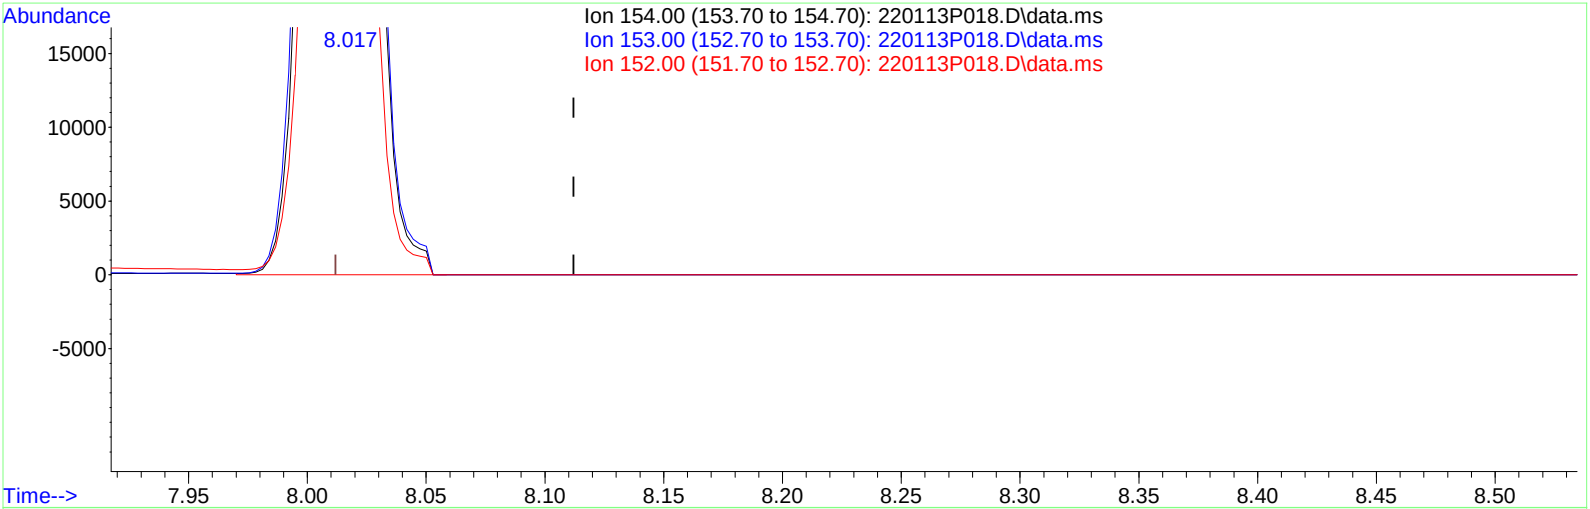

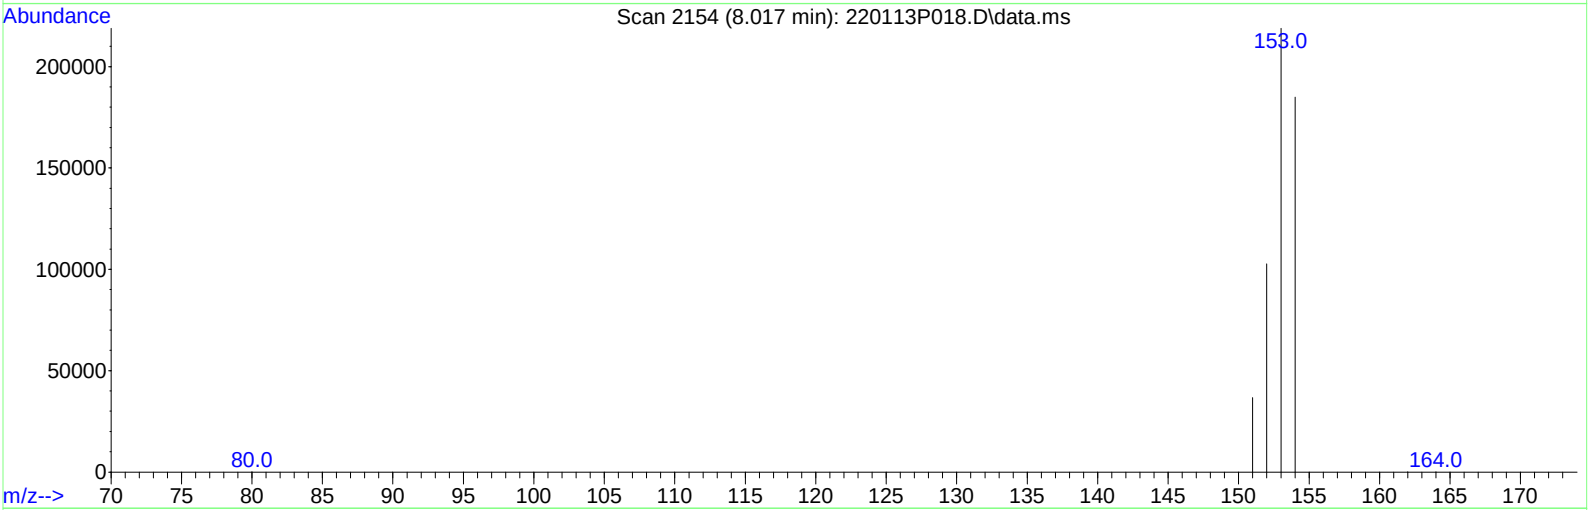

TIC: 220113P018.D\data.ms

(10) Acenaphthene (T)

8.017min (+ 0.005) 93.643 ug/ml

response 244594

Ion	Exp%	Act%
154.00	100.00	100.00
153.00	115.60	120.08
152.00	53.40	56.91
0.00	0.00	0.00

Manual Integration Reasons

1. BaseLine Smoothing

Date: 01/14/22 By: BDE

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P018.D
Acq On : 13 Jan 2022 7:07 pm
Operator : BDE
Sample : ICAL 9
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 12 Sample Multiplier: 1

Quant Time: Jan 14 10:06:22 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

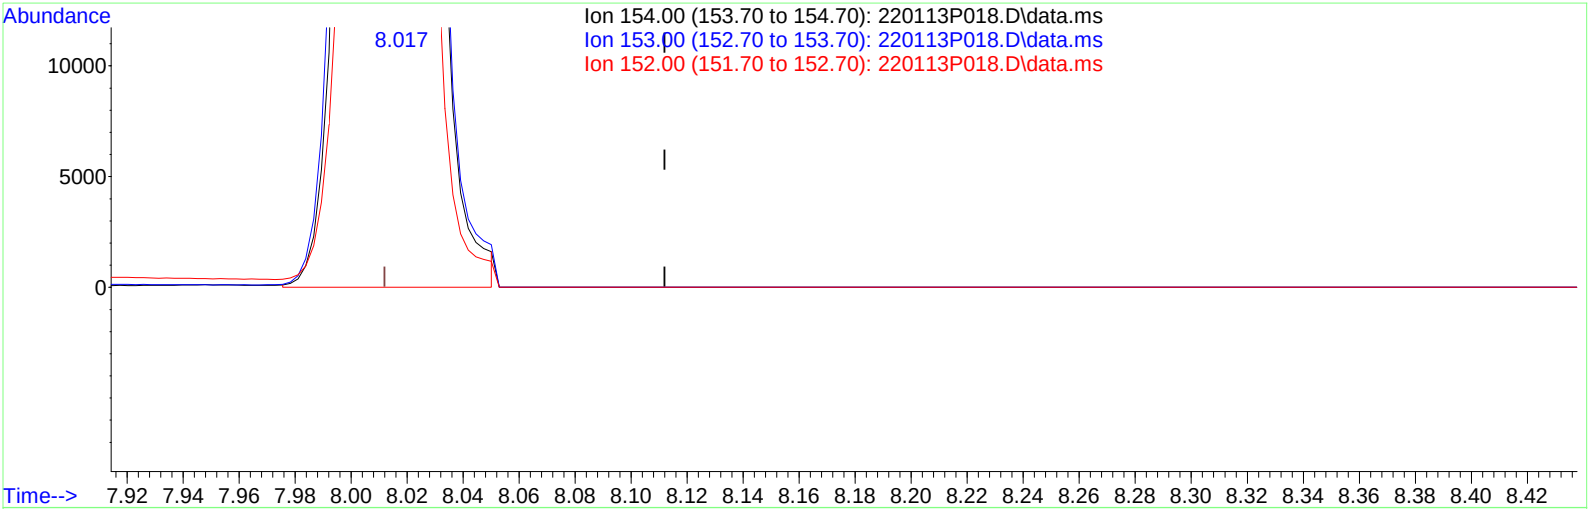

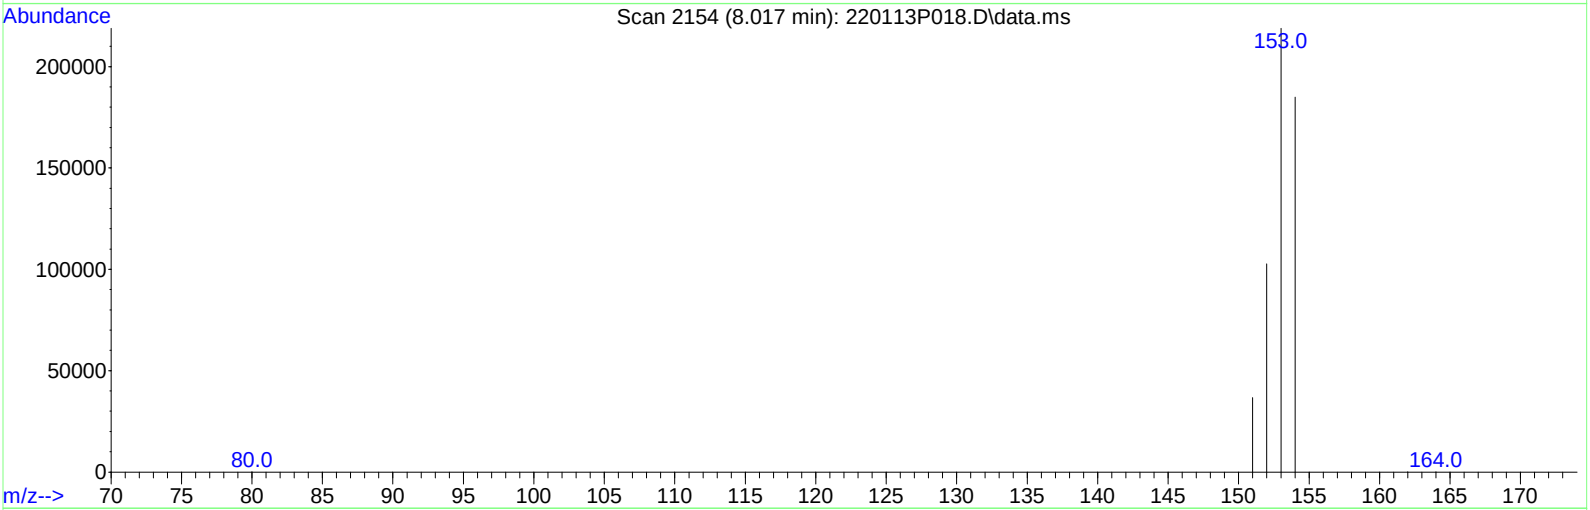

TIC: 220113P018.D\data.ms

(10) Acenaphthene (T)

8.017min (+ 0.005) 96.454 ug/ml m

response 251935

Ion	Exp%	Act%
154.00	100.00	100.00
153.00	115.60	116.58
152.00	53.40	55.26
0.00	0.00	0.00

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P018.D
Acq On : 13 Jan 2022 7:07 pm
Operator : BDE
Sample : ICAL 9
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 12 Sample Multiplier: 1

Quant Time: Jan 14 10:06:22 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

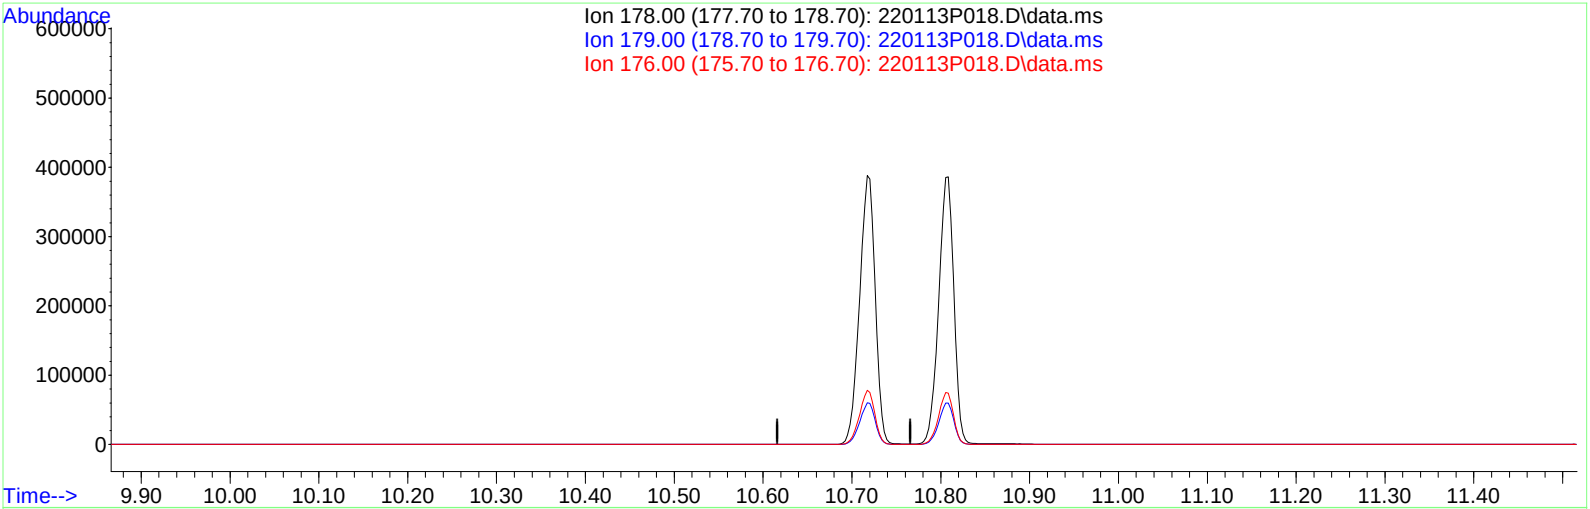

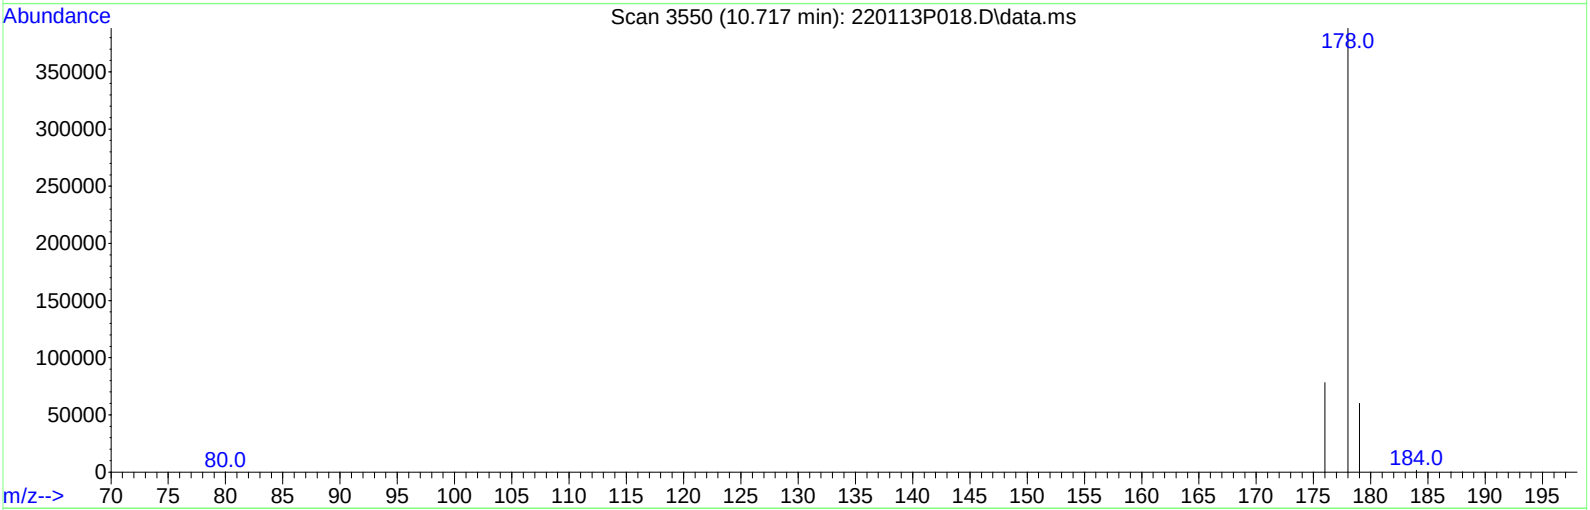

TIC: 220113P018.D\data.ms

(14) Phenanthrene (T)

10.716min (-10.716) 0.000 ug/ml

response 0

Ion	Exp%	Act%
178.00	100.00	0.00
179.00	15.90	0.00
176.00	18.90	0.00
0.00	0.00	0.00

Manual Integration Reasons

1. Peak Not Found
2. Assign Peak

Date: 01/14/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P018.D
Acq On : 13 Jan 2022 7:07 pm
Operator : BDE
Sample : ICAL 9
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 12 Sample Multiplier: 1

Quant Time: Jan 14 10:06:22 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

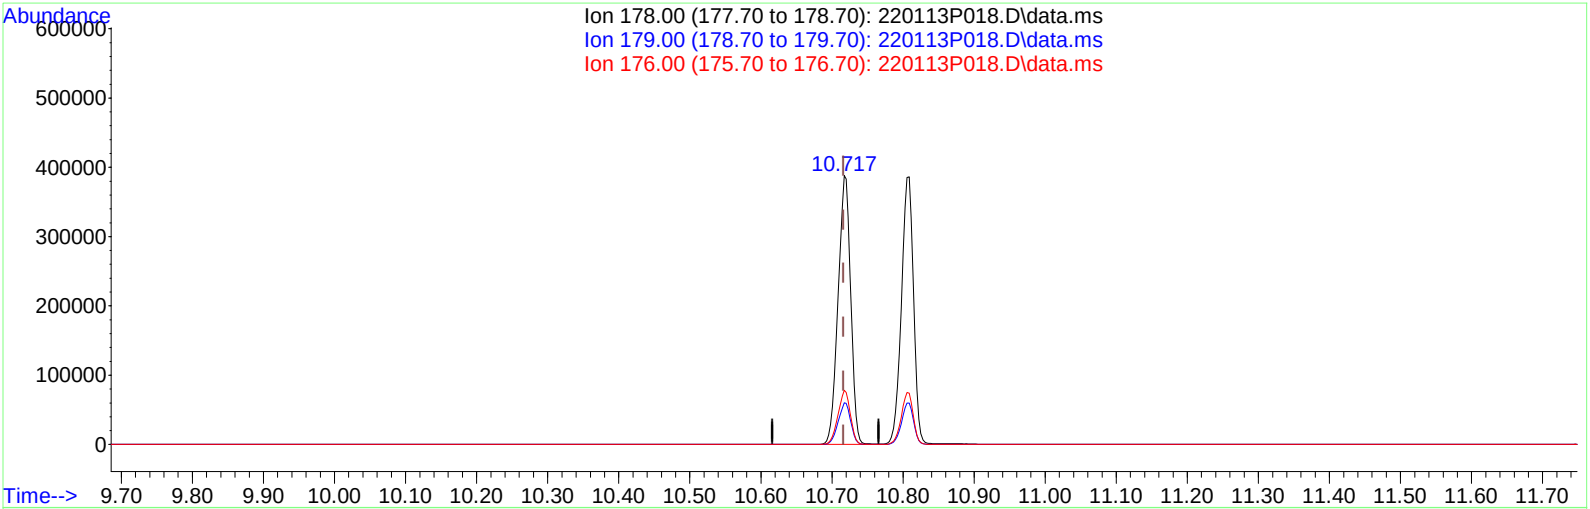

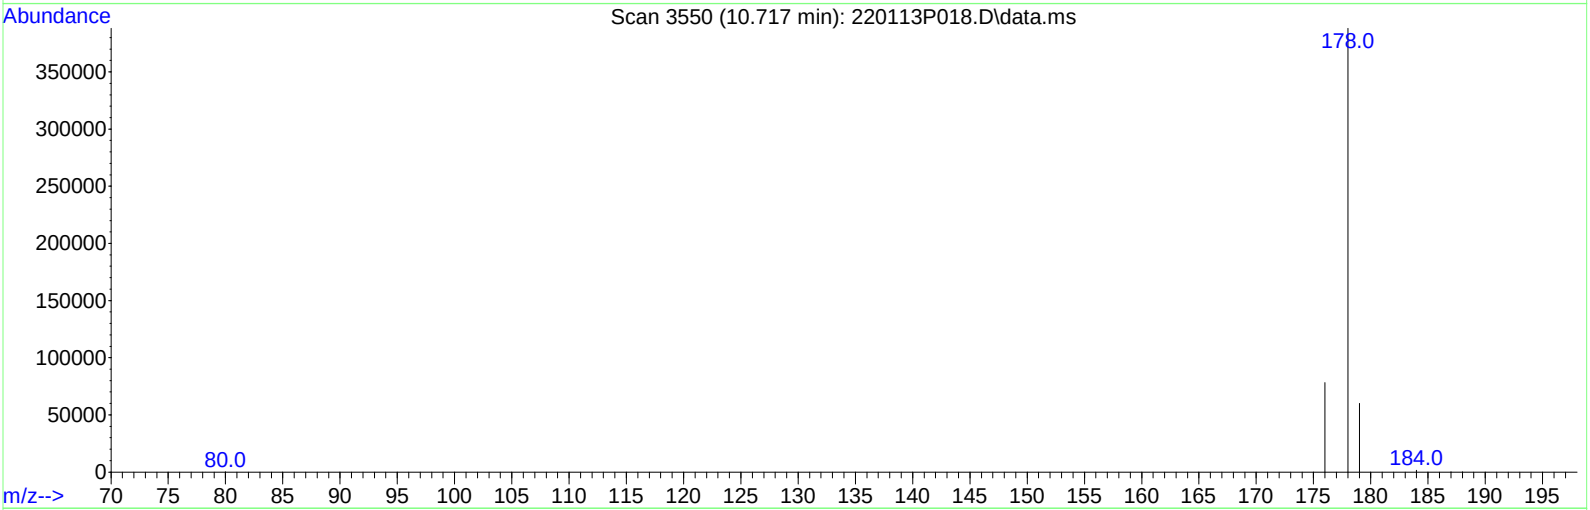

TIC: 220113P018.D\data.ms

(14) Phenanthrene (T)

10.717min (+ 0.001) 93.904 ug/ml m

response 474869

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.90	0.00
176.00	18.90	0.00
0.00	0.00	0.00

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P018.D
Acq On : 13 Jan 2022 7:07 pm
Operator : BDE
Sample : ICAL 9
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 12 Sample Multiplier: 1

Quant Time: Jan 14 10:06:22 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

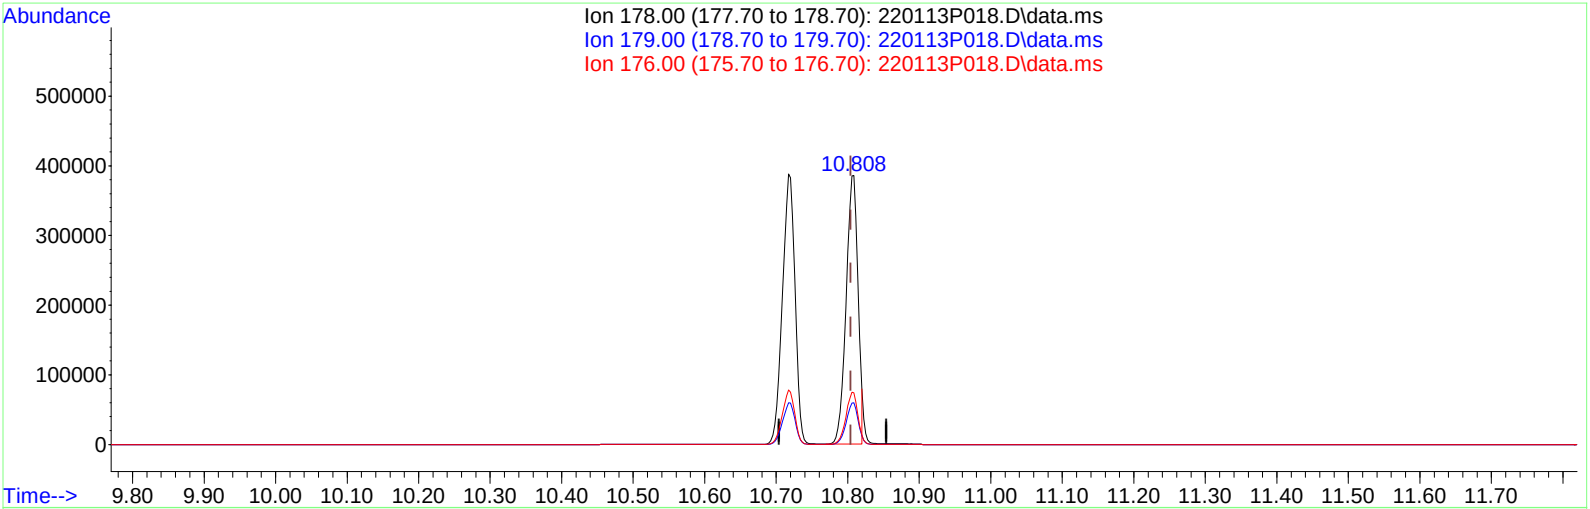

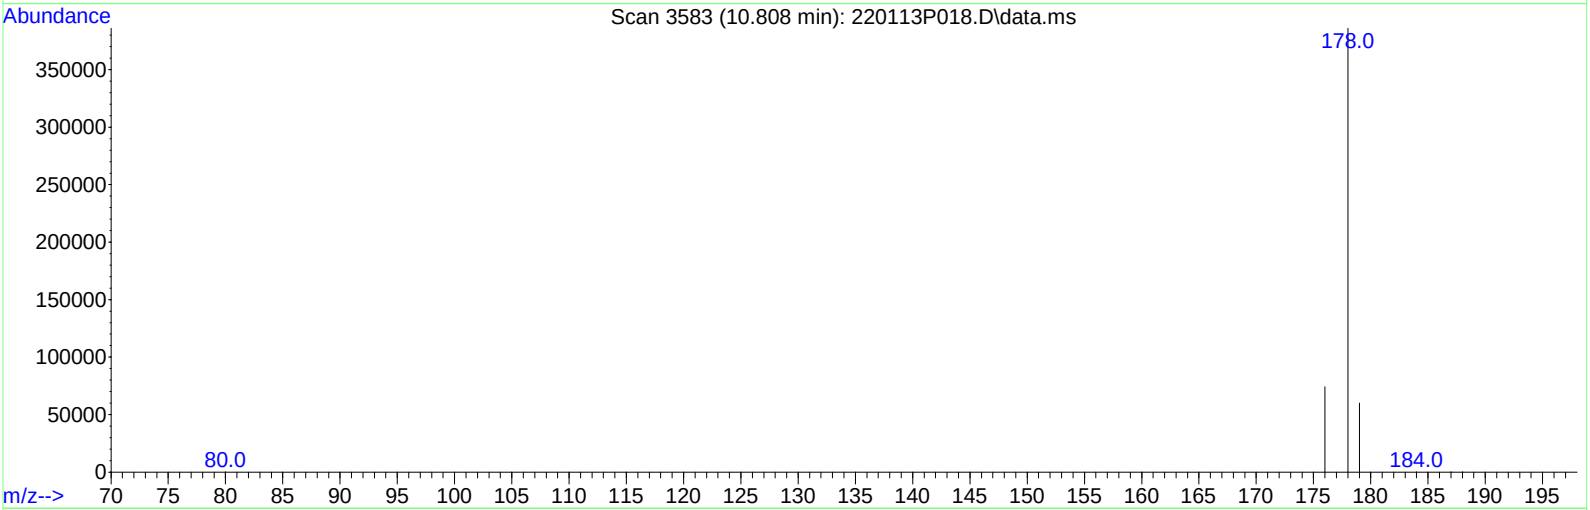

TIC: 220113P018.D\data.ms

(15) Anthracene (T)

10.808min (+ 0.004) 90.679 ug/ml

response 443964

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.80	15.40
176.00	18.20	19.25
0.00	0.00	0.00

Manual Integration Reasons

1. Incomplete Integration

Date: 01/14/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P018.D
Acq On : 13 Jan 2022 7:07 pm
Operator : BDE
Sample : ICAL 9
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 12 Sample Multiplier: 1

Quant Time: Jan 14 10:06:22 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

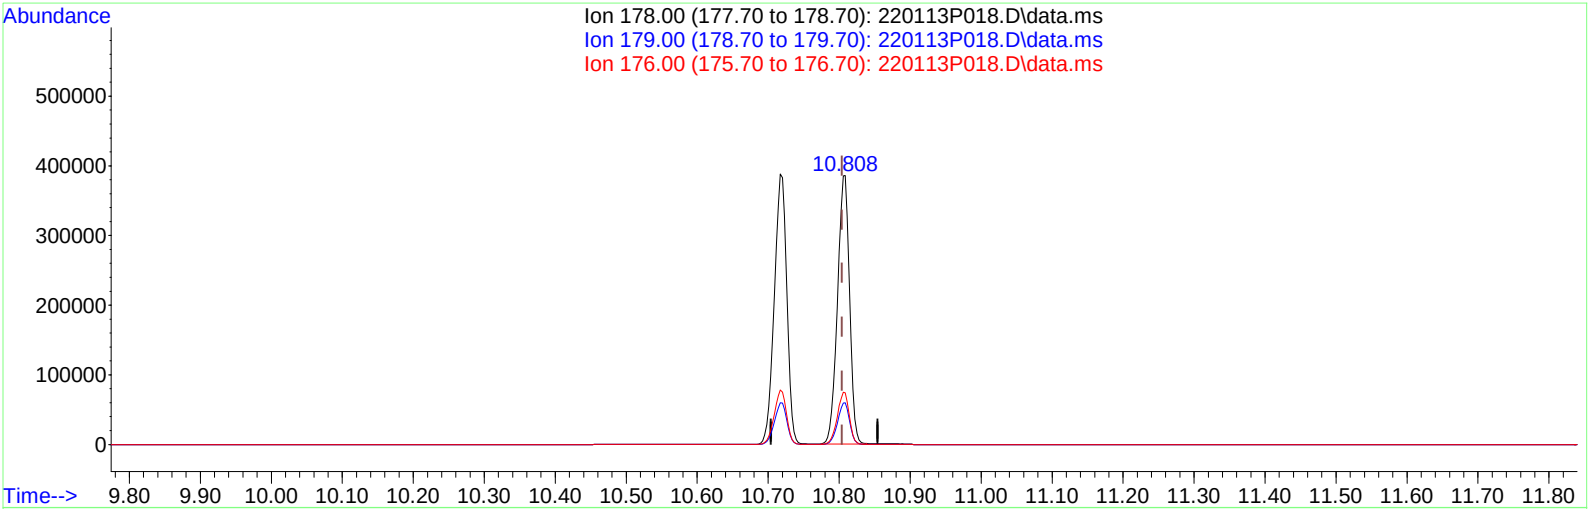

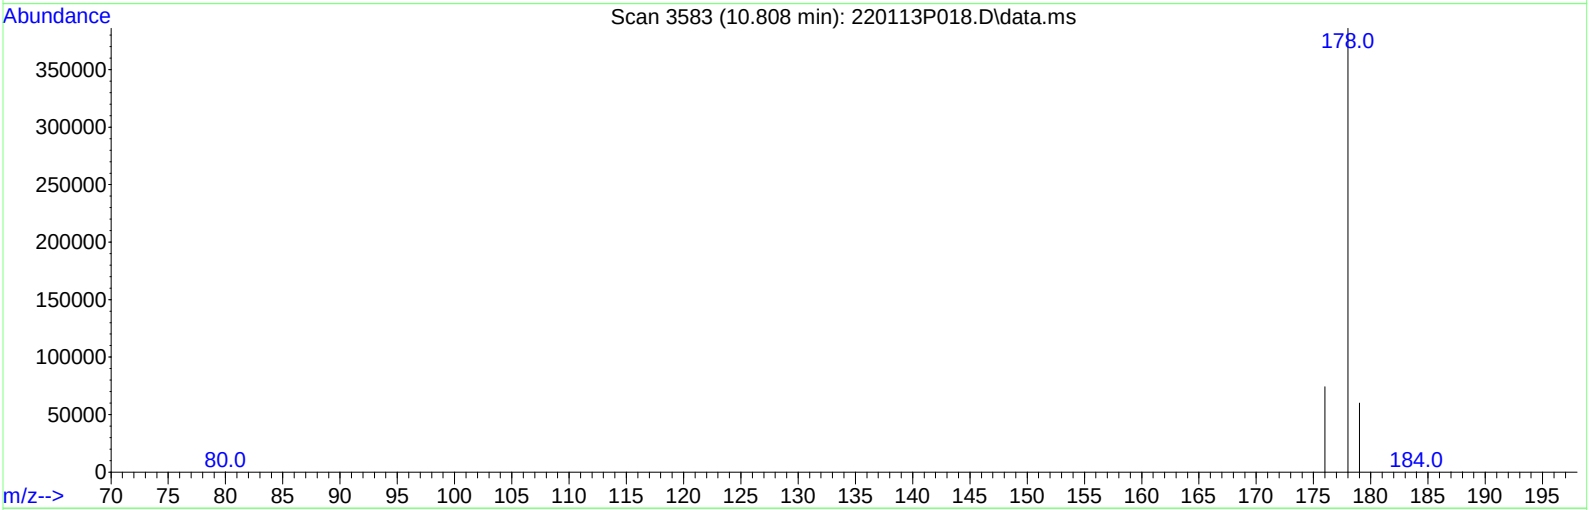

TIC: 220113P018.D\data.ms

(15) Anthracene (T)

10.808min (+ 0.004) 92.887 ug/ml m

response 454772

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.80	15.03
176.00	18.20	18.79
0.00	0.00	0.00

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P018.D
Acq On : 13 Jan 2022 7:07 pm
Operator : BDE
Sample : ICAL 9
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 12 Sample Multiplier: 1

Quant Time: Jan 14 10:06:22 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

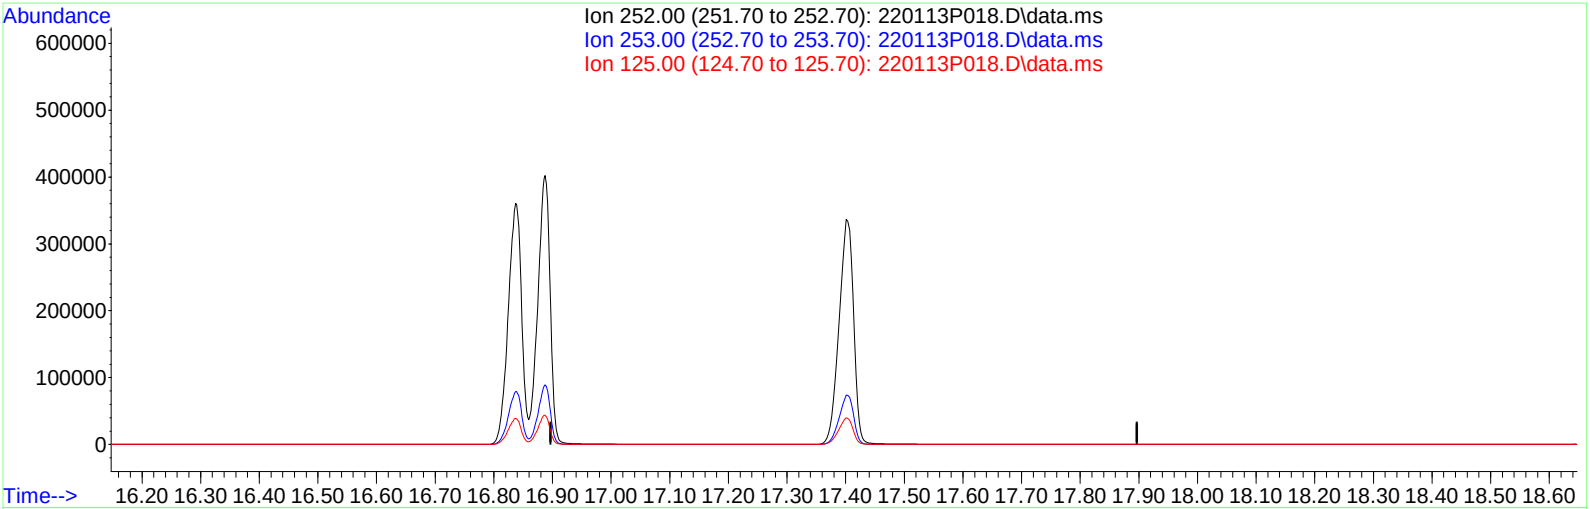

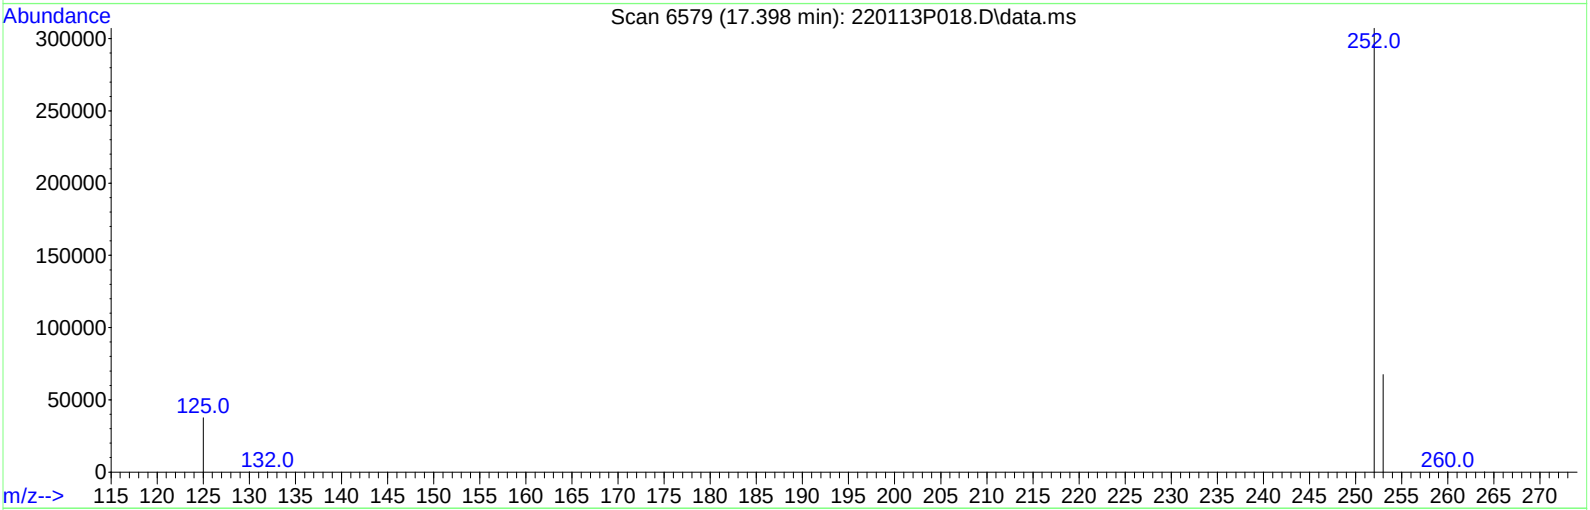

TIC: 220113P018.D\data.ms

(27) Benzo[a]pyrene (T)

17.397min (-17.397) 0.000 ug/ml

response 0

Ion	Exp%	Act%
252.00	100.00	0.00
253.00	0.00	0.00
125.00	0.00	0.00
0.00	0.00	0.00

Manual Integration Reasons

1. Peak Not Found
2. Assign Peak

Date: 01/14/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220113P\
Data File : 220113P018.D
Acq On : 13 Jan 2022 7:07 pm
Operator : BDE
Sample : ICAL 9
Misc : 8270C/D/E SIM;SVOCB045S9O
ALS Vial : 12 Sample Multiplier: 1

Quant Time: Jan 14 10:06:22 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:05:26 2022
Response via : Initial Calibration
Integrator: RTE

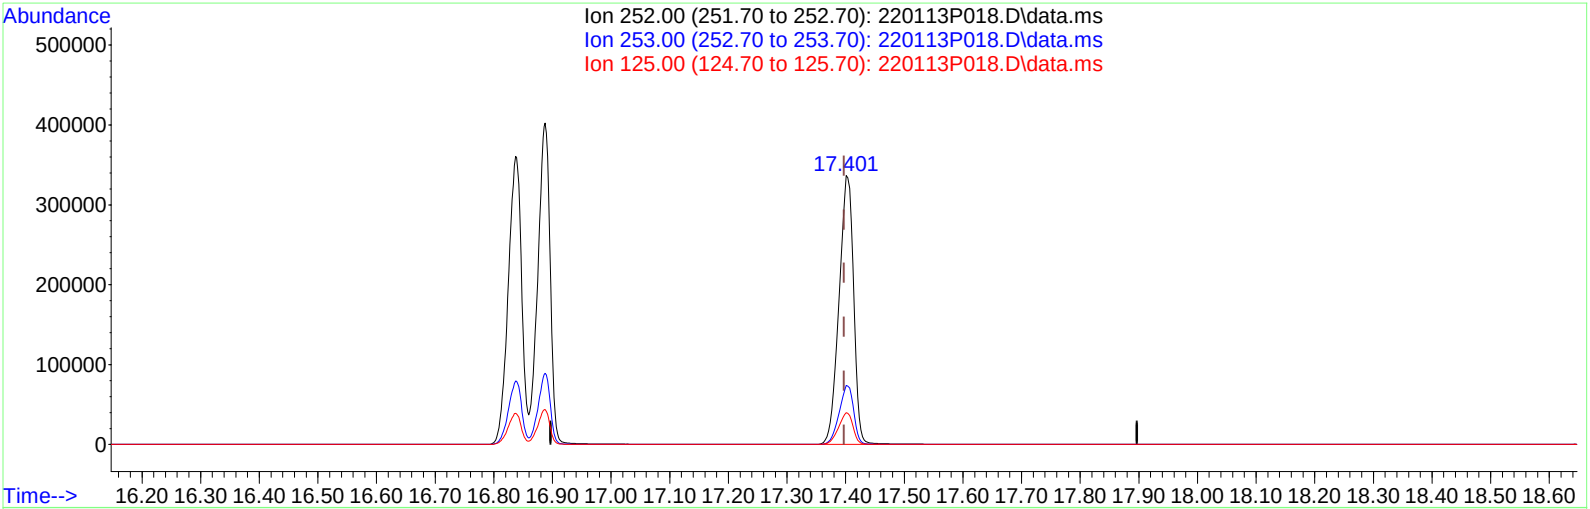

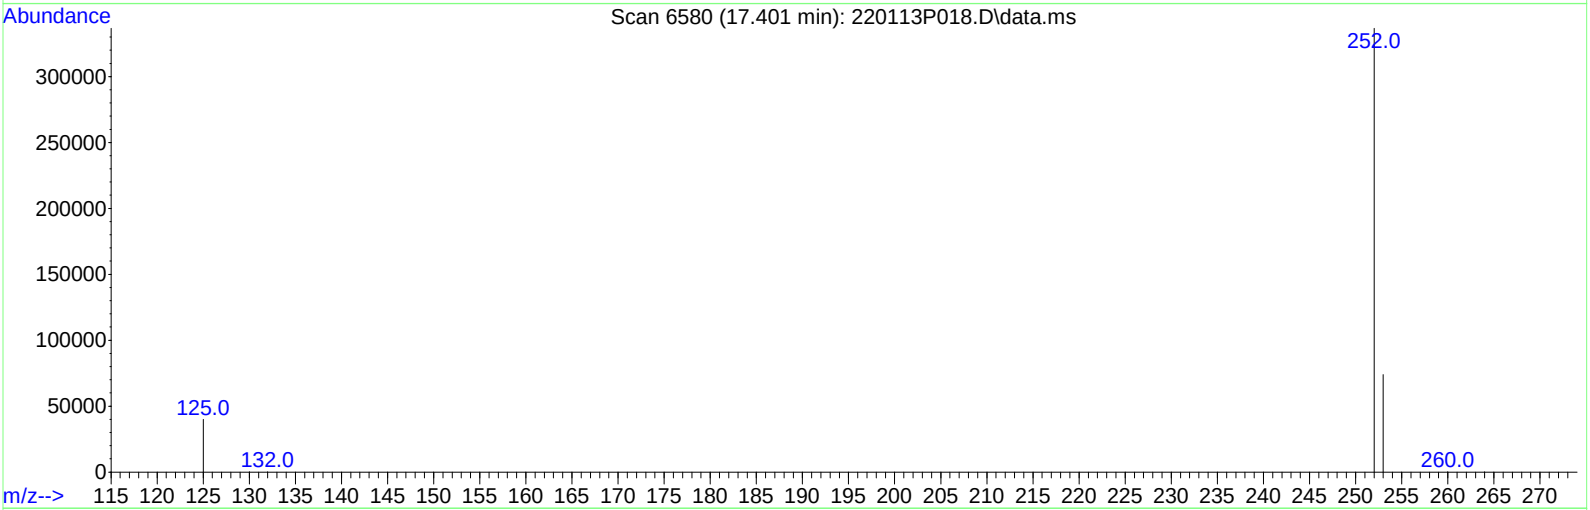

TIC: 220113P018.D\data.ms

(27) Benzo[a]pyrene (T)

17.401min (+ 0.004) 97.998 ug/ml m

response 578351

Ion	Exp%	Act%
252.00	100.00	100.00
253.00	0.00	0.00
125.00	0.00	0.00
0.00	0.00	0.00

Advanced Environmental Laboratories, Inc.

Initial Calibration Verification Summary Report

FORM 6B

SDG No.: J2200629

Client: Environmental Chemical Corporation (ECC)

Calibration Date/Time: 1/14/2022 11:46 **Lab File ID:** 220114P004.D

Instrument ID: J7P **Lab Sample ID:** ICV

Parameter	Spike Added	ICV Result	ICV %D	QC Limits Q	QC Limits % D
Benzo[a]anthracene	20.0	19.8	0.90		20

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220114P\
Data File : 220114P004.D
Acq On : 14 Jan 2022 11:46 am
Operator : BDE
Sample : ICV
Misc : 8270C/D/E SIM;SVOCB045S9P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 14 12:09:39 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

Compound	R.T.	QIon	Response	Conc	Units	Dev(Min)
Internal Standards						
1) Naphthalene-d8 (IS)	4.103	136	20077	4.000	ug/ml	0.00
7) Acenaphthene-d10 (IS)	7.948	164	10145m	4.000	ug/ml	0.00
13) Phenanthrene-d10 (IS)	10.676	188	20530	4.000	ug/ml	0.00
19) Chrysene-d12 (IS)	15.076	240	17851	4.000	ug/ml	0.00
24) Perylene-d12 (IS)	17.495	264	19189	4.000	ug/ml	0.00
System Monitoring Compounds						
2) Nitrobenzene-d5	2.839	82	24546	19.630	ug/ml	0.00
4) 2-Methylnaphthalene-d10	5.669	152	48595	18.906	ug/ml	0.00
8) 2-Fluorobiphenyl	6.592	172	67514	19.242	ug/ml	0.00
17) Fluoranthene-d10	12.685	212	88426	18.778	ug/ml	0.00
21) p-Terphenyl-d14	13.401	244	73481	19.324	ug/ml	0.00
Target Compounds						Qvalue
3) Naphthalene	4.154	128	88511	19.332	ug/ml	100
5) 2-Methylnaphthalene	5.741	142	56033	18.960	ug/ml	97
6) 1-Methylnaphthalene	5.958	142	54383	19.002	ug/ml	97
9) Acenaphthylene	7.652	152	98961	19.942	ug/ml	99
10) Acenaphthene	8.011	154	48002	18.983	ug/ml	95
11) Dibenzofuran	8.358	168	79458m	19.173	ug/ml	
12) Fluorene	9.010	166	63263	19.447	ug/ml	98
14) Phenanthrene	10.714	178	96376m	19.661	ug/ml	
15) Anthracene	10.803	178	94631m	20.011	ug/ml	
16) Carbazole	11.103	167	88091	18.583	ug/ml	99
18) Fluoranthene	12.717	202	106997	18.527	ug/ml	98
20) Pyrene	13.077	202	111589	19.378	ug/ml	98
22) Benzo[a]anthracene	15.062	228	106863	19.821	ug/ml	98
23) Chrysene	15.120	228	101377	19.333	ug/ml	98
25) Benzo[b]fluoranthene	16.827	252	111931	20.675	ug/ml	97
26) Benzo[k]fluoranthene	16.874	252	112144	19.775	ug/ml	97
27) Benzo[a]pyrene	17.390	252	110896	19.966	ug/ml	100
28) Indeno(1,2,3-cd)pyrene	19.827	276	105321	19.497	ug/ml	98
29) Dibenzo[a,h]anthracene	19.915	278	102359	19.499	ug/ml	98
30) Benzo[g,h,i]perylene	20.517	276	110406	19.055	ug/ml	97

(#) = qualifier out of range (m) = manual integration (+) = signals summed

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220114P\
Data File : 220114P004.D
Acq On : 14 Jan 2022 11:46 am
Operator : BDE
Sample : ICV
Misc : 8270C/D/E SIM;SVOCB045S9P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 14 12:09:39 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

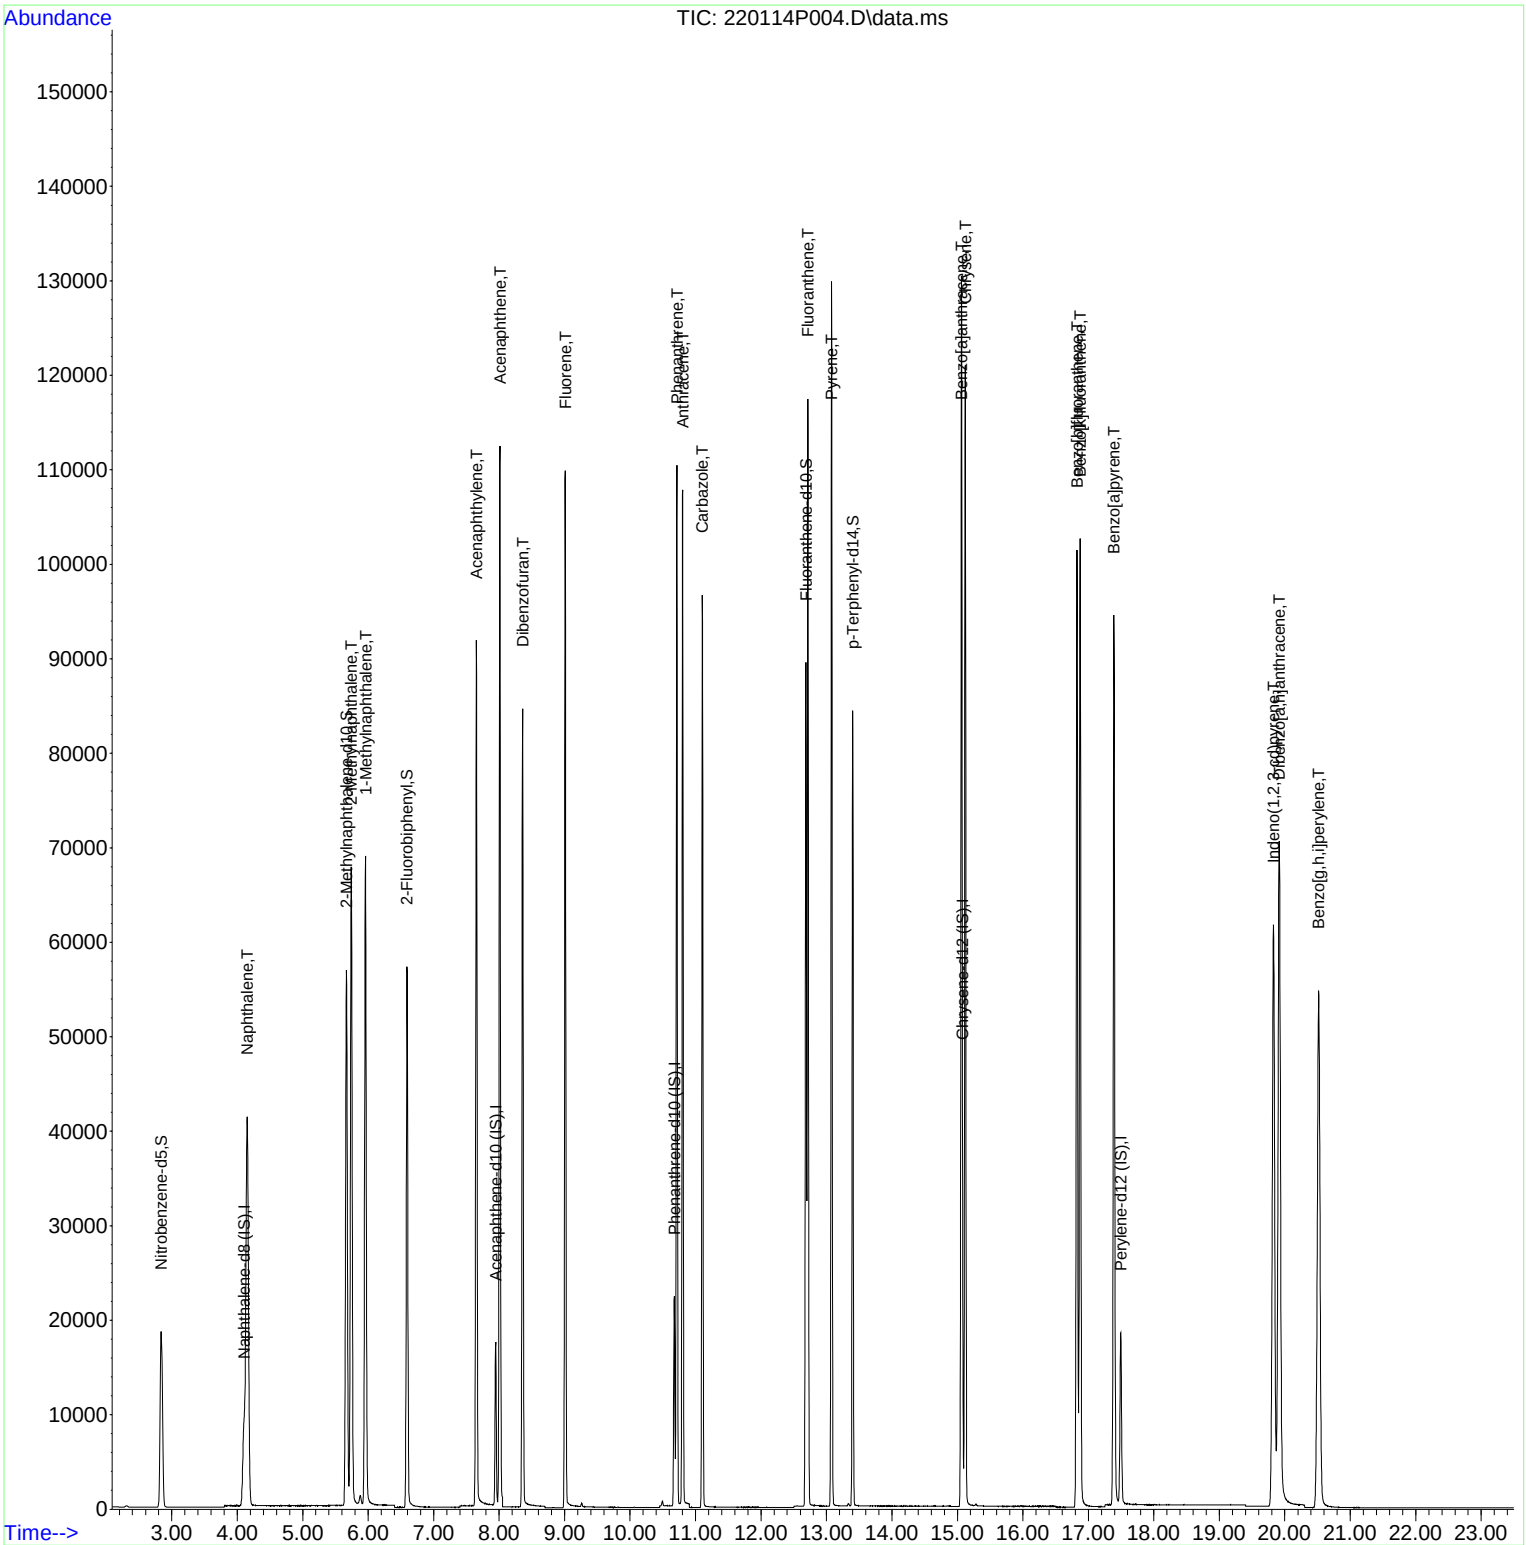

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220114P\
Data File : 220114P004.D
Acq On : 14 Jan 2022 11:46 am
Operator : BDE
Sample : ICV
Misc : 8270C/D/E SIM;SVOCB045S9P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 14 12:09:39 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

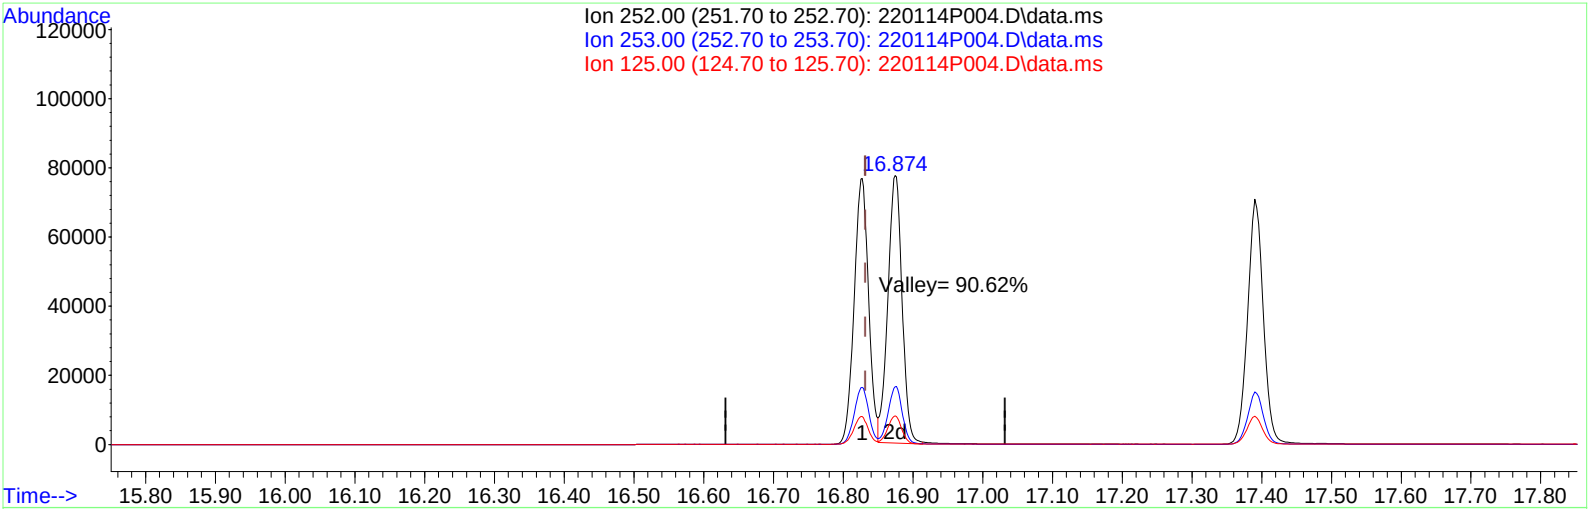

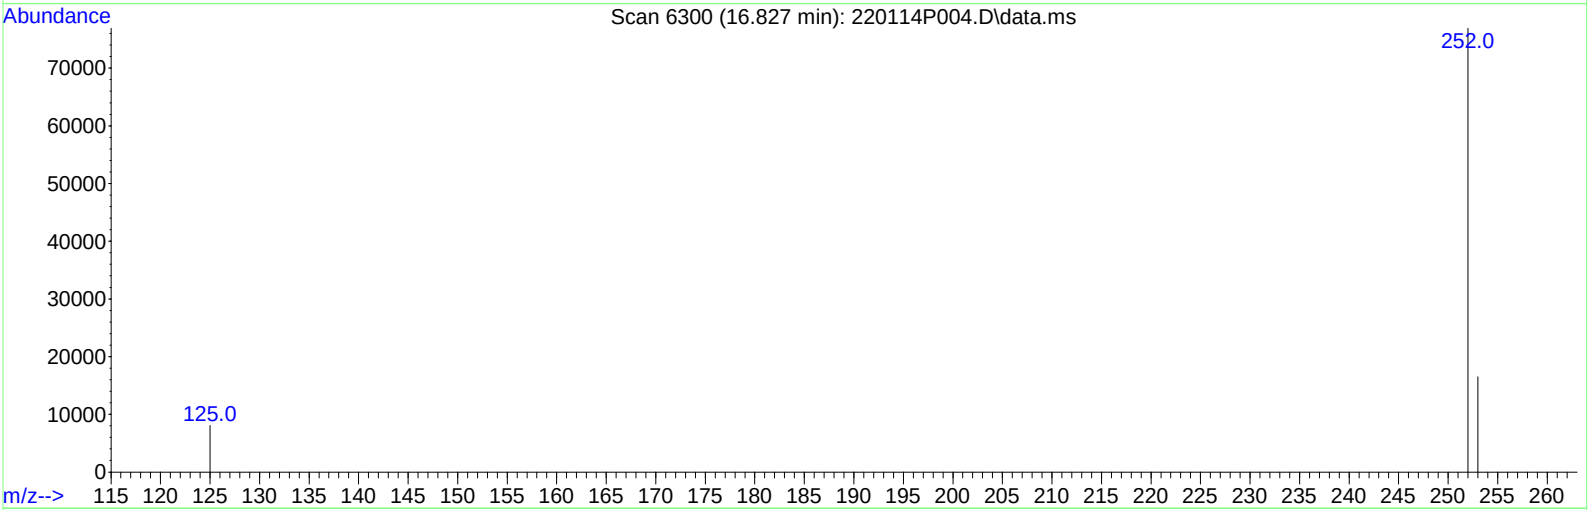

TIC: 220114P004.D\data.ms

(25) Benzo[b]fluoranthene (T)

16.827min (-0.005) 20.675 ug/ml

response 111931

Ion	Exp%	Act%
252.00	100.00	100.00
253.00	23.00	21.58
125.00	9.90	10.50
0.00	0.00	0.00

Data Path : C:\msdchem\1\data\220114P\
Data File : 220114P004.D
Acq On : 14 Jan 2022 11:46 am
Operator : BDE
Sample : ICV
Misc : 8270C/D/E SIM;SVOCB045S9P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 14 12:09:39 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

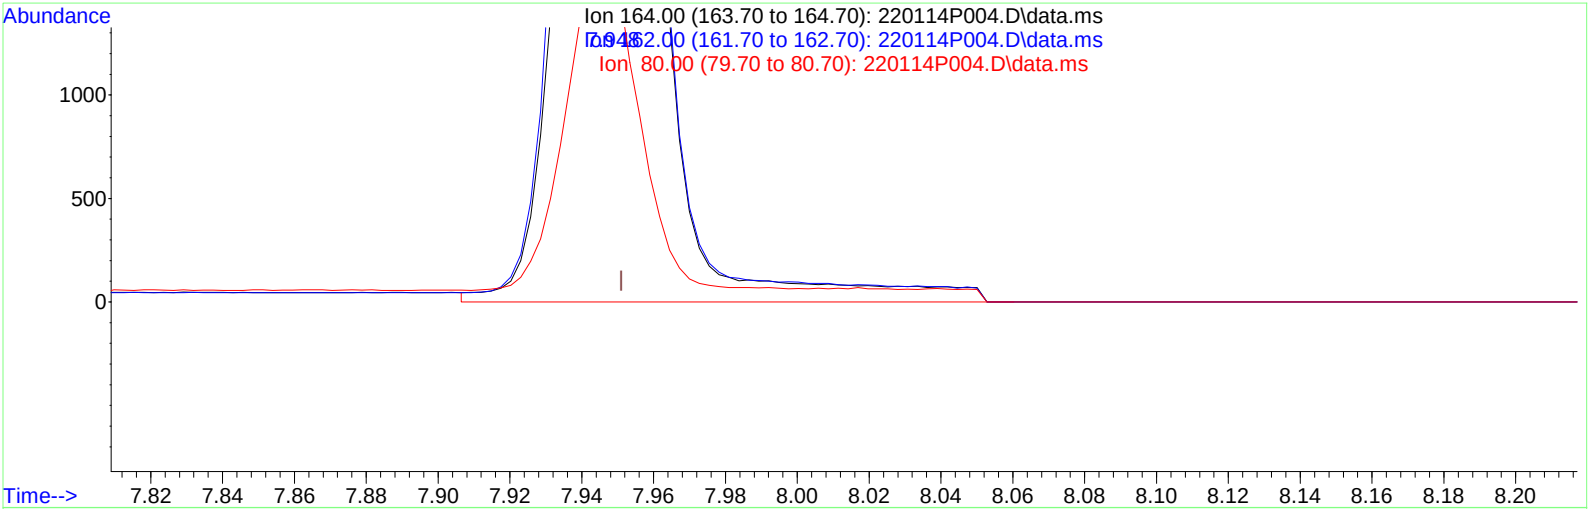

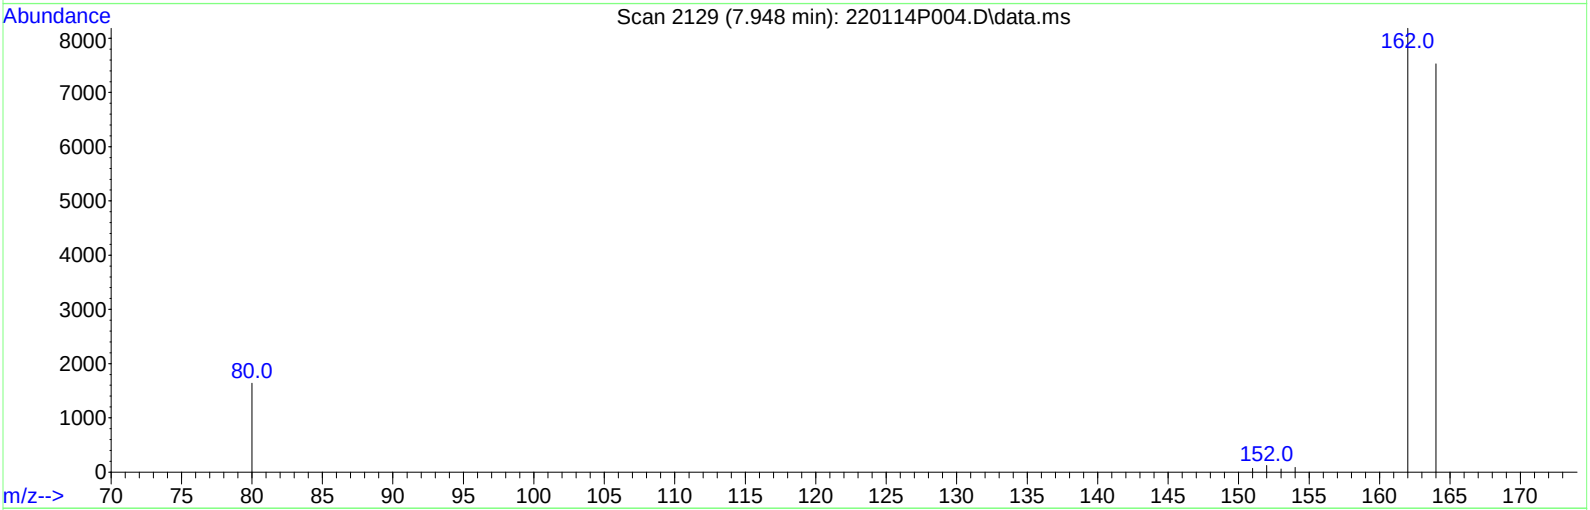

TIC: 220114P004.D\data.ms

(7) Acenaphthene-d10 (IS) (I)

7.948min (-0.003) 4.000 ug/ml

response 10390

Ion	Exp%	Act%
164.00	100.00	100.00
162.00	106.70	109.21
80.00	22.00	21.62
0.00	0.00	0.00

Manual Integration Reasons

1. BaseLine Smoothing

Date: 01/27/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220114P\
Data File : 220114P004.D
Acq On : 14 Jan 2022 11:46 am
Operator : BDE
Sample : ICV
Misc : 8270C/D/E SIM;SVOCB045S9P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 14 12:09:39 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

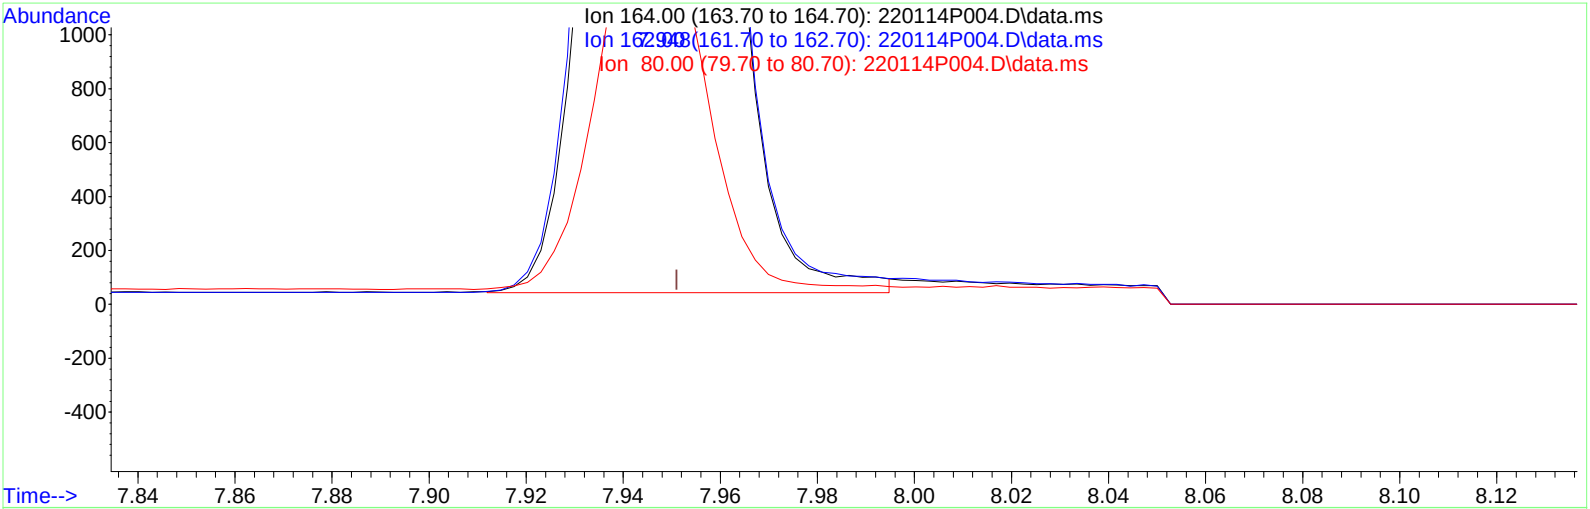

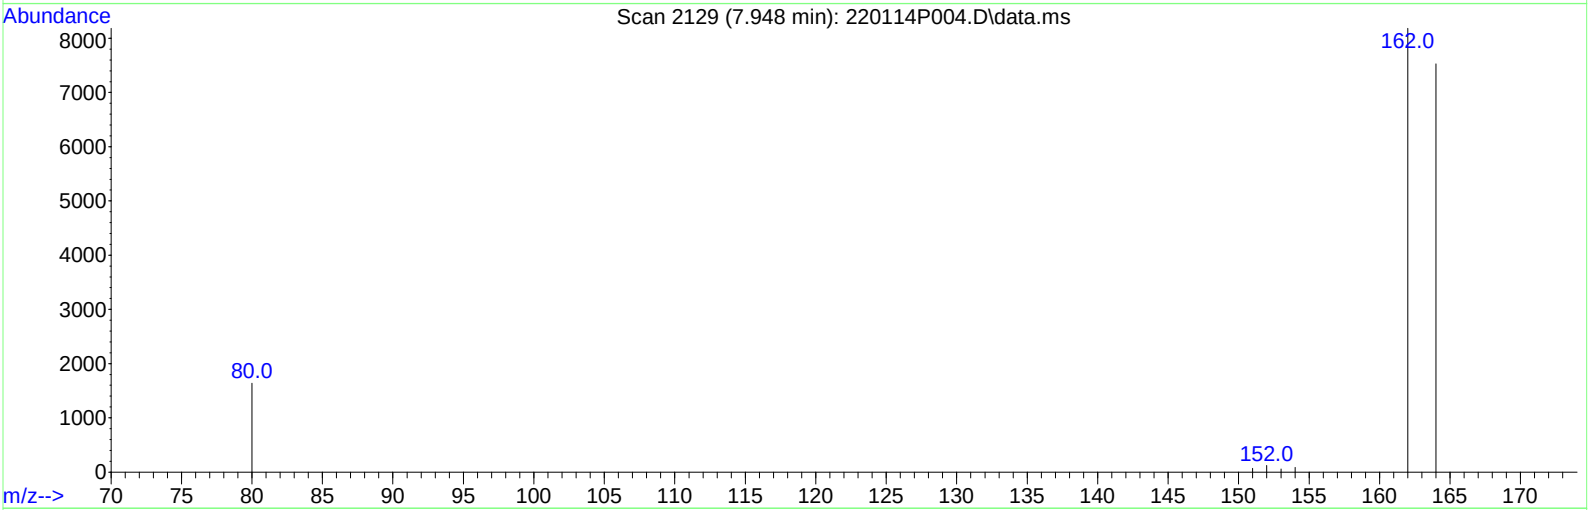

TIC: 220114P004.D\data.ms

(7) Acenaphthene-d10 (IS) (I)

7.948min (-0.003) 4.000 ug/ml m

response 10145

Ion	Exp%	Act%
164.00	100.00	100.00
162.00	106.70	111.85
80.00	22.00	22.14
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220114P\
Data File : 220114P004.D
Acq On : 14 Jan 2022 11:46 am
Operator : BDE
Sample : ICV
Misc : 8270C/D/E SIM;SVOCB045S9P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 14 12:09:39 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

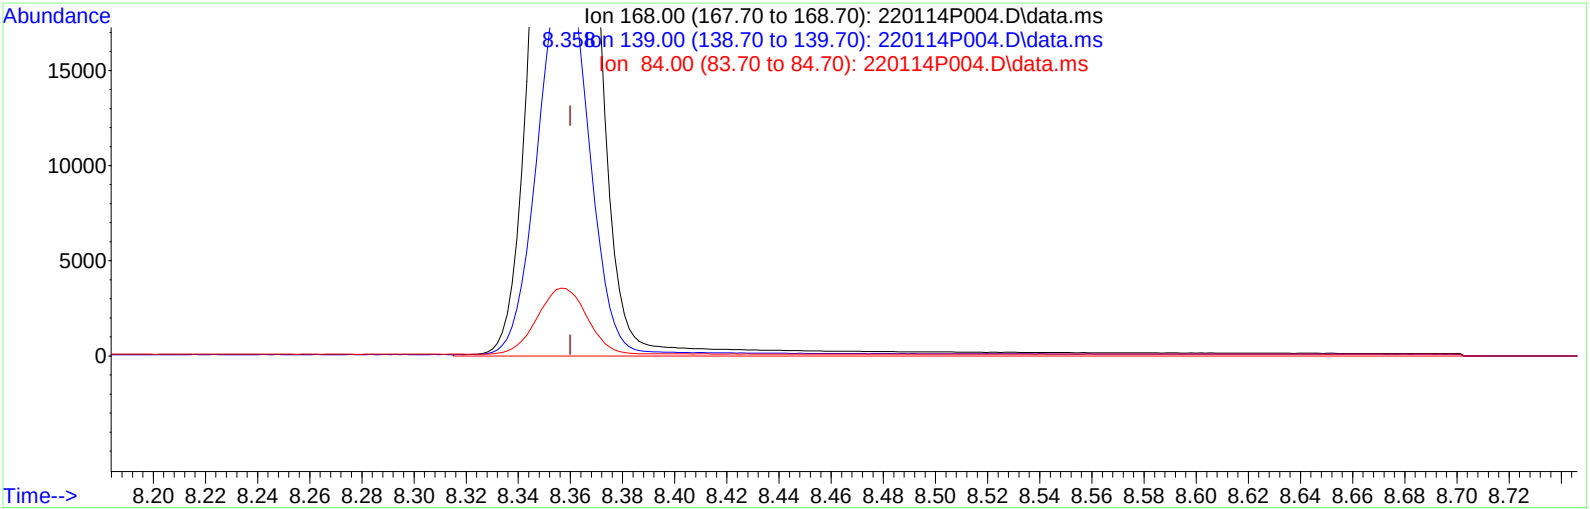

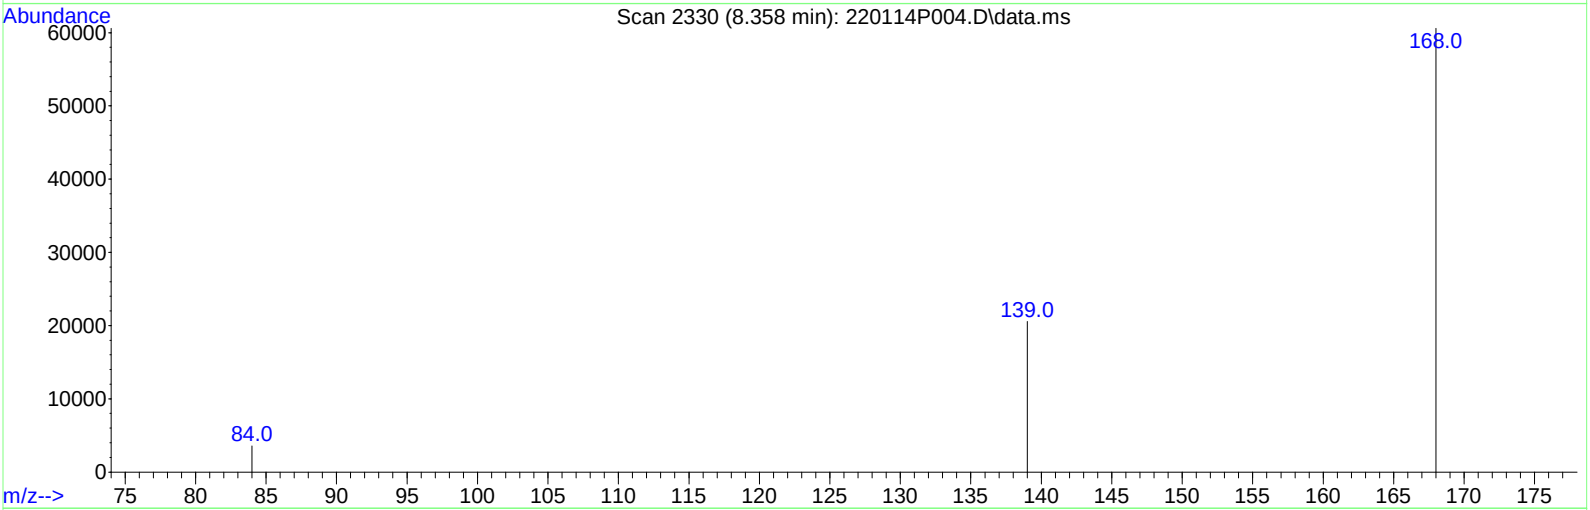

TIC: 220114P004.D\data.ms

(11) Dibenzofuran (T)

8.358min (-0.002) 20.156 ug/ml

response 83531

Ion	Exp%	Act%
168.00	100.00	100.00
139.00	0.00	33.31#
84.00	0.00	5.60
0.00	0.00	0.00

Manual Integration Reasons

1. BaseLine Smoothing

Date: 01/27/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220114P\
Data File : 220114P004.D
Acq On : 14 Jan 2022 11:46 am
Operator : BDE
Sample : ICV
Misc : 8270C/D/E SIM;SVOCB045S9P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 14 12:09:39 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

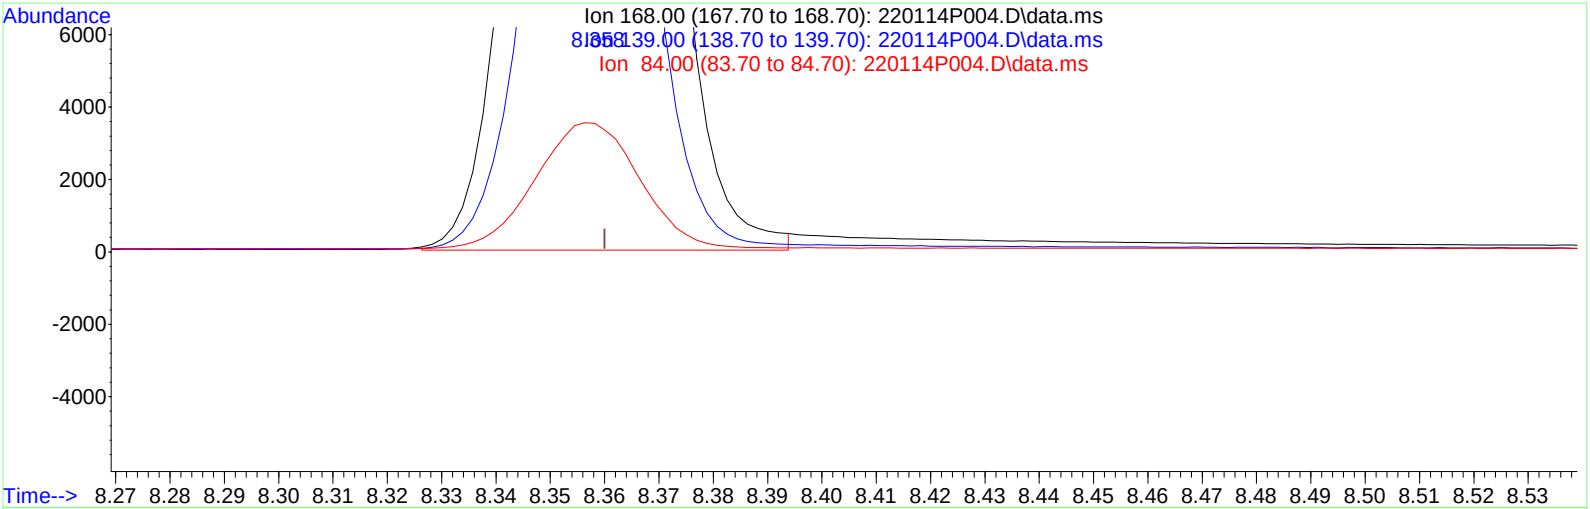

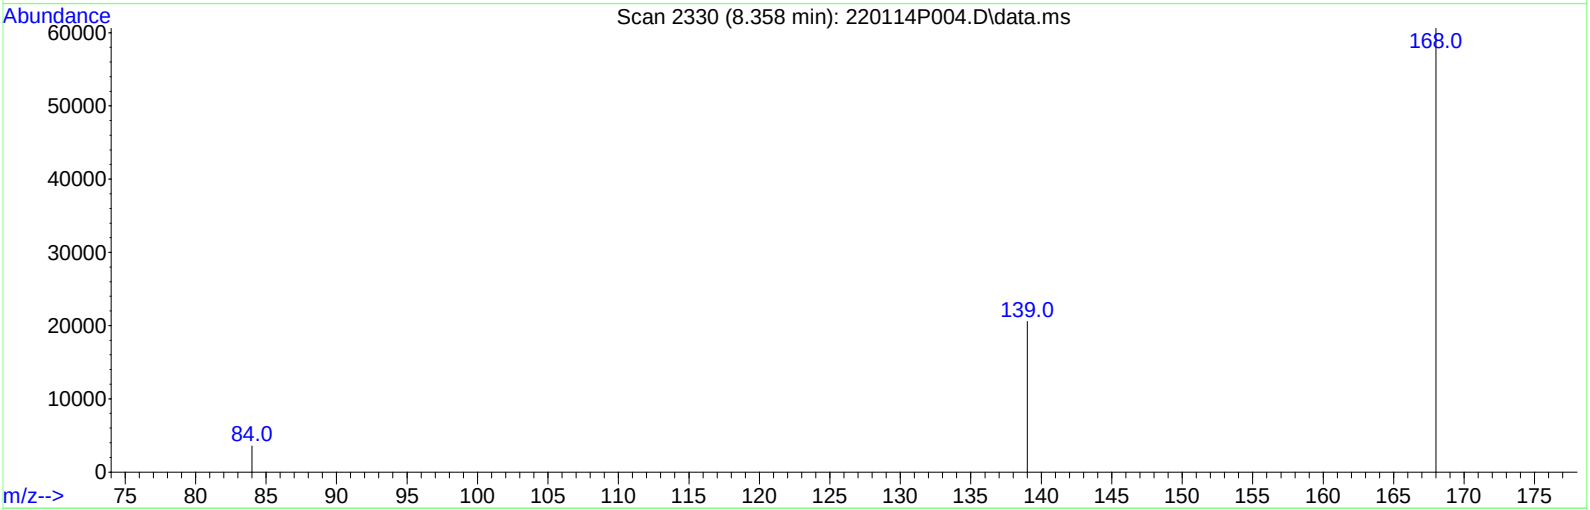

TIC: 220114P004.D\data.ms

(11) Dibenzofuran (T)

8.358min (-0.002) 19.173 ug/ml m

response 79458

Ion	Exp%	Act%
168.00	100.00	100.00
139.00	0.00	35.01#
84.00	0.00	5.89
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220114P\
Data File : 220114P004.D
Acq On : 14 Jan 2022 11:46 am
Operator : BDE
Sample : ICV
Misc : 8270C/D/E SIM;SVOCB045S9P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 14 12:09:39 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

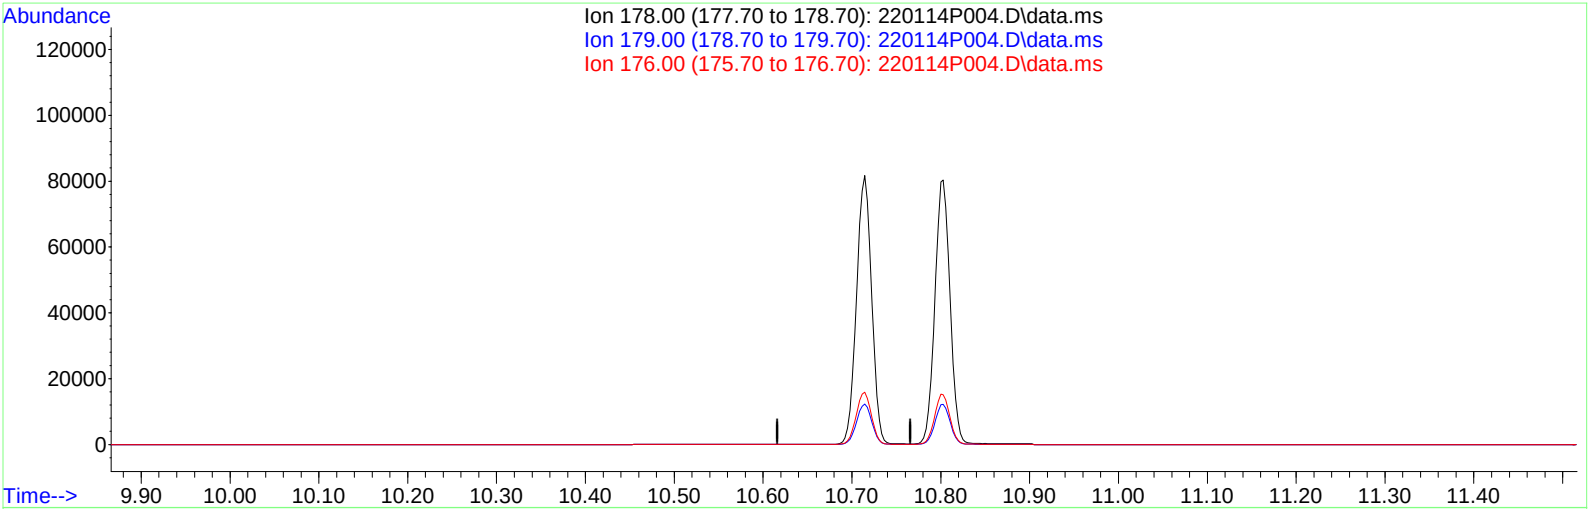

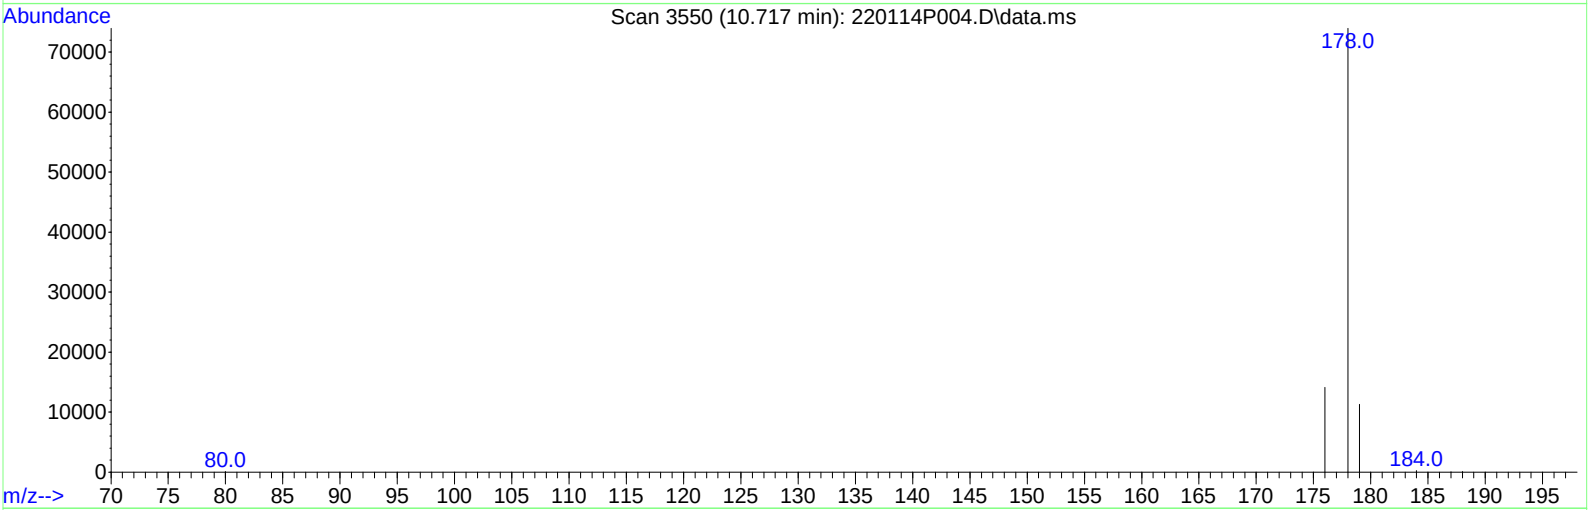

TIC: 220114P004.D\data.ms

(14) Phenanthrene (T)

10.716min (-10.716) 0.000 ug/ml

response 0

Ion	Exp%	Act%
178.00	100.00	0.00
179.00	15.90	0.00
176.00	18.90	0.00
0.00	0.00	0.00

Manual Integration Reasons

1. Peak Not Found
2. Assign Peak

Date: 01/27/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220114P\
Data File : 220114P004.D
Acq On : 14 Jan 2022 11:46 am
Operator : BDE
Sample : ICV
Misc : 8270C/D/E SIM;SVOCB045S9P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 14 12:09:39 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

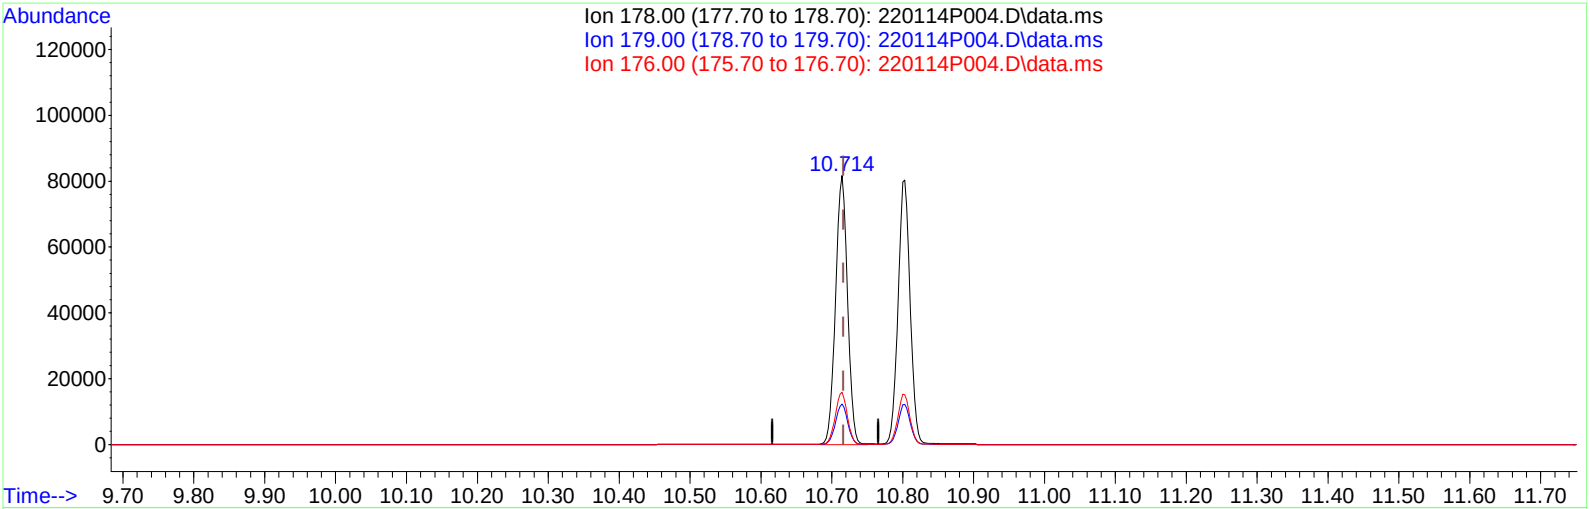

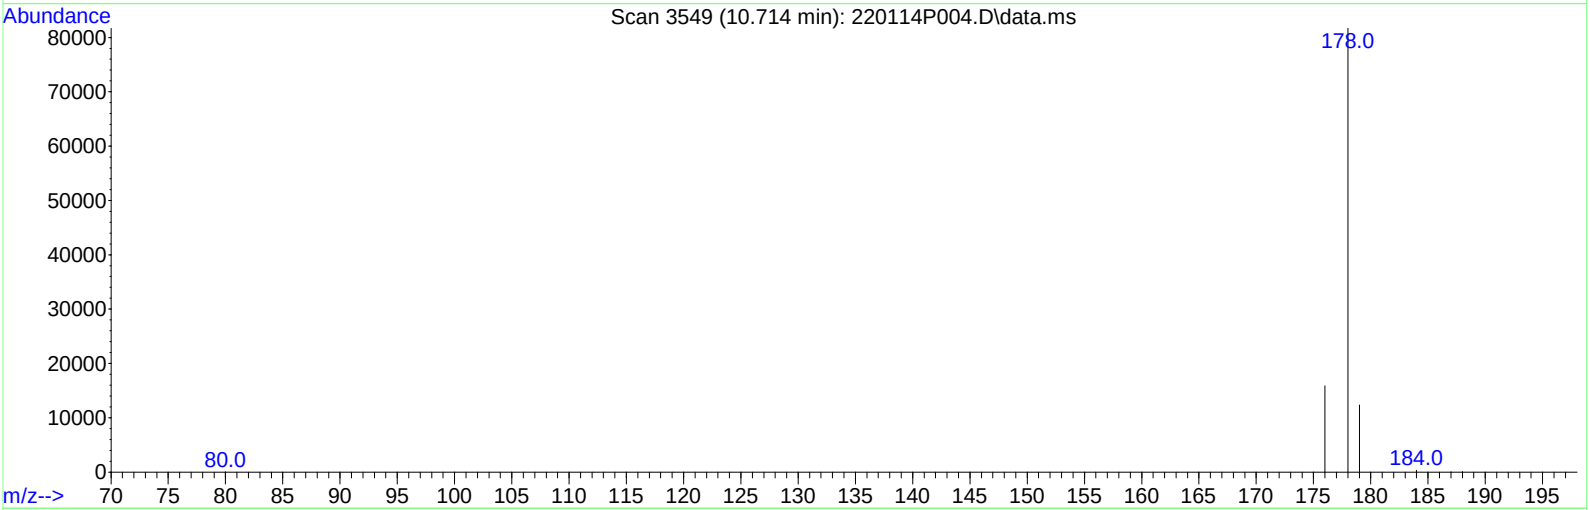

TIC: 220114P004.D\data.ms

(14) Phenanthrene (T)

10.714min (-0.002) 19.661 ug/ml m

response 96376

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.90	0.00
176.00	18.90	0.00
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220114P\
Data File : 220114P004.D
Acq On : 14 Jan 2022 11:46 am
Operator : BDE
Sample : ICV
Misc : 8270C/D/E SIM;SVOCB045S9P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 14 12:09:39 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

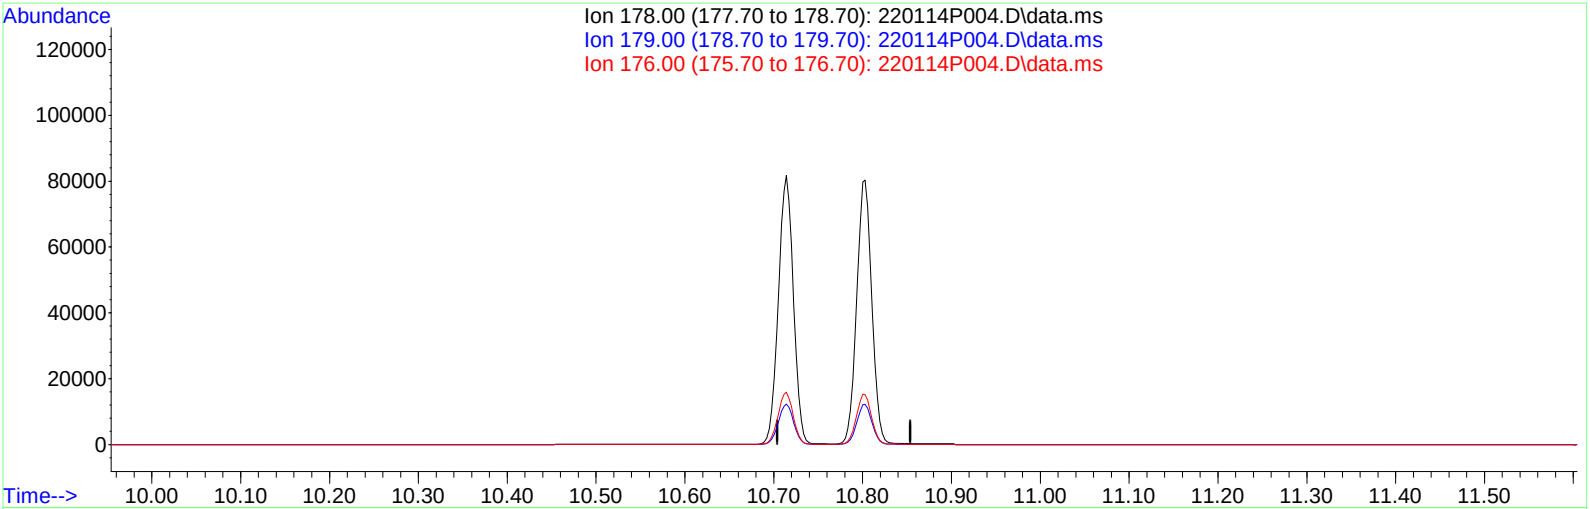

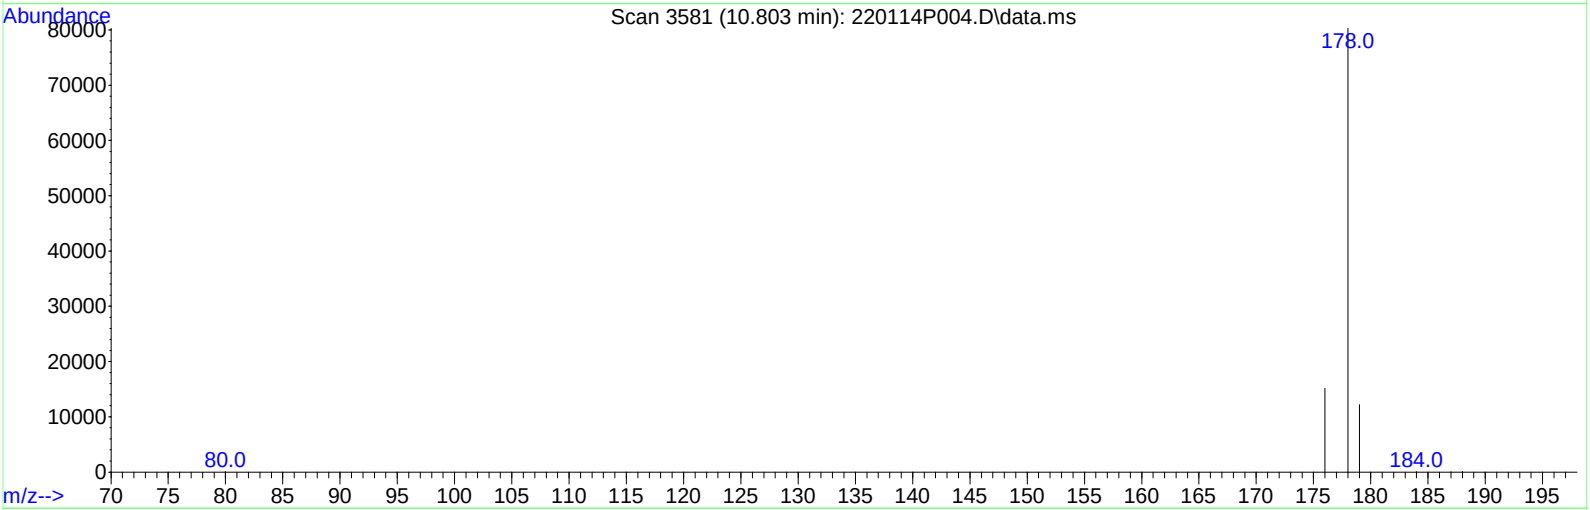

TIC: 220114P004.D\data.ms

(15) Anthracene (T)

10.804min (-10.804) 0.000 ug/ml

response 0

Ion	Exp%	Act%
178.00	100.00	0.00
179.00	15.80	0.00
176.00	18.20	0.00
0.00	0.00	0.00

Manual Integration Reasons

1. Peak Not Found
2. Assign Peak

Date: 01/27/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220114P\
Data File : 220114P004.D
Acq On : 14 Jan 2022 11:46 am
Operator : BDE
Sample : ICV
Misc : 8270C/D/E SIM;SVOCB045S9P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 14 12:09:39 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

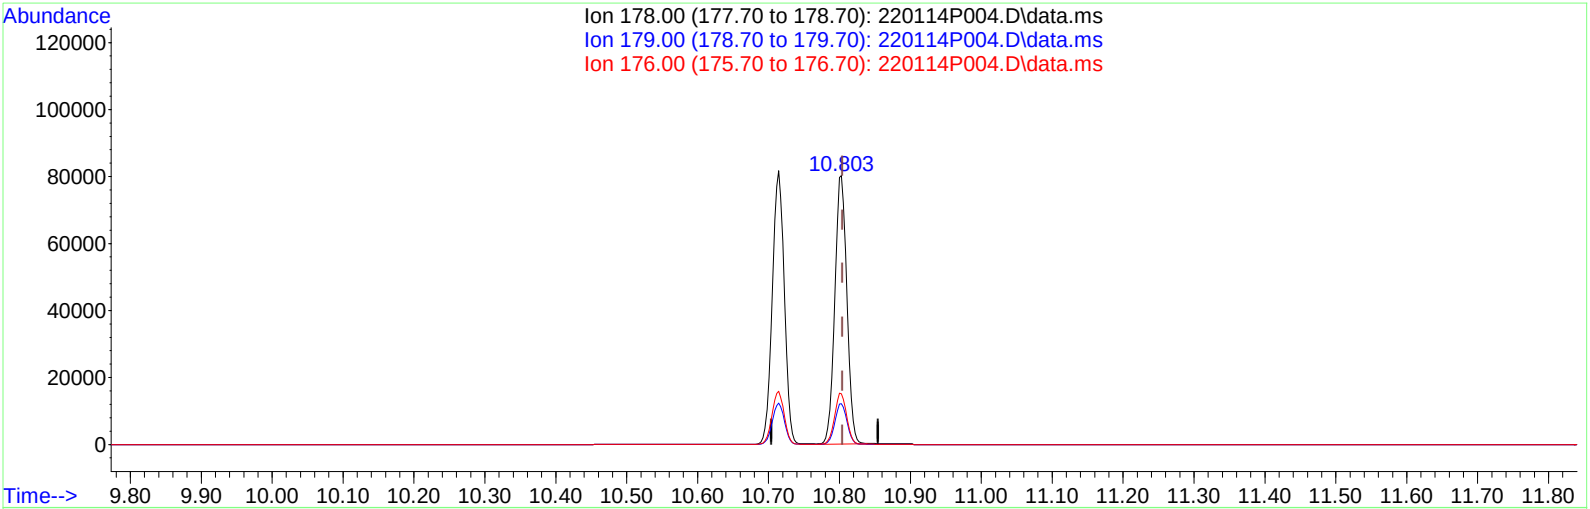

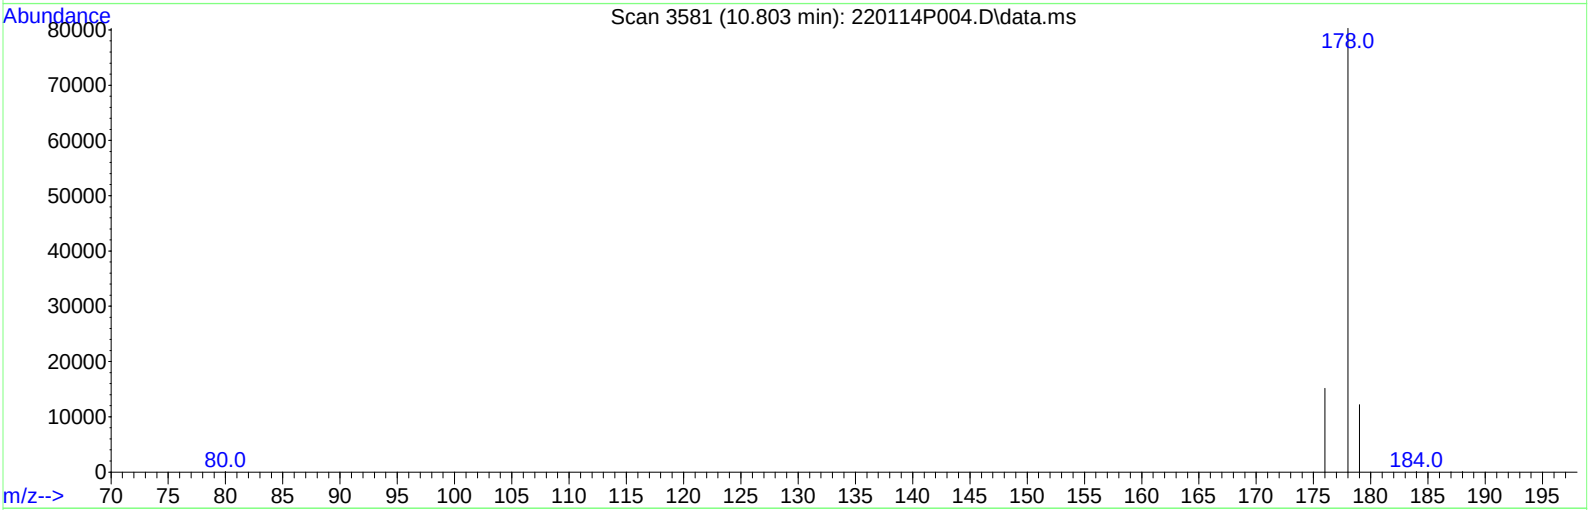

TIC: 220114P004.D\data.ms

(15) Anthracene (T)

10.803min (-0.001) 20.011 ug/ml m

response 94631

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.80	0.00
176.00	18.20	0.00
0.00	0.00	0.00

Advanced Environmental Laboratories, Inc.

Continuing Calibration Verification Summary Report

FORM 7

SDG No.: J2200629

Client: Environmental Chemical Corporation (ECC)

Calibration Date/Time: 1/20/2022 13:33 **Lab File ID:** 220120P004.D

Instrument ID: J7P **Lab Sample ID:** CCV

Parameter	Spike Added	CCV Result	CCV %D	QC Limits Q	QC Limits % D
Benzo[a]anthracene	20.0	19.6	1.9		20
2-Fluorobiphenyl	20.0	18.6	6.9		20
2-Methylnaphthalene-d10	20.0	18.9	5.7		20
Fluoranthene-d10	20.0	18.9	5.5		20
Nitrobenzene-d5	20.0	20.3	1.5		20
p-Terphenyl-d14	20.0	19.4	3.1		20

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P004.D
Acq On : 20 Jan 2022 1:33 pm
Operator : BDE
Sample : CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 09:45:16 2022
Quant Method : C:\msdchem\1\methods\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

Compound	R.T.	QIon	Response	Conc	Units	Dev(Min)
Internal Standards						
1) Naphthalene-d8 (IS)	4.101	136	21542	4.000	ug/ml	0.00
7) Acenaphthene-d10 (IS)	7.940	164	11175	4.000	ug/ml	-0.01
13) Phenanthrene-d10 (IS)	10.670	188	21618	4.000	ug/ml	0.00
19) Chrysene-d12 (IS)	15.069	240	18900	4.000	ug/ml	0.00
24) Perylene-d12 (IS)	17.484	264	20252	4.000	ug/ml	-0.01
System Monitoring Compounds						
2) Nitrobenzene-d5	2.839	82	27246	20.307	ug/ml	0.00
4) 2-Methylnaphthalene-d10	5.662	152	51990	18.852	ug/ml	-0.01
8) 2-Fluorobiphenyl	6.587	172	71975	18.623	ug/ml	0.00
17) Fluoranthene-d10	12.678	212	93737	18.904	ug/ml	-0.01
21) p-Terphenyl-d14	13.389	244	78063	19.389	ug/ml	-0.01
Target Compounds						Qvalue
3) Naphthalene	4.149	128	94157	19.167	ug/ml	100
5) 2-Methylnaphthalene	5.736	142	59560	18.783	ug/ml	97
6) 1-Methylnaphthalene	5.951	142	57755	18.808	ug/ml	97
9) Acenaphthylene	7.647	152	105458	19.292	ug/ml	99
10) Acenaphthene	8.003	154	51653	18.544	ug/ml	95
11) Dibenzofuran	8.353	168	85436m	18.715	ug/ml	
12) Fluorene	9.003	166	67935	18.958	ug/ml	98
14) Phenanthrene	10.709	178	102003m	19.761	ug/ml	
15) Anthracene	10.795	178	96718m	19.423	ug/ml	
16) Carbazole	11.101	167	92794	18.590	ug/ml	99
18) Fluoranthene	12.709	202	114129	18.767	ug/ml	98
20) Pyrene	13.070	202	119294	19.566	ug/ml	98
22) Benzo[a]anthracene	15.052	228	111958	19.613	ug/ml	98
23) Chrysene	15.110	228	106719	19.222	ug/ml	98
25) Benzo[b]fluoranthene	16.816	252	116552	20.397	ug/ml	97
26) Benzo[k]fluoranthene	16.863	252	116962m	19.542	ug/ml	
27) Benzo[a]pyrene	17.379	252	115765	19.749	ug/ml	100
28) Indeno(1,2,3-cd)pyrene	19.813	276	110795	19.434	ug/ml	98
29) Dibenzo[a,h]anthracene	19.898	278	108144	19.520	ug/ml	98
30) Benzo[g,h,i]perylene	20.500	276	116521	19.055	ug/ml	97

(#) = qualifier out of range (m) = manual integration (+) = signals summed

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P004.D
Acq On : 20 Jan 2022 1:33 pm
Operator : BDE
Sample : CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 09:45:16 2022
Quant Method : C:\msdchem\1\methods\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

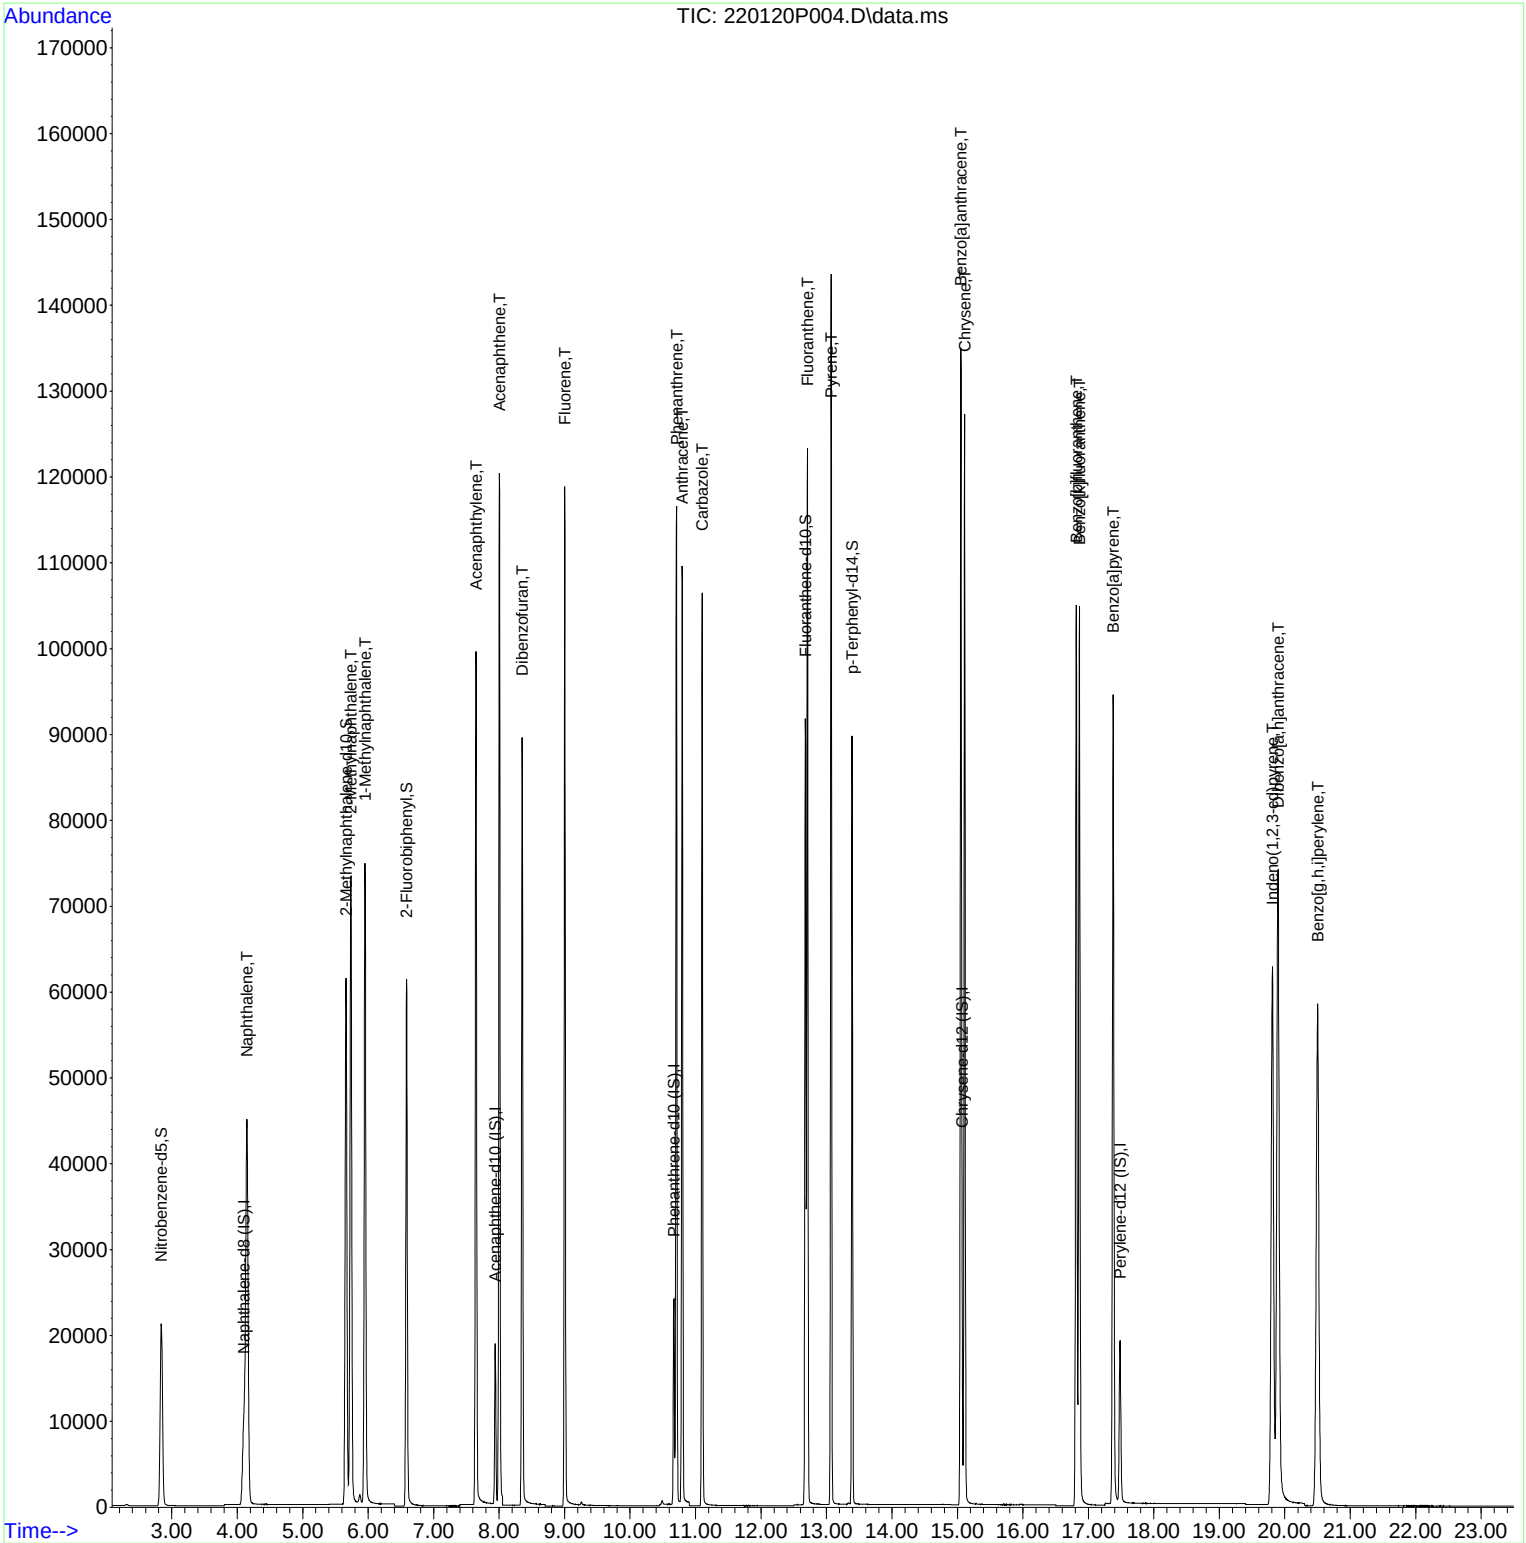

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P004.D
Acq On : 20 Jan 2022 1:33 pm
Operator : BDE
Sample : CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 09:45:16 2022
Quant Method : C:\msdchem\1\methods\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

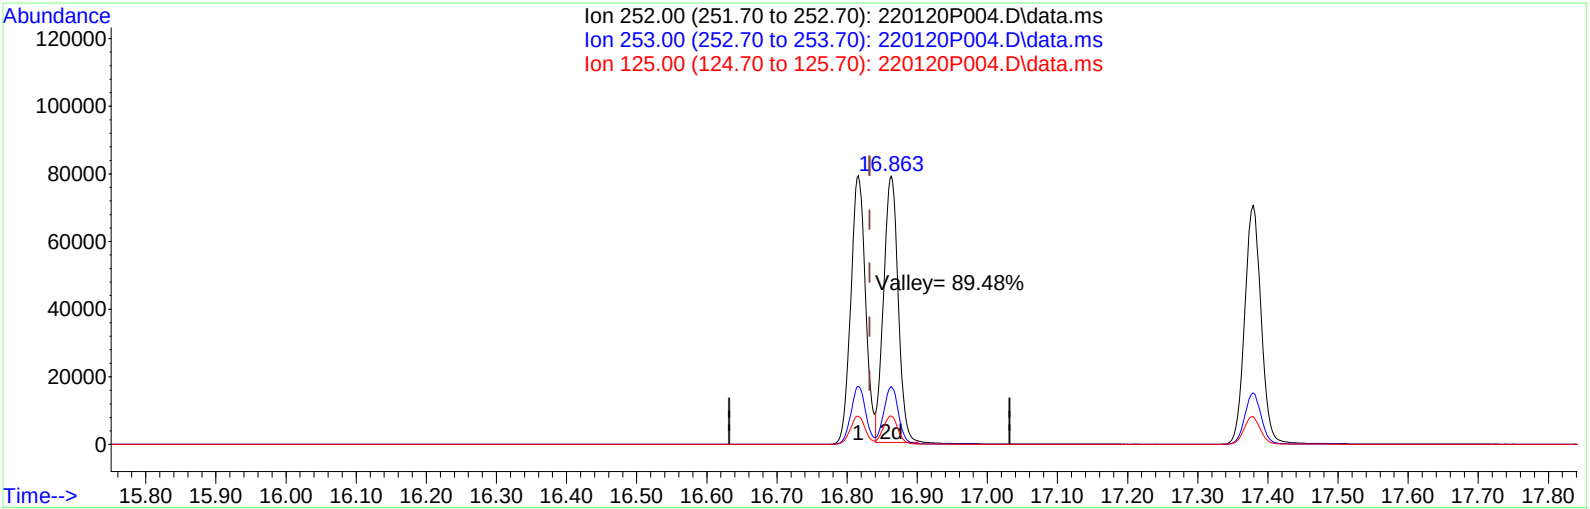

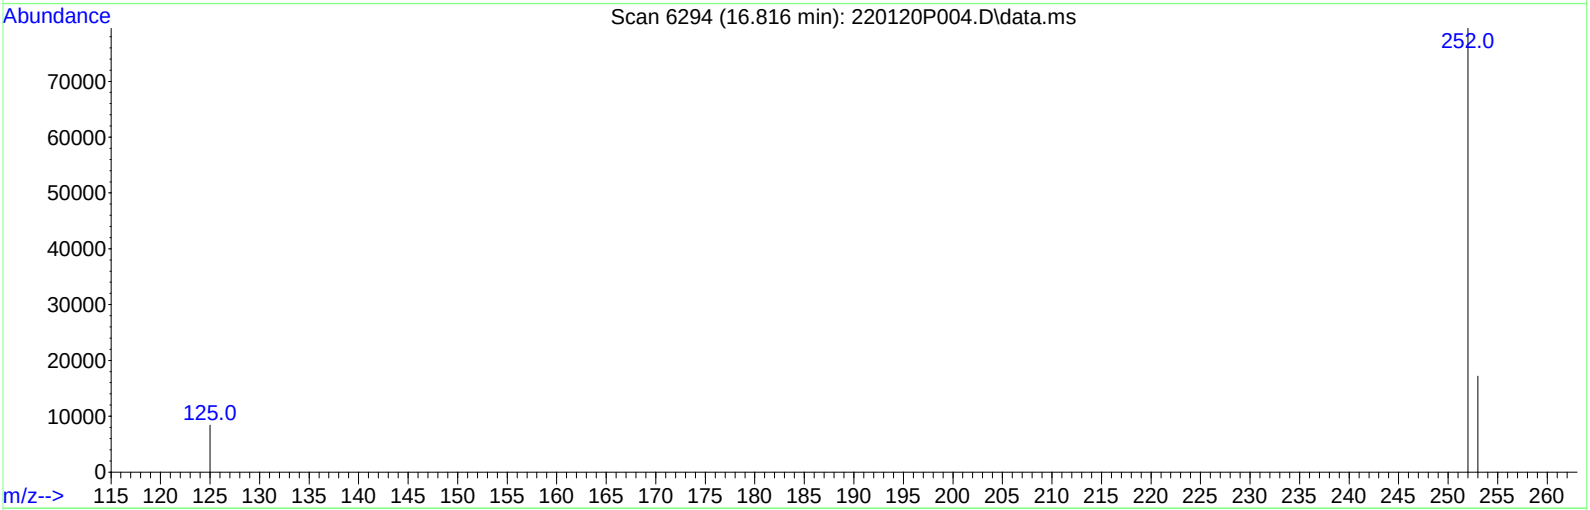

TIC: 220120P004.D\data.ms

(25) Benzo[b]fluoranthene (T)

16.816min (-0.016) 20.397 ug/ml

response 116552

Ion	Exp%	Act%
252.00	100.00	100.00
253.00	23.00	21.62
125.00	9.90	10.61
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P004.D
Acq On : 20 Jan 2022 1:33 pm
Operator : BDE
Sample : CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 09:45:16 2022
Quant Method : C:\msdchem\1\methods\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

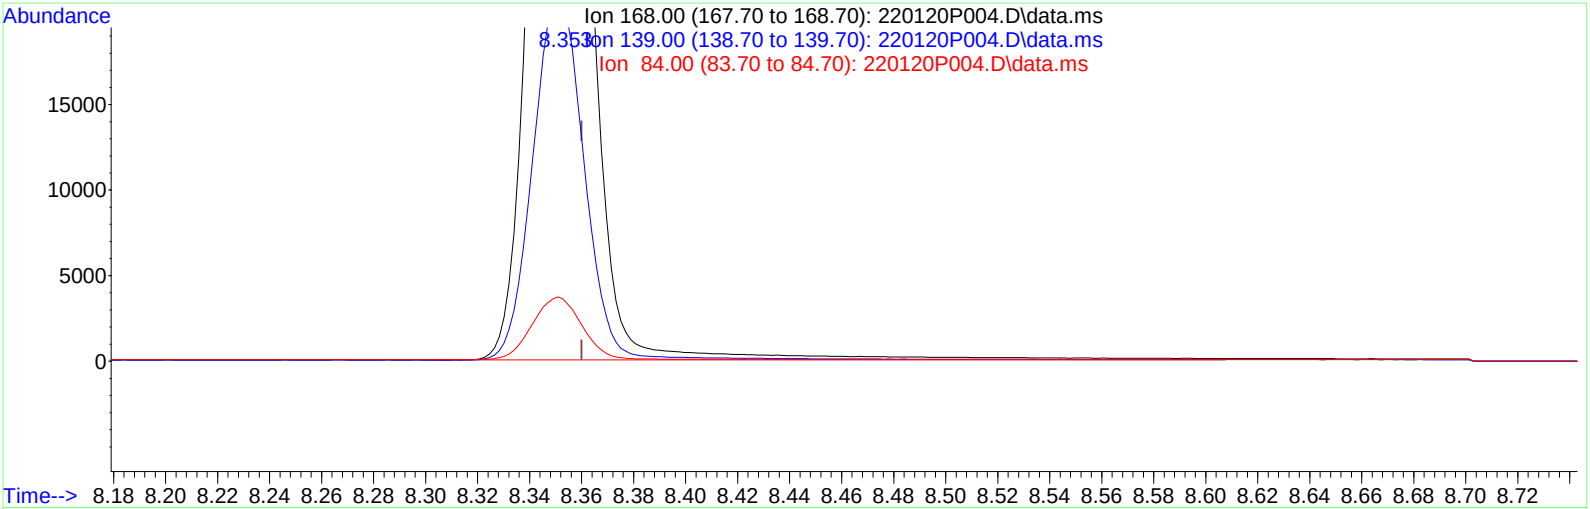

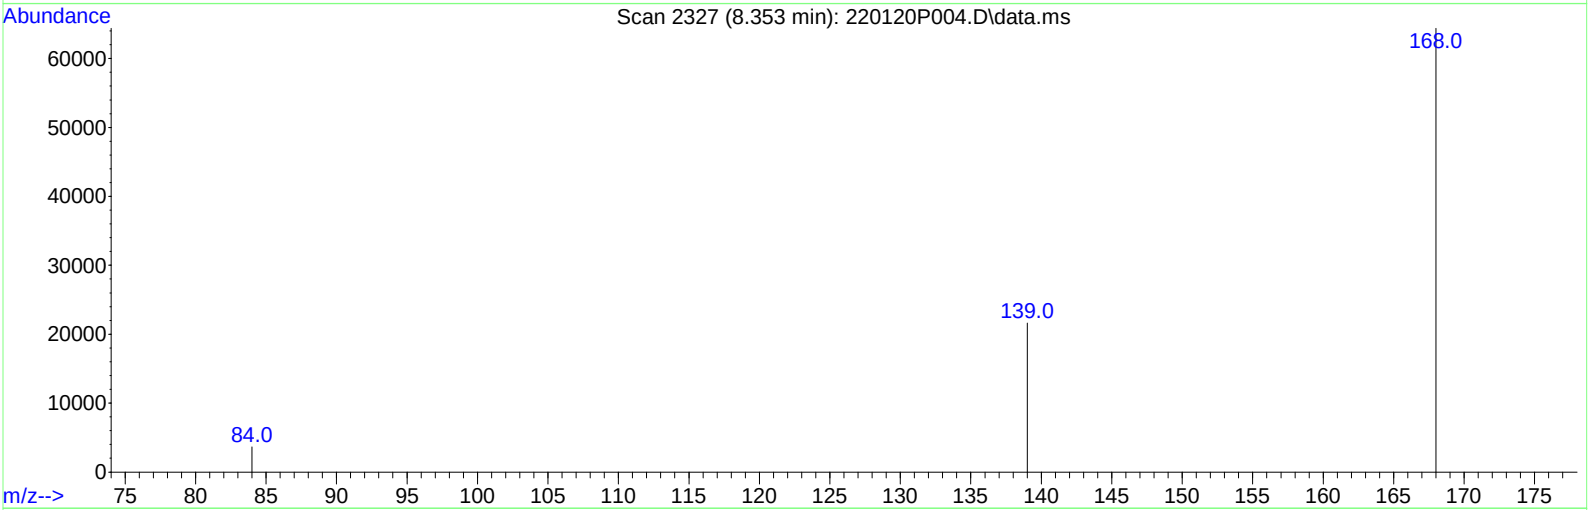

TIC: 220120P004.D\data.ms

(11) Dibenzofuran (T)

8.353min (-0.007) 19.212 ug/ml

response 87701

Ion	Exp%	Act%
168.00	100.00	100.00
139.00	0.00	33.64#
84.00	0.00	5.59
0.00	0.00	0.00

Manual Integration Reasons

1. BaseLine Smoothing

Date: 01/27/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P004.D
Acq On : 20 Jan 2022 1:33 pm
Operator : BDE
Sample : CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 09:45:16 2022
Quant Method : C:\msdchem\1\methods\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

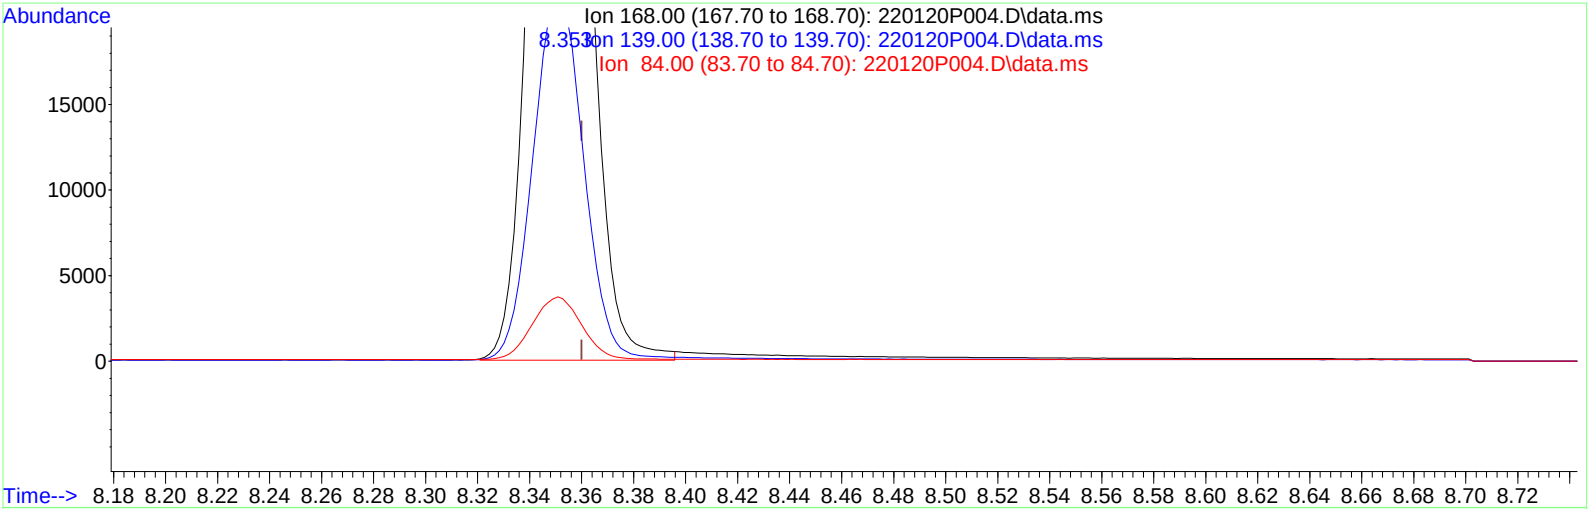

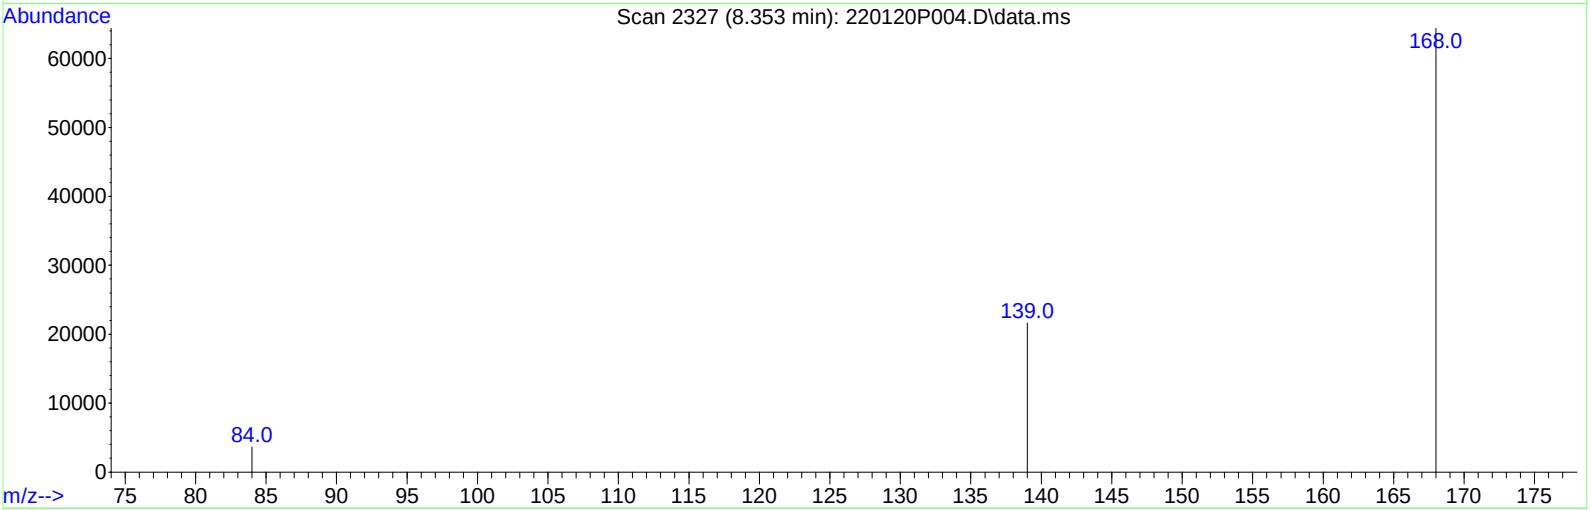

TIC: 220120P004.D\data.ms

(11) Dibenzofuran (T)

8.353min (-0.007) 18.715 ug/ml m

response 85436

Ion	Exp%	Act%
168.00	100.00	100.00
139.00	0.00	34.53#
84.00	0.00	5.74
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P004.D
Acq On : 20 Jan 2022 1:33 pm
Operator : BDE
Sample : CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 09:45:16 2022
Quant Method : C:\msdchem\1\methods\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

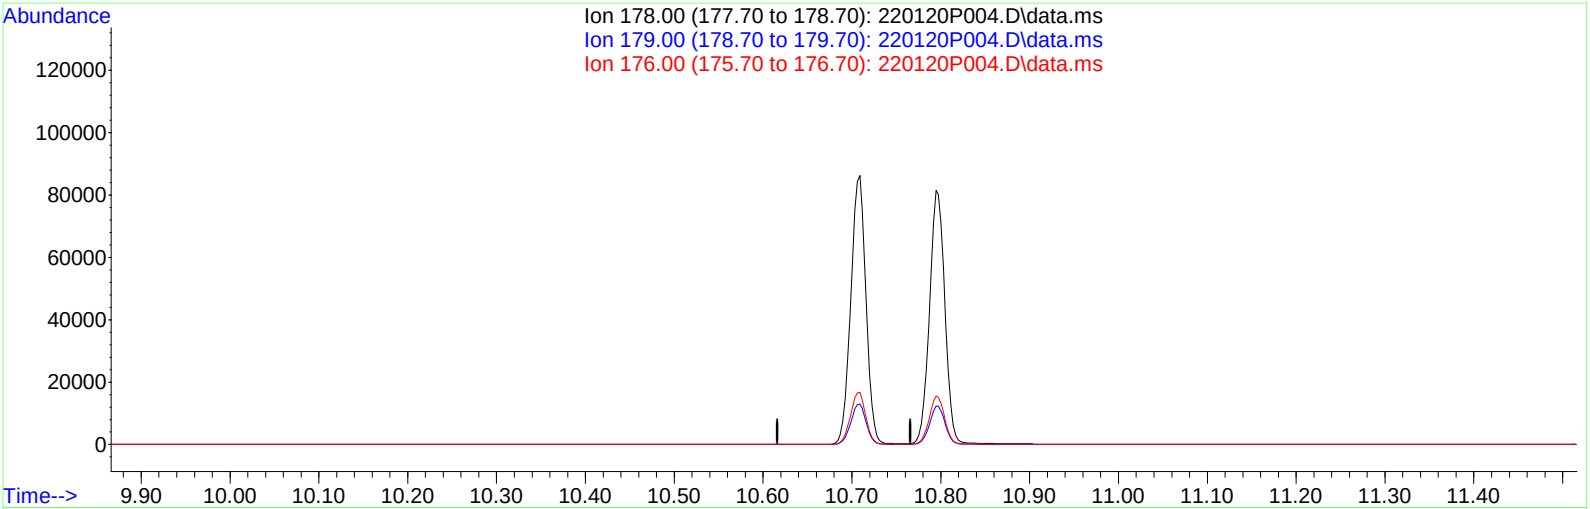

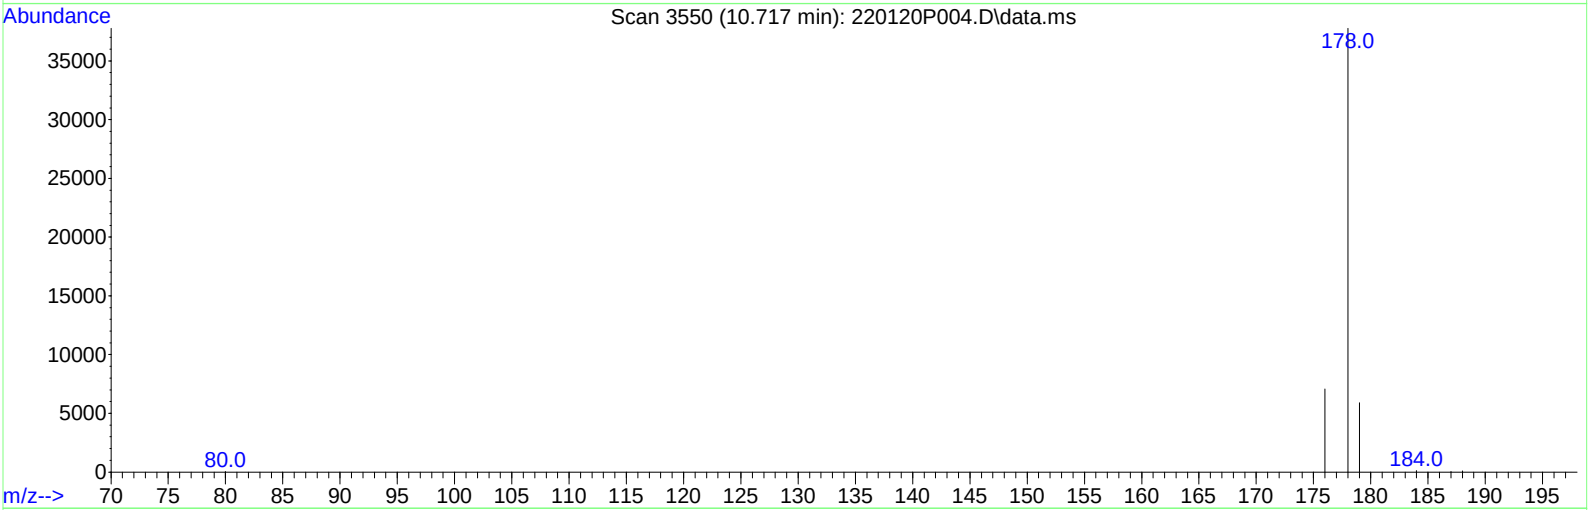

TIC: 220120P004.D\data.ms

(14) Phenanthrene (T)

10.716min (-10.716) 0.000 ug/ml

response 0

Ion	Exp%	Act%
178.00	100.00	0.00
179.00	15.90	0.00
176.00	18.90	0.00
0.00	0.00	0.00

Manual Integration Reasons

1. Peak Not Found
2. Assign Peak

Date: 01/27/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P004.D
Acq On : 20 Jan 2022 1:33 pm
Operator : BDE
Sample : CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 09:45:16 2022
Quant Method : C:\msdchem\1\methods\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

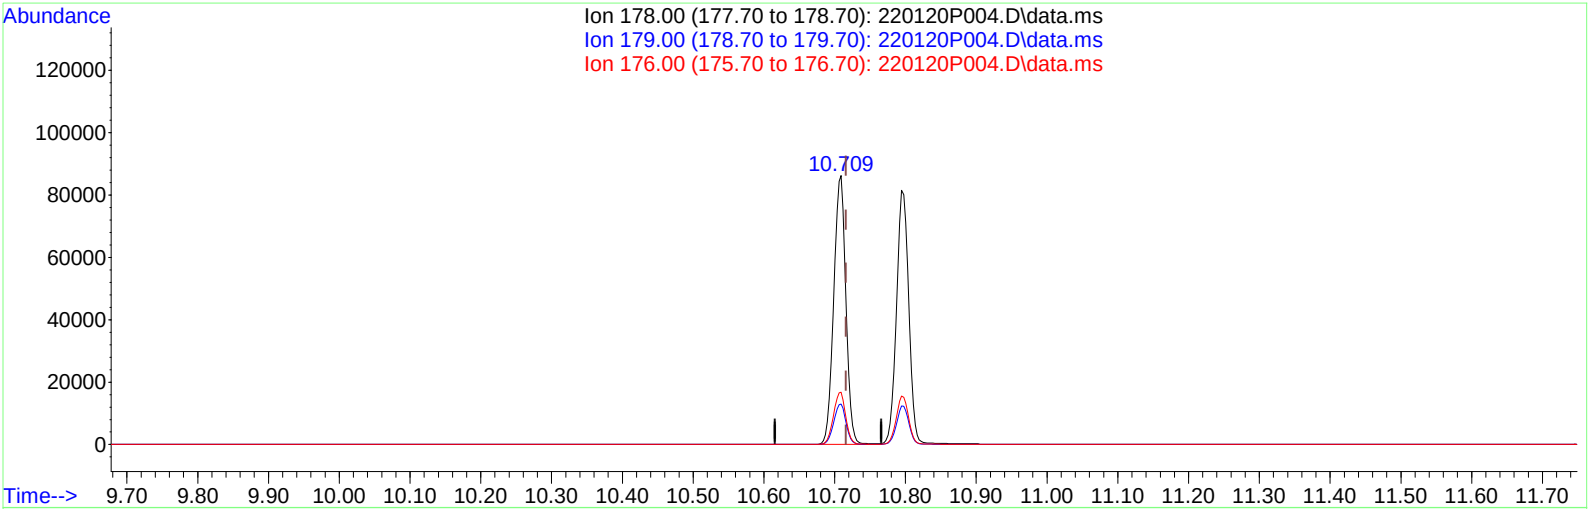

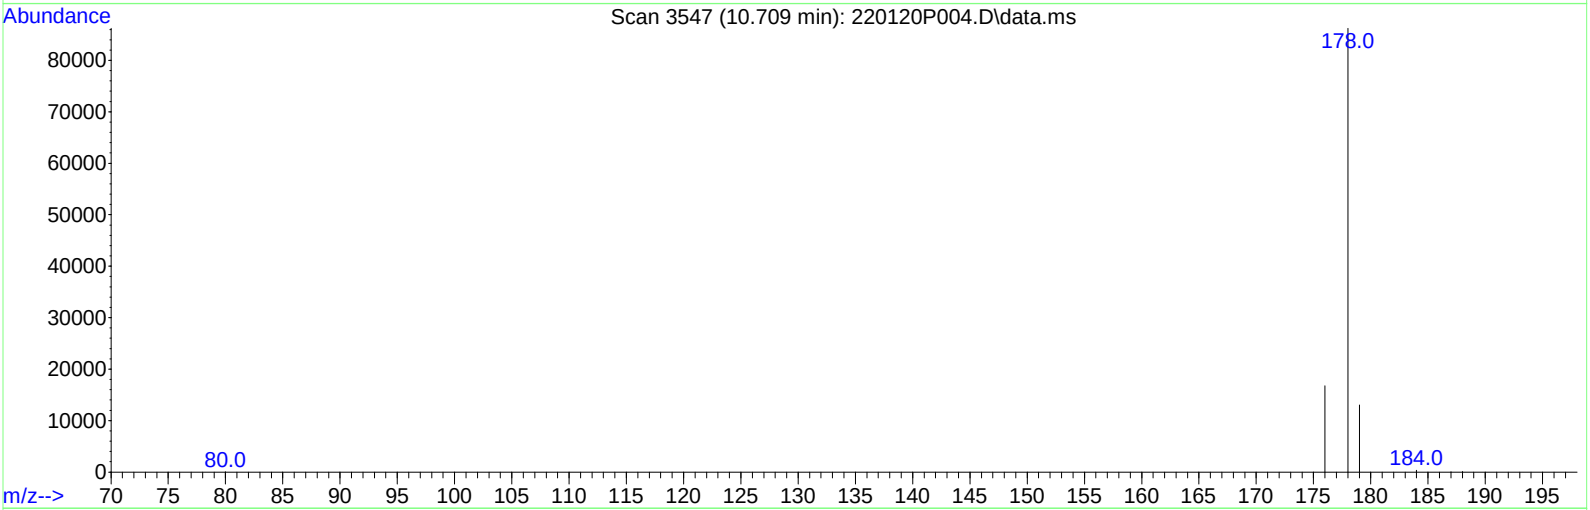

TIC: 220120P004.D\data.ms

(14) Phenanthrene (T)

10.709min (-0.007) 19.761 ug/ml m

response 102003

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.90	0.00
176.00	18.90	0.00
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P004.D
Acq On : 20 Jan 2022 1:33 pm
Operator : BDE
Sample : CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 09:45:16 2022
Quant Method : C:\msdchem\1\methods\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

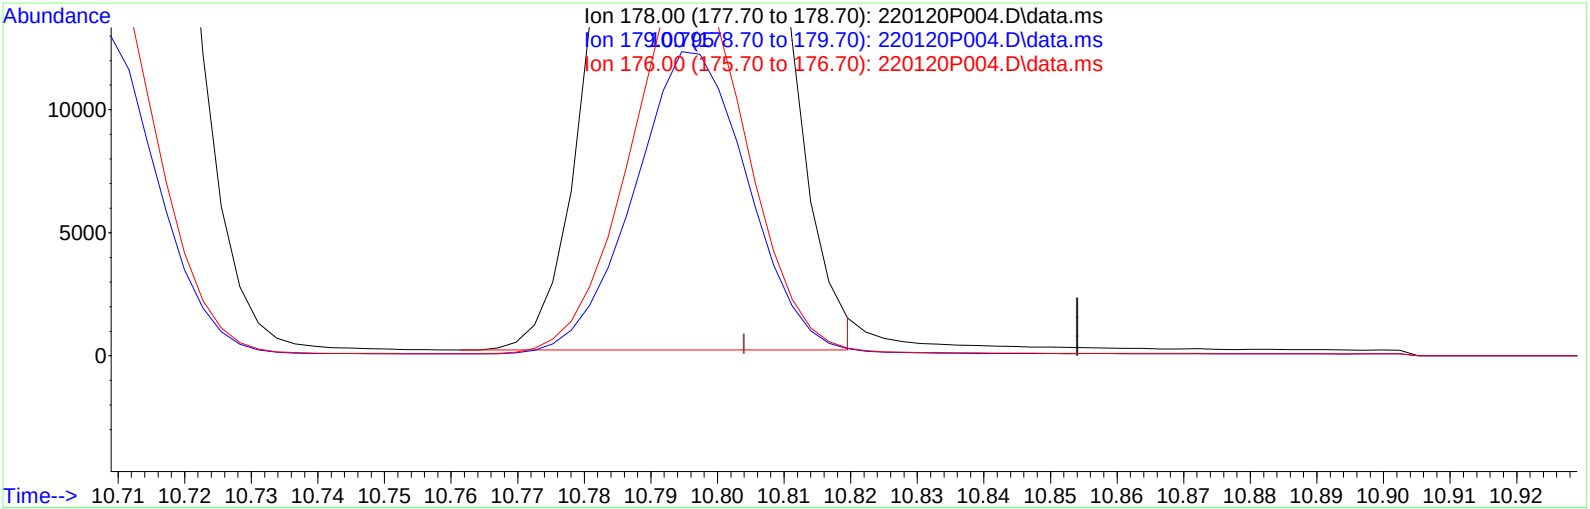

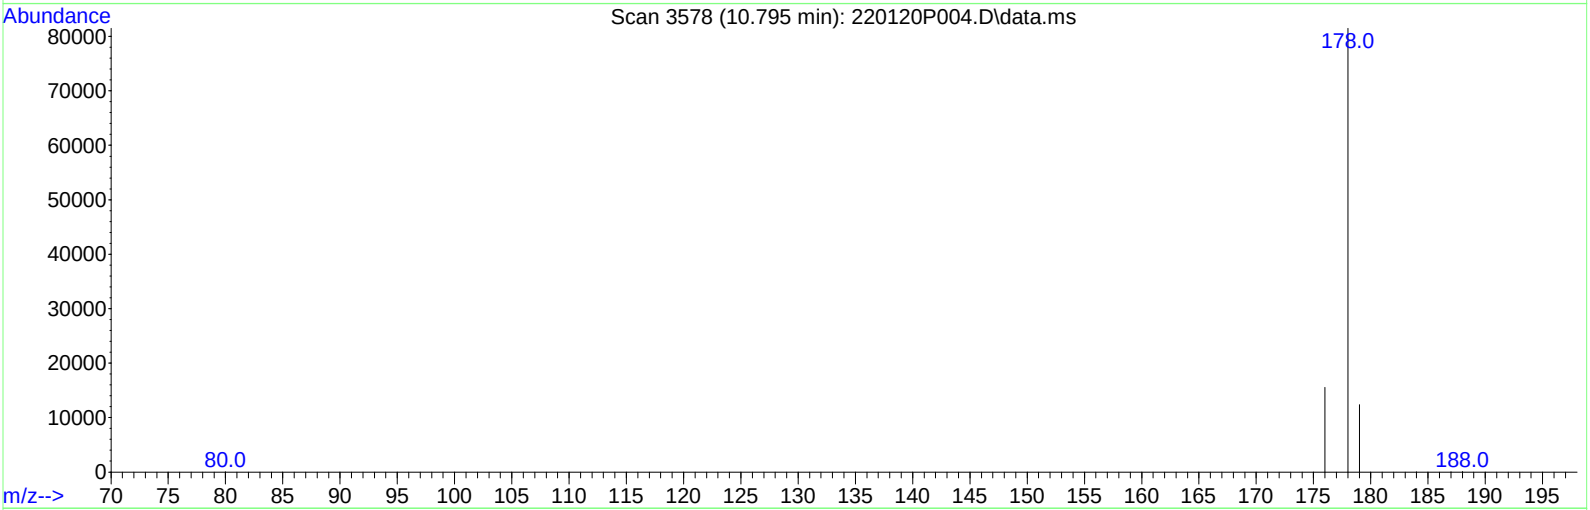

TIC: 220120P004.D\data.ms

(15) Anthracene (T)

10.795min (-0.009) 19.389 ug/ml

response 96545

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.80	15.19
176.00	18.20	19.09
0.00	0.00	0.00

Manual Integration Reasons

1. Incomplete Integration

Date: 01/27/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P004.D
Acq On : 20 Jan 2022 1:33 pm
Operator : BDE
Sample : CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 09:45:16 2022
Quant Method : C:\msdchem\1\methods\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

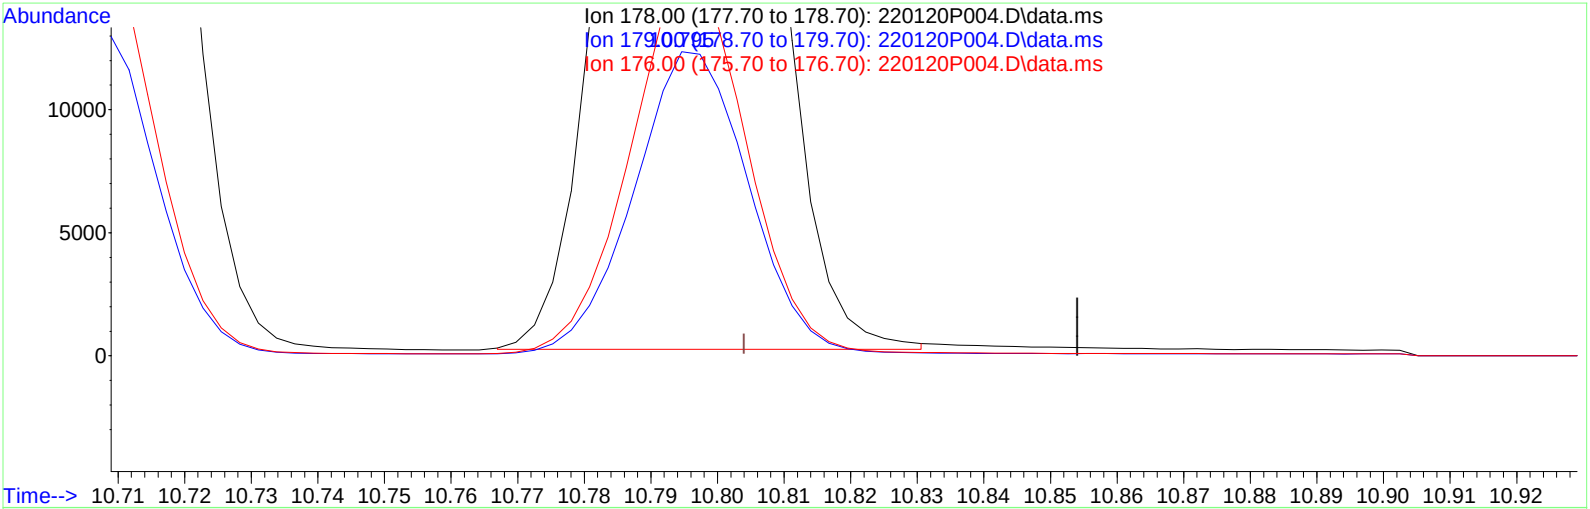

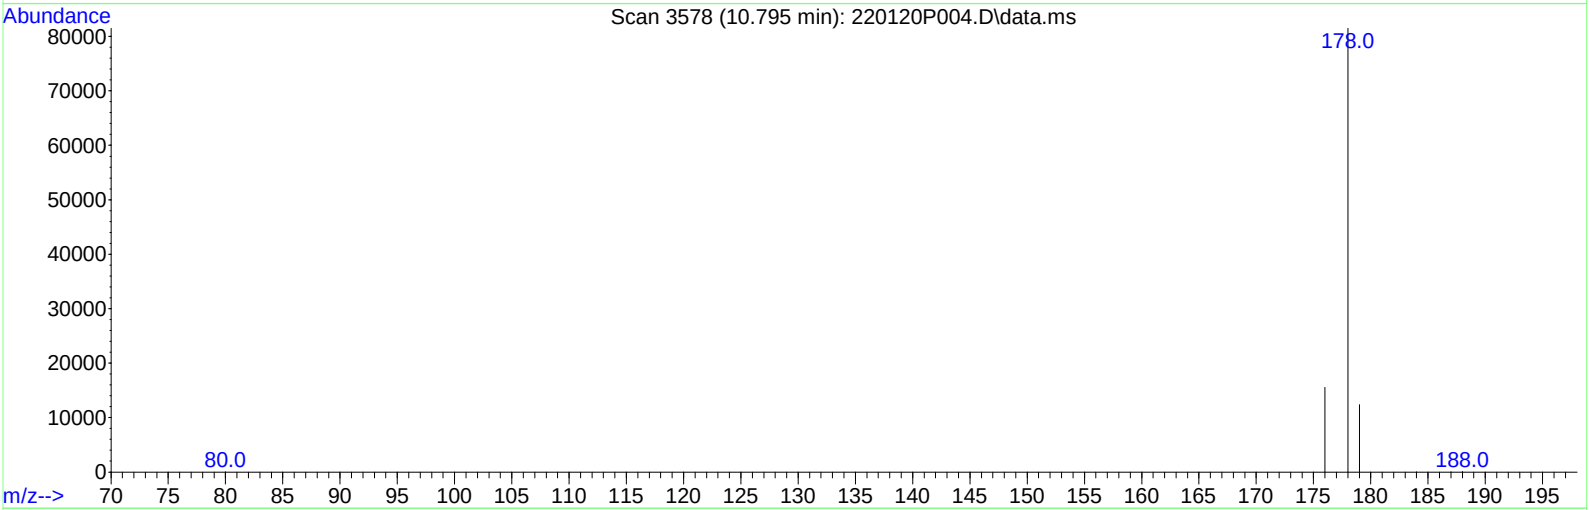

TIC: 220120P004.D\data.ms

(15) Anthracene (T)

10.795min (-0.009) 19.423 ug/ml m

response 96718

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.80	15.17
176.00	18.20	19.05
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P004.D
Acq On : 20 Jan 2022 1:33 pm
Operator : BDE
Sample : CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 09:45:16 2022
Quant Method : C:\msdchem\1\methods\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

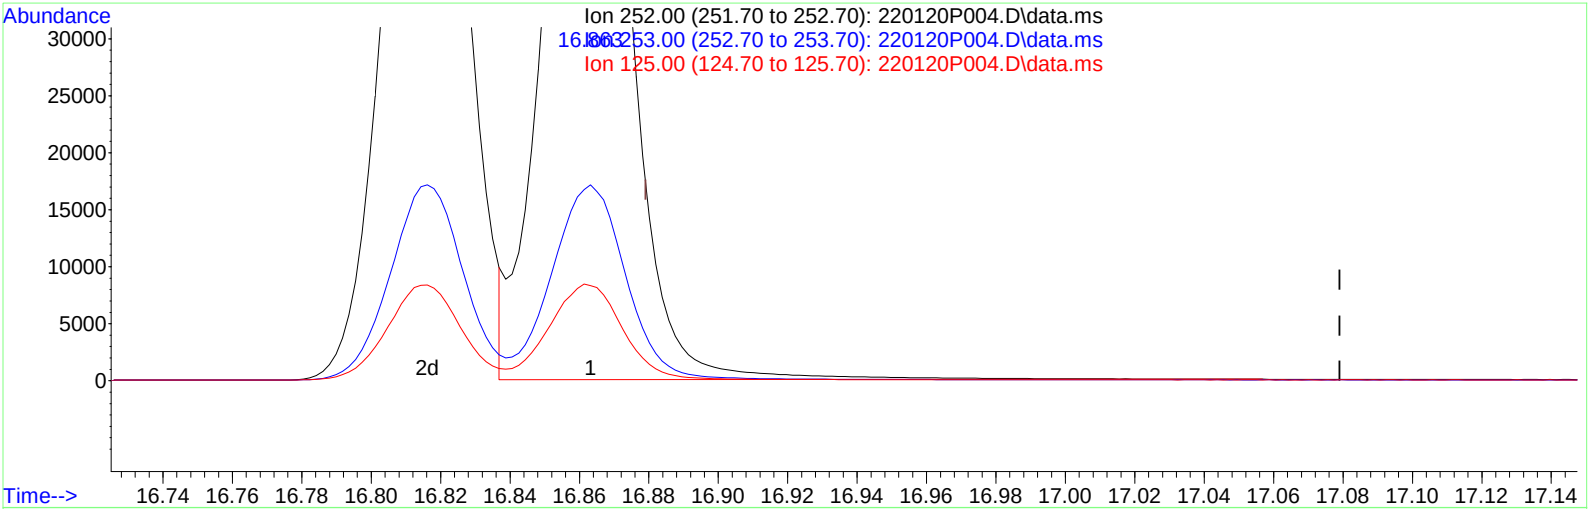

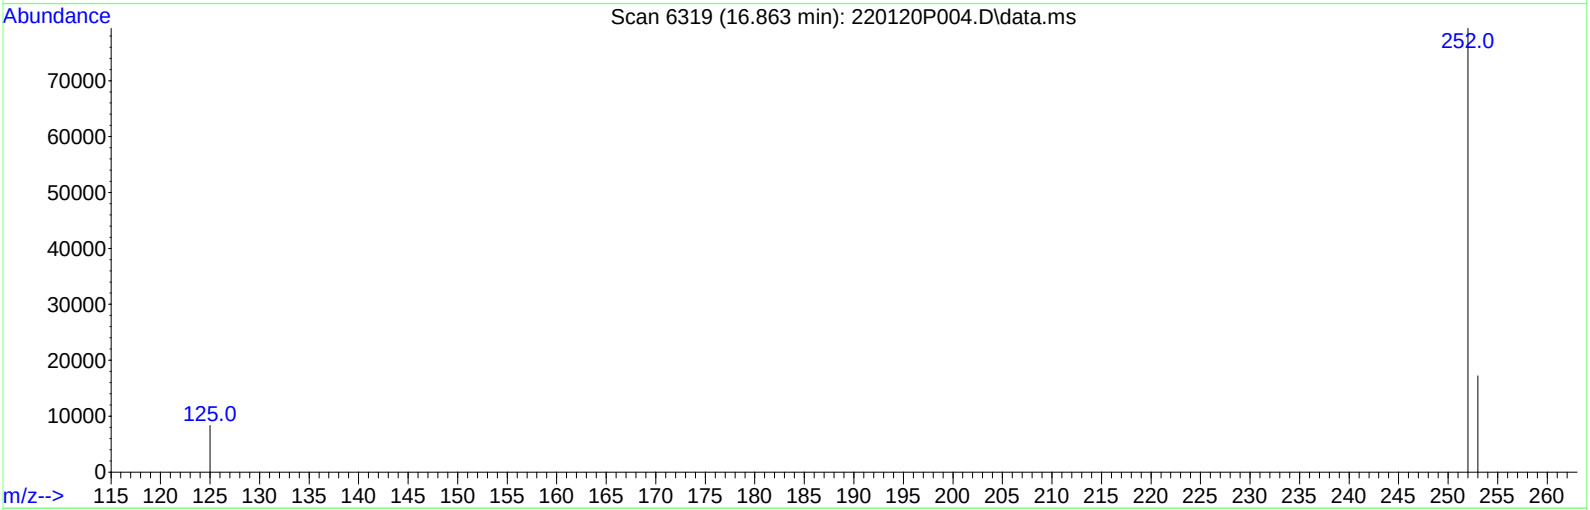

TIC: 220120P004.D\data.ms

(26) Benzo[k]fluoranthene (T)

16.863min (-0.016) 19.821 ug/ml

response 118634

Ion	Exp%	Act%
252.00	100.00	100.00
253.00	23.00	21.63
125.00	9.90	10.52
0.00	0.00	0.00

Manual Integration Reasons

1. BaseLine Smoothing

Date: 01/27/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P004.D
Acq On : 20 Jan 2022 1:33 pm
Operator : BDE
Sample : CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 09:45:16 2022
Quant Method : C:\msdchem\1\methods\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

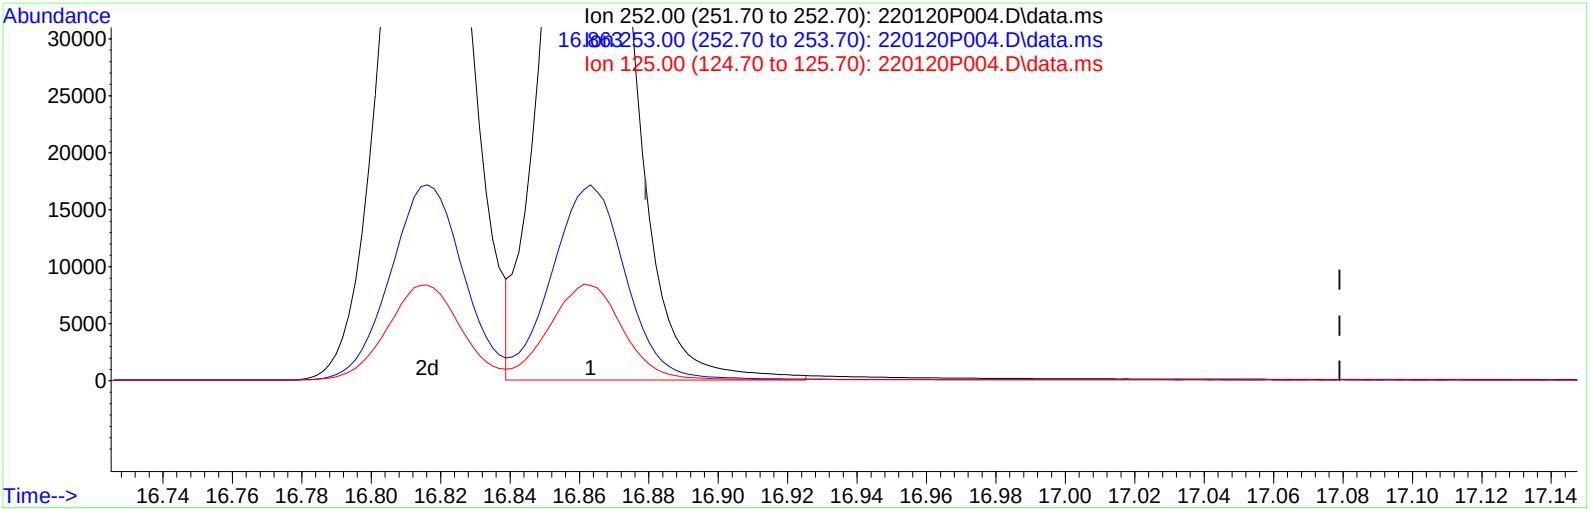

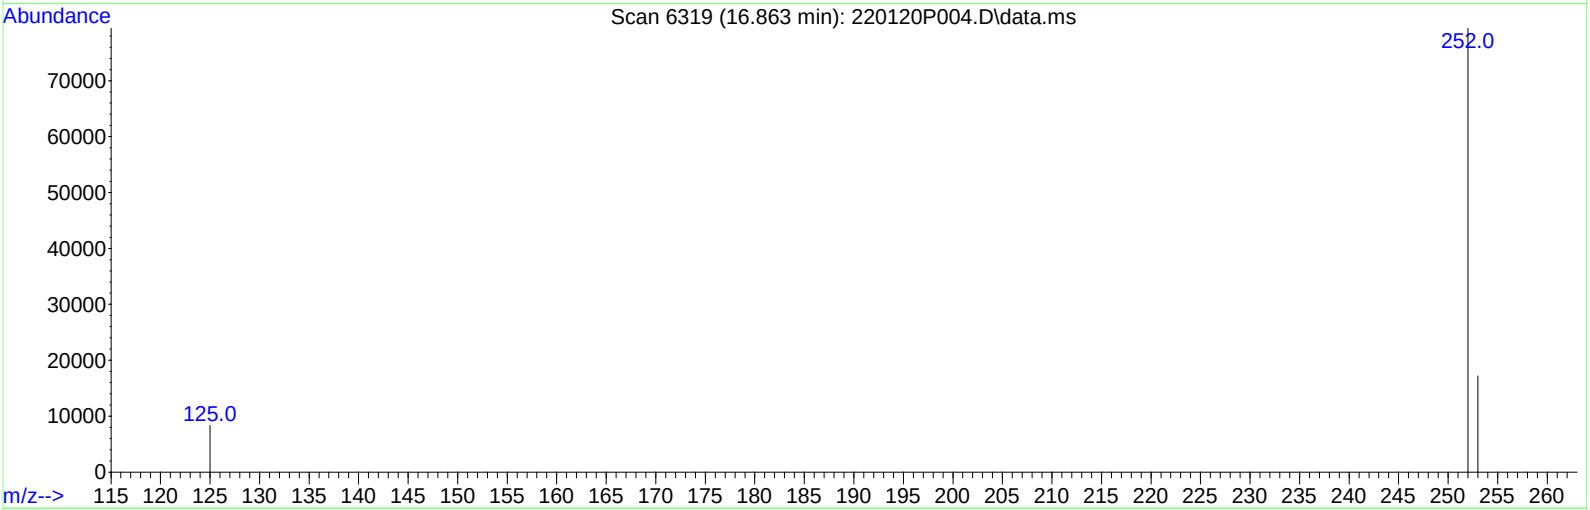

TIC: 220120P004.D\data.ms

(26) Benzo[k]fluoranthene (T)

16.863min (-0.016) 19.542 ug/ml m

response 116962

Ion	Exp%	Act%
252.00	100.00	100.00
253.00	23.00	21.94
125.00	9.90	10.67
0.00	0.00	0.00

Advanced Environmental Laboratories, Inc.

Continuing Calibration Verification Summary Report

FORM 7

SDG No.: J2200629

Client: Environmental Chemical Corporation (ECC)

Calibration Date/Time: 1/20/2022 23:54 **Lab File ID:** 220120P027.D

Instrument ID: J7P **Lab Sample ID:** ENDCCV

Parameter	Spike Added	CCV Result	CCV %D	QC Limits Q	QC Limits % D
Benzo[a]anthracene	20.0	19.4	3.2		50
2-Fluorobiphenyl	20.0	18.7	6.7		50
2-Methylnaphthalene-d10	20.0	19.1	4.4		50
Fluoranthene-d10	20.0	19.3	3.5		50
Nitrobenzene-d5	20.0	20.5	2.4		50
p-Terphenyl-d14	20.0	19.3	3.5		50

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P027.D
Acq On : 20 Jan 2022 11:54 pm
Operator : BDE
Sample : END CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 00:17:49 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

Compound	R.T.	QIon	Response	Conc	Units	Dev(Min)
Internal Standards						
1) Naphthalene-d8 (IS)	4.110	136	21096	4.000	ug/ml	0.00
7) Acenaphthene-d10 (IS)	7.942	164	11107	4.000	ug/ml	0.00
13) Phenanthrene-d10 (IS)	10.667	188	21688	4.000	ug/ml	0.00
19) Chrysene-d12 (IS)	15.064	240	19026	4.000	ug/ml	-0.01
24) Perylene-d12 (IS)	17.481	264	20226	4.000	ug/ml	-0.02
System Monitoring Compounds						
2) Nitrobenzene-d5	2.855	82	26902	20.474	ug/ml	0.02
4) 2-Methylnaphthalene-d10	5.666	152	51642	19.121	ug/ml	0.00
8) 2-Fluorobiphenyl	6.589	172	71699m	18.665	ug/ml	0.00
17) Fluoranthene-d10	12.678	212	95963	19.291	ug/ml	-0.01
21) p-Terphenyl-d14	13.389	244	78243	19.305	ug/ml	-0.01
Target Compounds						Qvalue
3) Naphthalene	4.158	128	92819	19.294	ug/ml	100
5) 2-Methylnaphthalene	5.739	142	59468	19.150	ug/ml	97
6) 1-Methylnaphthalene	5.955	142	57720	19.194	ug/ml	97
9) Acenaphthylene	7.647	152	105153	19.354	ug/ml	99
10) Acenaphthene	8.003	154	51517	18.609	ug/ml	95
11) Dibenzofuran	8.351	168	85628m	18.872	ug/ml	
12) Fluorene	9.001	166	67531	18.961	ug/ml	98
14) Phenanthrene	10.706	178	103072m	19.904	ug/ml	
15) Anthracene	10.795	178	97362m	19.489	ug/ml	
16) Carbazole	11.099	167	93428	18.656	ug/ml	99
18) Fluoranthene	12.707	202	115303	18.899	ug/ml	98
20) Pyrene	13.067	202	119608	19.488	ug/ml	98
22) Benzo[a]anthracene	15.050	228	111274	19.363	ug/ml	98
23) Chrysene	15.108	228	108326	19.382	ug/ml	98
25) Benzo[b]fluoranthene	16.814	252	113899	19.957	ug/ml	97
26) Benzo[k]fluoranthene	16.859	252	117982	19.737	ug/ml	98
27) Benzo[a]pyrene	17.376	252	116188	19.847	ug/ml	100
28) Indeno(1,2,3-cd)pyrene	19.803	276	109438	19.220	ug/ml	98
29) Dibenzo[a,h]anthracene	19.890	278	107676	19.460	ug/ml	98
30) Benzo[g,h,i]perylene	20.497	276	116151	19.019	ug/ml	97

(#) = qualifier out of range (m) = manual integration (+) = signals summed

Quantitation Report (QT Reviewed)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P027.D
Acq On : 20 Jan 2022 11:54 pm
Operator : BDE
Sample : END CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 00:17:49 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

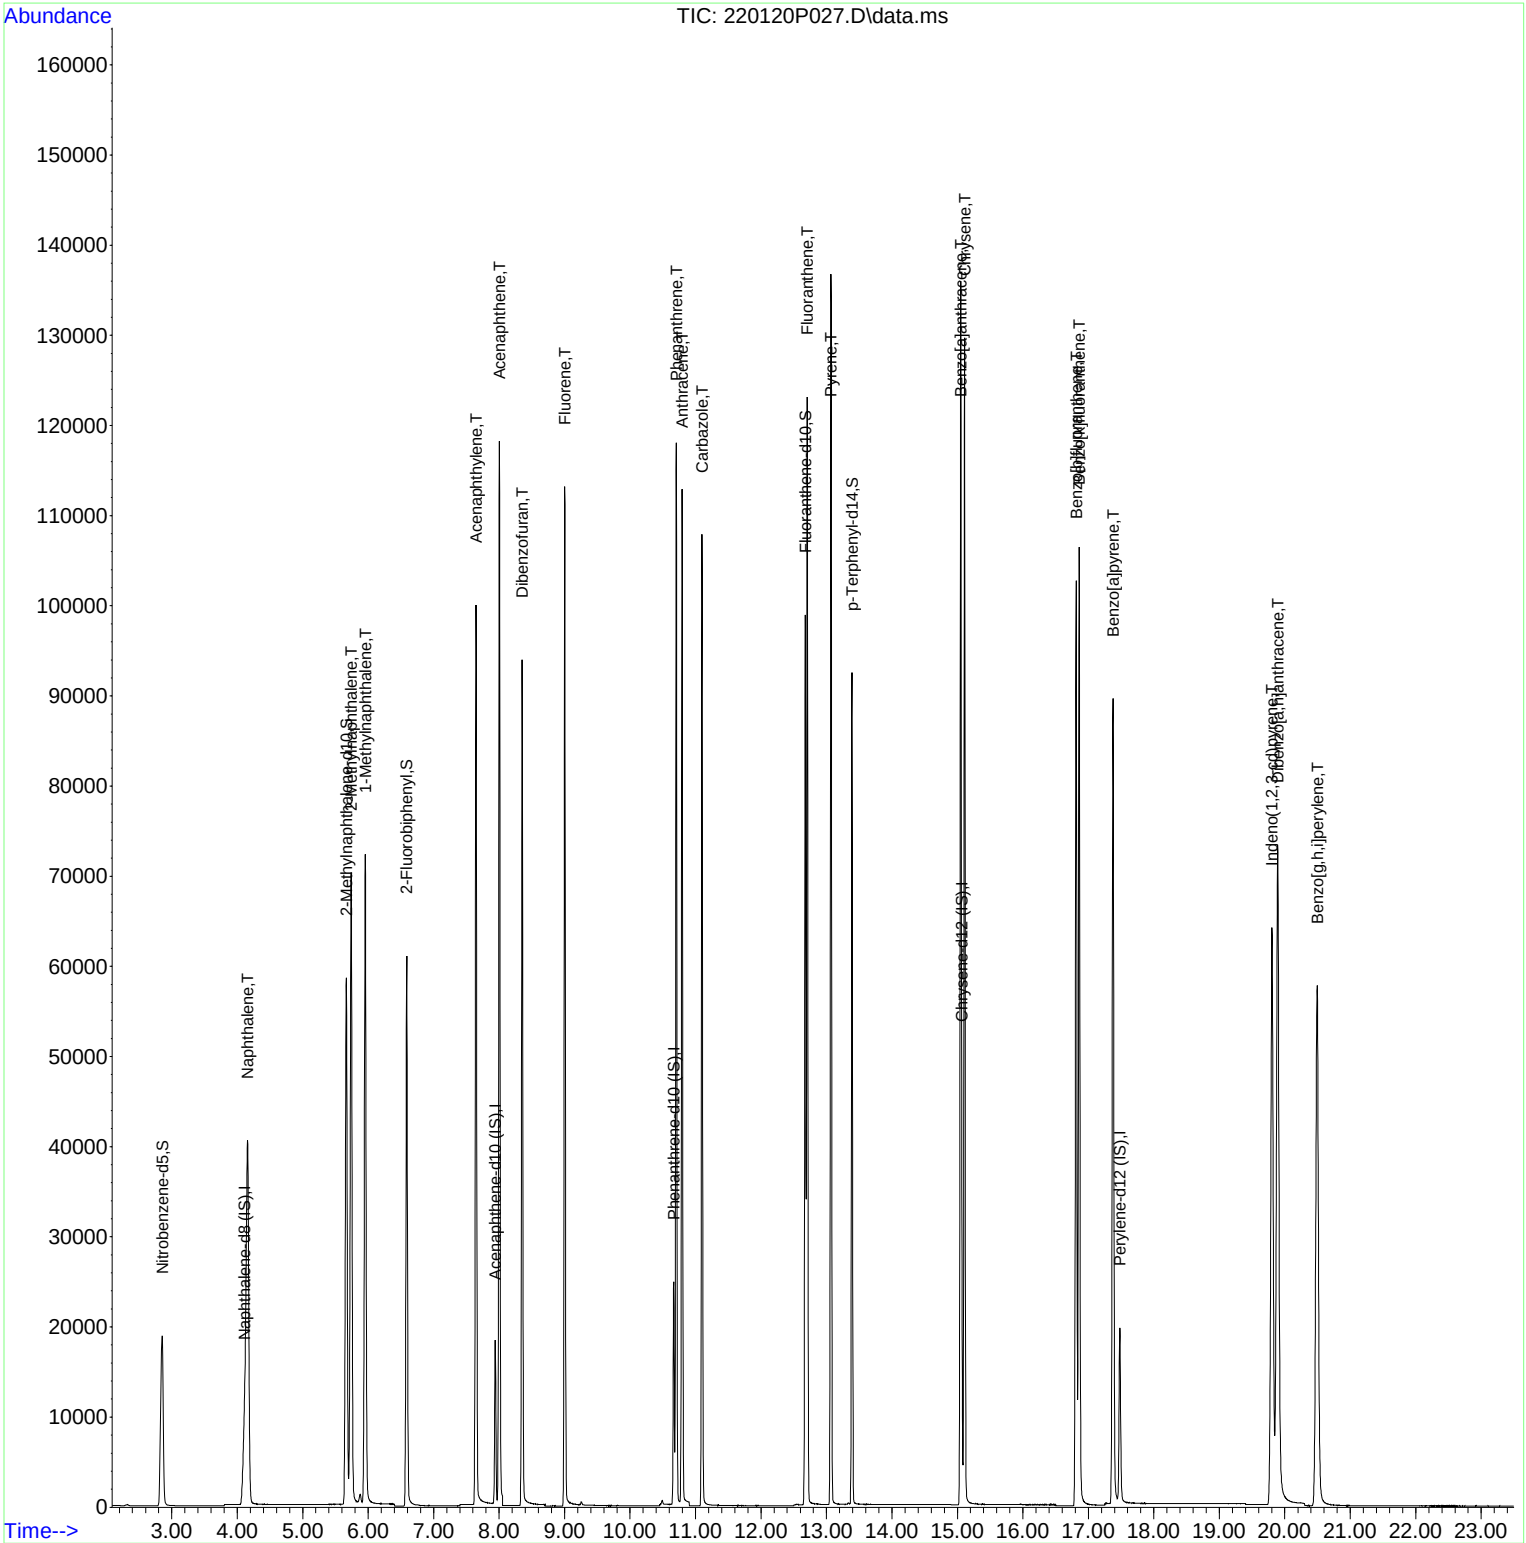

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P027.D
Acq On : 20 Jan 2022 11:54 pm
Operator : BDE
Sample : END CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 00:17:49 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

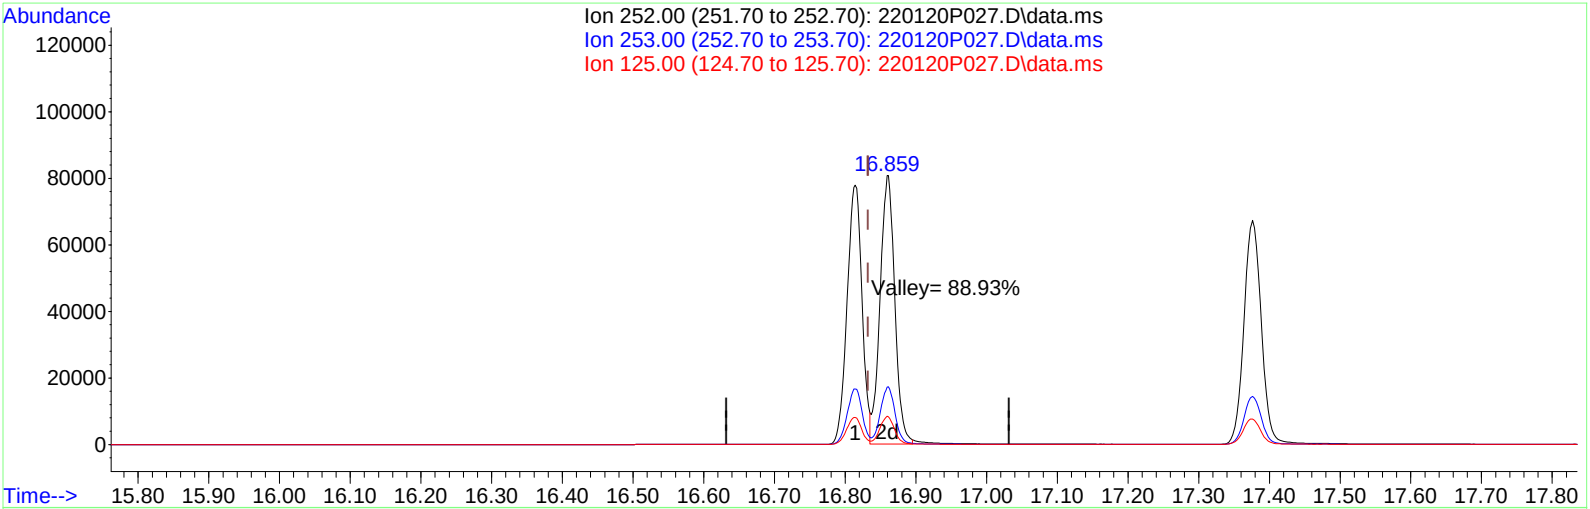

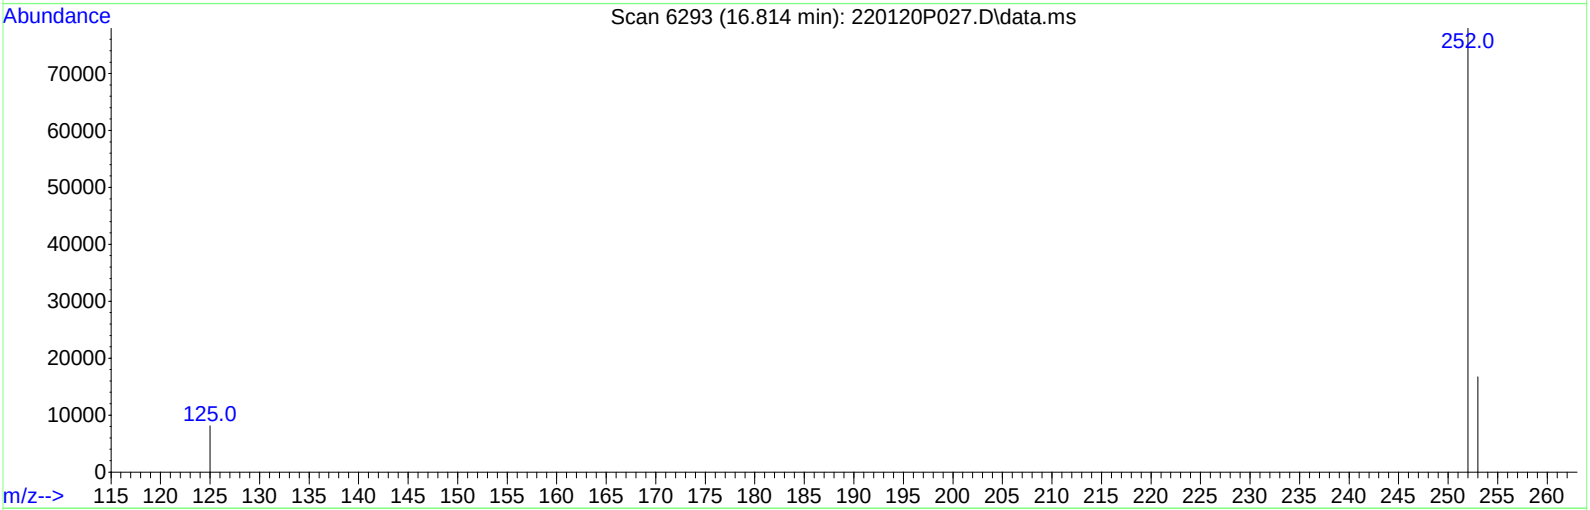

TIC: 220120P027.D\data.ms

(25) Benzo[b]fluoranthene (T)

16.814min (-0.018) 19.957 ug/ml

response 113899

Ion	Exp%	Act%
252.00	100.00	100.00
253.00	23.00	21.58
125.00	9.90	10.46
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P027.D
Acq On : 20 Jan 2022 11:54 pm
Operator : BDE
Sample : END CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 00:17:49 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

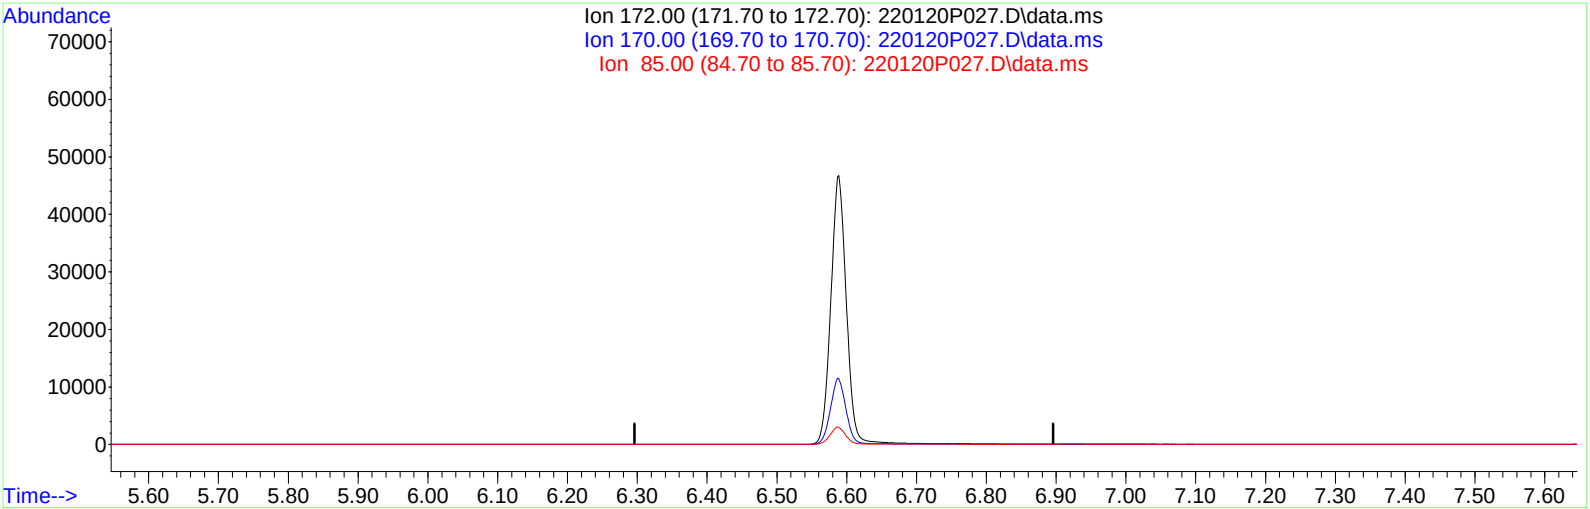

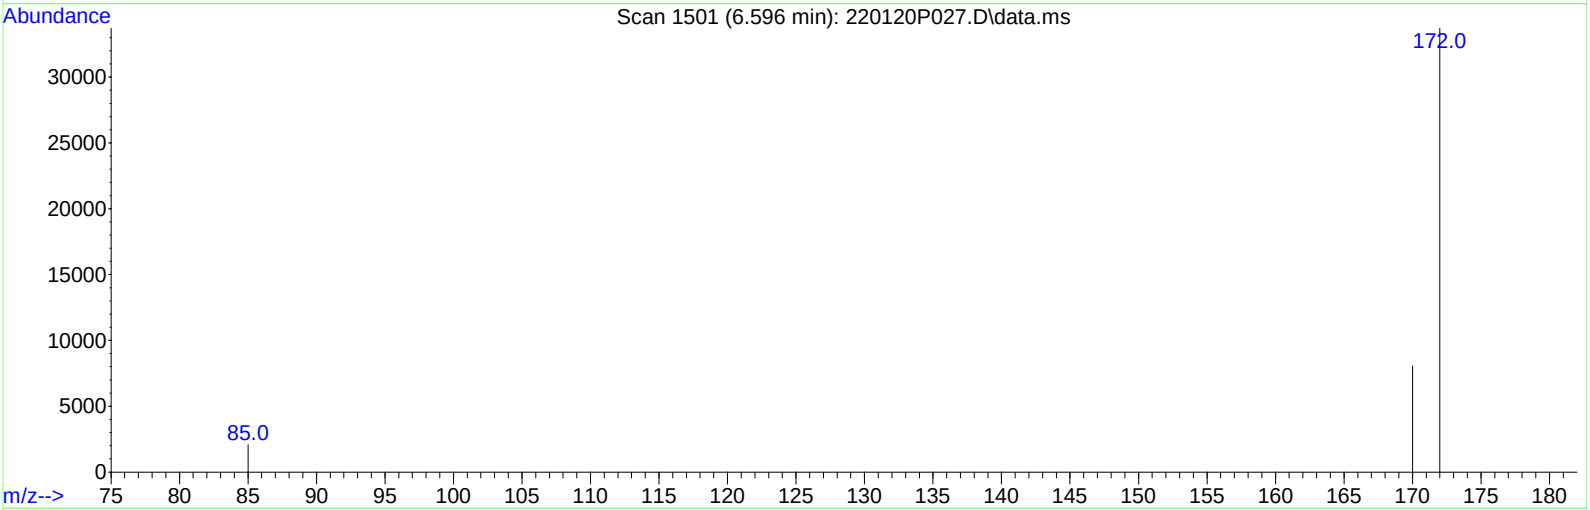

TIC: 220120P027.D\data.ms

(8) 2-Fluorobiphenyl (S)

6.596min (-6.596) 0.000 ug/ml

response 0

Ion	Exp%	Act%
172.00	100.00	0.00
170.00	23.80	0.00
85.00	6.70	0.00
0.00	0.00	0.00

Manual Integration Reasons

1. Peak Not Found
2. Assign Peak

Date: 01/27/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P027.D
Acq On : 20 Jan 2022 11:54 pm
Operator : BDE
Sample : END CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 00:17:49 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

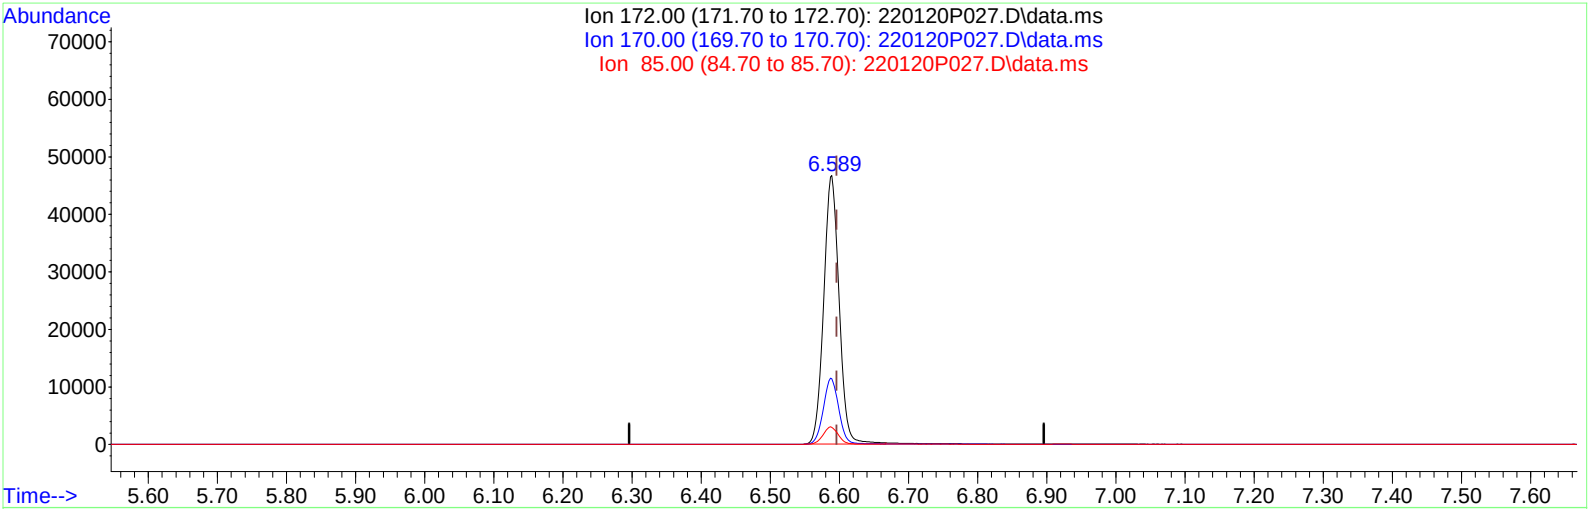

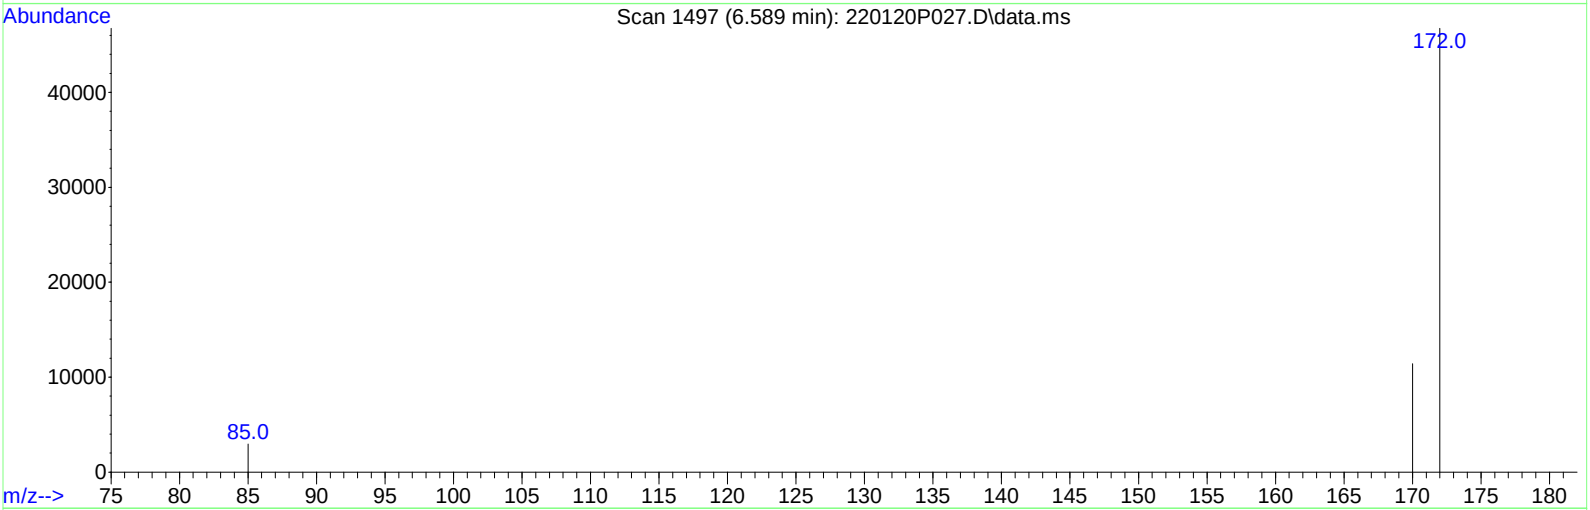

TIC: 220120P027.D\data.ms

(8) 2-Fluorobiphenyl (S)

6.589min (-0.007) 18.665 ug/ml m

response 71699

Ion	Exp%	Act%
172.00	100.00	100.00
170.00	23.80	0.00
85.00	6.70	0.00
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P027.D
Acq On : 20 Jan 2022 11:54 pm
Operator : BDE
Sample : END CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 00:17:49 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

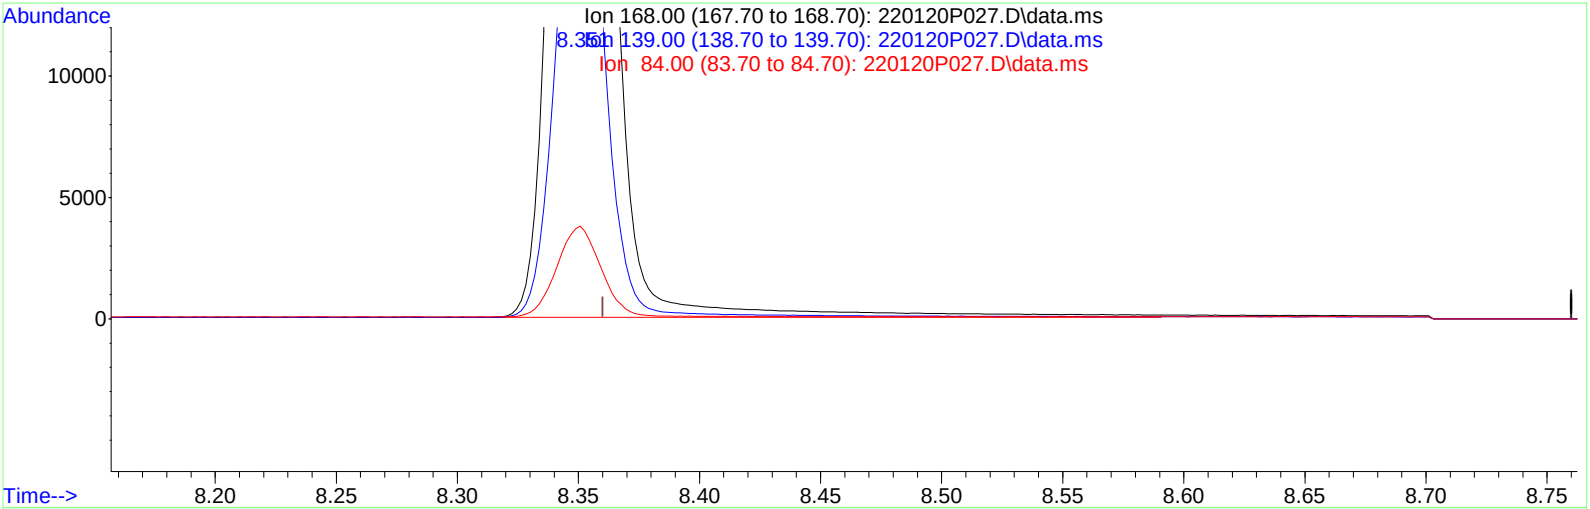

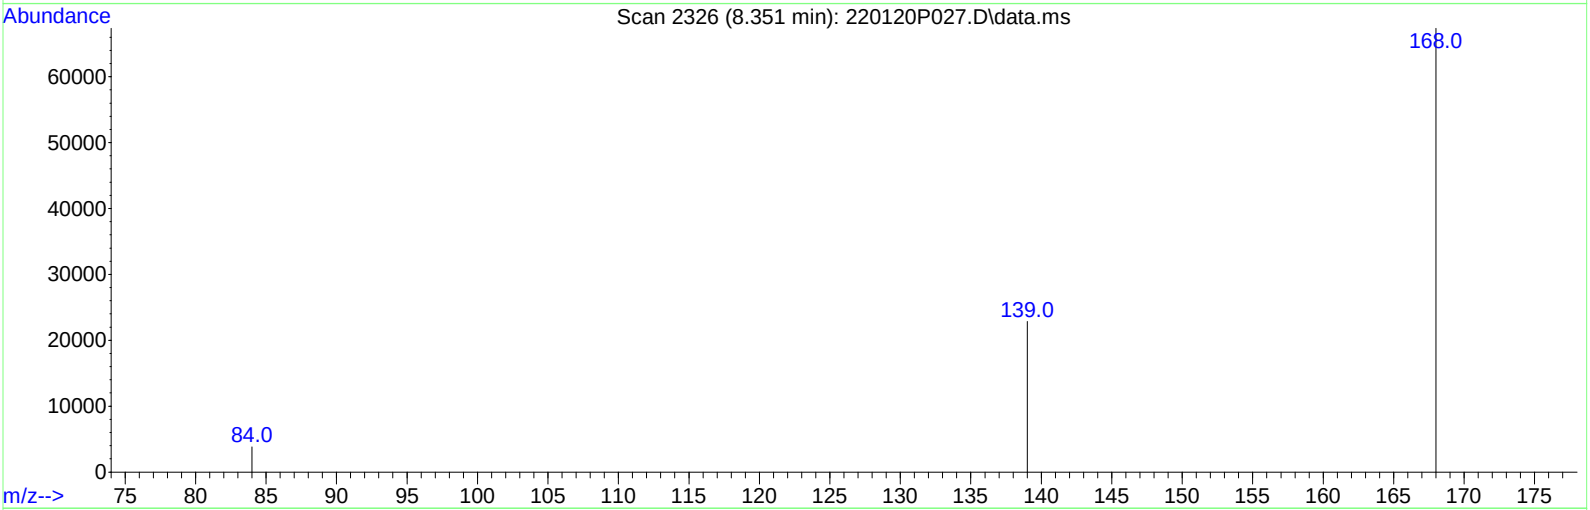

TIC: 220120P027.D\data.ms

(11) Dibenzofuran (T)

8.351min (-0.009) 19.291 ug/ml

response 87527

Ion	Exp%	Act%
168.00	100.00	100.00
139.00	0.00	33.74#
84.00	0.00	5.43
0.00	0.00	0.00

Manual Integration Reasons

1. BaseLine Smoothing

Date: 01/27/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P027.D
Acq On : 20 Jan 2022 11:54 pm
Operator : BDE
Sample : END CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 00:17:49 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

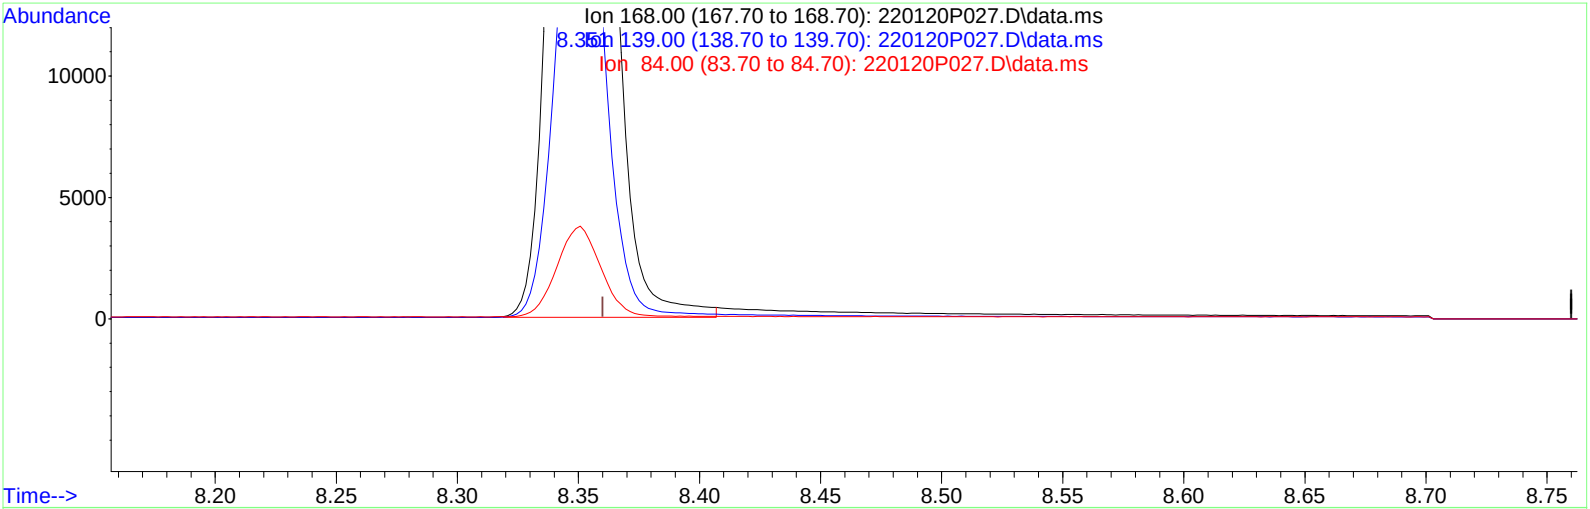

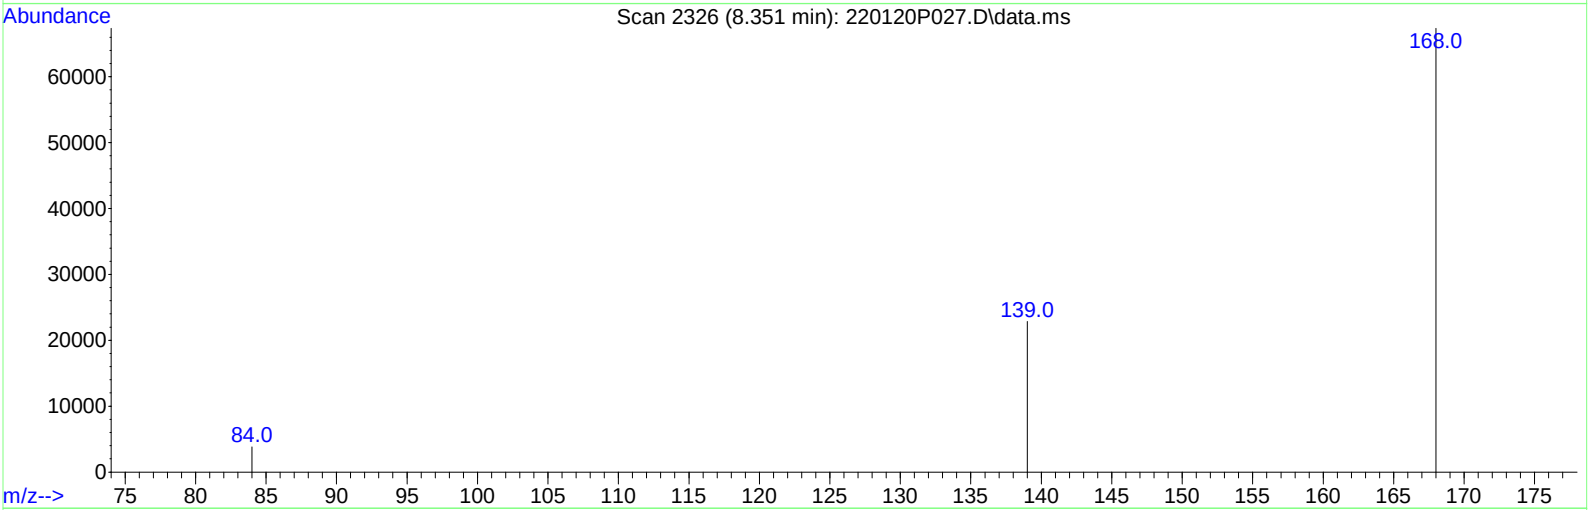

TIC: 220120P027.D\data.ms

(11) Dibenzofuran (T)

8.351min (-0.009) 18.872 ug/ml m

response 85628

Ion	Exp%	Act%
168.00	100.00	100.00
139.00	0.00	34.49#
84.00	0.00	5.55
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P027.D
Acq On : 20 Jan 2022 11:54 pm
Operator : BDE
Sample : END CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 00:17:49 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

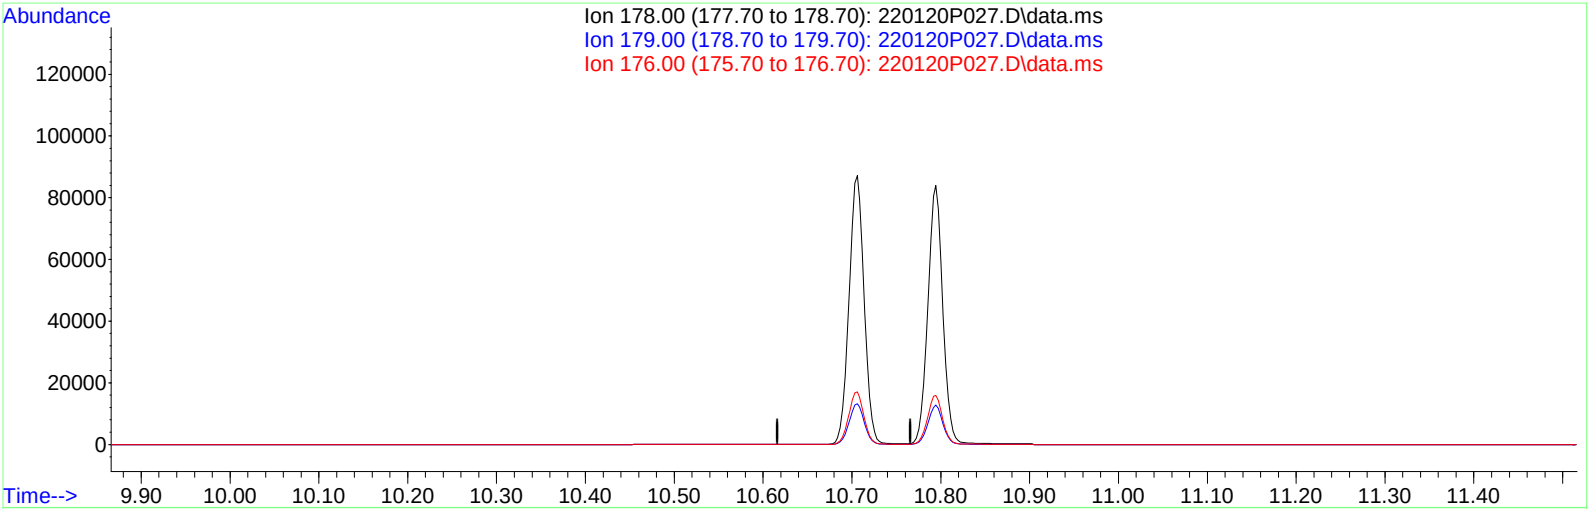

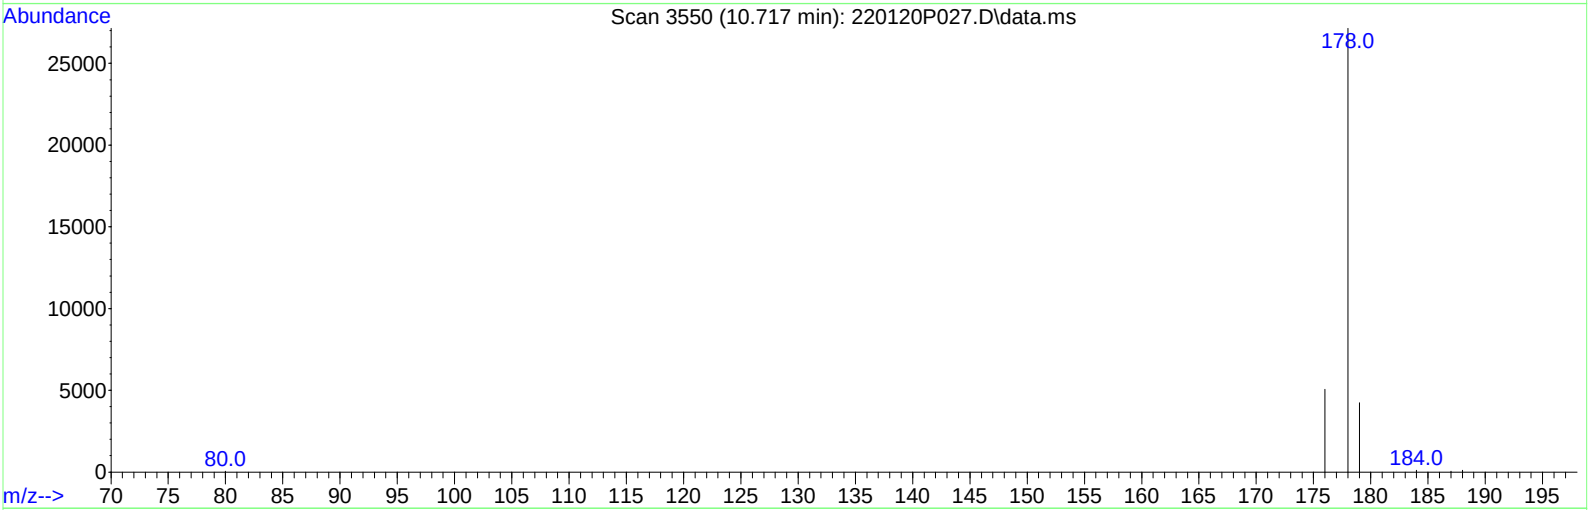

TIC: 220120P027.D\data.ms

(14) Phenanthrene (T)

10.716min (-10.716) 0.000 ug/ml

response 0

Ion	Exp%	Act%
178.00	100.00	0.00
179.00	15.90	0.00
176.00	18.90	0.00
0.00	0.00	0.00

Manual Integration Reasons

1. Peak Not Found
2. Assign Peak

Date: 01/27/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P027.D
Acq On : 20 Jan 2022 11:54 pm
Operator : BDE
Sample : END CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 00:17:49 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

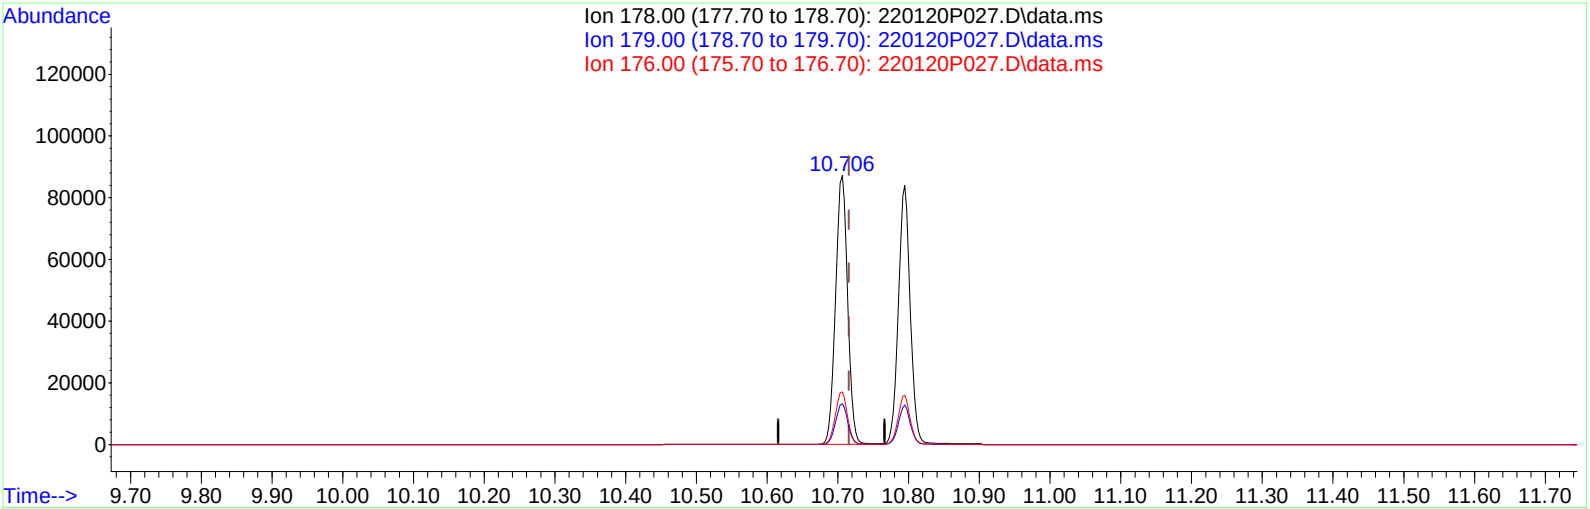

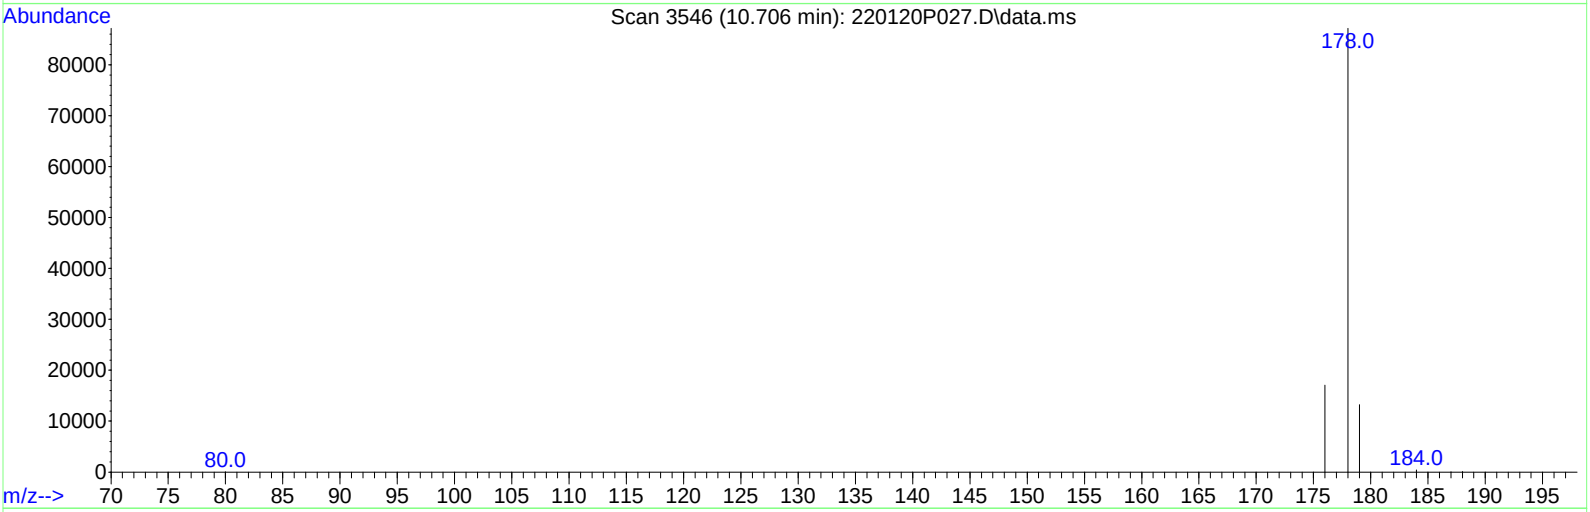

TIC: 220120P027.D\data.ms

(14) Phenanthrene (T)

10.706min (-0.010) 19.904 ug/ml m

response 103072

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.90	0.00
176.00	18.90	0.00
0.00	0.00	0.00

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P027.D
Acq On : 20 Jan 2022 11:54 pm
Operator : BDE
Sample : END CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 00:17:49 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

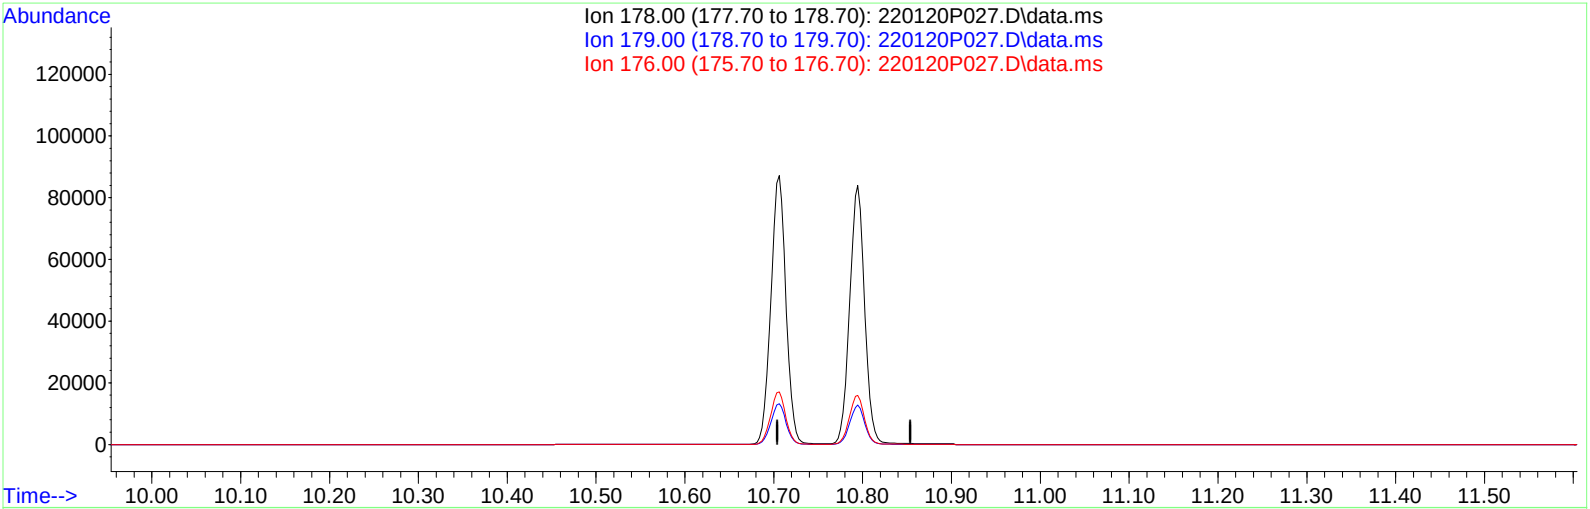

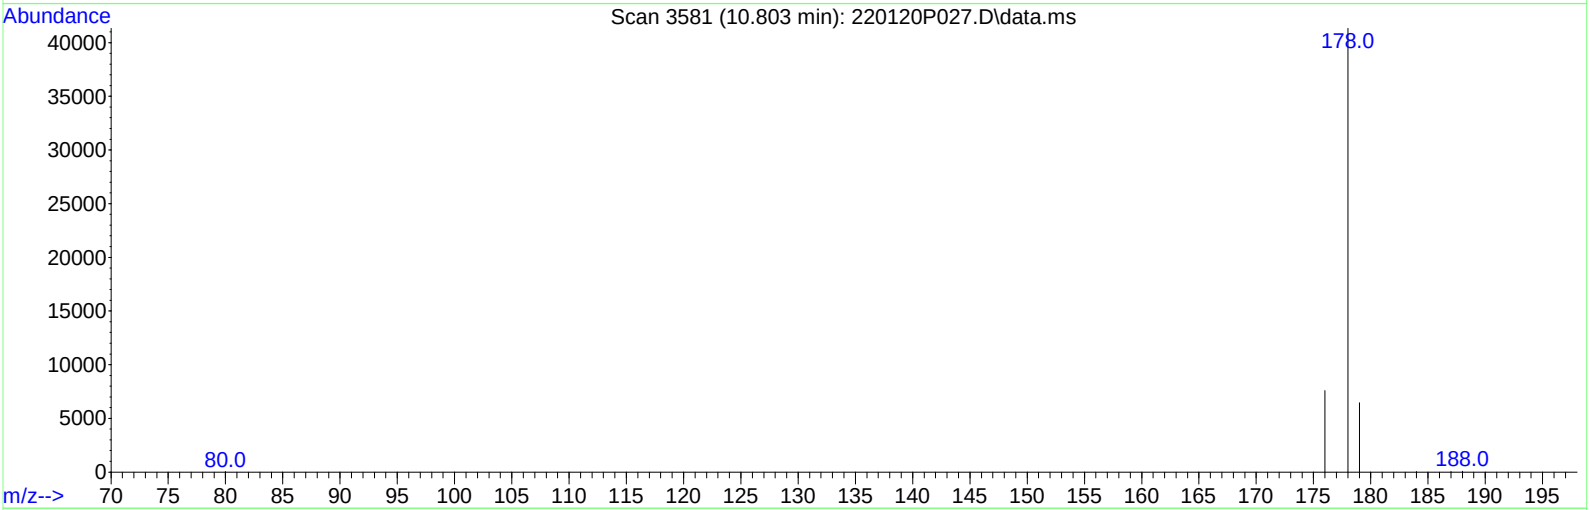

TIC: 220120P027.D\data.ms

(15) Anthracene (T)

10.804min (-10.804) 0.000 ug/ml

response 0

Ion	Exp%	Act%
178.00	100.00	0.00
179.00	15.80	0.00
176.00	18.20	0.00
0.00	0.00	0.00

Manual Integration Reasons

1. Peak Not Found
2. Assign Peak

Date: 01/27/22 By: BDE

Quantitation Report (Qedit)

Data Path : C:\msdchem\1\data\220120P\
Data File : 220120P027.D
Acq On : 20 Jan 2022 11:54 pm
Operator : BDE
Sample : END CCV
Misc : 8270C/D/E SIM; SVOCB04529P
ALS Vial : 4 Sample Multiplier: 1

Quant Time: Jan 21 00:17:49 2022
Quant Method : C:\MSDCHEM\1\METHODS\SIM-220113P-DOD.M
InstName : J7P
Quant Title : 8270 PAH SIM
QLast Update : Fri Jan 14 10:25:29 2022
Response via : Initial Calibration
Integrator: RTE

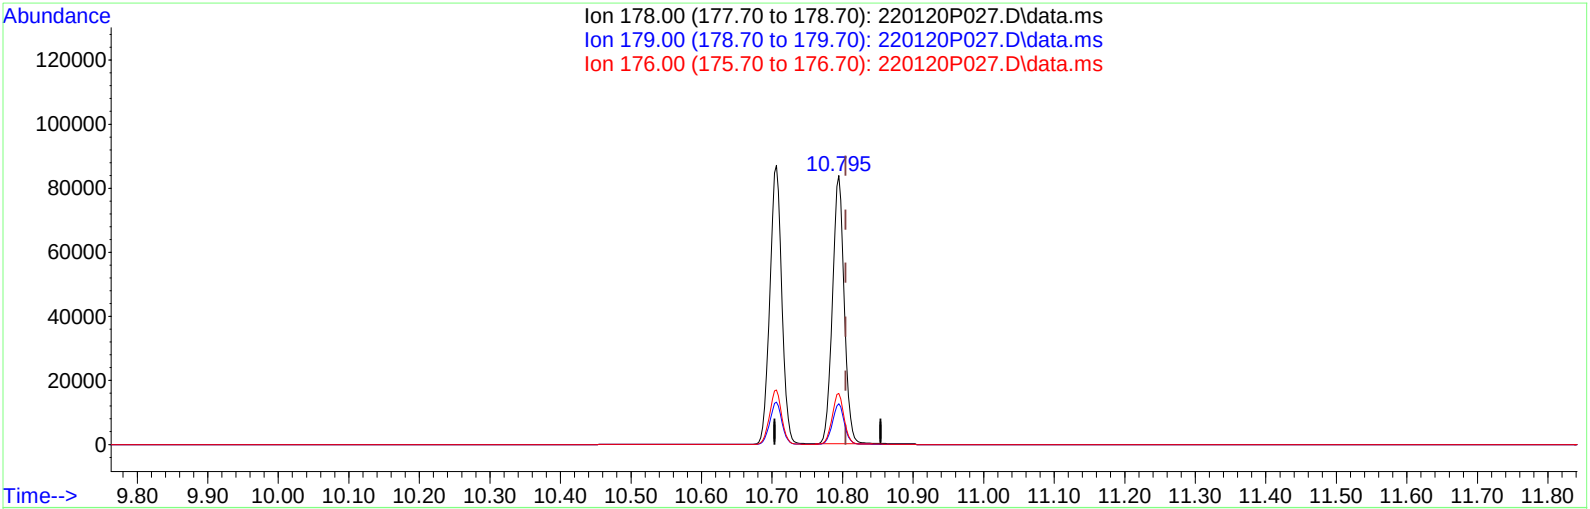

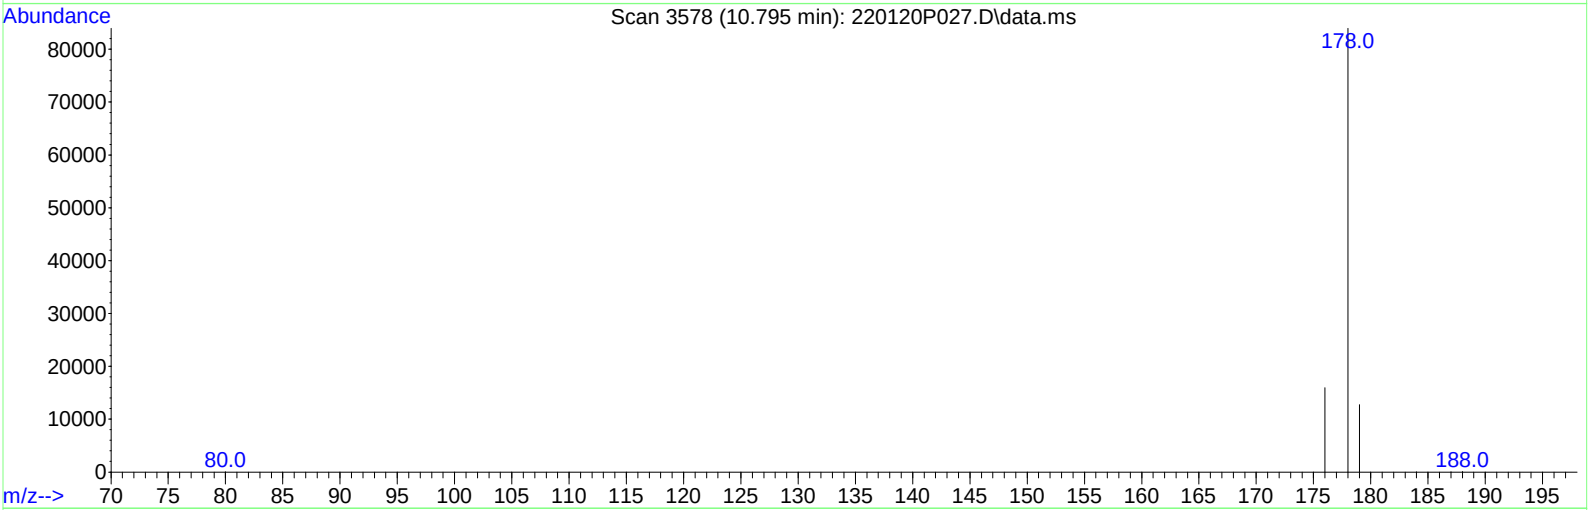

TIC: 220120P027.D\data.ms

(15) Anthracene (T)

10.795min (-0.009) 19.489 ug/ml m

response 97362

Ion	Exp%	Act%
178.00	100.00	100.00
179.00	15.80	0.00
176.00	18.20	0.00
0.00	0.00	0.00

Advanced Environmental Laboratories, Inc.

FORM 8

SDG No.: J2200629

Client: Environmental Chemical Corporation (ECC)

Run Number	**220113P-SIM-ICAL**
Method	**EPA PAH**
Instrument ID	**J7P**

Seq	Sample ID	Analysis Date	Time	DF	Matrix	Data File
1.	TUNE	1/13/2022	14:59	1	WATER	220113P009.D
2.	ICAL1	1/13/2022	15:31	1	WATER	220113P010.D
3.	ICAL2	1/13/2022	15:58	1	WATER	220113P011.D
4.	ICAL3	1/13/2022	16:25	1	WATER	220113P012.D
5.	ICAL4	1/13/2022	16:52	1	WATER	220113P013.D
6.	ICAL5	1/13/2022	17:19	1	WATER	220113P014.D
7.	ICAL6	1/13/2022	17:46	1	WATER	220113P015.D
8.	ICAL7	1/13/2022	18:13	1	WATER	220113P016.D
9.	ICAL8	1/13/2022	18:40	1	WATER	220113P017.D
10.	ICAL9	1/13/2022	19:07	1	WATER	220113P018.D

Advanced Environmental Laboratories, Inc.

FORM 8

SDG No.: J2200629

Client: Environmental Chemical Corporation (ECC)

Run Number	**220114P-SIM**
Method	**EPA PAH**
Instrument ID	**J7P**

Seq	Sample ID	Analysis Date	Time	DF	Matrix	Data File
2.	IB	1/14/2022	11:02	1	WATER	220114P002.D
3.	TUNE	1/14/2022	11:29	1	WATER	220114P003.D
4.	ICV	1/14/2022	11:46	1	WATER	220114P004.D

Advanced Environmental Laboratories, Inc.

FORM 8

SDG No.: J2200629

Client: Environmental Chemical Corporation (ECC)

Run Number	**220120P-SIM-DOD**
Method	**EPA PAH**
Instrument ID	**J7P**

Seq	Sample ID	Analysis Date	Time	DF	Matrix	Data File
2.	IB	1/20/2022	12:48	1	WATER	220120P002.D
3.	TUNE	1/20/2022	13:16	1	WATER	220120P003.D
4.	CCV	1/20/2022	13:33	1	WATER	220120P004.D
5.	4172602	1/20/2022	14:00	1	WATER	220120P005.D
6.	4172603	1/20/2022	14:27	1	WATER	220120P006.D
7.	4172604	1/20/2022	14:54	1	WATER	220120P007.D
8.	4172605	1/20/2022	15:21	1	WATER	220120P008.D
9.	J2200629002	1/20/2022	15:48	1	WATER	220120P009.D
10.	J2200629003	1/20/2022	16:15	1	WATER	220120P010.D
11.	J2200629004	1/20/2022	16:42	1	WATER	220120P011.D
12.	J2200629005	1/20/2022	17:09	1	WATER	220120P012.D
13.	J2200629006	1/20/2022	17:36	1	WATER	220120P013.D
14.	J2200629007	1/20/2022	18:03	1	WATER	220120P014.D
15.	J2200629008	1/20/2022	18:30	1	WATER	220120P015.D
16.	J2200629009	1/20/2022	18:57	1	WATER	220120P016.D
17.	J2200629010	1/20/2022	19:24	1	WATER	220120P017.D
18.	J2200629011	1/20/2022	19:51	1	WATER	220120P018.D
19.	ENDCCV	1/20/2022	23:54	1	WATER	220120P027.D

Date Extracted: 1/17/22
Analyst: RWC
Time of Extraction: 0900
Zymark Temp: 45
TurboVap ID: X
Sonicator ID: NA
Syringe(s) ID: Ext #19

Matrix: (Water) / Soil (circle one)
EPA Analysis Method: 8270C,D,E (SIM) / FL-PRO / DRO
EPA Extraction Method: (3510C) / 3550B / FL-PRO
EPA Clean-up Method (SIM only): 3630C (Silica)
Prep Batch Number: SIM- DOD 74244, 74254 / 74245, 74258
FL-PRO- NA
DRO- "
DOD Spike Witness Initial and Date: TF 1/17/22

Surrogate: 10 ppm PAH Surr: Log X11 259A DE: 07/14/22
Surrogate: NA ppm OTP:C39 Surr: Log NA DE: NA
Surrogate: NA NA

Balance I.D: NA
(when soil)

Spike: 5 ppm PAH Spike: Log X11 259B DE: 07/14/22
Spike: NA ppm FL-PRO Spike: Log NA DE: NA
Spike: NA

Reagents Used	Lot Number
Na2SO4	SE3-206-2
Silica Gel (When used)	SE3-197-1
H2SO4 (When used)	NA

Solvent Used	Company	Lot #
Extraction: DCM	Baker	SE3-208-1

	Lot #
pH Paper	1400155

Lab Code	DOD SIM	SIM PRO Cleanup	DRO
MB	4172002	4172023	NA
LCS	3	1-24	"
MS	4	NIA	"
MSD	5	"	"
NIA	NIA	"	"

Detailed Comments
N/A

DCN: EXT-D017
eff 5/11/10,rev 2/11/2020

NOTE: DRO samples are not to be prepped as a combination batch.
NOTE: The MB and LCS/LCSD must be treated the same as the samples.
For SIM only batches: NO clean-up and pH adjustment. For FL-PRO only batches: Silica gel clean-up and pH <2. For COMBO batches: Silica gel clean-up and pH<2 (circle 3630C).

Sep. Funnel I.D.	Project Number (Lab Code)	Sample Name (when no Project # available, otherwise N/A)	Initial pH	pH>12	pH<2	Sample Amount mL or g	Final Vol (mL)	Spike (mL)	Surr (mL)	Clean-up Required	Emulsions H / M / L	Turbo Vap I.D.
N/A	MB	N/A	6	NA	NA	1000	1.0	NA	1.0	Silica	NA	X
	LCS	"	6			1000		1.0			L	
	J2200629004	DOD Sim	7					NA			L	
	MS	N/A						1.0				
	MSD	"						"				
	J2200629002	DOD Sim						NA				
	3											
	5											
	6											
	7											
	8											
	9											
	10											
	11										L	
	J2200760 001	Sim only	7 1/18/22			250					M	
	2										M	
	3										H	
	J2200760 3 001										M	
	2										M	
	3										M	
	4										M	
	5										M	

BDE 02/02/2022

DCN: EXT-D017
eff 5/11/10,rev 2/11/2020

ICPMS Data Section

Result Summary Reports

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629002 **Client ID:** 263-1907-ACC3042

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6020A **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Manganese	7439-96-5	9.8	ug/L			1.0	2.0	4.0	1	2711	1/17/22	10:15	1723	1/18/22	11:16

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629003 **Client ID:** 263-1903-ACC3037

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6020A **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Manganese	7439-96-5	25	ug/L			1.0	2.0	4.0	1	2711	1/17/22	10:15	1723	1/18/22	11:22

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629004 **Client ID:** 263-2388-ACC3044

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6020A **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Manganese	7439-96-5	31	ug/L			1.0	2.0	4.0	1	2711	1/17/22	10:15	1723	1/18/22	11:29

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629005 **Client ID:** 263-2389-ACC3046

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6020A **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Manganese	7439-96-5	9.5	ug/L			1.0	2.0	4.0	1	2711	1/17/22	10:15	1723	1/18/22	12:00

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629006 **Client ID:** 263-1908-ACC3043

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6020A **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Manganese	7439-96-5	2.8	ug/L	J		1.0	2.0	4.0	1	2711	1/17/22	10:15	1723	1/18/22	12:19

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629007 **Client ID:** 263-1905-ACC3039

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6020A **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Manganese	7439-96-5	430	ug/L			10	20	40	10	2711	1/17/22	10:15	1723	1/18/22	14:19

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629008 **Client ID:** 263-1906-ACC3040

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6020A **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Manganese	7439-96-5	20	ug/L			1.0	2.0	4.0	1	2711	1/17/22	10:15	1723	1/18/22	12:32

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629009 **Client ID:** 263-1906-ACC3041-FD

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6020A **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Manganese	7439-96-5	17	ug/L			1.0	2.0	4.0	1	2711	1/17/22	10:15	1723	1/18/22	12:38

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629010 **Client ID:** 263-ACC8001-ER

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6020A **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Manganese	7439-96-5	2.0	ug/L	U		1.0	2.0	4.0	1	2711	1/17/22	10:15	1723	1/18/22	12:44

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629011 **Client ID:** 263-ACC9001

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6020A **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Manganese	7439-96-5	250	ug/L			10	20	40	10	2711	1/17/22	10:15	1723	1/18/22	14:25

Comments:

QC Summary Reports

- FORM 2a -

INITIAL AND CONTINUING CALIBRATION VERIFICATION

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Analytical Method: SW-846 6020A

Sample ID / Analyte	Result ug/L	True Value ug/L	% Recovery	Acceptance Window (%R)	Q	Analysis Date	Analysis Time	Run Number
ICV1 J3MS-2820								
Manganese	20.3	20.0	102	90 - 110		1/18/2022	10:26	220118R
CCV J3MS-2842								
Manganese	18.9	20.0	94.3	90 - 110		1/18/2022	12:06	220118R
CCV J3MS-2842								
Manganese	20.1	20.0	101	90 - 110		1/18/2022	13:22	220118R
CCV J3MS-2842								
Manganese	19.6	20.0	98.0	90 - 110		1/18/2022	14:31	220118R

Advanced Environmental Laboratories, Inc.

- FORM 2b -
PQL/RL STANDARD

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Analytical Method: SW-846 6020A

Sample ID	Analyte	Result ug/L	True Value ug/L	% Recovery	Q	Advisory Limits (%R)	Analysis Date	Analysis Time	Run Number
LLCCV2 J3MS-2815									
	Manganese	3.88	4.00	97.1		80 - 120	1/18/2022	10:45	220118R

Advanced Environmental Laboratories, Inc.

- FORM 3a -

INITIAL AND CONTINUING CALIBRATION BLANK SUMMARY

Client: Environmental Chemical Corporation (ECC)

Analytical Method: SW-846 6020A **SDG No.:** J2200629

Sample ID	Analyte	Result ug/L	Acceptance Limit	Conc Qual	MDL	LOD	LOQ	Analysis Date	Analysis Time	Run
IB J3MS-2841 J3MS-2840										
	Manganese	2.0	+/-2.0	U	1.0	2.0	4.0	1/18/2022	10:51	220118R
CCB J3MS-2839 J3MS-2841										
	Manganese	2.0	+/-2.0	U	1.0	2.0	4.0	1/18/2022	12:13	220118R
CCB J3MS-2839 J3MS-2841										
	Manganese	2.0	+/-2.0	U	1.0	2.0	4.0	1/18/2022	13:28	220118R
CCB J3MS-2839 J3MS-2841										
	Manganese	2.0	+/-2.0	U	1.0	2.0	4.0	1/18/2022	14:38	220118R

Advanced Environmental Laboratories, Inc.

- FORM 3b -
METHOD BLANK SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Analytical Method: SW-846 6020A **Preparation Method:** SW-846 3010A

Sample ID / Analyte	Result	C	Q	Units	Acceptance Limit	MDL	LOD	LOQ	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
4170475	**WATER**	**TOTAL**												
Manganese	2.0	U		ug/L	+/-2.0	1.0	2.0	4.0	2711	1/17/22	10:15	1723	1/18/22	11:04

Advanced Environmental Laboratories, Inc.

- FORM 4 -
INTERFERENCE CHECK SAMPLE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Instrument ID: J3R **Analytical Method:** SW-846 6020A

Sample ID	Analyte	Result ug/L	True Value ug/L	% Recovery	Acceptance Window	Q	Analysis Date	Analysis Time	Run Number
ICSA J3MS-2831									
	Aluminum	9390	10000	93.9	80 - 120%		1/18/2022	10:57	220118R
	Calcium	9280	10000	92.8	80 - 120%		1/18/2022	10:57	220118R
	Iron	9600	10000	96.0	80 - 120%		1/18/2022	10:57	220118R
	Magnesium	9540	10000	95.4	80 - 120%		1/18/2022	10:57	220118R
	Manganese	0.082			-2.2 to 2.2		1/18/2022	10:57	220118R
	Molybdenum	193	200	96.7	80 - 120%		1/18/2022	10:57	220118R
	Potassium	9440	10000	94.4	80 - 120%		1/18/2022	10:57	220118R
	Sodium	9040	10000	90.4	80 - 120%		1/18/2022	10:57	220118R

Advanced Environmental Laboratories, Inc.

- FORM 5a -

MATRIX SPIKE SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629004 **MS ID:** 4170477 **Client ID:** 263-2388-ACC3044

Matrix: WATER

Analytical Method: SW-846 6020A **Preparation Method:** SW-846 3010A

TOTAL Analyte	Units	Acceptance Limit %R	MS Result	C	Sample Result	C	Spike Added	% Recovery	Q	Analytical Batch	Analytical Date	Analytical Time
Manganese	ug/L	87 - 115	**49.1**		31.0		20.0	90.4		1723	1/18/22	11:41

NC = Not Calculable - the spike concentration added has been diluted below the LOQ

Advanced Environmental Laboratories, Inc.

- FORM 5a -

MATRIX SPIKE DUPLICATE SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629004 **MSD ID:** 4170478 **Client ID:** 263-2388-ACC3044

Matrix: WATER

Analytical Method: SW-846 6020A **Preparation Method:** SW-846 3010A

TOTAL Analyte	Units	Acceptance Limit %R	MSD Result	C	Sample Result	C	Spike Added	% Recovery	Q	Analytical Batch	Analytical Date	Analytical Time
Manganese	ug/L	87 - 115	**49.8**		31.0		20.0	94.1		1723	1/18/22	11:48

NC = Not Calculable - the spike concentration added has been diluted below the LOQ

Advanced Environmental Laboratories, Inc.

- FORM 5b -
POST DIGEST SPIKE SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Matrix: WATER **Analytical Method:** SW-846 6020A

Sample ID: J2200629004 **PS ID:** J2200629004PS **Client ID:** 263-2388-ACC3044

TOTAL Analyte	Units	Acceptance Limit %R	PS Result	C	Sample Result	C	Spike Added	% Recovery	Q	Analytical Batch	Analytical Date	Analytical Time
Manganese	ug/L	80 - 120	48.5		31.0		20.0	87.5		1723	1/18/22	11:54

Advanced Environmental Laboratories, Inc.

- FORM 6 -
MATRIX SPIKE DUPLICATE SAMPLE SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Matrix: WATER **MS ID:** 4170477 **Client ID:** 263-2388-ACC3044

Percent Solids: 0.00 **MSD ID:** 4170478

Parent Sample: J2200629004 **Analytical Method:** SW-846 6020A **Preparation Method:** SW-846 3010A

TOTAL Analyte	Units	Acceptance Limit	MS Result	C	MSD Result	C	RPD	Q	MS Batch	MS Date	MS Time	MSD Date	MSD Time
Manganese	ug/L	0 - 20	49.1		49.8		1.5		1723	1/18/22	11:41	1/18/22	11:48

NC = Not Calculable - the spike concentration added has been diluted below the LOQ

Advanced Environmental Laboratories, Inc.

- FORM 7 -
LABORATORY CONTROL SAMPLE SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

LCS ID: 4170476 **Preparation Method:** SW-846 3010A **Analytical Method:** SW-846 6020A

TOTAL Analyte	Units	True Value	LCS RESULT	C	% Recovery	Q	Acceptance Limits	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Manganese	ug/L	20.0	19.0		95.1		87 - 115	2711	1/17/22	10:15	1723	1/18/22	11:10

Advanced Environmental Laboratories, Inc.

- FORM 9 -

SERIAL DILUTION SAMPLE SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Matrix: WATER **Client ID:** 263-2388-ACC3044

Sample ID: J2200629004 **Analytical Method:** SW-846 6020A **Serial Dilution ID:** J2200629004SD

TOTAL

Analyte	Initial Result ug/L	C	Serial Result ug/L	C	% Difference	Q	Acceptance Limits	Analytical Batch	Date	Time
Manganese	31.0		31.4			N	10 %	1723	1/18/22	11:35

If Q Qualifier "N" the initial result was < 50 times the LOQ therefore the Results were not evaluated.

Advanced Environmental Laboratories, Inc.

Detection Limits

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Analytical Method: SW-846 6020A

Instrument: J3R **Matrix Category:** LIQUID

Analyte	MDL ug/L	LOD ug/L	LOQ ug/L
Manganese	1.0	2.0	4.0

Advanced Environmental Laboratories, Inc.

LINEAR RANGES

Client: Environmental Chemical Corporation (ECC) **SDG ID:** J2200629

Instrument ID: J3R **Analytical Method:** SW-846 6020A

Analyte	LDR ug/L
Manganese	200

Advanced Environmental Laboratories, Inc.

ANALYSIS RUN LOG

Client: Environmental Chemical Corporation (ECC) **SDG ID:** J2200629

Instrument: J3R **Run Number:** 220118R

Start Date: 1/18/2022 **End Date:** 1/18/2022 **Analytical Method:** SW-846 6020A

Client Sample No.	DF	Time	Analytes																								
			AL	SB	AS	BA	BE	CD	CA	CR	CO	CU	FE	PB	MG	MN	NI	K	SE	AG	NA	TL	V	ZN	B	LI
RB J3MS-2841 J3MS-2840	1	0923																								
CALB J3MS-2841 J3MS-2840	1	0930														X										
ICAL1 J3MS-2814	1	0936														X										
ICAL2 J3MS-2815	1	0942														X										
ICAL3 J3MS-2816	1	0948														X										
ICAL4 J3MS-2842	1	0955														X										
ICAL5 J3MS-2818	1	1001														X										
ICAL6 J3MS-2819	1	1007														X										
ICAL7 J3MS-2791	1	1013														X										
RB J3MS-2841 J3MS-2840	1	1020																								
ICV1 J3MS-2820	1	1026														X										
ZZZZZZ	1	1032																								
LLCCV1 J3MS-2814	1	1039																								
LLCCV2 J3MS-2815	1	1045														X										
IB J3MS-2841 J3MS-2840	1	1051														X										
ICSA J3MS-2831	1	1057	X						X				X		X	X		X			X					
MB for HBN 73758 [DGMj/2711]	1	1104														X										
LCS for HBN 73758 [DGMj/2711]	1	1110														X										
263-1907-ACC3042	1	1116														X										
263-1903-ACC3037	1	1122														X										
263-2388-ACC3044	1	1129														X										
263-2388-ACC3044SD	5	1135														X										
263-2388MS	1	1141														X										
263-2388MSD	1	1148														X										
263-2388-ACC3044PS	1	1154														X										
263-2389-ACC3046	1	1200														X										
CCV J3MS-2842	1	1206														X										
CCB J3MS-2839 J3MS-2841	1	1213														X										
263-1908-ACC3043	1	1219														X										
ZZZZZZ	1	1225																								
263-1906-ACC3040	1	1232														X										
263-1906-ACC3041-FD	1	1238														X										

Advanced Environmental Laboratories, Inc.

ANALYSIS RUN LOG

Client: Environmental Chemical Corporation (ECC) **SDG ID:** J2200629

Instrument: J3R **Run Number:** 220118R

Start Date: 1/18/2022 **End Date:** 1/18/2022 **Analytical Method:** SW-846 6020A

Client Sample No.	DF	Time	Analytes																										
			AL	SB	AS	BA	BE	CD	CA	CR	CO	CU	FE	PB	MG	MN	NI	K	SE	AG	NA	TL	V	ZN	B	LI
263-ACC8001-ER	1	1244														X										
ZZZZZZ	1	1251																								
ZZZZZZ	1	1257																								
ZZZZZZ	1	1303																								
ZZZZZZ	1	1309																								
ZZZZZZ	1	1316																								
CCV J3MS-2842	1	1322														X										
CCB J3MS-2839 J3MS-2841	1	1328														X										
ZZZZZZ	1	1335																								
ZZZZZZ	1	1341																								
ZZZZZZ	1	1347																								
ZZZZZZ	1	1354																								
ZZZZZZ	10	1400																								
ZZZZZZ	50	1406																								
ZZZZZZ	20	1412																								
263-1905-ACC3039	10	1419														X										
263-ACC9001	10	1425														X										
CCV J3MS-2842	1	1431														X										
CCB J3MS-2839 J3MS-2841	1	1438														X										

Advanced Environmental Laboratories, Inc.

ANALYSIS RUN LOG

Client: Environmental Chemical Corporation (ECC) **SDG ID:** J2200629

Instrument: J3R **Run Number:** 220118R

Start Date: 1/18/2022 **End Date:** 1/18/2022 **Analytical Method:** SW-846 6020A

Client Sample No.	DF	Time	Analytes																								
			HG	MO	SI	SN	SR	TI	U	TH																	
RB J3MS-2841 J3MS-2840	1	09:23																									
CALB J3MS-2841 J3MS-2840	1	09:30																									
ICAL1 J3MS-2814	1	09:36																									
ICAL2 J3MS-2815	1	09:42																									
ICAL3 J3MS-2816	1	09:48																									
ICAL4 J3MS-2842	1	09:55																									
ICAL5 J3MS-2818	1	10:01																									
ICAL6 J3MS-2819	1	10:07																									
ICAL7 J3MS-2791	1	10:13																									
RB J3MS-2841 J3MS-2840	1	10:20																									
ICV1 J3MS-2820	1	10:26																									
ZZZZZZ	1	10:32																									
LLCCV1 J3MS-2814	1	10:39																									
LLCCV2 J3MS-2815	1	10:45																									
IB J3MS-2841 J3MS-2840	1	10:51																									
ICSA J3MS-2831	1	10:57		X																							
MB for HBN 73758 [DGMj/2711]	1	11:04																									
LCS for HBN 73758 [DGMj/2711]	1	11:10																									
263-1907-ACC3042	1	11:16																									
263-1903-ACC3037	1	11:22																									
263-2388-ACC3044	1	11:29																									
263-2388-ACC3044SD	5	11:35																									
263-2388MS	1	11:41																									
263-2388MSD	1	11:48																									
263-2388-ACC3044PS	1	11:54																									
263-2389-ACC3046	1	12:00																									
CCV J3MS-2842	1	12:06																									
CCB J3MS-2839 J3MS-2841	1	12:13																									
263-1908-ACC3043	1	12:19																									
ZZZZZZ	1	12:25																									
263-1906-ACC3040	1	12:32																									
263-1906-ACC3041-FD	1	12:38																									
263-ACC8001-ER	1	12:44																									
ZZZZZZ	1	12:51																									

Advanced Environmental Laboratories, Inc.

ANALYSIS RUN LOG

Client: Environmental Chemical Corporation (ECC) **SDG ID:** J2200629

Instrument: J3R **Run Number:** 220118R

Start Date: 1/18/2022 **End Date:** 1/18/2022 **Analytical Method:** SW-846 6020A

Client Sample No.	DF	Time	Analytes																								
			HG	MO	SI	SN	SR	TI	U	TH																	
ZZZZZZ	1	12:57																									
ZZZZZZ	1	13:03																									
ZZZZZZ	1	13:09																									
ZZZZZZ	1	13:16																									
CCV J3MS-2842	1	13:22																									
CCB J3MS-2839 J3MS-2841	1	13:28																									
ZZZZZZ	1	13:35																									
ZZZZZZ	1	13:41																									
ZZZZZZ	1	13:47																									
ZZZZZZ	1	13:54																									
ZZZZZZ	10	14:00																									
ZZZZZZ	50	14:06																									
ZZZZZZ	20	14:12																									
263-1905-ACC3039	10	14:19																									
263-ACC9001	10	14:25																									
CCV J3MS-2842	1	14:31																									
CCB J3MS-2839 J3MS-2841	1	14:38																									

Advanced Environmental Laboratories, Inc.

INTERNAL STANDARDS RELATIVE INTENSITY SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG NO.:** J2200629

Instrument: J3R **Run No.:** 220118R

Start Time: 0930 **End Time:** 1438 **Method:** SW-846 6020A

Sample ID	Client ID	Time	Internal Standards %RI For: Element 209Bi (K	Q	Element 115In (K	Q	Element 45Sc (KED	Q	Element 159Tb (K	Q	Element 89Y (KED)	Q	Element	Q
CALB J3MS-2	CALB J3MS-2841 J	0930	100.0		100.0		100.0		100.0		100.0			
ICAL1 J3MS-	ICAL1 J3MS-2814	0936	100.5		98.1		97.7		101.0		98.8			
ICAL2 J3MS-	ICAL2 J3MS-2815	0942	103.4		101.5		100.4		104.1		103.1			
ICAL3 J3MS-	ICAL3 J3MS-2816	0948	105.5		98.5		95.4		107.7		101.9			
ICAL4 J3MS-	ICAL4 J3MS-2842	0955	107.0		98.2		93.1		107.4		101.3			
ICAL5 J3MS-	ICAL5 J3MS-2818	1001	104.5		97.2		93.5		113.6		103.5			
ICAL6 J3MS-	ICAL6 J3MS-2819	1007	118.8		107.9		96.7		119.0		107.0			
ICAL7 J3MS-	ICAL7 J3MS-2791	1013	116.8		103.0		96.3		111.2		104.2			
ICV1	ICV1 J3MS-2820	1026	107.3		102.9		100.4		115.7		110.1			
ZZZZZZ	ZZZZZZ	1032												
CRDL1	LLCCV1 J3MS-2814	1039	108.0		104.1		98.2		111.4		104.5			
CRDL2	LLCCV2 J3MS-2815	1045	108.4		103.3		97.5		113.4		103.2			
ICB1	IB J3MS-2841 J3M	1051	107.6		108.8		101.7		118.0		107.0			
ICS-A1	ICSA J3MS-2831	1057	98.1		98.0		91.6		109.9		96.5			
4170475	MB for HBN 73758	1104	109.4		105.6		96.3		112.8		100.1			
4170476	LCS for HBN 7375	1110	102.5		103.9		96.4		114.0		101.7			
J2200629002	263-1907-ACC3042	1116	101.5		102.5		96.1		112.6		104.9			
J2200629003	263-1903-ACC3037	1122	103.6		103.1		94.3		112.3		102.4			
J2200629004	263-2388-ACC3044	1129	106.6		105.5		97.1		114.4		100.1			
J2200629004	263-2388-ACC3044	1135	111.4		110.7		97.3		120.9	*	103.1			
4170477	263-2388MS	1141	104.6		102.9		91.9		114.2		98.2			
4170478	263-2388MSD	1148	105.1		105.3		93.1		114.6		97.9			
J2200629004	263-2388-ACC3044	1154	104.4		103.8		92.7		115.7		99.8			
J2200629005	263-2389-ACC3046	1200	109.7		104.7		94.9		116.0		97.6			
CCV1	CCV J3MS-2842	1206	112.7		105.1		93.7		119.0		98.3			
CCB1	CCB J3MS-2839 J3	1213	120.9	*	114.5		98.4		123.6	*	103.0			
J2200629006	263-1908-ACC3043	1219	111.9		106.1		94.1		116.2		97.9			
ZZZZZZ	ZZZZZZ	1225												
J2200629008	263-1906-ACC3040	1232	115.1		109.0		96.3		118.2		100.8			
J2200629009	263-1906-ACC3041	1238	118.0		108.1		96.2		118.0		100.2			
J2200629010	263-ACC8001-ER	1244	113.6		106.3		95.2		114.2		99.2			
ZZZZZZ	ZZZZZZ	1251												
ZZZZZZ	ZZZZZZ	1257												
ZZZZZZ	ZZZZZZ	1303												
ZZZZZZ	ZZZZZZ	1309												
ZZZZZZ	ZZZZZZ	1316												

Comments: _____

Internal Standard Acceptance Criteria: 30-120 %

Advanced Environmental Laboratories, Inc.

INTERNAL STANDARDS RELATIVE INTENSITY SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG NO.:** J2200629

Instrument: J3R **Run No.:** 220118R

Start Time: 0930 **End Time:** 1438 **Method:** SW-846 6020A

Sample ID	Client ID	Time	Internal Standards %RI For: Element 209Bi (K	Q	Element 115In (K	Q	Element 45Sc (KED	Q	Element 159Tb (K	Q	Element 89Y (KED)	Q	Element	Q
CCV2	CCV J3MS-2842	1322	109.8		103.3		91.1		116.4		96.9			
CCB2	CCB J3MS-2839 J3	1328	117.9		110.8		95.7		123.9	*	101.5			
ZZZZZZ	ZZZZZZ	1335												
ZZZZZZ	ZZZZZZ	1341												
ZZZZZZ	ZZZZZZ	1347												
ZZZZZZ	ZZZZZZ	1354												
ZZZZZZ	ZZZZZZ	1400												
ZZZZZZ	ZZZZZZ	1406												
ZZZZZZ	ZZZZZZ	1412												
J2200629007	263-1905-ACC3039	1419	112.9		108.6		96.5		120.8	*	102.0			
J2200629011	263-ACC9001	1425	113.0		107.8		95.2		122.3	*	101.9			
CCV3	CCV J3MS-2842	1431	107.0		103.4		90.5		118.1		96.7			
CCB3	CCB J3MS-2839 J3	1438	114.3		110.4		95.3		122.8	*	101.2			

Comments:

Internal Standard Acceptance Criteria: 30-120 %

Raw Data

Sample List Summary

2/17/2022 1:44:00 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

LabBook	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Created by (User)	LAB-AELLAB\Jax-uICP…	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICP…	Last change time	2/17/2022 1:41:35 PM

Label	Sample Type	Start time	Comment
RB J3MS-2841 J3MS-2840	BLK	1/18/2022 9:23:55 AM	LL
CALB J3MS-2841 J3MS-2840	BLK	1/18/2022 9:30:07 AM	LL
ICAL1 J3MS-2814	STD	1/18/2022 9:36:21 AM	LL
ICAL2 J3MS-2815	STD	1/18/2022 9:42:36 AM	LL
ICAL3 J3MS-2816	STD	1/18/2022 9:48:51 AM	LL
ICAL4 J3MS-2842	STD	1/18/2022 9:55:07 AM	LL
ICAL5 J3MS-2818	STD	1/18/2022 10:01:23 AM	LL
ICAL6 J3MS-2819	STD	1/18/2022 10:07:39 AM	LL
ICAL7 J3MS-2791	STD	1/18/2022 10:13:55 AM	LL
RB J3MS-2841 J3MS-2840	UNKNOWN	1/18/2022 10:20:12 AM	LL
ICV1 J3MS-2820	QC	1/18/2022 10:26:28 AM	LL
RINSE	UNKNOWN	1/18/2022 10:32:44 AM	LL
LLCCV1 J3MS-2814	QC	1/18/2022 10:39:00 AM	LL
LLCCV2 J3MS-2815	QC	1/18/2022 10:45:16 AM	LL
IB J3MS-2841 J3MS-2840	QC	1/18/2022 10:51:32 AM	LL
ICSA J3MS-2831	QC	1/18/2022 10:57:49 AM	LL
4170475	UNKNOWN	1/18/2022 11:04:07 AM	LL 1723
4170476	UNKNOWN	1/18/2022 11:10:24 AM	LL 1723
J2200629002	UNKNOWN	1/18/2022 11:16:41 AM	LL 1723
J2200629003	UNKNOWN	1/18/2022 11:22:58 AM	LL 1723
J2200629004	UNKNOWN	1/18/2022 11:29:15 AM	LL 1723
J2200629004SD 5X	UNKNOWN	1/18/2022 11:35:32 AM	LL 1723
4170477	UNKNOWN	1/18/2022 11:41:49 AM	LL 1723
4170478	UNKNOWN	1/18/2022 11:48:06 AM	LL 1723
J2200629004PS	UNKNOWN	1/18/2022 11:54:23 AM	LL 1723
J2200629005	UNKNOWN	1/18/2022 12:00:41 PM	LL 1723
CCV J3MS-2842	QC	1/18/2022 12:06:59 PM	LL
CCB J3MS-2839 J3MS-2841	QC	1/18/2022 12:13:16 PM	LL
J2200629006	UNKNOWN	1/18/2022 12:19:32 PM	LL 1723
J2200629007	UNKNOWN	1/18/2022 12:25:51 PM	LL 1723
J2200629008	UNKNOWN	1/18/2022 12:32:09 PM	LL 1723
J2200629009	UNKNOWN	1/18/2022 12:38:27 PM	LL 1723
J2200629010	UNKNOWN	1/18/2022 12:44:44 PM	LL 1723
J2200629011	UNKNOWN	1/18/2022 12:51:02 PM	LL 1723
J2200709002	UNKNOWN	1/18/2022 12:57:20 PM	LL 1723
J2200715002	UNKNOWN	1/18/2022 1:03:38 PM	LL 1723
J2200716002	UNKNOWN	1/18/2022 1:09:56 PM	LL 1723
J2200716003	UNKNOWN	1/18/2022 1:16:14 PM	LL 1723
CCV J3MS-2842	QC	1/18/2022 1:22:32 PM	LL
CCB J3MS-2839 J3MS-2841	QC	1/18/2022 1:28:50 PM	LL
4173059	UNKNOWN	1/18/2022 1:35:07 PM	LL 1724
4173060	UNKNOWN	1/18/2022 1:41:26 PM	LL 1724

Sample List Summary

2/17/2022 1:44:00 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Label	Sample Type	Start time	Comment
4173061	UNKNOWN	1/18/2022 1:47:44 PM	LL 1724
J2200785002	UNKNOWN	1/18/2022 1:54:03 PM	LL 1724
G2200502001 10X	UNKNOWN	1/18/2022 2:00:22 PM	LL 1719
J2200492012 50X	UNKNOWN	1/18/2022 2:06:41 PM	LL 1720
J2200492012 20X	UNKNOWN	1/18/2022 2:12:59 PM	LL 1720
J2200629007 10X	UNKNOWN	1/18/2022 2:19:18 PM	LL 1723
J2200629011 10X	UNKNOWN	1/18/2022 2:25:37 PM	LL 1723
CCV J3MS-2842	QC	1/18/2022 2:31:56 PM	LL
CCB J3MS-2839 J3MS-2841	QC	1/18/2022 2:38:14 PM	LL

Performance Report

System

Start time:	1/18/2022 8:57:54 AM
Instrument:	iCAP RQ
Operator:	LAB-AELLAB\Jax-uICPMS3
Template:	KED 2
Instrument Serial Number:	RQ02518
Last Autotune:	Autotune-SourceTune High Matrix-20220112-132248063.imatdat
Solution:	No solution specified

Sensitivity & Stability Test

Result	Runs	Sweeps
Passed	5	30

Sensitivity

Analyte	Result	Value	Condition	Limit
Bkg4.5	Passed	0.067 CPS	Less than	0.5 CPS
Bkg220.7	Passed	0.13 CPS	Less than	2.0 CPS
59Co/35Cl.16O	Passed	31.1	Greater than	16.0
59Co	Passed	86,347.0 CPS	Greater than	25,000.0 CPS
238U	Passed	286,306.0 CPS	Greater than	80,000.0 CPS
140Ce.16O/140Ce	Passed	0.0065	Less than	0.02
115In	Passed	72,694.0 CPS	Greater than	30,000.0 CPS

Stability

Analyte	Value	Limit
59Co	0.8%	2
238U	1.0%	2
115In	0.5%	2

Mass Calibration Test

Result	Channels	Dwell	MeasureWidth	PointSpacing	Sweeps
Passed	75	0.04	1.5	0.02	5

Analyte	Result	Centroid Mass [u]	Offset	Peak width [u]	Peak width min [u]	Peak width max [u]
59Co	Passed	58.9614	0.0282	0.709	0.650	0.850
115In	Passed	114.9290	0.0251	0.693	0.650	0.850
238U	Passed	238.0477	0.0031	0.690	0.650	0.850

Tune Settings

Parameter	Value
Additional Gas Flow 1	0.00
Additional Gas Flow 2	0.00
Additional Gas Flow 3	0.00
Angular Deflection	-374.02
Auxilliary Flow	0.80
CCT Bias	-21.00
CCT Entry Lens	-108.36
CCT Exit Lens	-39.99
CCT Focus Lens	-8.28
CCT1 Flow	4.35
CCT1 Shut-Off Valve	1.00
Cool Flow	14.00
D1 Lens	-349.40
D2 Lens	-158.00
Deflection Entry Lens	-35.01
Dry Pump Speed	100.00
Extraction Lens 1 Negative	0.00
Extraction Lens 1 Polarity	0.00
Extraction Lens 1 Positive	0.00
Extraction Lens 2	-95.00
Focus Lens	-9.50
Nebulizer Flow	1.08
Peristaltic Pump Speed	30.00
Plasma Power	1550.00
Pole Bias	-18.00
Quad Entry Lens	-62.00
Sampling Depth	5.00
Spray Chamber Temperature	2.00
Torch Horizontal Position	0.03
Torch Vertical Position	0.32
Virtual CCT Mass Maximum Dac Limit Set	4095.00
Virtual CCT Mass parameter b	1.00
Virtual CCT Mass to Dac Factor	60.00
Virtual CCT Mass to Dac Offset	140.01

Vacuum Check

Parameter	Result	Value
Analyzer Pressure	Vacuum ok	4.938e-7
Interface Pressure		1.581e+0

Detector Voltages

Analog	Counting
-1712.50	1212.50

Mass Calibration Peaks

Analyte: 59Co

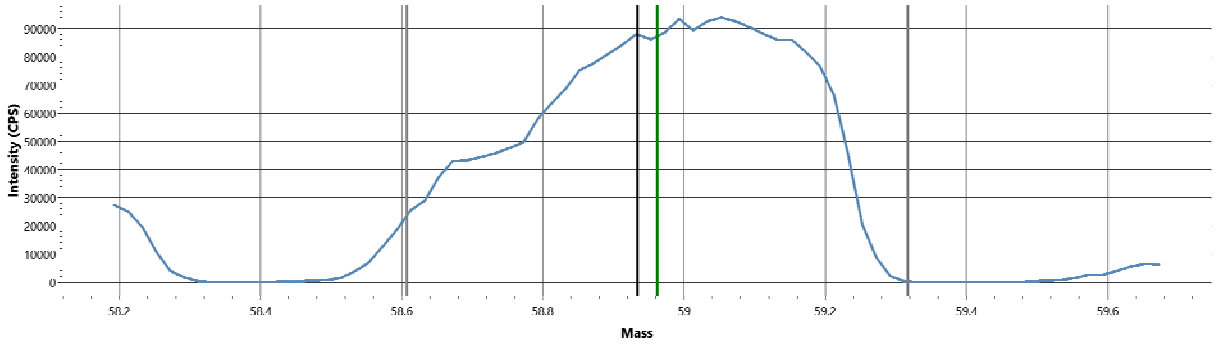

Analyte: 238U

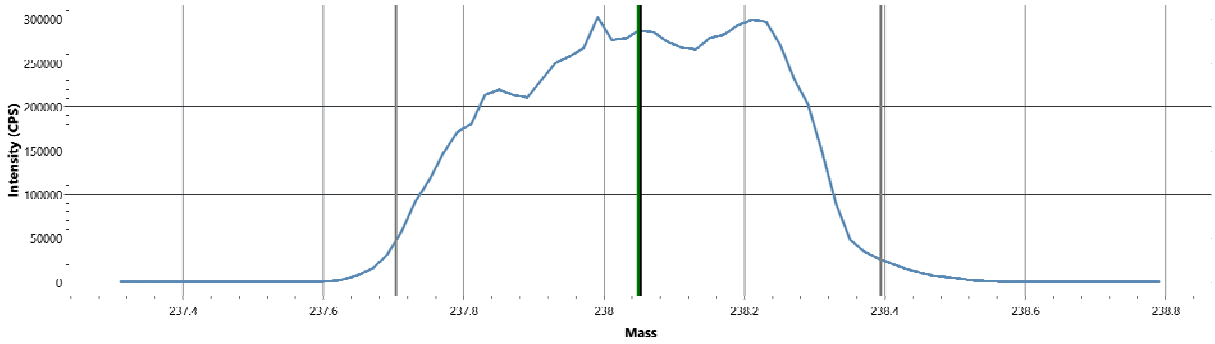

Analyte: 115In

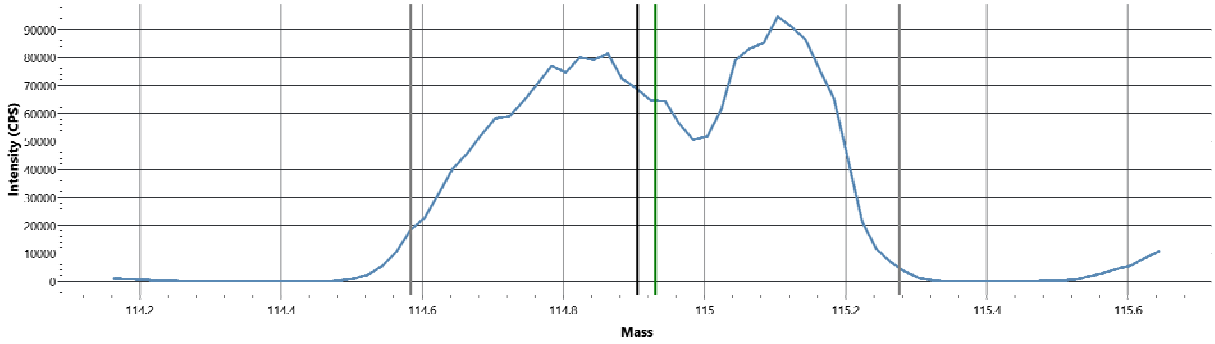

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Calibration Curves:

LabBook	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICP…	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICP…	Last change time	2/17/2022 1:41:35 PM

9Be (KED)

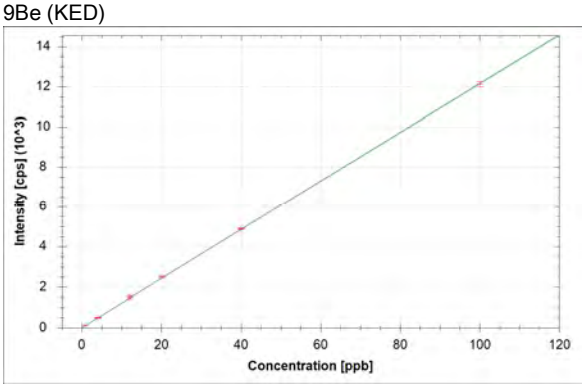

f(x) = 121.5387*x + 0.6586
R² = 0.9999
BEC = 0.005 ppb
LoD = 0.0282 ppb

11B (KED)

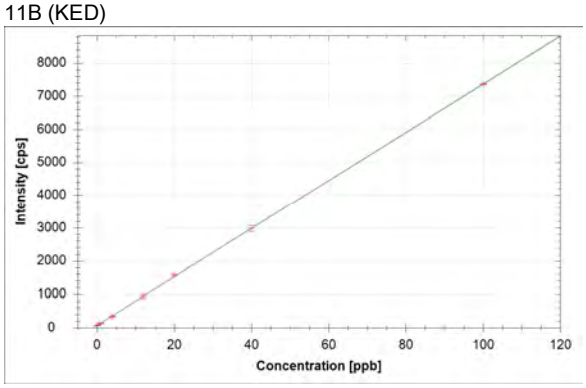

f(x) = 72.9304*x + 72.4247
R² = 0.9999
BEC = 0.993 ppb
LoD = 0.4334 ppb

23Na (KED)

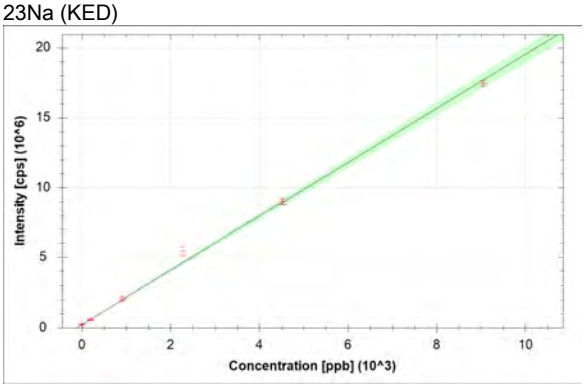

f(x) = 1930.1060*x + 224605.6049
R² = 0.9965
BEC = 116.370 ppb
LoD = 15.4128 ppb

24Mg (KED)

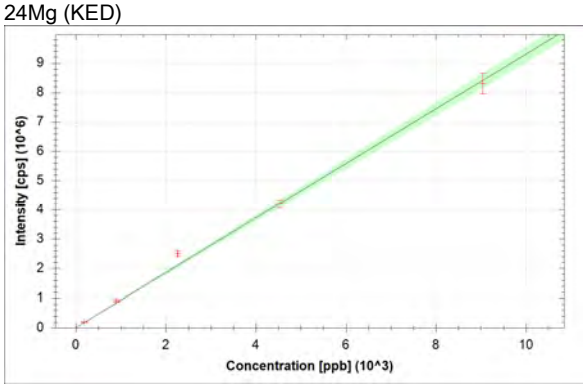

f(x) = 930.3109*x + 876.5141
R² = 0.9966
BEC = 0.942 ppb
LoD = 0.1776 ppb

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

27Al (KED)

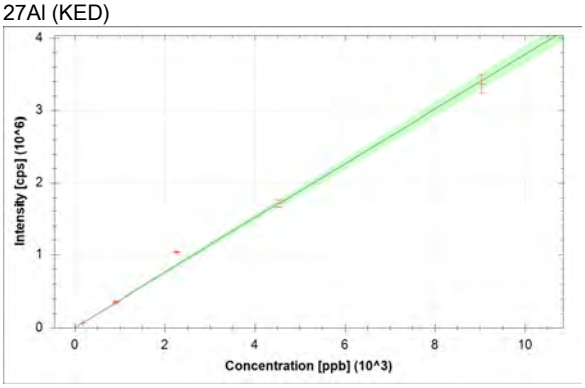

f(x) = 377.2040*x + 867.0669
R² = 0.9959
BEC = 2.299 ppb
LoD = 0.3963 ppb

39K (KED)

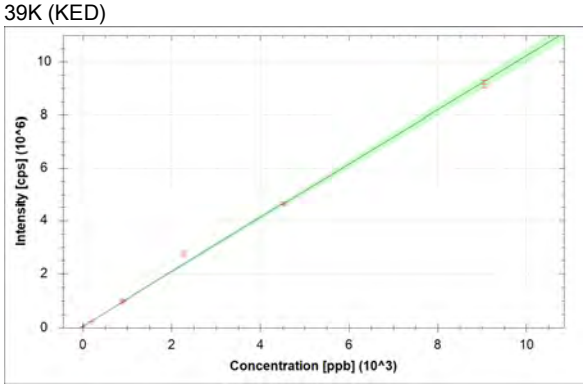

f(x) = 1017.3873*x + 56145.3463
R² = 0.9974
BEC = 55.186 ppb
LoD = 11.3459 ppb

44Ca (KED)

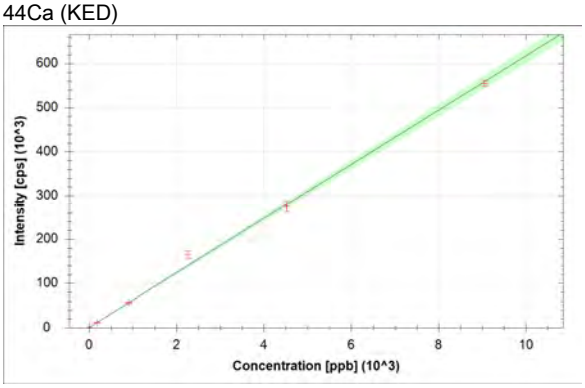

f(x) = 61.7040*x + 786.3639
R² = 0.9972
BEC = 12.744 ppb
LoD = 4.4591 ppb

47Ti (STD)

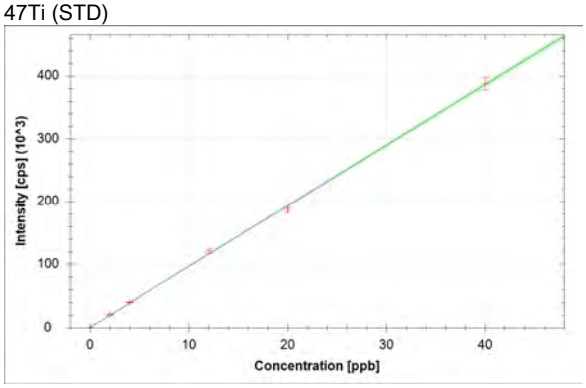

f(x) = 9640.6056*x + 638.1868
R² = 0.9994
BEC = 0.066 ppb
LoD = 0.0229 ppb

51V (KED)

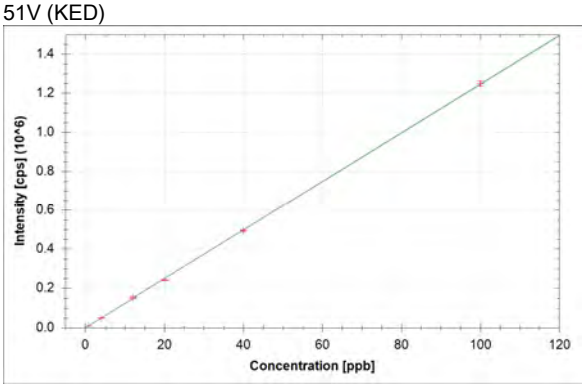

f(x) = 12463.9577*x + 79.9510
R² = 0.9999
BEC = 0.006 ppb
LoD = 0.0020 ppb

52Cr (KED)

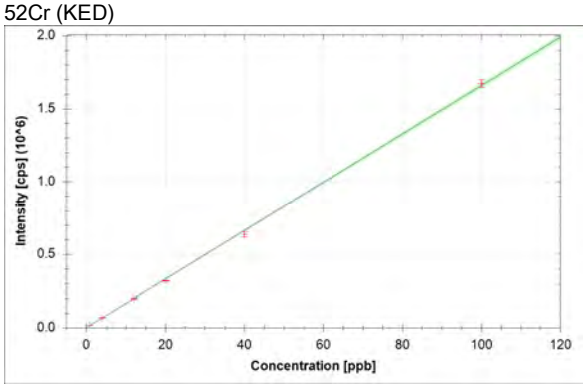

f(x) = 16588.9198*x + 284.2523
R² = 0.9995
BEC = 0.017 ppb
LoD = 0.0062 ppb

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

54Fe (KED)

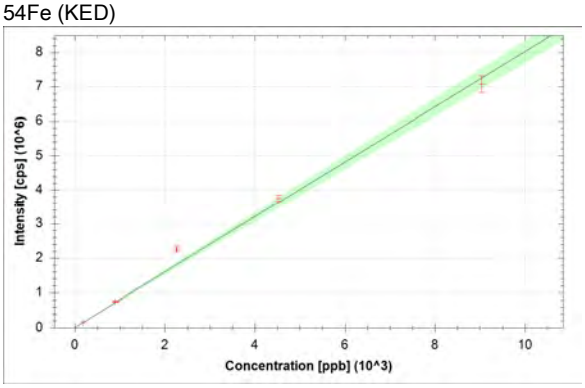

f(x) = 801.6541*x + 1460.7573
R^2 = 0.9934
BEC = 1.822 ppb
LoD = 0.5099 ppb

55Mn (KED)

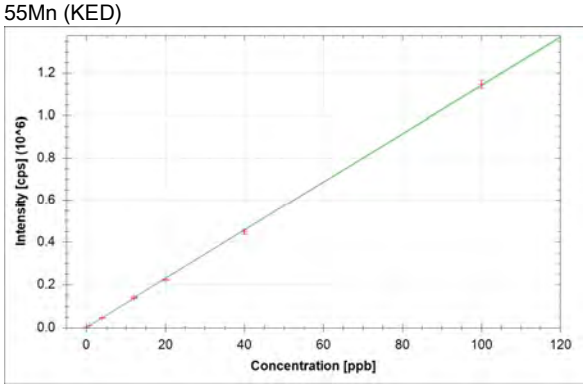

f(x) = 11404.6086*x + 1674.8386
R^2 = 0.9998
BEC = 0.147 ppb
LoD = 0.0238 ppb

56Fe (KED)

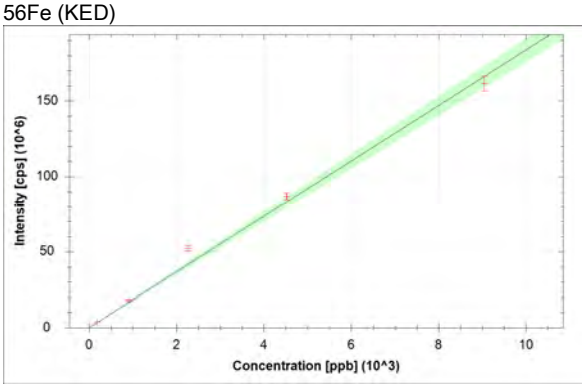

f(x) = 18368.1283*x + 29241.0058
R^2 = 0.9924
BEC = 1.592 ppb
LoD = 0.2870 ppb

59Co (KED)

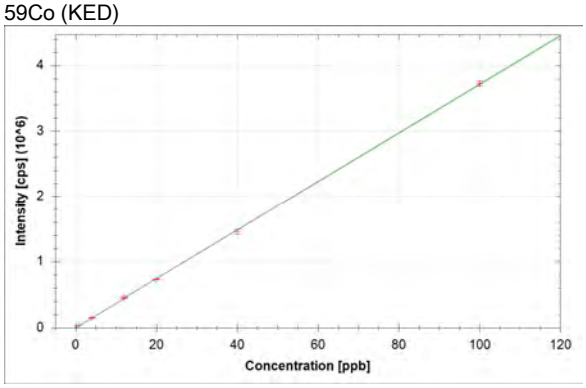

f(x) = 37130.4963*x + 52.2382
R^2 = 0.9999
BEC = 0.001 ppb
LoD = 0.0003 ppb

60Ni (KED)

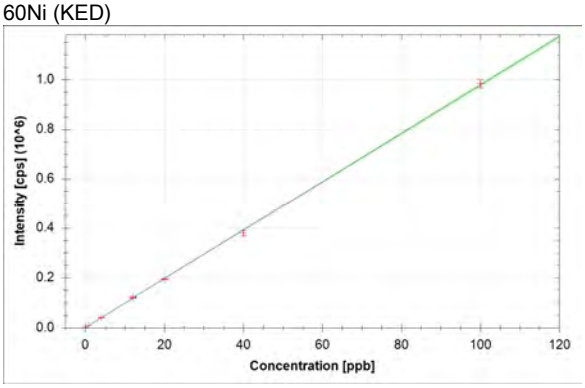

f(x) = 9775.2140*x + 1295.2956
R^2 = 0.9997
BEC = 0.133 ppb
LoD = 0.0097 ppb

63Cu (KED)

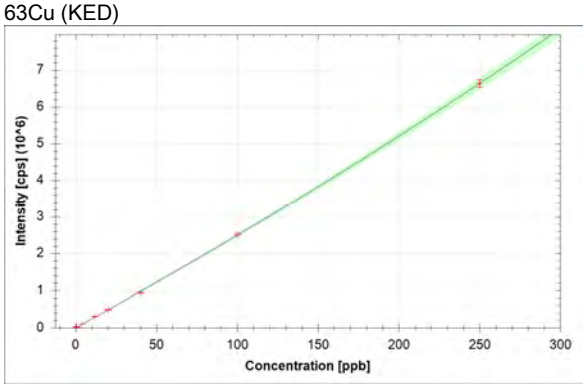

f(x) = $10.5018*x^2 + 23909.6399*x + 3292.0332$
R^2 = 0.9999
BEC = 2276.572 ppb
LoD = N/A

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

66Zn (KED)

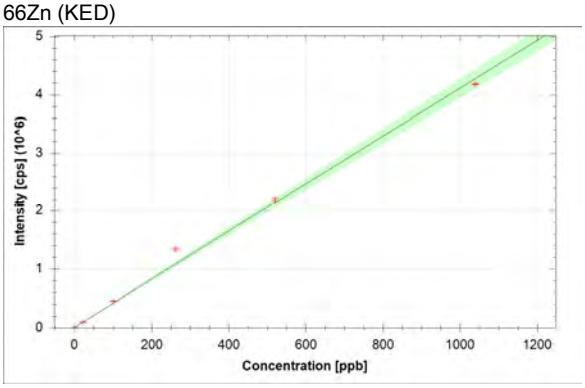

f(x) = 4107.1657*x + 5693.5980
R² = 0.9938
BEC = 1.386 ppb
LoD = 0.0050 ppb

75As (KED)

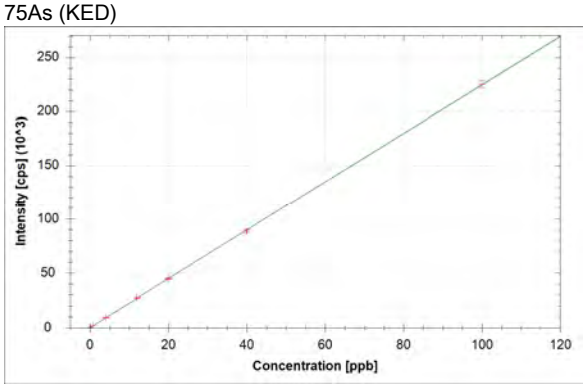

f(x) = 2244.9649*x + 107.8110
R² = 0.9999
BEC = 0.048 ppb
LoD = 0.0216 ppb

78Se (KED)

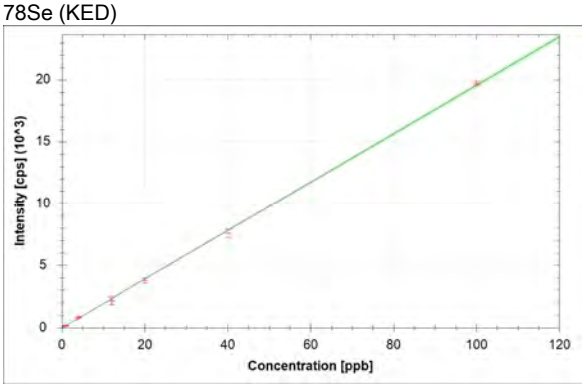

f(x) = 195.7831*x + -10.9466
R² = 0.9996
BEC = -0.056 ppb
LoD = 0.1044 ppb

88Sr (KED)

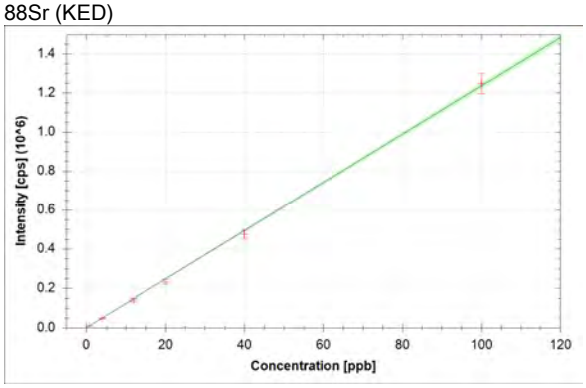

f(x) = 12354.4269*x + 393.1426
R² = 0.9993
BEC = 0.032 ppb
LoD = 0.0036 ppb

95Mo (KED)

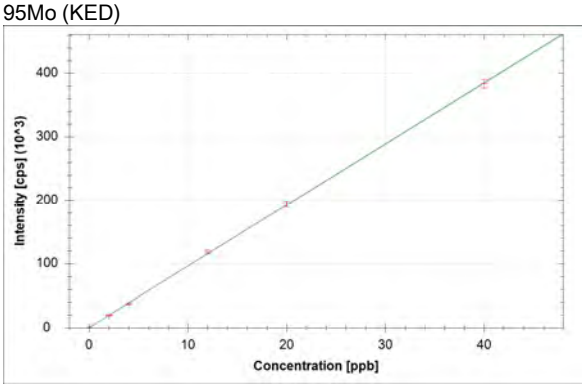

f(x) = 9612.3884*x + 287.3692
R² = 0.9999
BEC = 0.030 ppb
LoD = 0.0192 ppb

109Ag (KED)

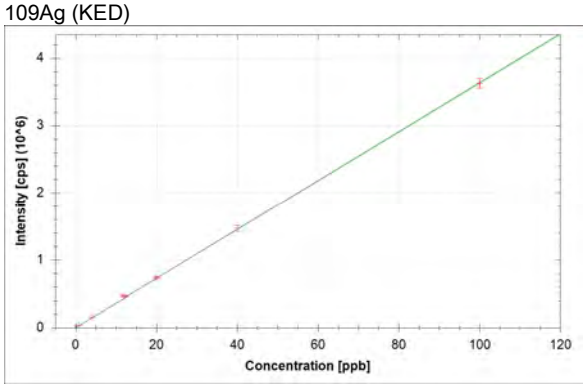

f(x) = 36344.2918*x + 168.1309
R² = 0.9999
BEC = 0.005 ppb
LoD = 0.0031 ppb

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

111Cd (KED)

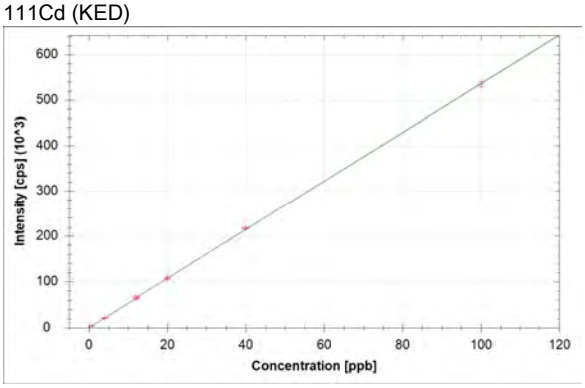

f(x) = 5362.5507*x + 7.0344
R² = 0.9999
BEC = 0.001 ppb
LoD = 0.0016 ppb

118Sn (KED)

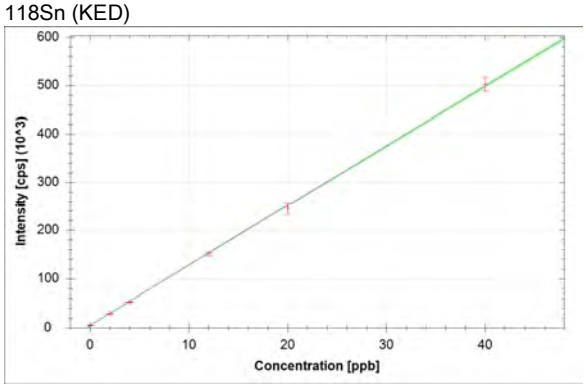

f(x) = 12334.5258*x + 4968.3890
R² = 0.9996
BEC = 0.403 ppb
LoD = 0.1012 ppb

123Sb (KED)

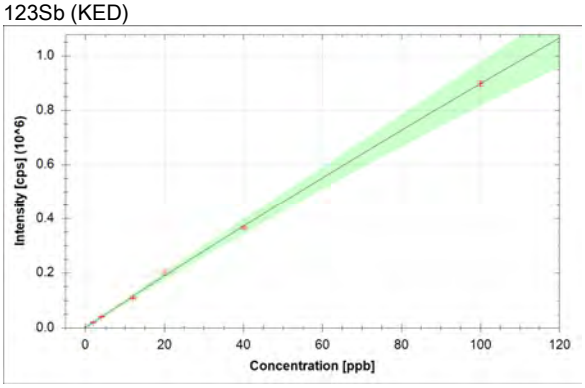

f(x) = -4.7650*x² + 9432.6201*x + 1707.8472
R² = 0.9996
BEC = 0.181 ppb
LoD = N/A

137Ba (KED)

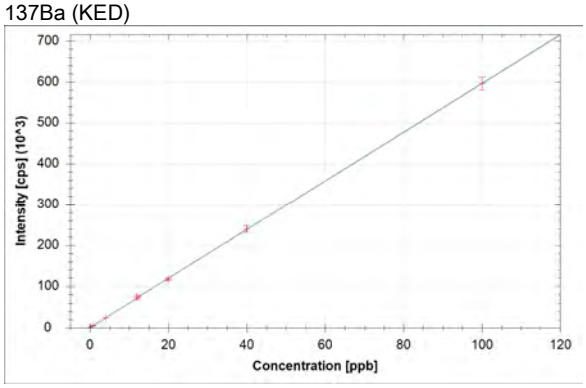

f(x) = 5956.5894*x + 543.5010
R² = 1.0000
BEC = 0.091 ppb
LoD = 0.0062 ppb

205Tl (KED)

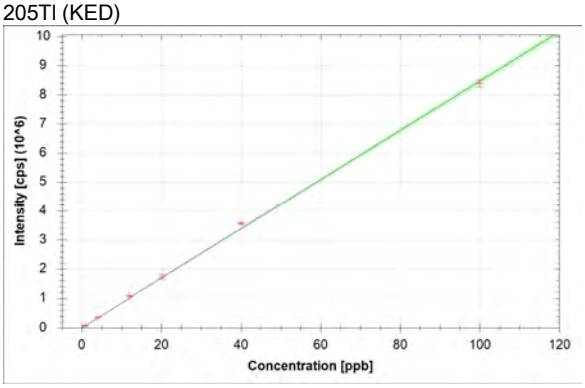

f(x) = 84664.3240*x + 117.7527
R² = 0.9992
BEC = 0.001 ppb
LoD = 0.0003 ppb

206Pb (KED)

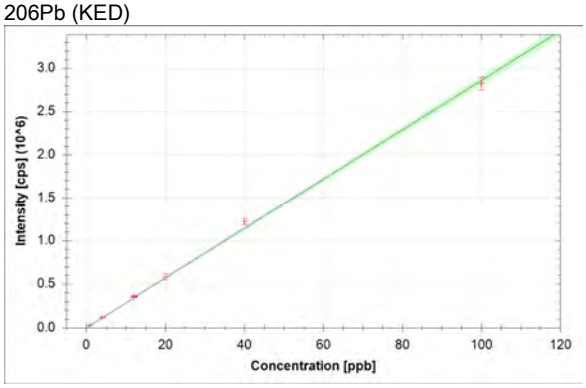

f(x) = 28593.2233*x + 452.2567
R² = 0.9987
BEC = 0.016 ppb
LoD = 0.0020 ppb

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

207Pb (KED)

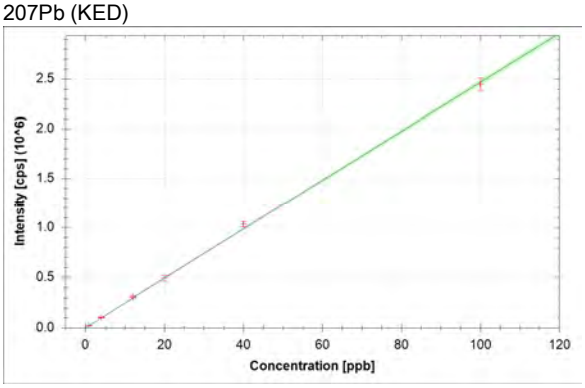

f(x) = 24662.3628*x + 314.8511
R² = 0.9994
BEC = 0.013 ppb
LoD = 0.0070 ppb

208Pb (KED)

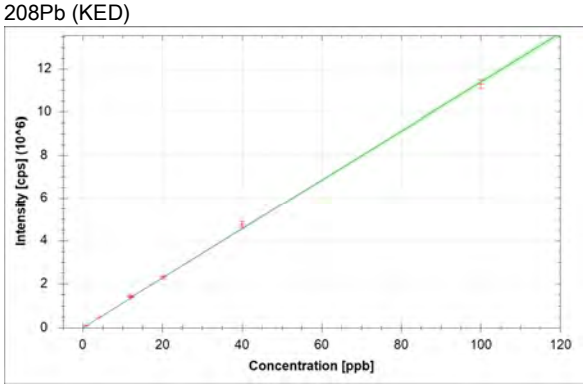

f(x) = 113845.2292*x + 1640.0564
R² = 0.9994
BEC = 0.014 ppb
LoD = 0.0015 ppb

232Th (KED)

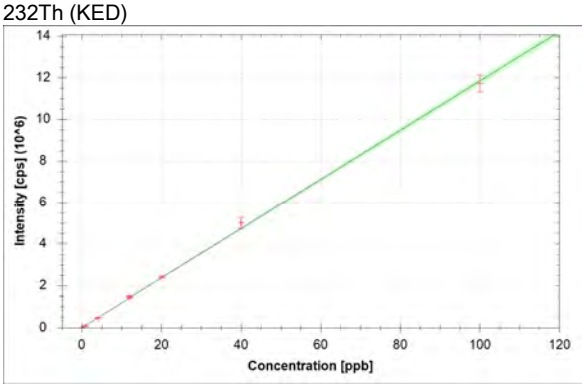

f(x) = 118358.2631*x + 6133.5099
R² = 0.9991
BEC = 0.052 ppb
LoD = 0.0073 ppb

238U (KED)

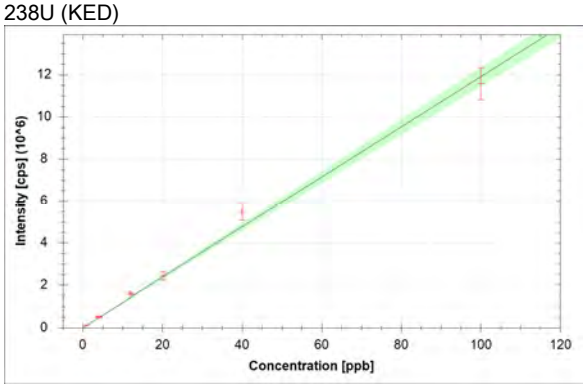

f(x) = 119031.8979*x + 163.2710
R² = 0.9937
BEC = 0.001 ppb
LoD = 0.0009 ppb

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Standards:

Analysis Index: 3
Analysis Name: ICAL1 J3MS-2814
AnalysisType: STD
Analysis Started at: 1/18/2022 9:36:21 AM
Standard (Stock): ICAL-1
Standard DF: 1

Category	Concentration average	Concentration RSD	RSE
6Li (STD)	97.630 %	0.5 %	0.0 %
9Be (KED)	0.893 ppb	4.8 %	6.4 %
11B (KED)	0.712 ppb	53.3 %	7.3 %
23Na (KED)	177.913 ppb	10.0 %	11.4 %
24Mg (KED)	200.393 ppb	0.5 %	13.2 %
27Al (KED)	175.765 ppb	1.8 %	12.4 %
39K (KED)	171.309 ppb	1.8 %	10.2 %
44Ca (KED)	181.048 ppb	4.8 %	10.2 %
45Sc (KED)	97.669 %	1.2 %	0.0 %
47Ti (STD)	2.088 ppb	5.0 %	4.2 %
51V (KED)	0.804 ppb	1.1 %	1.9 %
52Cr (KED)	0.888 ppb	1.9 %	6.2 %
54Fe (KED)	190.893 ppb	1.6 %	14.9 %
55Mn (KED)	0.780 ppb	3.2 %	2.6 %
56Fe (KED)	201.946 ppb	2.1 %	17.0 %
59Co (KED)	0.850 ppb	1.0 %	3.9 %
60Ni (KED)	0.804 ppb	2.3 %	2.8 %
63Cu (KED)	0.839 ppb	0.0 %	4.9 %
66Zn (KED)	21.625 ppb	1.4 %	15.2 %
75As (KED)	0.844 ppb	4.0 %	3.3 %
78Se (KED)	0.765 ppb	22.2 %	6.4 %
88Sr (KED)	0.764 ppb	4.0 %	5.6 %
89Y (KED)	98.845 %	1.3 %	0.0 %
95Mo (KED)	2.005 ppb	4.1 %	2.8 %
109Ag (KED)	0.855 ppb	1.9 %	5.6 %
111Cd (KED)	0.802 ppb	1.5 %	1.4 %
115In (KED)	98.085 %	2.1 %	0.0 %
118Sn (KED)	1.913 ppb	6.9 %	4.1 %
123Sb (KED)	1.924 ppb	0.0 %	5.7 %
137Ba (KED)	0.768 ppb	4.3 %	2.7 %
159Tb (KED)	101.047 %	1.1 %	0.0 %
205Tl (KED)	0.872 ppb	7.6 %	7.4 %
206Pb (KED)	0.852 ppb	5.3 %	6.3 %
207Pb (KED)	0.821 ppb	3.0 %	3.6 %
208Pb (KED)	0.837 ppb	3.5 %	4.6 %
209Bi (KED)	100.497 %	3.3 %	0.0 %
232Th (KED)	0.573 ppb	8.8 %	14.6 %
238U (KED)	0.869 ppb	3.0 %	11.2 %

Category	Standard Concentration
6Li (STD)	

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Category	Standard Concentration
9Be (KED)	0.800 ppb
11B (KED)	0.800 ppb
23Na (KED)	180.800 ppb
24Mg (KED)	180.800 ppb
27Al (KED)	180.800 ppb
39K (KED)	180.800 ppb
44Ca (KED)	180.800 ppb
45Sc (KED)	
47Ti (STD)	2.000 ppb
51V (KED)	0.800 ppb
52Cr (KED)	0.800 ppb
54Fe (KED)	180.800 ppb
55Mn (KED)	0.800 ppb
56Fe (KED)	180.800 ppb
59Co (KED)	0.800 ppb
60Ni (KED)	0.800 ppb
63Cu (KED)	0.800 ppb
66Zn (KED)	20.800 ppb
75As (KED)	0.800 ppb
78Se (KED)	0.800 ppb
88Sr (KED)	0.800 ppb
89Y (KED)	
95Mo (KED)	2.000 ppb
109Ag (KED)	0.800 ppb
111Cd (KED)	0.800 ppb
115In (KED)	
118Sn (KED)	2.000 ppb
123Sb (KED)	2.000 ppb
137Ba (KED)	0.800 ppb
159Tb (KED)	
205Tl (KED)	0.800 ppb
206Pb (KED)	0.800 ppb
207Pb (KED)	0.800 ppb
208Pb (KED)	0.800 ppb
209Bi (KED)	
232Th (KED)	0.800 ppb
238U (KED)	0.800 ppb

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Standards:

Analysis Index: 4
Analysis Name: ICAL2 J3MS-2815
AnalysisType: STD
Analysis Started at: 1/18/2022 9:42:36 AM
Standard (Stock): ICAL-2
Standard DF: 1

Category	Concentration average	Concentration RSD	RSE
6Li (STD)	97.576 %	3.5 %	0.0 %
9Be (KED)	4.023 ppb	3.2 %	6.4 %
11B (KED)	3.638 ppb	8.2 %	7.3 %
23Na (KED)	943.403 ppb	6.6 %	11.4 %
24Mg (KED)	969.497 ppb	4.5 %	13.2 %
27Al (KED)	934.719 ppb	4.5 %	12.4 %
39K (KED)	923.972 ppb	6.2 %	10.2 %
44Ca (KED)	888.503 ppb	4.1 %	10.2 %
45Sc (KED)	100.408 %	3.2 %	0.0 %
47Ti (STD)	4.118 ppb	1.3 %	4.2 %
51V (KED)	3.965 ppb	1.6 %	1.9 %
52Cr (KED)	4.003 ppb	2.4 %	6.2 %
54Fe (KED)	936.040 ppb	2.5 %	14.9 %
55Mn (KED)	3.932 ppb	2.3 %	2.6 %
56Fe (KED)	978.847 ppb	3.9 %	17.0 %
59Co (KED)	4.091 ppb	2.3 %	3.9 %
60Ni (KED)	4.110 ppb	2.2 %	2.8 %
63Cu (KED)	4.223 ppb	0.0 %	4.9 %
66Zn (KED)	110.133 ppb	1.5 %	15.2 %
75As (KED)	4.104 ppb	3.2 %	3.3 %
78Se (KED)	4.322 ppb	6.3 %	6.4 %
88Sr (KED)	3.780 ppb	1.7 %	5.6 %
89Y (KED)	103.121 %	3.5 %	0.0 %
95Mo (KED)	3.830 ppb	4.1 %	2.8 %
109Ag (KED)	4.211 ppb	0.5 %	5.6 %
111Cd (KED)	3.984 ppb	2.0 %	1.4 %
115In (KED)	101.536 %	0.7 %	0.0 %
118Sn (KED)	3.811 ppb	1.7 %	4.1 %
123Sb (KED)	4.041 ppb	0.0 %	5.7 %
137Ba (KED)	3.940 ppb	0.3 %	2.7 %
159Tb (KED)	104.144 %	2.9 %	0.0 %
205Tl (KED)	4.325 ppb	1.7 %	7.4 %
206Pb (KED)	4.272 ppb	2.1 %	6.3 %
207Pb (KED)	4.121 ppb	3.8 %	3.6 %
208Pb (KED)	4.172 ppb	1.5 %	4.6 %
209Bi (KED)	103.396 %	2.1 %	0.0 %
232Th (KED)	3.904 ppb	3.3 %	14.6 %
238U (KED)	4.258 ppb	4.1 %	11.2 %

Category	Standard Concentration
6Li (STD)	

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Category	Standard Concentration
9Be (KED)	4.000 ppb
11B (KED)	4.000 ppb
23Na (KED)	904.000 ppb
24Mg (KED)	904.000 ppb
27Al (KED)	904.000 ppb
39K (KED)	904.000 ppb
44Ca (KED)	904.000 ppb
45Sc (KED)	
47Ti (STD)	4.000 ppb
51V (KED)	4.000 ppb
52Cr (KED)	4.000 ppb
54Fe (KED)	904.000 ppb
55Mn (KED)	4.000 ppb
56Fe (KED)	904.000 ppb
59Co (KED)	4.000 ppb
60Ni (KED)	4.000 ppb
63Cu (KED)	4.000 ppb
66Zn (KED)	100.400 ppb
75As (KED)	4.000 ppb
78Se (KED)	4.000 ppb
88Sr (KED)	4.000 ppb
89Y (KED)	
95Mo (KED)	4.000 ppb
109Ag (KED)	4.000 ppb
111Cd (KED)	4.000 ppb
115In (KED)	
118Sn (KED)	4.000 ppb
123Sb (KED)	4.000 ppb
137Ba (KED)	4.000 ppb
159Tb (KED)	
205Tl (KED)	4.000 ppb
206Pb (KED)	4.000 ppb
207Pb (KED)	4.000 ppb
208Pb (KED)	4.000 ppb
209Bi (KED)	
232Th (KED)	4.000 ppb
238U (KED)	4.000 ppb

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Standards:

Analysis Index: 5
Analysis Name: ICAL3 J3MS-2816
AnalysisType: STD
Analysis Started at: 1/18/2022 9:48:51 AM
Standard (Stock): ICAL-3
Standard DF: 1

Category	Concentration average	Concentration RSD	RSE
6Li (STD)	91.972 %	5.3 %	0.0 %
9Be (KED)	12.502 ppb	5.1 %	6.4 %
11B (KED)	11.876 ppb	7.0 %	7.3 %
23Na (KED)	2,694.985 ppb	6.0 %	11.4 %
24Mg (KED)	2,686.907 ppb	3.9 %	13.2 %
27Al (KED)	2,735.975 ppb	1.0 %	12.4 %
39K (KED)	2,639.015 ppb	3.8 %	10.2 %
44Ca (KED)	2,657.034 ppb	4.9 %	10.2 %
45Sc (KED)	95.432 %	0.7 %	0.0 %
47Ti (STD)	12.464 ppb	2.7 %	4.2 %
51V (KED)	12.164 ppb	2.5 %	1.9 %
52Cr (KED)	11.932 ppb	2.1 %	6.2 %
54Fe (KED)	2,818.742 ppb	3.6 %	14.9 %
55Mn (KED)	12.037 ppb	2.6 %	2.6 %
56Fe (KED)	2,834.154 ppb	3.3 %	17.0 %
59Co (KED)	12.398 ppb	2.5 %	3.9 %
60Ni (KED)	12.312 ppb	1.0 %	2.8 %
63Cu (KED)	12.586 ppb	0.0 %	4.9 %
66Zn (KED)	324.752 ppb	1.8 %	15.2 %
75As (KED)	12.218 ppb	1.1 %	3.3 %
78Se (KED)	11.087 ppb	15.0 %	6.4 %
88Sr (KED)	11.460 ppb	5.3 %	5.6 %
89Y (KED)	101.942 %	0.9 %	0.0 %
95Mo (KED)	12.246 ppb	2.4 %	2.8 %
109Ag (KED)	12.845 ppb	2.1 %	5.6 %
111Cd (KED)	12.261 ppb	4.2 %	1.4 %
115In (KED)	98.478 %	3.3 %	0.0 %
118Sn (KED)	11.823 ppb	2.5 %	4.1 %
123Sb (KED)	11.379 ppb	0.0 %	5.7 %
137Ba (KED)	12.313 ppb	6.2 %	2.7 %
159Tb (KED)	107.733 %	4.2 %	0.0 %
205Tl (KED)	12.757 ppb	0.7 %	7.4 %
206Pb (KED)	12.499 ppb	2.1 %	6.3 %
207Pb (KED)	12.445 ppb	3.7 %	3.6 %
208Pb (KED)	12.540 ppb	2.4 %	4.6 %
209Bi (KED)	105.517 %	3.1 %	0.0 %
232Th (KED)	12.279 ppb	3.1 %	14.6 %
238U (KED)	13.405 ppb	3.7 %	11.2 %

Category	Standard Concentration
6Li (STD)	

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Category	Standard Concentration
9Be (KED)	12.000 ppb
11B (KED)	12.000 ppb
23Na (KED)	2,262.000 ppb
24Mg (KED)	2,262.000 ppb
27Al (KED)	2,262.000 ppb
39K (KED)	2,262.000 ppb
44Ca (KED)	2,262.000 ppb
45Sc (KED)	
47Ti (STD)	12.000 ppb
51V (KED)	12.000 ppb
52Cr (KED)	12.000 ppb
54Fe (KED)	2,262.000 ppb
55Mn (KED)	12.000 ppb
56Fe (KED)	2,262.000 ppb
59Co (KED)	12.000 ppb
60Ni (KED)	12.000 ppb
63Cu (KED)	12.000 ppb
66Zn (KED)	262.000 ppb
75As (KED)	12.000 ppb
78Se (KED)	12.000 ppb
88Sr (KED)	12.000 ppb
89Y (KED)	
95Mo (KED)	12.000 ppb
109Ag (KED)	12.000 ppb
111Cd (KED)	12.000 ppb
115In (KED)	
118Sn (KED)	12.000 ppb
123Sb (KED)	12.000 ppb
137Ba (KED)	12.000 ppb
159Tb (KED)	
205Tl (KED)	12.000 ppb
206Pb (KED)	12.000 ppb
207Pb (KED)	12.000 ppb
208Pb (KED)	12.000 ppb
209Bi (KED)	
232Th (KED)	12.000 ppb
238U (KED)	12.000 ppb

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Standards:

Analysis Index: 6
Analysis Name: ICAL4 J3MS-2842
AnalysisType: STD
Analysis Started at: 1/18/2022 9:55:07 AM
Standard (Stock): ICAL-4
Standard DF: 1

Category	Concentration average	Concentration RSD	RSE
6Li (STD)	92.176 %	4.2 %	0.0 %
9Be (KED)	20.598 ppb	1.7 %	6.4 %
11B (KED)	20.537 ppb	2.3 %	7.3 %
23Na (KED)	4,538.525 ppb	2.7 %	11.4 %
24Mg (KED)	4,518.582 ppb	3.4 %	13.2 %
27Al (KED)	4,530.740 ppb	3.5 %	12.4 %
39K (KED)	4,516.655 ppb	1.6 %	10.2 %
44Ca (KED)	4,448.062 ppb	4.5 %	10.2 %
45Sc (KED)	93.106 %	1.6 %	0.0 %
47Ti (STD)	19.356 ppb	2.1 %	4.2 %
51V (KED)	19.330 ppb	1.2 %	1.9 %
52Cr (KED)	19.177 ppb	0.7 %	6.2 %
54Fe (KED)	4,674.853 ppb	2.5 %	14.9 %
55Mn (KED)	19.290 ppb	1.7 %	2.6 %
56Fe (KED)	4,717.414 ppb	2.6 %	17.0 %
59Co (KED)	19.742 ppb	0.8 %	3.9 %
60Ni (KED)	19.600 ppb	1.8 %	2.8 %
63Cu (KED)	20.048 ppb	0.0 %	4.9 %
66Zn (KED)	533.163 ppb	1.7 %	15.2 %
75As (KED)	19.816 ppb	1.3 %	3.3 %
78Se (KED)	19.268 ppb	5.1 %	6.4 %
88Sr (KED)	18.785 ppb	5.2 %	5.6 %
89Y (KED)	101.292 %	2.7 %	0.0 %
95Mo (KED)	20.120 ppb	2.2 %	2.8 %
109Ag (KED)	20.156 ppb	2.6 %	5.6 %
111Cd (KED)	19.899 ppb	2.5 %	1.4 %
115In (KED)	98.173 %	3.4 %	0.0 %
118Sn (KED)	19.464 ppb	5.1 %	4.1 %
123Sb (KED)	21.467 ppb	0.0 %	5.7 %
137Ba (KED)	19.565 ppb	2.7 %	2.7 %
159Tb (KED)	107.352 %	3.1 %	0.0 %
205Tl (KED)	20.415 ppb	4.4 %	7.4 %
206Pb (KED)	20.420 ppb	5.7 %	6.3 %
207Pb (KED)	19.848 ppb	6.0 %	3.6 %
208Pb (KED)	20.299 ppb	2.9 %	4.6 %
209Bi (KED)	107.018 %	4.2 %	0.0 %
232Th (KED)	20.287 ppb	2.2 %	14.6 %
238U (KED)	20.424 ppb	8.0 %	11.2 %

Category	Standard Concentration
6Li (STD)	

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Category	Standard Concentration
9Be (KED)	20.000 ppb
11B (KED)	20.000 ppb
23Na (KED)	4,520.000 ppb
24Mg (KED)	4,520.000 ppb
27Al (KED)	4,520.000 ppb
39K (KED)	4,520.000 ppb
44Ca (KED)	4,520.000 ppb
45Sc (KED)	
47Ti (STD)	20.000 ppb
51V (KED)	20.000 ppb
52Cr (KED)	20.000 ppb
54Fe (KED)	4,520.000 ppb
55Mn (KED)	20.000 ppb
56Fe (KED)	4,520.000 ppb
59Co (KED)	20.000 ppb
60Ni (KED)	20.000 ppb
63Cu (KED)	20.000 ppb
66Zn (KED)	520.000 ppb
75As (KED)	20.000 ppb
78Se (KED)	20.000 ppb
88Sr (KED)	20.000 ppb
89Y (KED)	
95Mo (KED)	20.000 ppb
109Ag (KED)	20.000 ppb
111Cd (KED)	20.000 ppb
115In (KED)	
118Sn (KED)	20.000 ppb
123Sb (KED)	20.000 ppb
137Ba (KED)	20.000 ppb
159Tb (KED)	
205Tl (KED)	20.000 ppb
206Pb (KED)	20.000 ppb
207Pb (KED)	20.000 ppb
208Pb (KED)	20.000 ppb
209Bi (KED)	
232Th (KED)	20.000 ppb
238U (KED)	20.000 ppb

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Standards:

Analysis Index: 7
Analysis Name: ICAL5 J3MS-2818
AnalysisType: STD
Analysis Started at: 1/18/2022 10:01:23 AM
Standard (Stock): ICAL-5
Standard DF: 1

Category	Concentration average	Concentration RSD	RSE
6Li (STD)	90.680 %	2.3 %	0.0 %
9Be (KED)	40.215 ppb	0.6 %	6.4 %
11B (KED)	39.920 ppb	3.0 %	7.3 %
23Na (KED)	8,918.513 ppb	1.2 %	11.4 %
24Mg (KED)	8,927.447 ppb	4.2 %	13.2 %
27Al (KED)	8,913.060 ppb	3.9 %	12.4 %
39K (KED)	8,945.528 ppb	1.5 %	10.2 %
44Ca (KED)	8,978.668 ppb	1.2 %	10.2 %
45Sc (KED)	93.492 %	1.9 %	0.0 %
47Ti (STD)	40.167 ppb	2.5 %	4.2 %
51V (KED)	39.647 ppb	1.1 %	1.9 %
52Cr (KED)	38.353 ppb	2.7 %	6.2 %
54Fe (KED)	8,819.859 ppb	3.5 %	14.9 %
55Mn (KED)	39.155 ppb	2.3 %	2.6 %
56Fe (KED)	8,790.220 ppb	3.0 %	17.0 %
59Co (KED)	39.195 ppb	2.5 %	3.9 %
60Ni (KED)	38.621 ppb	2.8 %	2.8 %
63Cu (KED)	38.325 ppb	0.0 %	4.9 %
66Zn (KED)	1,016.654 ppb	0.3 %	15.2 %
75As (KED)	39.367 ppb	1.8 %	3.3 %
78Se (KED)	38.812 ppb	4.5 %	6.4 %
88Sr (KED)	38.390 ppb	5.0 %	5.6 %
89Y (KED)	103.518 %	3.5 %	0.0 %
95Mo (KED)	39.883 ppb	1.8 %	2.8 %
109Ag (KED)	40.366 ppb	2.8 %	5.6 %
111Cd (KED)	40.584 ppb	1.0 %	1.4 %
115In (KED)	97.229 %	0.3 %	0.0 %
118Sn (KED)	40.344 ppb	2.9 %	4.1 %
123Sb (KED)	39.283 ppb	0.0 %	5.7 %
137Ba (KED)	40.213 ppb	3.4 %	2.7 %
159Tb (KED)	113.576 %	5.3 %	0.0 %
205Tl (KED)	42.020 ppb	0.8 %	7.4 %
206Pb (KED)	42.761 ppb	3.3 %	6.3 %
207Pb (KED)	41.881 ppb	2.4 %	3.6 %
208Pb (KED)	41.799 ppb	2.9 %	4.6 %
209Bi (KED)	104.525 %	1.1 %	0.0 %
232Th (KED)	42.349 ppb	5.2 %	14.6 %
238U (KED)	46.105 ppb	7.4 %	11.2 %

Category	Standard Concentration
6Li (STD)	

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Category	Standard Concentration
9Be (KED)	40.000 ppb
11B (KED)	40.000 ppb
23Na (KED)	9,040.000 ppb
24Mg (KED)	9,040.000 ppb
27Al (KED)	9,040.000 ppb
39K (KED)	9,040.000 ppb
44Ca (KED)	9,040.000 ppb
45Sc (KED)	
47Ti (STD)	40.000 ppb
51V (KED)	40.000 ppb
52Cr (KED)	40.000 ppb
54Fe (KED)	9,040.000 ppb
55Mn (KED)	40.000 ppb
56Fe (KED)	9,040.000 ppb
59Co (KED)	40.000 ppb
60Ni (KED)	40.000 ppb
63Cu (KED)	40.000 ppb
66Zn (KED)	1,040.000 ppb
75As (KED)	40.000 ppb
78Se (KED)	40.000 ppb
88Sr (KED)	40.000 ppb
89Y (KED)	
95Mo (KED)	40.000 ppb
109Ag (KED)	40.000 ppb
111Cd (KED)	40.000 ppb
115In (KED)	
118Sn (KED)	40.000 ppb
123Sb (KED)	40.000 ppb
137Ba (KED)	40.000 ppb
159Tb (KED)	
205Tl (KED)	40.000 ppb
206Pb (KED)	40.000 ppb
207Pb (KED)	40.000 ppb
208Pb (KED)	40.000 ppb
209Bi (KED)	
232Th (KED)	40.000 ppb
238U (KED)	40.000 ppb

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Standards:

Analysis Index: 8
Analysis Name: ICAL6 J3MS-2819
AnalysisType: STD
Analysis Started at: 1/18/2022 10:07:39 AM
Standard (Stock): ICAL-6
Standard DF: 1

Category	Concentration average	Concentration RSD	RSE
6Li (STD)	96.313 %	2.0 %	0.0 %
9Be (KED)	99.732 ppb	1.2 %	6.4 %
11B (KED)	99.955 ppb	0.3 %	7.3 %
23Na (KED)	N/A	N/A	11.4 %
24Mg (KED)	N/A	N/A	13.2 %
27Al (KED)	N/A	N/A	12.4 %
39K (KED)	N/A	N/A	10.2 %
44Ca (KED)	N/A	N/A	10.2 %
45Sc (KED)	96.702 %	0.8 %	0.0 %
47Ti (STD)	N/A	N/A	4.2 %
51V (KED)	100.257 ppb	1.0 %	1.9 %
52Cr (KED)	100.831 ppb	1.6 %	6.2 %
54Fe (KED)	N/A	N/A	14.9 %
55Mn (KED)	100.478 ppb	1.8 %	2.6 %
56Fe (KED)	N/A	N/A	17.0 %
59Co (KED)	100.322 ppb	1.0 %	3.9 %
60Ni (KED)	100.590 ppb	1.7 %	2.8 %
63Cu (KED)	100.760 ppb	0.0 %	4.9 %
66Zn (KED)	N/A	N/A	15.2 %
75As (KED)	100.259 ppb	1.4 %	3.3 %
78Se (KED)	100.719 ppb	0.7 %	6.4 %
88Sr (KED)	100.961 ppb	4.1 %	5.6 %
89Y (KED)	106.992 %	0.6 %	0.0 %
95Mo (KED)	N/A	N/A	2.8 %
109Ag (KED)	99.712 ppb	2.0 %	5.6 %
111Cd (KED)	99.756 ppb	1.1 %	1.4 %
115In (KED)	107.935 %	0.9 %	0.0 %
118Sn (KED)	N/A	N/A	4.1 %
123Sb (KED)	100.068 ppb	0.0 %	5.7 %
137Ba (KED)	99.967 ppb	2.7 %	2.7 %
159Tb (KED)	119.045 %	0.5 %	0.0 %
205Tl (KED)	99.005 ppb	1.4 %	7.4 %
206Pb (KED)	98.740 ppb	2.6 %	6.3 %
207Pb (KED)	99.220 ppb	2.5 %	3.6 %
208Pb (KED)	99.148 ppb	1.8 %	4.6 %
209Bi (KED)	118.779 %	2.6 %	0.0 %
232Th (KED)	98.975 ppb	3.4 %	14.6 %
238U (KED)	97.294 ppb	6.5 %	11.2 %

Category	Standard Concentration
6Li (STD)	

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Category	Standard Concentration
9Be (KED)	100.000 ppb
11B (KED)	100.000 ppb
23Na (KED)	N/A
24Mg (KED)	N/A
27Al (KED)	N/A
39K (KED)	N/A
44Ca (KED)	N/A
45Sc (KED)	
47Ti (STD)	N/A
51V (KED)	100.000 ppb
52Cr (KED)	100.000 ppb
54Fe (KED)	N/A
55Mn (KED)	100.000 ppb
56Fe (KED)	N/A
59Co (KED)	100.000 ppb
60Ni (KED)	100.000 ppb
63Cu (KED)	100.000 ppb
66Zn (KED)	N/A
75As (KED)	100.000 ppb
78Se (KED)	100.000 ppb
88Sr (KED)	100.000 ppb
89Y (KED)	
95Mo (KED)	N/A
109Ag (KED)	100.000 ppb
111Cd (KED)	100.000 ppb
115In (KED)	
118Sn (KED)	N/A
123Sb (KED)	100.000 ppb
137Ba (KED)	100.000 ppb
159Tb (KED)	
205Tl (KED)	100.000 ppb
206Pb (KED)	100.000 ppb
207Pb (KED)	100.000 ppb
208Pb (KED)	100.000 ppb
209Bi (KED)	
232Th (KED)	100.000 ppb
238U (KED)	100.000 ppb

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Standards:

Analysis Index: 9
Analysis Name: ICAL7 J3MS-2791
AnalysisType: STD
Analysis Started at: 1/18/2022 10:13:55 AM
Standard (Stock): ICAL-7
Standard DF: 1

Category	Concentration average	Concentration RSD	RSE
6Li (STD)	97.028 %	0.6 %	0.0 %
9Be (KED)	N/A	N/A	6.4 %
11B (KED)	N/A	N/A	7.3 %
23Na (KED)	N/A	N/A	11.4 %
24Mg (KED)	N/A	N/A	13.2 %
27Al (KED)	N/A	N/A	12.4 %
39K (KED)	N/A	N/A	10.2 %
44Ca (KED)	N/A	N/A	10.2 %
45Sc (KED)	96.282 %	0.9 %	0.0 %
47Ti (STD)	N/A	N/A	4.2 %
51V (KED)	N/A	N/A	1.9 %
52Cr (KED)	N/A	N/A	6.2 %
54Fe (KED)	N/A	N/A	14.9 %
55Mn (KED)	N/A	N/A	2.6 %
56Fe (KED)	N/A	N/A	17.0 %
59Co (KED)	N/A	N/A	3.9 %
60Ni (KED)	N/A	N/A	2.8 %
63Cu (KED)	249.926 ppb	0.0 %	4.9 %
66Zn (KED)	N/A	N/A	15.2 %
75As (KED)	N/A	N/A	3.3 %
78Se (KED)	N/A	N/A	6.4 %
88Sr (KED)	N/A	N/A	5.6 %
89Y (KED)	104.239 %	1.9 %	0.0 %
95Mo (KED)	N/A	N/A	2.8 %
109Ag (KED)	N/A	N/A	5.6 %
111Cd (KED)	N/A	N/A	1.4 %
115In (KED)	102.957 %	1.2 %	0.0 %
118Sn (KED)	N/A	N/A	4.1 %
123Sb (KED)	N/A	N/A	5.7 %
137Ba (KED)	N/A	N/A	2.7 %
159Tb (KED)	111.160 %	1.4 %	0.0 %
205Tl (KED)	N/A	N/A	7.4 %
206Pb (KED)	N/A	N/A	6.3 %
207Pb (KED)	N/A	N/A	3.6 %
208Pb (KED)	N/A	N/A	4.6 %
209Bi (KED)	116.793 %	2.4 %	0.0 %
232Th (KED)	N/A	N/A	14.6 %
238U (KED)	N/A	N/A	11.2 %

Category	Standard Concentration
6Li (STD)	

Calibration

2/17/2022 1:43:28 PM
Instrument: J3R
Method: EPA6020A/B, 200.8

Category	Standard Concentration
9Be (KED)	N/A
11B (KED)	N/A
23Na (KED)	N/A
24Mg (KED)	N/A
27Al (KED)	N/A
39K (KED)	N/A
44Ca (KED)	N/A
45Sc (KED)	
47Ti (STD)	N/A
51V (KED)	N/A
52Cr (KED)	N/A
54Fe (KED)	N/A
55Mn (KED)	N/A
56Fe (KED)	N/A
59Co (KED)	N/A
60Ni (KED)	N/A
63Cu (KED)	250.000 ppb
66Zn (KED)	N/A
75As (KED)	N/A
78Se (KED)	N/A
88Sr (KED)	N/A
89Y (KED)	
95Mo (KED)	N/A
109Ag (KED)	N/A
111Cd (KED)	N/A
115In (KED)	
118Sn (KED)	N/A
123Sb (KED)	N/A
137Ba (KED)	N/A
159Tb (KED)	
205Tl (KED)	N/A
206Pb (KED)	N/A
207Pb (KED)	N/A
208Pb (KED)	N/A
209Bi (KED)	
232Th (KED)	N/A
238U (KED)	N/A

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	CALB J3MS-2841 J3MS-2840	Comment	LL
Dilution Factor	1	Sample Type:	BLK
Date Collected:	1/18/2022 9:30:07 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	100.000 %	0.1 %	208,535 cps
9Be (KED)	0.000 ppb	1.7 %	1 cps
11B (KED)	0.000 ppb	0.1 %	72 cps
23Na (KED)	0.000 ppb	0.0 %	224,626 cps
24Mg (KED)	0.000 ppb	0.1 %	877 cps
27Al (KED)	0.000 ppb	0.1 %	867 cps
39K (KED)	0.000 ppb	0.1 %	56,150 cps
44Ca (KED)	0.000 ppb	0.1 %	787 cps
45Sc (KED)	100.000 %	0.0 %	141,768 cps
47Ti (STD)	0.000 ppb	0.1 %	640 cps
51V (KED)	0.000 ppb	0.1 %	80 cps
52Cr (KED)	0.000 ppb	0.1 %	284 cps
54Fe (KED)	0.000 ppb	0.1 %	1,460 cps
55Mn (KED)	0.000 ppb	0.1 %	1,676 cps
56Fe (KED)	0.000 ppb	0.1 %	29,235 cps
59Co (KED)	0.000 ppb	0.1 %	52 cps
60Ni (KED)	0.000 ppb	0.0 %	1,295 cps
63Cu (KED)	0.000 ppb	N/A	3,292 cps
66Zn (KED)	0.000 ppb	0.0 %	5,694 cps
74Ge (KED)			18,710 cps
75As (KED)	0.000 ppb	0.2 %	108 cps
77Se (KED)			27 cps
78Se (KED)	0.000 ppb	-0.6 %	-11 cps
83Kr (KED)			43 cps
88Sr (KED)	0.000 ppb	0.0 %	393 cps
89Y (KED)	100.000 %	0.0 %	237,842 cps
95Mo (KED)	0.000 ppb	0.2 %	287 cps
109Ag (KED)	0.000 ppb	0.2 %	168 cps
111Cd (KED)	0.000 ppb	0.4 %	7 cps
115In (KED)	100.000 %	0.0 %	283,710 cps
118Sn (KED)	0.000 ppb	0.1 %	4,969 cps
123Sb (KED)	-0.161 ppb	N/A	184 cps
125Te (KED)			0 cps
137Ba (KED)	0.000 ppb	0.0 %	543 cps
146Nd (KED)			20 cps
147Sm (KED)			3 cps
159Tb (KED)	100.000 %	0.0 %	438,582 cps
205Tl (KED)	0.000 ppb	0.1 %	118 cps
206Pb (KED)	0.000 ppb	0.0 %	452 cps
207Pb (KED)	0.000 ppb	0.2 %	314 cps
208Pb (KED)	0.000 ppb	0.0 %	1,640 cps
209Bi (KED)	100.000 %	0.0 %	303,028 cps
232Th (KED)	0.000 ppb	0.0 %	6,132 cps
238U (KED)	0.000 ppb	0.2 %	163 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	ICAL1 J3MS-2814	Comment	LL
Dilution Factor	1	Sample Type:	STD
Date Collected:	1/18/2022 9:36:21 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	RSE
6Li (STD)	97.630 %	0.5 %	0.0 %
9Be (KED)	0.893 ppb	4.8 %	6.4 %
11B (KED)	0.712 ppb	53.3 %	7.3 %
23Na (KED)	177.913 ppb	10.0 %	11.4 %
24Mg (KED)	200.393 ppb	0.5 %	13.2 %
27Al (KED)	175.765 ppb	1.8 %	12.4 %
39K (KED)	171.309 ppb	1.8 %	10.2 %
44Ca (KED)	181.048 ppb	4.8 %	10.2 %
45Sc (KED)	97.669 %	1.2 %	0.0 %
47Ti (STD)	2.088 ppb	5.0 %	4.2 %
51V (KED)	0.804 ppb	1.1 %	1.9 %
52Cr (KED)	0.888 ppb	1.9 %	6.2 %
54Fe (KED)	190.893 ppb	1.6 %	14.9 %
55Mn (KED)	0.780 ppb	3.2 %	2.6 %
56Fe (KED)	201.946 ppb	2.1 %	17.0 %
59Co (KED)	0.850 ppb	1.0 %	3.9 %
60Ni (KED)	0.804 ppb	2.3 %	2.8 %
63Cu (KED)	0.839 ppb	0.0 %	4.9 %
66Zn (KED)	21.625 ppb	1.4 %	15.2 %
74Ge (KED)			
75As (KED)	0.844 ppb	4.0 %	3.3 %
77Se (KED)			
78Se (KED)	0.765 ppb	22.2 %	6.4 %
83Kr (KED)			
88Sr (KED)	0.764 ppb	4.0 %	5.6 %
89Y (KED)	98.845 %	1.3 %	0.0 %
95Mo (KED)	2.005 ppb	4.1 %	2.8 %
109Ag (KED)	0.855 ppb	1.9 %	5.6 %
111Cd (KED)	0.802 ppb	1.5 %	1.4 %
115In (KED)	98.085 %	2.1 %	0.0 %
118Sn (KED)	1.913 ppb	6.9 %	4.1 %
123Sb (KED)	1.924 ppb	0.0 %	5.7 %
125Te (KED)			
137Ba (KED)	0.768 ppb	4.3 %	2.7 %
146Nd (KED)			
147Sm (KED)			
159Tb (KED)	101.047 %	1.1 %	0.0 %
205Tl (KED)	0.872 ppb	7.6 %	7.4 %
206Pb (KED)	0.852 ppb	5.3 %	6.3 %
207Pb (KED)	0.821 ppb	3.0 %	3.6 %
208Pb (KED)	0.837 ppb	3.5 %	4.6 %
209Bi (KED)	100.497 %	3.3 %	0.0 %
232Th (KED)	0.573 ppb	8.8 %	14.6 %
238U (KED)	0.869 ppb	3.0 %	11.2 %

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	ICAL2 J3MS-2815	Comment	LL
Dilution Factor	1	Sample Type:	STD
Date Collected:	1/18/2022 9:42:36 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	RSE
6Li (STD)	97.576 %	3.5 %	0.0 %
9Be (KED)	4.023 ppb	3.2 %	6.4 %
11B (KED)	3.638 ppb	8.2 %	7.3 %
23Na (KED)	943.403 ppb	6.6 %	11.4 %
24Mg (KED)	969.497 ppb	4.5 %	13.2 %
27Al (KED)	934.719 ppb	4.5 %	12.4 %
39K (KED)	923.972 ppb	6.2 %	10.2 %
44Ca (KED)	888.503 ppb	4.1 %	10.2 %
45Sc (KED)	100.408 %	3.2 %	0.0 %
47Ti (STD)	4.118 ppb	1.3 %	4.2 %
51V (KED)	3.965 ppb	1.6 %	1.9 %
52Cr (KED)	4.003 ppb	2.4 %	6.2 %
54Fe (KED)	936.040 ppb	2.5 %	14.9 %
55Mn (KED)	3.932 ppb	2.3 %	2.6 %
56Fe (KED)	978.847 ppb	3.9 %	17.0 %
59Co (KED)	4.091 ppb	2.3 %	3.9 %
60Ni (KED)	4.110 ppb	2.2 %	2.8 %
63Cu (KED)	4.223 ppb	0.0 %	4.9 %
66Zn (KED)	110.133 ppb	1.5 %	15.2 %
74Ge (KED)			
75As (KED)	4.104 ppb	3.2 %	3.3 %
77Se (KED)			
78Se (KED)	4.322 ppb	6.3 %	6.4 %
83Kr (KED)			
88Sr (KED)	3.780 ppb	1.7 %	5.6 %
89Y (KED)	103.121 %	3.5 %	0.0 %
95Mo (KED)	3.830 ppb	4.1 %	2.8 %
109Ag (KED)	4.211 ppb	0.5 %	5.6 %
111Cd (KED)	3.984 ppb	2.0 %	1.4 %
115In (KED)	101.536 %	0.7 %	0.0 %
118Sn (KED)	3.811 ppb	1.7 %	4.1 %
123Sb (KED)	4.041 ppb	0.0 %	5.7 %
125Te (KED)			
137Ba (KED)	3.940 ppb	0.3 %	2.7 %
146Nd (KED)			
147Sm (KED)			
159Tb (KED)	104.144 %	2.9 %	0.0 %
205Tl (KED)	4.325 ppb	1.7 %	7.4 %
206Pb (KED)	4.272 ppb	2.1 %	6.3 %
207Pb (KED)	4.121 ppb	3.8 %	3.6 %
208Pb (KED)	4.172 ppb	1.5 %	4.6 %
209Bi (KED)	103.396 %	2.1 %	0.0 %
232Th (KED)	3.904 ppb	3.3 %	14.6 %
238U (KED)	4.258 ppb	4.1 %	11.2 %

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	ICAL3 J3MS-2816	Comment	LL
Dilution Factor	1	Sample Type:	STD
Date Collected:	1/18/2022 9:48:51 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	RSE
6Li (STD)	91.972 %	5.3 %	0.0 %
9Be (KED)	12.502 ppb	5.1 %	6.4 %
11B (KED)	11.876 ppb	7.0 %	7.3 %
23Na (KED)	2,694.985 ppb	6.0 %	11.4 %
24Mg (KED)	2,686.907 ppb	3.9 %	13.2 %
27Al (KED)	2,735.975 ppb	1.0 %	12.4 %
39K (KED)	2,639.015 ppb	3.8 %	10.2 %
44Ca (KED)	2,657.034 ppb	4.9 %	10.2 %
45Sc (KED)	95.432 %	0.7 %	0.0 %
47Ti (STD)	12.464 ppb	2.7 %	4.2 %
51V (KED)	12.164 ppb	2.5 %	1.9 %
52Cr (KED)	11.932 ppb	2.1 %	6.2 %
54Fe (KED)	2,818.742 ppb	3.6 %	14.9 %
55Mn (KED)	12.037 ppb	2.6 %	2.6 %
56Fe (KED)	2,834.154 ppb	3.3 %	17.0 %
59Co (KED)	12.398 ppb	2.5 %	3.9 %
60Ni (KED)	12.312 ppb	1.0 %	2.8 %
63Cu (KED)	12.586 ppb	0.0 %	4.9 %
66Zn (KED)	324.752 ppb	1.8 %	15.2 %
74Ge (KED)			
75As (KED)	12.218 ppb	1.1 %	3.3 %
77Se (KED)			
78Se (KED)	11.087 ppb	15.0 %	6.4 %
83Kr (KED)			
88Sr (KED)	11.460 ppb	5.3 %	5.6 %
89Y (KED)	101.942 %	0.9 %	0.0 %
95Mo (KED)	12.246 ppb	2.4 %	2.8 %
109Ag (KED)	12.845 ppb	2.1 %	5.6 %
111Cd (KED)	12.261 ppb	4.2 %	1.4 %
115In (KED)	98.478 %	3.3 %	0.0 %
118Sn (KED)	11.823 ppb	2.5 %	4.1 %
123Sb (KED)	11.379 ppb	0.0 %	5.7 %
125Te (KED)			
137Ba (KED)	12.313 ppb	6.2 %	2.7 %
146Nd (KED)			
147Sm (KED)			
159Tb (KED)	107.733 %	4.2 %	0.0 %
205Tl (KED)	12.757 ppb	0.7 %	7.4 %
206Pb (KED)	12.499 ppb	2.1 %	6.3 %
207Pb (KED)	12.445 ppb	3.7 %	3.6 %
208Pb (KED)	12.540 ppb	2.4 %	4.6 %
209Bi (KED)	105.517 %	3.1 %	0.0 %
232Th (KED)	12.279 ppb	3.1 %	14.6 %
238U (KED)	13.405 ppb	3.7 %	11.2 %

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	ICAL4 J3MS-2842	Comment	LL
Dilution Factor	1	Sample Type:	STD
Date Collected:	1/18/2022 9:55:07 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	RSE
6Li (STD)	92.176 %	4.2 %	0.0 %
9Be (KED)	20.598 ppb	1.7 %	6.4 %
11B (KED)	20.537 ppb	2.3 %	7.3 %
23Na (KED)	4,538.525 ppb	2.7 %	11.4 %
24Mg (KED)	4,518.582 ppb	3.4 %	13.2 %
27Al (KED)	4,530.740 ppb	3.5 %	12.4 %
39K (KED)	4,516.655 ppb	1.6 %	10.2 %
44Ca (KED)	4,448.062 ppb	4.5 %	10.2 %
45Sc (KED)	93.106 %	1.6 %	0.0 %
47Ti (STD)	19.356 ppb	2.1 %	4.2 %
51V (KED)	19.330 ppb	1.2 %	1.9 %
52Cr (KED)	19.177 ppb	0.7 %	6.2 %
54Fe (KED)	4,674.853 ppb	2.5 %	14.9 %
55Mn (KED)	19.290 ppb	1.7 %	2.6 %
56Fe (KED)	4,717.414 ppb	2.6 %	17.0 %
59Co (KED)	19.742 ppb	0.8 %	3.9 %
60Ni (KED)	19.600 ppb	1.8 %	2.8 %
63Cu (KED)	20.048 ppb	0.0 %	4.9 %
66Zn (KED)	533.163 ppb	1.7 %	15.2 %
74Ge (KED)			
75As (KED)	19.816 ppb	1.3 %	3.3 %
77Se (KED)			
78Se (KED)	19.268 ppb	5.1 %	6.4 %
83Kr (KED)			
88Sr (KED)	18.785 ppb	5.2 %	5.6 %
89Y (KED)	101.292 %	2.7 %	0.0 %
95Mo (KED)	20.120 ppb	2.2 %	2.8 %
109Ag (KED)	20.156 ppb	2.6 %	5.6 %
111Cd (KED)	19.899 ppb	2.5 %	1.4 %
115In (KED)	98.173 %	3.4 %	0.0 %
118Sn (KED)	19.464 ppb	5.1 %	4.1 %
123Sb (KED)	21.467 ppb	0.0 %	5.7 %
125Te (KED)			
137Ba (KED)	19.565 ppb	2.7 %	2.7 %
146Nd (KED)			
147Sm (KED)			
159Tb (KED)	107.352 %	3.1 %	0.0 %
205Tl (KED)	20.415 ppb	4.4 %	7.4 %
206Pb (KED)	20.420 ppb	5.7 %	6.3 %
207Pb (KED)	19.848 ppb	6.0 %	3.6 %
208Pb (KED)	20.299 ppb	2.9 %	4.6 %
209Bi (KED)	107.018 %	4.2 %	0.0 %
232Th (KED)	20.287 ppb	2.2 %	14.6 %
238U (KED)	20.424 ppb	8.0 %	11.2 %

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	ICAL5 J3MS-2818	Comment	LL
Dilution Factor	1	Sample Type:	STD
Date Collected:	1/18/2022 10:01:23 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	RSE
6Li (STD)	90.680 %	2.3 %	0.0 %
9Be (KED)	40.215 ppb	0.6 %	6.4 %
11B (KED)	39.920 ppb	3.0 %	7.3 %
23Na (KED)	8,918.513 ppb	1.2 %	11.4 %
24Mg (KED)	8,927.447 ppb	4.2 %	13.2 %
27Al (KED)	8,913.060 ppb	3.9 %	12.4 %
39K (KED)	8,945.528 ppb	1.5 %	10.2 %
44Ca (KED)	8,978.668 ppb	1.2 %	10.2 %
45Sc (KED)	93.492 %	1.9 %	0.0 %
47Ti (STD)	40.167 ppb	2.5 %	4.2 %
51V (KED)	39.647 ppb	1.1 %	1.9 %
52Cr (KED)	38.353 ppb	2.7 %	6.2 %
54Fe (KED)	8,819.859 ppb	3.5 %	14.9 %
55Mn (KED)	39.155 ppb	2.3 %	2.6 %
56Fe (KED)	8,790.220 ppb	3.0 %	17.0 %
59Co (KED)	39.195 ppb	2.5 %	3.9 %
60Ni (KED)	38.621 ppb	2.8 %	2.8 %
63Cu (KED)	38.325 ppb	0.0 %	4.9 %
66Zn (KED)	1,016.654 ppb	0.3 %	15.2 %
74Ge (KED)			
75As (KED)	39.367 ppb	1.8 %	3.3 %
77Se (KED)			
78Se (KED)	38.812 ppb	4.5 %	6.4 %
83Kr (KED)			
88Sr (KED)	38.390 ppb	5.0 %	5.6 %
89Y (KED)	103.518 %	3.5 %	0.0 %
95Mo (KED)	39.883 ppb	1.8 %	2.8 %
109Ag (KED)	40.366 ppb	2.8 %	5.6 %
111Cd (KED)	40.584 ppb	1.0 %	1.4 %
115In (KED)	97.229 %	0.3 %	0.0 %
118Sn (KED)	40.344 ppb	2.9 %	4.1 %
123Sb (KED)	39.283 ppb	0.0 %	5.7 %
125Te (KED)			
137Ba (KED)	40.213 ppb	3.4 %	2.7 %
146Nd (KED)			
147Sm (KED)			
159Tb (KED)	113.576 %	5.3 %	0.0 %
205Tl (KED)	42.020 ppb	0.8 %	7.4 %
206Pb (KED)	42.761 ppb	3.3 %	6.3 %
207Pb (KED)	41.881 ppb	2.4 %	3.6 %
208Pb (KED)	41.799 ppb	2.9 %	4.6 %
209Bi (KED)	104.525 %	1.1 %	0.0 %
232Th (KED)	42.349 ppb	5.2 %	14.6 %
238U (KED)	46.105 ppb	7.4 %	11.2 %

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	ICAL6 J3MS-2819	Comment	LL
Dilution Factor	1	Sample Type:	STD
Date Collected:	1/18/2022 10:07:39 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	RSE
6Li (STD)	96.313 %	2.0 %	0.0 %
9Be (KED)	99.732 ppb	1.2 %	6.4 %
11B (KED)	99.955 ppb	0.3 %	7.3 %
23Na (KED)	N/A	N/A	11.4 %
24Mg (KED)	N/A	N/A	13.2 %
27Al (KED)	N/A	N/A	12.4 %
39K (KED)	N/A	N/A	10.2 %
44Ca (KED)	N/A	N/A	10.2 %
45Sc (KED)	96.702 %	0.8 %	0.0 %
47Ti (STD)	N/A	N/A	4.2 %
51V (KED)	100.257 ppb	1.0 %	1.9 %
52Cr (KED)	100.831 ppb	1.6 %	6.2 %
54Fe (KED)	N/A	N/A	14.9 %
55Mn (KED)	100.478 ppb	1.8 %	2.6 %
56Fe (KED)	N/A	N/A	17.0 %
59Co (KED)	100.322 ppb	1.0 %	3.9 %
60Ni (KED)	100.590 ppb	1.7 %	2.8 %
63Cu (KED)	100.760 ppb	0.0 %	4.9 %
66Zn (KED)	N/A	N/A	15.2 %
74Ge (KED)			
75As (KED)	100.259 ppb	1.4 %	3.3 %
77Se (KED)			
78Se (KED)	100.719 ppb	0.7 %	6.4 %
83Kr (KED)			
88Sr (KED)	100.961 ppb	4.1 %	5.6 %
89Y (KED)	106.992 %	0.6 %	0.0 %
95Mo (KED)	N/A	N/A	2.8 %
109Ag (KED)	99.712 ppb	2.0 %	5.6 %
111Cd (KED)	99.756 ppb	1.1 %	1.4 %
115In (KED)	107.935 %	0.9 %	0.0 %
118Sn (KED)	N/A	N/A	4.1 %
123Sb (KED)	100.068 ppb	0.0 %	5.7 %
125Te (KED)			
137Ba (KED)	99.967 ppb	2.7 %	2.7 %
146Nd (KED)			
147Sm (KED)			
159Tb (KED)	119.045 %	0.5 %	0.0 %
205Tl (KED)	99.005 ppb	1.4 %	7.4 %
206Pb (KED)	98.740 ppb	2.6 %	6.3 %
207Pb (KED)	99.220 ppb	2.5 %	3.6 %
208Pb (KED)	99.148 ppb	1.8 %	4.6 %
209Bi (KED)	118.779 %	2.6 %	0.0 %
232Th (KED)	98.975 ppb	3.4 %	14.6 %
238U (KED)	97.294 ppb	6.5 %	11.2 %

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	ICAL7 J3MS-2791	Comment	LL
Dilution Factor	1	Sample Type:	STD
Date Collected:	1/18/2022 10:13:55 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	RSE
6Li (STD)	97.028 %	0.6 %	0.0 %
9Be (KED)	N/A	N/A	6.4 %
11B (KED)	N/A	N/A	7.3 %
23Na (KED)	N/A	N/A	11.4 %
24Mg (KED)	N/A	N/A	13.2 %
27Al (KED)	N/A	N/A	12.4 %
39K (KED)	N/A	N/A	10.2 %
44Ca (KED)	N/A	N/A	10.2 %
45Sc (KED)	96.282 %	0.9 %	0.0 %
47Ti (STD)	N/A	N/A	4.2 %
51V (KED)	N/A	N/A	1.9 %
52Cr (KED)	N/A	N/A	6.2 %
54Fe (KED)	N/A	N/A	14.9 %
55Mn (KED)	N/A	N/A	2.6 %
56Fe (KED)	N/A	N/A	17.0 %
59Co (KED)	N/A	N/A	3.9 %
60Ni (KED)	N/A	N/A	2.8 %
63Cu (KED)	249.926 ppb	0.0 %	4.9 %
66Zn (KED)	N/A	N/A	15.2 %
74Ge (KED)			
75As (KED)	N/A	N/A	3.3 %
77Se (KED)			
78Se (KED)	N/A	N/A	6.4 %
83Kr (KED)			
88Sr (KED)	N/A	N/A	5.6 %
89Y (KED)	104.239 %	1.9 %	0.0 %
95Mo (KED)	N/A	N/A	2.8 %
109Ag (KED)	N/A	N/A	5.6 %
111Cd (KED)	N/A	N/A	1.4 %
115In (KED)	102.957 %	1.2 %	0.0 %
118Sn (KED)	N/A	N/A	4.1 %
123Sb (KED)	N/A	N/A	5.7 %
125Te (KED)			
137Ba (KED)	N/A	N/A	2.7 %
146Nd (KED)			
147Sm (KED)			
159Tb (KED)	111.160 %	1.4 %	0.0 %
205Tl (KED)	N/A	N/A	7.4 %
206Pb (KED)	N/A	N/A	6.3 %
207Pb (KED)	N/A	N/A	3.6 %
208Pb (KED)	N/A	N/A	4.6 %
209Bi (KED)	116.793 %	2.4 %	0.0 %
232Th (KED)	N/A	N/A	14.6 %
238U (KED)	N/A	N/A	11.2 %

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	ICV1 J3MS-2820	Comment	LL
Dilution Factor	1	Sample Type:	QC
Date Collected:	1/18/2022 10:26:28 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	99.587 %	3.5 %	207,674 cps
9Be (KED)	20.231 ppb	4.3 %	2,468 cps
11B (KED)	19.941 ppb	5.9 %	1,533 cps
23Na (KED)	-35.861 ppb	8.8 %	155,916 cps
24Mg (KED)	20.651 ppb	2.8 %	20,187 cps
27Al (KED)	4,379.569 ppb	0.6 %	1,660,142 cps
39K (KED)	-5.181 ppb	8.4 %	51,085 cps
44Ca (KED)	157.207 ppb	1.3 %	10,534 cps
45Sc (KED)	100.428 %	3.7 %	142,375 cps
47Ti (STD)	19.759 ppb	4.5 %	190,150 cps
51V (KED)	19.789 ppb	1.4 %	250,977 cps
52Cr (KED)	19.581 ppb	1.9 %	331,361 cps
54Fe (KED)	4,523.871 ppb	4.2 %	3,711,970 cps
55Mn (KED)	20.316 ppb	1.7 %	239,419 cps
56Fe (KED)	4,449.897 ppb	1.5 %	84,088,552 cps
59Co (KED)	20.213 ppb	2.7 %	776,501 cps
60Ni (KED)	20.318 ppb	1.7 %	207,299 cps
63Cu (KED)	21.074 ppb	2.8 %	533,992 cps
66Zn (KED)	528.799 ppb	2.4 %	2,286,509 cps
74Ge (KED)			22,007 cps
75As (KED)	20.217 ppb	1.7 %	48,682 cps
77Se (KED)			6,148 cps
78Se (KED)	20.158 ppb	7.5 %	4,235 cps
83Kr (KED)			3,907 cps
88Sr (KED)	18.785 ppb	3.0 %	255,453 cps
89Y (KED)	110.125 %	2.7 %	261,925 cps
95Mo (KED)	19.919 ppb	1.8 %	208,015 cps
109Ag (KED)	20.909 ppb	1.5 %	794,592 cps
111Cd (KED)	20.357 ppb	1.1 %	113,533 cps
115In (KED)	102.874 %	0.8 %	291,862 cps
118Sn (KED)	19.792 ppb	2.5 %	258,395 cps
123Sb (KED)	21.501 ppb	1.0 %	212,828 cps
125Te (KED)			7 cps
137Ba (KED)	20.670 ppb	2.1 %	135,140 cps
146Nd (KED)			400,162 cps
147Sm (KED)			371,918 cps
159Tb (KED)	115.673 %	0.3 %	507,321 cps
205Tl (KED)	20.891 ppb	0.8 %	1,909,343 cps
206Pb (KED)	21.301 ppb	3.8 %	656,668 cps
207Pb (KED)	20.895 ppb	4.3 %	554,640 cps
208Pb (KED)	21.126 ppb	3.4 %	2,584,785 cps
209Bi (KED)	107.263 %	1.3 %	325,037 cps
232Th (KED)	21.302 ppb	3.4 %	2,710,629 cps
238U (KED)	21.069 ppb	4.8 %	2,691,014 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	LLCCV1 J3MS-2814	Comment	LL
Dilution Factor	1	Sample Type:	QC
Date Collected:	1/18/2022 10:39:00 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	97.610 %	3.0 %	203,552 cps
9Be (KED)	0.770 ppb	10.8 %	93 cps
11B (KED)	0.714 ppb	28.1 %	122 cps
23Na (KED)	129.821 ppb	4.4 %	466,604 cps
24Mg (KED)	193.517 ppb	2.7 %	177,663 cps
27Al (KED)	174.012 ppb	2.5 %	65,301 cps
39K (KED)	172.240 ppb	3.3 %	227,203 cps
44Ca (KED)	177.237 ppb	4.8 %	11,515 cps
45Sc (KED)	98.223 %	2.2 %	139,248 cps
47Ti (STD)	2.056 ppb	4.3 %	19,956 cps
51V (KED)	0.805 ppb	2.3 %	10,023 cps
52Cr (KED)	0.875 ppb	2.4 %	14,679 cps
54Fe (KED)	189.830 ppb	3.9 %	152,811 cps
55Mn (KED)	0.767 ppb	3.0 %	10,384 cps
56Fe (KED)	185.065 ppb	2.8 %	3,421,924 cps
59Co (KED)	0.821 ppb	1.5 %	30,610 cps
60Ni (KED)	0.734 ppb	3.5 %	8,505 cps
63Cu (KED)	0.759 ppb	1.4 %	21,601 cps
66Zn (KED)	21.100 ppb	1.5 %	93,457 cps
74Ge (KED)			18,958 cps
75As (KED)	0.834 ppb	0.5 %	2,029 cps
77Se (KED)			313 cps
78Se (KED)	1.086 ppb	20.7 %	207 cps
83Kr (KED)			157 cps
88Sr (KED)	0.761 ppb	2.6 %	10,224 cps
89Y (KED)	104.471 %	0.4 %	248,476 cps
95Mo (KED)	2.073 ppb	3.6 %	21,105 cps
109Ag (KED)	0.843 ppb	1.4 %	32,088 cps
111Cd (KED)	0.820 ppb	2.5 %	4,587 cps
115In (KED)	104.138 %	0.7 %	295,450 cps
118Sn (KED)	2.034 ppb	1.3 %	31,448 cps
123Sb (KED)	2.138 ppb	2.7 %	23,052 cps
125Te (KED)			1 cps
137Ba (KED)	0.773 ppb	6.0 %	5,548 cps
146Nd (KED)			16,818 cps
147Sm (KED)			14,592 cps
159Tb (KED)	111.412 %	2.3 %	488,631 cps
205Tl (KED)	0.856 ppb	1.9 %	78,608 cps
206Pb (KED)	0.835 ppb	3.9 %	26,326 cps
207Pb (KED)	0.830 ppb	4.8 %	22,480 cps
208Pb (KED)	0.841 ppb	4.1 %	105,186 cps
209Bi (KED)	108.013 %	1.6 %	327,311 cps
232Th (KED)	0.683 ppb	3.3 %	93,875 cps
238U (KED)	0.853 ppb	5.1 %	109,813 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	LLCCV2 J3MS-2815	Comment	LL
Dilution Factor	1	Sample Type:	QC
Date Collected:	1/18/2022 10:45:16 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	94.651 %	2.5 %	197,381 cps
9Be (KED)	4.061 ppb	4.5 %	482 cps
11B (KED)	4.055 ppb	17.8 %	359 cps
23Na (KED)	890.246 ppb	6.2 %	1,895,048 cps
24Mg (KED)	939.766 ppb	3.6 %	853,559 cps
27Al (KED)	893.695 ppb	1.0 %	329,589 cps
39K (KED)	939.470 ppb	2.1 %	986,931 cps
44Ca (KED)	892.121 ppb	3.2 %	54,452 cps
45Sc (KED)	97.521 %	0.5 %	138,253 cps
47Ti (STD)	4.171 ppb	3.9 %	38,687 cps
51V (KED)	4.018 ppb	1.1 %	49,302 cps
52Cr (KED)	4.002 ppb	1.1 %	65,620 cps
54Fe (KED)	972.855 ppb	1.2 %	771,075 cps
55Mn (KED)	3.883 ppb	0.9 %	45,420 cps
56Fe (KED)	924.013 ppb	0.7 %	16,822,456 cps
59Co (KED)	4.055 ppb	0.8 %	149,605 cps
60Ni (KED)	4.026 ppb	1.4 %	40,433 cps
63Cu (KED)	4.112 ppb	0.5 %	101,642 cps
66Zn (KED)	108.688 ppb	1.6 %	453,212 cps
74Ge (KED)			19,243 cps
75As (KED)	4.033 ppb	1.9 %	9,288 cps
77Se (KED)			1,230 cps
78Se (KED)	4.184 ppb	16.9 %	824 cps
83Kr (KED)			663 cps
88Sr (KED)	3.976 ppb	4.1 %	51,008 cps
89Y (KED)	103.218 %	2.2 %	245,497 cps
95Mo (KED)	4.011 ppb	1.8 %	40,102 cps
109Ag (KED)	4.212 ppb	1.3 %	158,201 cps
111Cd (KED)	4.075 ppb	1.8 %	22,568 cps
115In (KED)	103.262 %	1.1 %	292,963 cps
118Sn (KED)	3.886 ppb	1.2 %	54,989 cps
123Sb (KED)	4.289 ppb	1.7 %	44,219 cps
125Te (KED)			1 cps
137Ba (KED)	3.871 ppb	2.3 %	25,563 cps
146Nd (KED)			81,054 cps
147Sm (KED)			73,337 cps
159Tb (KED)	113.394 %	1.7 %	497,323 cps
205Tl (KED)	4.119 ppb	2.7 %	379,512 cps
206Pb (KED)	4.093 ppb	2.7 %	127,711 cps
207Pb (KED)	4.123 ppb	4.1 %	110,726 cps
208Pb (KED)	4.178 ppb	2.0 %	517,818 cps
209Bi (KED)	108.438 %	2.3 %	328,597 cps
232Th (KED)	4.195 ppb	5.8 %	544,837 cps
238U (KED)	4.254 ppb	3.5 %	549,266 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	IB J3MS-2841 J3MS-2840	Comment	LL
Dilution Factor	1	Sample Type:	QC
Date Collected:	1/18/2022 10:51:32 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	101.000 %	2.0 %	210,619 cps
9Be (KED)	0.030 ppb	30.0 %	4 cps
11B (KED)	-0.013 ppb	624.1 %	73 cps
23Na (KED)	-47.278 ppb	2.4 %	135,671 cps
24Mg (KED)	1.122 ppb	37.5 %	1,957 cps
27Al (KED)	1.421 ppb	38.0 %	1,430 cps
39K (KED)	1.639 ppb	116.9 %	58,839 cps
44Ca (KED)	1.797 ppb	118.0 %	913 cps
45Sc (KED)	101.742 %	1.9 %	144,238 cps
47Ti (STD)	-0.012 ppb	50.4 %	523 cps
51V (KED)	0.004 ppb	32.0 %	138 cps
52Cr (KED)	0.005 ppb	47.3 %	370 cps
54Fe (KED)	1.205 ppb	14.4 %	2,497 cps
55Mn (KED)	0.005 ppb	40.3 %	1,786 cps
56Fe (KED)	1.174 ppb	22.8 %	52,421 cps
59Co (KED)	0.005 ppb	34.8 %	250 cps
60Ni (KED)	-0.007 ppb	117.3 %	1,271 cps
63Cu (KED)	0.005 ppb	19.4 %	3,554 cps
66Zn (KED)	0.082 ppb	27.7 %	6,288 cps
74Ge (KED)			19,166 cps
75As (KED)	0.018 ppb	12.5 %	156 cps
77Se (KED)			23 cps
78Se (KED)	0.137 ppb	24.4 %	17 cps
83Kr (KED)			40 cps
88Sr (KED)	0.004 ppb	163.7 %	477 cps
89Y (KED)	107.014 %	2.1 %	254,525 cps
95Mo (KED)	0.069 ppb	40.2 %	1,013 cps
109Ag (KED)	0.005 ppb	7.4 %	390 cps
111Cd (KED)	0.003 ppb	5.7 %	28 cps
115In (KED)	108.769 %	1.4 %	308,588 cps
118Sn (KED)	0.018 ppb	62.4 %	5,681 cps
123Sb (KED)	-0.038 ppb	55.7 %	1,490 cps
125Te (KED)			0 cps
137Ba (KED)	0.010 ppb	54.7 %	683 cps
146Nd (KED)			100 cps
147Sm (KED)			93 cps
159Tb (KED)	118.035 %	1.9 %	517,678 cps
205Tl (KED)	0.006 ppb	18.4 %	664 cps
206Pb (KED)	0.007 ppb	24.3 %	709 cps
207Pb (KED)	0.009 ppb	8.9 %	574 cps
208Pb (KED)	0.007 ppb	18.6 %	2,648 cps
209Bi (KED)	107.619 %	1.6 %	326,118 cps
232Th (KED)	0.201 ppb	7.2 %	32,192 cps
238U (KED)	0.005 ppb	13.1 %	813 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	ICSA J3MS-2831	Comment	LL
Dilution Factor	1	Sample Type:	QC
Date Collected:	1/18/2022 10:57:49 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	89.134 %	2.3 %	185,875 cps
9Be (KED)	-0.005 ppb	0.0 %	0 cps
11B (KED)	0.224 ppb	19.3 %	81 cps
23Na (KED)	9,043.279 ppb	1.2 %	16,189,798 cps
24Mg (KED)	9,544.047 ppb	1.4 %	8,131,545 cps
27Al (KED)	9,393.835 ppb	2.3 %	3,246,087 cps
39K (KED)	9,441.760 ppb	1.8 %	8,850,307 cps
44Ca (KED)	9,284.075 ppb	2.7 %	525,292 cps
45Sc (KED)	91.586 %	1.5 %	129,840 cps
47Ti (STD)	197.278 ppb	2.4 %	1,695,169 cps
51V (KED)	0.010 ppb	5.7 %	183 cps
52Cr (KED)	0.082 ppb	8.1 %	1,512 cps
54Fe (KED)	9,596.748 ppb	3.4 %	7,124,590 cps
55Mn (KED)	0.082 ppb	6.4 %	2,421 cps
56Fe (KED)	9,533.781 ppb	2.4 %	162,570,730 cps
59Co (KED)	0.103 ppb	3.3 %	3,625 cps
60Ni (KED)	0.513 ppb	3.2 %	5,886 cps
63Cu (KED)	-0.054 ppb	3.6 %	1,882 cps
66Zn (KED)	-0.554 ppb	3.2 %	3,209 cps
74Ge (KED)			17,600 cps
75As (KED)	0.072 ppb	13.0 %	255 cps
77Se (KED)			50 cps
78Se (KED)	0.591 ppb	20.1 %	100 cps
83Kr (KED)			43 cps
88Sr (KED)	0.030 ppb	20.3 %	733 cps
89Y (KED)	96.496 %	3.5 %	229,507 cps
95Mo (KED)	193.492 ppb	1.9 %	1,801,866 cps
109Ag (KED)	0.006 ppb	18.8 %	383 cps
111Cd (KED)	0.071 ppb	3.1 %	378 cps
115In (KED)	98.016 %	1.7 %	278,080 cps
118Sn (KED)	0.104 ppb	139.7 %	6,181 cps
123Sb (KED)	-0.049 ppb	16.6 %	1,246 cps
125Te (KED)			0 cps
137Ba (KED)	-0.051 ppb	10.8 %	248 cps
146Nd (KED)			17 cps
147Sm (KED)			13 cps
159Tb (KED)	109.851 %	1.5 %	481,788 cps
205Tl (KED)	0.012 ppb	9.4 %	1,118 cps
206Pb (KED)	0.035 ppb	7.8 %	1,433 cps
207Pb (KED)	0.034 ppb	3.2 %	1,147 cps
208Pb (KED)	0.035 ppb	3.4 %	5,554 cps
209Bi (KED)	98.111 %	2.3 %	297,305 cps
232Th (KED)	0.068 ppb	22.4 %	13,911 cps
238U (KED)	0.003 ppb	9.8 %	543 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	4170475	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 11:04:07 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	94.180 %	3.8 %	196,397 cps
9Be (KED)	0.012 ppb	146.1 %	2 cps
11B (KED)	-0.002 ppb	3,840.6 %	70 cps
23Na (KED)	-39.227 ppb	3.4 %	143,351 cps
24Mg (KED)	4.732 ppb	21.4 %	5,091 cps
27Al (KED)	4.401 ppb	9.1 %	2,434 cps
39K (KED)	-25.379 ppb	11.8 %	29,221 cps
44Ca (KED)	2.228 ppb	44.0 %	890 cps
45Sc (KED)	96.287 %	1.4 %	136,504 cps
47Ti (STD)	0.116 ppb	17.1 %	1,653 cps
51V (KED)	-0.003 ppb	41.3 %	44 cps
52Cr (KED)	-0.010 ppb	17.0 %	117 cps
54Fe (KED)	4.640 ppb	17.7 %	5,034 cps
55Mn (KED)	-0.040 ppb	9.8 %	1,188 cps
56Fe (KED)	4.488 ppb	19.4 %	108,729 cps
59Co (KED)	0.000 ppb	15.1 %	39 cps
60Ni (KED)	0.004 ppb	112.0 %	1,300 cps
63Cu (KED)	-0.075 ppb	1.8 %	1,465 cps
66Zn (KED)	0.254 ppb	18.1 %	6,608 cps
74Ge (KED)			18,488 cps
75As (KED)	-0.001 ppb	645.7 %	104 cps
77Se (KED)			17 cps
78Se (KED)	0.033 ppb	175.9 %	-4 cps
83Kr (KED)			40 cps
88Sr (KED)	-0.016 ppb	18.7 %	193 cps
89Y (KED)	100.068 %	1.7 %	238,004 cps
95Mo (KED)	0.737 ppb	6.4 %	7,469 cps
109Ag (KED)	0.000 ppb	207.5 %	169 cps
111Cd (KED)	-0.001 ppb	30.4 %	4 cps
115In (KED)	105.649 %	1.0 %	299,735 cps
118Sn (KED)	-0.131 ppb	24.6 %	3,562 cps
123Sb (KED)	-0.082 ppb	19.6 %	1,000 cps
125Te (KED)			0 cps
137Ba (KED)	-0.048 ppb	12.2 %	280 cps
146Nd (KED)			7 cps
147Sm (KED)			10 cps
159Tb (KED)	112.836 %	0.8 %	494,877 cps
205Tl (KED)	0.000 ppb	54.8 %	88 cps
206Pb (KED)	-0.006 ppb	15.3 %	320 cps
207Pb (KED)	-0.002 ppb	55.0 %	281 cps
208Pb (KED)	-0.004 ppb	16.3 %	1,273 cps
209Bi (KED)	109.364 %	0.8 %	331,405 cps
232Th (KED)	-0.046 ppb	0.8 %	767 cps
238U (KED)	-0.001 ppb	5.4 %	67 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	4170476	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 11:10:24 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	93.283 %	1.8 %	194,527 cps
9Be (KED)	19.538 ppb	3.7 %	2,287 cps
11B (KED)	19.945 ppb	2.5 %	1,471 cps
23Na (KED)	4,343.849 ppb	4.4 %	8,290,388 cps
24Mg (KED)	4,321.978 ppb	7.6 %	3,868,809 cps
27Al (KED)	4,507.772 ppb	3.6 %	1,637,835 cps
39K (KED)	4,393.663 ppb	2.4 %	4,359,053 cps
44Ca (KED)	4,462.081 ppb	4.5 %	265,865 cps
45Sc (KED)	96.369 %	4.1 %	136,620 cps
47Ti (STD)	18.892 ppb	1.3 %	170,467 cps
51V (KED)	19.120 ppb	2.3 %	231,408 cps
52Cr (KED)	18.492 ppb	2.0 %	298,389 cps
54Fe (KED)	4,340.744 ppb	1.9 %	3,391,489 cps
55Mn (KED)	19.018 ppb	3.3 %	213,174 cps
56Fe (KED)	4,316.151 ppb	1.1 %	77,473,508 cps
59Co (KED)	18.743 ppb	1.7 %	682,341 cps
60Ni (KED)	18.563 ppb	2.7 %	179,352 cps
63Cu (KED)	19.252 ppb	3.0 %	460,498 cps
66Zn (KED)	540.661 ppb	2.0 %	2,201,545 cps
74Ge (KED)			20,505 cps
75As (KED)	19.940 ppb	0.4 %	44,880 cps
77Se (KED)			6,028 cps
78Se (KED)	21.036 ppb	8.6 %	4,127 cps
83Kr (KED)			3,214 cps
88Sr (KED)	18.737 ppb	3.1 %	235,669 cps
89Y (KED)	101.725 %	1.7 %	241,944 cps
95Mo (KED)	18.341 ppb	1.1 %	180,516 cps
109Ag (KED)	19.384 ppb	2.5 %	728,530 cps
111Cd (KED)	19.887 ppb	1.3 %	110,449 cps
115In (KED)	103.909 %	1.6 %	294,800 cps
118Sn (KED)	18.344 ppb	1.4 %	241,840 cps
123Sb (KED)	17.049 ppb	0.6 %	170,408 cps
125Te (KED)			11 cps
137Ba (KED)	19.414 ppb	1.5 %	126,593 cps
146Nd (KED)			396,647 cps
147Sm (KED)			345,523 cps
159Tb (KED)	114.039 %	2.0 %	500,156 cps
205Tl (KED)	19.643 ppb	2.9 %	1,719,092 cps
206Pb (KED)	19.686 ppb	4.0 %	580,894 cps
207Pb (KED)	19.390 ppb	3.3 %	492,384 cps
208Pb (KED)	19.906 ppb	3.4 %	2,328,055 cps
209Bi (KED)	102.462 %	1.7 %	310,488 cps
232Th (KED)	19.857 ppb	3.5 %	2,413,482 cps
238U (KED)	21.627 ppb	6.1 %	2,636,730 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	J2200629002	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 11:16:41 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	95.045 %	3.4 %	198,202 cps
9Be (KED)	0.060 ppb	15.0 %	8 cps
11B (KED)	3.544 ppb	13.7 %	318 cps
23Na (KED)	4,799.496 ppb	4.0 %	9,115,371 cps
24Mg (KED)	1,471.082 ppb	2.2 %	1,315,976 cps
27Al (KED)	184.514 ppb	6.6 %	67,703 cps
39K (KED)	631.246 ppb	0.6 %	671,146 cps
44Ca (KED)	21,397.386 ppb	1.2 %	1,269,651 cps
45Sc (KED)	96.107 %	1.4 %	136,248 cps
47Ti (STD)	6.662 ppb	25.9 %	61,961 cps
51V (KED)	0.277 ppb	1.8 %	3,432 cps
52Cr (KED)	2.392 ppb	0.7 %	38,968 cps
54Fe (KED)	78.246 ppb	7.6 %	62,795 cps
55Mn (KED)	9.841 ppb	0.9 %	111,727 cps
56Fe (KED)	72.534 ppb	5.4 %	1,339,273 cps
59Co (KED)	0.084 ppb	19.8 %	3,147 cps
60Ni (KED)	0.523 ppb	1.6 %	6,353 cps
63Cu (KED)	0.197 ppb	4.0 %	7,978 cps
66Zn (KED)	11.977 ppb	18.0 %	55,198 cps
74Ge (KED)			18,051 cps
75As (KED)	0.104 ppb	15.2 %	348 cps
77Se (KED)			47 cps
78Se (KED)	0.326 ppb	19.4 %	54 cps
83Kr (KED)			27 cps
88Sr (KED)	43.656 ppb	0.9 %	564,748 cps
89Y (KED)	104.859 %	4.5 %	249,400 cps
95Mo (KED)	0.306 ppb	15.5 %	3,357 cps
109Ag (KED)	0.011 ppb	21.0 %	580 cps
111Cd (KED)	0.098 ppb	9.1 %	549 cps
115In (KED)	102.463 %	1.2 %	290,698 cps
118Sn (KED)	0.046 ppb	100.7 %	5,713 cps
123Sb (KED)	0.161 ppb	27.7 %	3,366 cps
125Te (KED)			0 cps
137Ba (KED)	15.774 ppb	2.6 %	101,630 cps
146Nd (KED)			5,825 cps
147Sm (KED)			1,240 cps
159Tb (KED)	112.609 %	0.4 %	493,884 cps
205Tl (KED)	0.020 ppb	11.8 %	1,859 cps
206Pb (KED)	0.063 ppb	5.4 %	2,307 cps
207Pb (KED)	0.069 ppb	9.2 %	2,050 cps
208Pb (KED)	0.063 ppb	6.7 %	8,970 cps
209Bi (KED)	101.533 %	2.1 %	307,672 cps
232Th (KED)	0.244 ppb	4.6 %	35,531 cps
238U (KED)	0.112 ppb	21.8 %	13,643 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	J2200629003	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 11:22:58 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	93.458 %	2.9 %	194,893 cps
9Be (KED)	0.015 ppb	34.4 %	2 cps
11B (KED)	8.774 ppb	3.2 %	671 cps
23Na (KED)	8,659.457 ppb	3.2 %	15,965,042 cps
24Mg (KED)	3,049.113 ppb	1.5 %	2,675,318 cps
27Al (KED)	67.184 ppb	5.2 %	24,725 cps
39K (KED)	611.950 ppb	1.3 %	639,936 cps
44Ca (KED)	21,677.809 ppb	0.2 %	1,261,827 cps
45Sc (KED)	94.279 %	1.9 %	133,657 cps
47Ti (STD)	0.540 ppb	3.1 %	5,465 cps
51V (KED)	0.207 ppb	8.4 %	2,541 cps
52Cr (KED)	1.205 ppb	2.3 %	19,381 cps
54Fe (KED)	41.055 ppb	5.2 %	32,996 cps
55Mn (KED)	25.268 ppb	2.4 %	278,512 cps
56Fe (KED)	39.802 ppb	6.4 %	732,759 cps
59Co (KED)	0.172 ppb	3.1 %	6,226 cps
60Ni (KED)	0.686 ppb	2.0 %	7,764 cps
63Cu (KED)	1.091 ppb	0.6 %	28,681 cps
66Zn (KED)	14.529 ppb	1.0 %	64,143 cps
74Ge (KED)			17,952 cps
75As (KED)	0.092 ppb	13.0 %	313 cps
77Se (KED)			27 cps
78Se (KED)	0.226 ppb	32.2 %	33 cps
83Kr (KED)			40 cps
88Sr (KED)	48.668 ppb	3.5 %	614,517 cps
89Y (KED)	102.378 %	2.8 %	243,499 cps
95Mo (KED)	0.376 ppb	9.0 %	3,997 cps
109Ag (KED)	0.001 ppb	71.2 %	227 cps
111Cd (KED)	0.056 ppb	5.7 %	315 cps
115In (KED)	103.126 %	1.2 %	292,578 cps
118Sn (KED)	0.007 ppb	867.7 %	5,242 cps
123Sb (KED)	0.040 ppb	47.3 %	2,181 cps
125Te (KED)			0 cps
137Ba (KED)	20.949 ppb	2.4 %	134,939 cps
146Nd (KED)			5,004 cps
147Sm (KED)			1,030 cps
159Tb (KED)	112.266 %	3.6 %	492,377 cps
205Tl (KED)	0.010 ppb	3.2 %	1,031 cps
206Pb (KED)	0.106 ppb	4.8 %	3,629 cps
207Pb (KED)	0.108 ppb	4.3 %	3,088 cps
208Pb (KED)	0.107 ppb	2.3 %	14,343 cps
209Bi (KED)	103.599 %	0.4 %	313,935 cps
232Th (KED)	0.040 ppb	9.0 %	11,228 cps
238U (KED)	0.140 ppb	2.0 %	17,392 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	J2200629004	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 11:29:15 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	96.227 %	1.3 %	200,668 cps
9Be (KED)	0.012 ppb	128.6 %	2 cps
11B (KED)	2.747 ppb	6.7 %	265 cps
23Na (KED)	1,001.712 ppb	4.3 %	2,095,140 cps
24Mg (KED)	2,149.634 ppb	1.3 %	1,943,054 cps
27Al (KED)	18.953 ppb	6.0 %	7,789 cps
39K (KED)	169.963 ppb	1.4 %	222,439 cps
44Ca (KED)	22,734.604 ppb	1.9 %	1,363,015 cps
45Sc (KED)	97.118 %	1.6 %	137,682 cps
47Ti (STD)	1.545 ppb	64.1 %	14,931 cps
51V (KED)	0.415 ppb	10.3 %	5,127 cps
52Cr (KED)	0.929 ppb	1.7 %	15,326 cps
54Fe (KED)	70.642 ppb	2.5 %	56,765 cps
55Mn (KED)	30.978 ppb	1.0 %	347,191 cps
56Fe (KED)	68.579 ppb	1.7 %	1,261,315 cps
59Co (KED)	0.167 ppb	2.8 %	6,138 cps
60Ni (KED)	0.472 ppb	2.0 %	5,803 cps
63Cu (KED)	0.309 ppb	0.6 %	10,507 cps
66Zn (KED)	12.569 ppb	0.5 %	56,484 cps
74Ge (KED)			17,973 cps
75As (KED)	0.105 ppb	12.1 %	340 cps
77Se (KED)			37 cps
78Se (KED)	0.228 ppb	33.2 %	34 cps
83Kr (KED)			30 cps
88Sr (KED)	49.417 ppb	2.1 %	611,090 cps
89Y (KED)	100.124 %	2.1 %	238,137 cps
95Mo (KED)	0.114 ppb	10.4 %	1,400 cps
109Ag (KED)	0.000 ppb	90.2 %	191 cps
111Cd (KED)	0.109 ppb	3.7 %	618 cps
115In (KED)	105.529 %	1.7 %	299,395 cps
118Sn (KED)	0.172 ppb	7.6 %	7,525 cps
123Sb (KED)	-0.020 ppb	50.0 %	1,627 cps
125Te (KED)			0 cps
137Ba (KED)	13.044 ppb	1.4 %	86,031 cps
146Nd (KED)			1,947 cps
147Sm (KED)			310 cps
159Tb (KED)	114.389 %	2.2 %	501,690 cps
205Tl (KED)	0.009 ppb	14.7 %	968 cps
206Pb (KED)	0.191 ppb	10.1 %	6,314 cps
207Pb (KED)	0.178 ppb	4.8 %	5,040 cps
208Pb (KED)	0.183 ppb	4.5 %	23,929 cps
209Bi (KED)	106.648 %	3.8 %	323,173 cps
232Th (KED)	0.003 ppb	30.4 %	6,905 cps
238U (KED)	0.138 ppb	3.8 %	17,629 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	J2200629004SD 5X	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 11:35:32 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	93.662 %	1.0 %	195,318 cps
9Be (KED)	-0.003 ppb	184.1 %	0 cps
11B (KED)	0.068 ppb	145.8 %	75 cps
23Na (KED)	179.334 ppb	2.0 %	555,470 cps
24Mg (KED)	434.236 ppb	1.6 %	394,011 cps
27Al (KED)	2.479 ppb	36.2 %	1,757 cps
39K (KED)	8.533 ppb	6.6 %	63,093 cps
44Ca (KED)	4,603.689 ppb	1.0 %	277,222 cps
45Sc (KED)	97.330 %	1.5 %	137,983 cps
47Ti (STD)	0.149 ppb	8.2 %	1,943 cps
51V (KED)	0.082 ppb	9.3 %	1,087 cps
52Cr (KED)	0.176 ppb	1.1 %	3,153 cps
54Fe (KED)	13.807 ppb	2.8 %	12,342 cps
55Mn (KED)	6.275 ppb	1.0 %	72,243 cps
56Fe (KED)	13.144 ppb	1.3 %	267,348 cps
59Co (KED)	0.033 ppb	9.0 %	1,266 cps
60Ni (KED)	0.029 ppb	8.2 %	1,572 cps
63Cu (KED)	-0.032 ppb	10.1 %	2,514 cps
66Zn (KED)	1.790 ppb	3.0 %	13,054 cps
74Ge (KED)			18,502 cps
75As (KED)	0.013 ppb	69.4 %	138 cps
77Se (KED)			37 cps
78Se (KED)	-0.036 ppb	195.6 %	-18 cps
83Kr (KED)			60 cps
88Sr (KED)	10.065 ppb	1.9 %	128,442 cps
89Y (KED)	103.085 %	1.2 %	245,181 cps
95Mo (KED)	0.055 ppb	48.6 %	853 cps
109Ag (KED)	0.000 ppb	331.8 %	168 cps
111Cd (KED)	0.020 ppb	10.0 %	126 cps
115In (KED)	110.716 %	1.1 %	314,112 cps
118Sn (KED)	-0.092 ppb	15.2 %	4,267 cps
123Sb (KED)	-0.063 ppb	14.6 %	1,253 cps
125Te (KED)			1 cps
137Ba (KED)	2.459 ppb	3.7 %	17,589 cps
146Nd (KED)			427 cps
147Sm (KED)			43 cps
159Tb (KED)	120.865 %	1.4 %	530,093 cps
205Tl (KED)	0.002 ppb	30.2 %	287 cps
206Pb (KED)	0.030 ppb	15.5 %	1,460 cps
207Pb (KED)	0.031 ppb	8.5 %	1,202 cps
208Pb (KED)	0.031 ppb	0.9 %	5,747 cps
209Bi (KED)	111.448 %	1.3 %	337,719 cps
232Th (KED)	0.041 ppb	26.1 %	12,236 cps
238U (KED)	0.027 ppb	5.3 %	3,784 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	4170477	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 11:41:49 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	90.479 %	1.7 %	188,681 cps
9Be (KED)	18.534 ppb	1.6 %	2,070 cps
11B (KED)	21.097 ppb	5.0 %	1,480 cps
23Na (KED)	5,270.255 ppb	3.2 %	9,547,777 cps
24Mg (KED)	6,420.947 ppb	2.1 %	5,488,760 cps
27Al (KED)	4,404.451 ppb	2.4 %	1,527,106 cps
39K (KED)	4,497.083 ppb	0.4 %	4,254,135 cps
44Ca (KED)	27,108.716 ppb	0.4 %	1,537,282 cps
45Sc (KED)	91.857 %	1.4 %	130,224 cps
47Ti (STD)	19.154 ppb	2.2 %	167,647 cps
51V (KED)	18.990 ppb	0.8 %	219,534 cps
52Cr (KED)	19.463 ppb	1.6 %	300,059 cps
54Fe (KED)	4,489.601 ppb	2.2 %	3,353,506 cps
55Mn (KED)	49.053 ppb	0.7 %	523,449 cps
56Fe (KED)	4,320.090 ppb	2.4 %	74,177,649 cps
59Co (KED)	17.642 ppb	1.4 %	614,958 cps
60Ni (KED)	17.798 ppb	1.5 %	164,763 cps
63Cu (KED)	18.056 ppb	0.8 %	414,057 cps
66Zn (KED)	532.923 ppb	1.3 %	2,081,867 cps
74Ge (KED)			19,094 cps
75As (KED)	18.951 ppb	0.4 %	41,019 cps
77Se (KED)			5,284 cps
78Se (KED)	19.026 ppb	6.7 %	3,589 cps
83Kr (KED)			2,970 cps
88Sr (KED)	66.728 ppb	5.2 %	808,874 cps
89Y (KED)	98.181 %	1.1 %	233,517 cps
95Mo (KED)	18.028 ppb	2.7 %	172,288 cps
109Ag (KED)	18.567 ppb	2.6 %	687,172 cps
111Cd (KED)	19.031 ppb	0.6 %	104,290 cps
115In (KED)	102.916 %	1.1 %	291,984 cps
118Sn (KED)	18.723 ppb	0.8 %	244,609 cps
123Sb (KED)	19.166 ppb	1.6 %	189,732 cps
125Te (KED)			14 cps
137Ba (KED)	31.837 ppb	0.5 %	206,475 cps
146Nd (KED)			394,285 cps
147Sm (KED)			344,087 cps
159Tb (KED)	114.226 %	3.2 %	500,976 cps
205Tl (KED)	20.148 ppb	0.9 %	1,797,661 cps
206Pb (KED)	19.807 ppb	2.7 %	596,127 cps
207Pb (KED)	19.814 ppb	3.0 %	513,352 cps
208Pb (KED)	20.013 ppb	2.0 %	2,389,489 cps
209Bi (KED)	104.613 %	1.0 %	317,008 cps
232Th (KED)	20.728 ppb	4.4 %	2,572,957 cps
238U (KED)	21.881 ppb	1.0 %	2,725,041 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	4170478	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 11:48:06 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	93.177 %	2.8 %	194,306 cps
9Be (KED)	19.134 ppb	1.1 %	2,165 cps
11B (KED)	22.727 ppb	2.6 %	1,610 cps
23Na (KED)	5,270.800 ppb	1.8 %	9,675,575 cps
24Mg (KED)	6,502.392 ppb	1.3 %	5,630,026 cps
27Al (KED)	4,398.481 ppb	1.2 %	1,544,829 cps
39K (KED)	4,423.640 ppb	2.3 %	4,240,125 cps
44Ca (KED)	27,122.762 ppb	2.7 %	1,558,422 cps
45Sc (KED)	93.062 %	0.8 %	131,932 cps
47Ti (STD)	19.512 ppb	3.4 %	175,781 cps
51V (KED)	19.693 ppb	1.1 %	230,112 cps
52Cr (KED)	19.723 ppb	1.7 %	307,292 cps
54Fe (KED)	4,528.771 ppb	3.8 %	3,415,255 cps
55Mn (KED)	49.792 ppb	1.7 %	536,299 cps
56Fe (KED)	4,400.434 ppb	1.6 %	76,217,719 cps
59Co (KED)	18.453 ppb	0.0 %	648,186 cps
60Ni (KED)	18.555 ppb	0.5 %	173,001 cps
63Cu (KED)	18.995 ppb	0.7 %	438,330 cps
66Zn (KED)	550.363 ppb	0.5 %	2,161,014 cps
74Ge (KED)			19,477 cps
75As (KED)	19.848 ppb	0.3 %	43,037 cps
77Se (KED)			5,481 cps
78Se (KED)	20.147 ppb	2.3 %	3,803 cps
83Kr (KED)			2,964 cps
88Sr (KED)	69.914 ppb	2.3 %	845,116 cps
89Y (KED)	97.886 %	1.5 %	232,815 cps
95Mo (KED)	19.423 ppb	1.4 %	186,240 cps
109Ag (KED)	19.028 ppb	0.2 %	716,723 cps
111Cd (KED)	19.826 ppb	0.7 %	110,777 cps
115In (KED)	105.334 %	0.9 %	298,843 cps
118Sn (KED)	18.897 ppb	1.0 %	252,240 cps
123Sb (KED)	19.856 ppb	0.9 %	200,250 cps
125Te (KED)			8 cps
137Ba (KED)	32.925 ppb	0.6 %	216,266 cps
146Nd (KED)			421,446 cps
147Sm (KED)			365,510 cps
159Tb (KED)	114.601 %	1.4 %	502,619 cps
205Tl (KED)	21.243 ppb	1.3 %	1,904,345 cps
206Pb (KED)	20.870 ppb	2.4 %	631,089 cps
207Pb (KED)	20.956 ppb	2.8 %	545,496 cps
208Pb (KED)	21.105 ppb	1.7 %	2,531,712 cps
209Bi (KED)	105.113 %	0.6 %	318,521 cps
232Th (KED)	21.182 ppb	4.8 %	2,641,401 cps
238U (KED)	22.861 ppb	4.6 %	2,860,426 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	J2200629004PS	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 11:54:23 AM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	91.427 %	2.3 %	190,657 cps
9Be (KED)	19.191 ppb	2.0 %	2,164 cps
11B (KED)	22.373 ppb	2.2 %	1,580 cps
23Na (KED)	4,901.292 ppb	3.1 %	8,980,426 cps
24Mg (KED)	6,207.713 ppb	4.9 %	5,355,746 cps
27Al (KED)	4,119.546 ppb	2.6 %	1,441,863 cps
39K (KED)	4,241.820 ppb	1.4 %	4,054,145 cps
44Ca (KED)	25,758.189 ppb	2.9 %	1,474,572 cps
45Sc (KED)	92.738 %	0.5 %	131,473 cps
47Ti (STD)	19.528 ppb	0.6 %	172,691 cps
51V (KED)	19.219 ppb	1.1 %	224,538 cps
52Cr (KED)	19.196 ppb	0.6 %	299,168 cps
54Fe (KED)	4,276.445 ppb	2.2 %	3,230,140 cps
55Mn (KED)	48.477 ppb	1.6 %	523,173 cps
56Fe (KED)	4,156.245 ppb	0.6 %	72,175,519 cps
59Co (KED)	18.004 ppb	0.7 %	635,044 cps
60Ni (KED)	18.222 ppb	1.1 %	170,719 cps
63Cu (KED)	18.272 ppb	1.1 %	424,300 cps
66Zn (KED)	514.596 ppb	1.4 %	2,036,950 cps
74Ge (KED)			19,385 cps
75As (KED)	19.305 ppb	0.5 %	42,388 cps
77Se (KED)			5,321 cps
78Se (KED)	19.811 ppb	9.5 %	3,791 cps
83Kr (KED)			3,090 cps
88Sr (KED)	68.090 ppb	1.2 %	838,759 cps
89Y (KED)	99.815 %	1.1 %	237,402 cps
95Mo (KED)	18.252 ppb	3.9 %	177,064 cps
109Ag (KED)	18.663 ppb	0.2 %	698,105 cps
111Cd (KED)	19.838 ppb	1.1 %	109,789 cps
115In (KED)	103.816 %	1.6 %	294,537 cps
118Sn (KED)	19.483 ppb	1.9 %	256,591 cps
123Sb (KED)	16.491 ppb	2.8 %	165,325 cps
125Te (KED)			21 cps
137Ba (KED)	32.602 ppb	1.5 %	213,726 cps
146Nd (KED)			408,555 cps
147Sm (KED)			356,567 cps
159Tb (KED)	115.697 %	1.8 %	507,428 cps
205Tl (KED)	21.154 ppb	3.4 %	1,885,335 cps
206Pb (KED)	20.717 ppb	3.0 %	622,570 cps
207Pb (KED)	20.574 ppb	2.2 %	531,995 cps
208Pb (KED)	20.846 ppb	1.8 %	2,483,093 cps
209Bi (KED)	104.352 %	2.2 %	316,216 cps
232Th (KED)	21.153 ppb	3.3 %	2,618,745 cps
238U (KED)	22.171 ppb	7.6 %	2,751,410 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	J2200629005	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 12:00:41 PM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	92.705 %	3.2 %	193,322 cps
9Be (KED)	0.035 ppb	13.0 %	5 cps
11B (KED)	3.061 ppb	3.7 %	281 cps
23Na (KED)	2,092.655 ppb	3.3 %	4,045,911 cps
24Mg (KED)	1,860.227 ppb	0.5 %	1,643,517 cps
27Al (KED)	7.516 ppb	17.7 %	3,514 cps
39K (KED)	432.574 ppb	2.0 %	470,952 cps
44Ca (KED)	17,194.540 ppb	0.4 %	1,007,818 cps
45Sc (KED)	94.917 %	1.2 %	134,561 cps
47Ti (STD)	0.545 ppb	5.2 %	5,455 cps
51V (KED)	0.510 ppb	0.8 %	6,134 cps
52Cr (KED)	0.914 ppb	0.5 %	14,724 cps
54Fe (KED)	24.051 ppb	6.2 %	19,791 cps
55Mn (KED)	9.537 ppb	1.8 %	105,511 cps
56Fe (KED)	23.670 ppb	2.3 %	443,568 cps
59Co (KED)	0.054 ppb	2.4 %	1,966 cps
60Ni (KED)	0.582 ppb	2.7 %	6,694 cps
63Cu (KED)	17.140 ppb	2.3 %	399,633 cps
66Zn (KED)	14.904 ppb	1.2 %	64,362 cps
74Ge (KED)			17,890 cps
75As (KED)	0.139 ppb	5.0 %	406 cps
77Se (KED)			47 cps
78Se (KED)	0.359 ppb	25.9 %	58 cps
83Kr (KED)			27 cps
88Sr (KED)	38.449 ppb	1.9 %	463,656 cps
89Y (KED)	97.615 %	2.3 %	232,169 cps
95Mo (KED)	0.295 ppb	15.9 %	3,094 cps
109Ag (KED)	0.017 ppb	12.7 %	824 cps
111Cd (KED)	0.067 ppb	6.3 %	380 cps
115In (KED)	104.652 %	0.9 %	296,907 cps
118Sn (KED)	0.112 ppb	31.0 %	6,695 cps
123Sb (KED)	0.426 ppb	14.7 %	6,108 cps
125Te (KED)			0 cps
137Ba (KED)	21.722 ppb	0.0 %	143,345 cps
146Nd (KED)			1,047 cps
147Sm (KED)			430 cps
159Tb (KED)	115.994 %	2.1 %	508,729 cps
205Tl (KED)	0.026 ppb	14.7 %	2,525 cps
206Pb (KED)	0.082 ppb	2.7 %	3,075 cps
207Pb (KED)	0.081 ppb	12.6 %	2,537 cps
208Pb (KED)	0.082 ppb	7.2 %	12,056 cps
209Bi (KED)	109.658 %	2.0 %	332,296 cps
232Th (KED)	0.155 ppb	1.3 %	26,869 cps
238U (KED)	0.053 ppb	10.1 %	7,139 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	CCV J3MS-2842	Comment	LL
Dilution Factor	1	Sample Type:	QC
Date Collected:	1/18/2022 12:06:59 PM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	92.450 %	2.4 %	192,790 cps
9Be (KED)	18.683 ppb	2.9 %	2,128 cps
11B (KED)	19.680 ppb	2.0 %	1,412 cps
23Na (KED)	4,284.106 ppb	1.1 %	7,953,969 cps
24Mg (KED)	4,597.829 ppb	1.6 %	4,006,390 cps
27Al (KED)	4,411.370 ppb	2.1 %	1,559,385 cps
39K (KED)	4,292.748 ppb	1.1 %	4,142,846 cps
44Ca (KED)	4,453.601 ppb	1.8 %	258,075 cps
45Sc (KED)	93.653 %	0.9 %	132,770 cps
47Ti (STD)	18.683 ppb	3.6 %	167,031 cps
51V (KED)	19.087 ppb	0.6 %	224,394 cps
52Cr (KED)	18.533 ppb	1.3 %	290,492 cps
54Fe (KED)	4,567.590 ppb	0.7 %	3,465,616 cps
55Mn (KED)	18.858 ppb	2.1 %	205,288 cps
56Fe (KED)	4,383.452 ppb	2.5 %	76,378,420 cps
59Co (KED)	18.443 ppb	1.1 %	651,548 cps
60Ni (KED)	18.561 ppb	1.6 %	174,048 cps
63Cu (KED)	18.993 ppb	1.2 %	440,740 cps
66Zn (KED)	529.082 ppb	1.1 %	2,088,979 cps
74Ge (KED)			19,883 cps
75As (KED)	19.342 ppb	1.7 %	42,152 cps
77Se (KED)			5,345 cps
78Se (KED)	18.417 ppb	5.5 %	3,492 cps
83Kr (KED)			3,404 cps
88Sr (KED)	18.892 ppb	3.8 %	229,587 cps
89Y (KED)	98.320 %	0.7 %	233,846 cps
95Mo (KED)	19.263 ppb	4.8 %	185,216 cps
109Ag (KED)	19.951 ppb	1.9 %	750,927 cps
111Cd (KED)	19.714 ppb	0.9 %	110,010 cps
115In (KED)	105.103 %	0.7 %	298,188 cps
118Sn (KED)	19.803 ppb	2.1 %	264,293 cps
123Sb (KED)	21.658 ppb	1.4 %	219,291 cps
125Te (KED)			12 cps
137Ba (KED)	19.426 ppb	2.9 %	130,249 cps
146Nd (KED)			414,406 cps
147Sm (KED)			370,185 cps
159Tb (KED)	119.002 %	3.1 %	521,923 cps
205Tl (KED)	20.671 ppb	3.7 %	1,980,595 cps
206Pb (KED)	20.416 ppb	2.9 %	660,426 cps
207Pb (KED)	19.897 ppb	1.1 %	554,505 cps
208Pb (KED)	20.298 ppb	0.4 %	2,608,710 cps
209Bi (KED)	112.683 %	1.2 %	341,462 cps
232Th (KED)	21.366 ppb	6.2 %	2,854,989 cps
238U (KED)	21.946 ppb	2.8 %	2,944,204 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	CCB J3MS-2839 J3MS-2841	Comment	LL
Dilution Factor	1	Sample Type:	QC
Date Collected:	1/18/2022 12:13:16 PM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	98.117 %	1.4 %	204,609 cps
9Be (KED)	0.009 ppb	57.0 %	2 cps
11B (KED)	0.019 ppb	379.5 %	73 cps
23Na (KED)	-44.244 ppb	2.5 %	136,963 cps
24Mg (KED)	1.505 ppb	7.4 %	2,240 cps
27Al (KED)	1.733 ppb	34.4 %	1,497 cps
39K (KED)	-3.439 ppb	16.4 %	51,794 cps
44Ca (KED)	3.959 ppb	65.3 %	1,013 cps
45Sc (KED)	98.381 %	0.7 %	139,473 cps
47Ti (STD)	-0.011 ppb	67.6 %	527 cps
51V (KED)	0.006 ppb	26.2 %	154 cps
52Cr (KED)	0.010 ppb	14.8 %	447 cps
54Fe (KED)	2.218 ppb	12.4 %	3,218 cps
55Mn (KED)	0.000 ppb	85.0 %	1,668 cps
56Fe (KED)	1.859 ppb	16.8 %	63,111 cps
59Co (KED)	0.007 ppb	3.3 %	308 cps
60Ni (KED)	-0.006 ppb	83.1 %	1,236 cps
63Cu (KED)	0.009 ppb	24.5 %	3,514 cps
66Zn (KED)	0.080 ppb	50.4 %	6,058 cps
74Ge (KED)			18,280 cps
75As (KED)	0.034 ppb	28.7 %	187 cps
77Se (KED)			23 cps
78Se (KED)	0.143 ppb	71.3 %	17 cps
83Kr (KED)			63 cps
88Sr (KED)	0.012 ppb	51.5 %	560 cps
89Y (KED)	103.027 %	0.7 %	245,042 cps
95Mo (KED)	0.157 ppb	11.6 %	1,893 cps
109Ag (KED)	0.008 ppb	13.1 %	503 cps
111Cd (KED)	0.005 ppb	25.4 %	40 cps
115In (KED)	114.482 %	3.3 %	324,798 cps
118Sn (KED)	0.101 ppb	19.0 %	7,151 cps
123Sb (KED)	0.092 ppb	38.5 %	3,001 cps
125Te (KED)			0 cps
137Ba (KED)	0.005 ppb	63.9 %	681 cps
146Nd (KED)			150 cps
147Sm (KED)			187 cps
159Tb (KED)	123.606 %	3.1 %	542,113 cps
205Tl (KED)	0.008 ppb	15.0 %	923 cps
206Pb (KED)	0.011 ppb	23.5 %	911 cps
207Pb (KED)	0.014 ppb	20.8 %	808 cps
208Pb (KED)	0.013 ppb	16.2 %	3,821 cps
209Bi (KED)	120.931 %	3.2 %	366,455 cps
232Th (KED)	0.267 ppb	4.2 %	45,634 cps
238U (KED)	0.009 ppb	21.9 %	1,523 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	J2200629006	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 12:19:32 PM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	96.019 %	4.3 %	200,234 cps
9Be (KED)	0.000 ppb	3,230.7 %	1 cps
11B (KED)	3.250 ppb	11.1 %	291 cps
23Na (KED)	3,825.801 ppb	3.4 %	7,157,429 cps
24Mg (KED)	1,768.560 ppb	0.9 %	1,548,462 cps
27Al (KED)	9.179 ppb	23.1 %	4,071 cps
39K (KED)	391.752 ppb	1.4 %	427,777 cps
44Ca (KED)	14,361.964 ppb	1.1 %	834,432 cps
45Sc (KED)	94.070 %	1.7 %	133,361 cps
47Ti (STD)	0.392 ppb	4.8 %	4,247 cps
51V (KED)	0.129 ppb	1.8 %	1,600 cps
52Cr (KED)	0.475 ppb	1.0 %	7,735 cps
54Fe (KED)	17.542 ppb	7.0 %	14,727 cps
55Mn (KED)	2.817 ppb	1.0 %	32,093 cps
56Fe (KED)	17.438 ppb	9.1 %	332,324 cps
59Co (KED)	0.041 ppb	2.3 %	1,501 cps
60Ni (KED)	0.399 ppb	3.9 %	4,949 cps
63Cu (KED)	0.115 ppb	1.1 %	5,780 cps
66Zn (KED)	13.002 ppb	1.5 %	56,657 cps
74Ge (KED)			18,004 cps
75As (KED)	0.044 ppb	4.5 %	201 cps
77Se (KED)			17 cps
78Se (KED)	0.159 ppb	30.4 %	20 cps
83Kr (KED)			37 cps
88Sr (KED)	34.494 ppb	1.7 %	417,180 cps
89Y (KED)	97.887 %	2.9 %	232,816 cps
95Mo (KED)	0.110 ppb	14.6 %	1,340 cps
109Ag (KED)	0.002 ppb	70.3 %	242 cps
111Cd (KED)	0.036 ppb	11.1 %	207 cps
115In (KED)	106.080 %	1.2 %	300,959 cps
118Sn (KED)	0.111 ppb	154.0 %	6,759 cps
123Sb (KED)	0.009 ppb	173.4 %	1,935 cps
125Te (KED)			0 cps
137Ba (KED)	17.287 ppb	3.4 %	115,059 cps
146Nd (KED)			1,353 cps
147Sm (KED)			303 cps
159Tb (KED)	116.196 %	2.1 %	509,616 cps
205Tl (KED)	0.011 ppb	4.6 %	1,132 cps
206Pb (KED)	0.032 ppb	9.8 %	1,518 cps
207Pb (KED)	0.033 ppb	8.0 %	1,268 cps
208Pb (KED)	0.031 ppb	7.4 %	5,785 cps
209Bi (KED)	111.950 %	1.0 %	339,239 cps
232Th (KED)	-0.029 ppb	6.0 %	3,064 cps
238U (KED)	0.080 ppb	3.7 %	10,788 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	J2200629008	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 12:32:09 PM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	95.127 %	1.9 %	198,373 cps
9Be (KED)	0.026 ppb	50.4 %	4 cps
11B (KED)	3.612 ppb	7.2 %	323 cps
23Na (KED)	791.950 ppb	3.5 %	1,687,917 cps
24Mg (KED)	707.080 ppb	2.5 %	634,165 cps
27Al (KED)	26.160 ppb	9.8 %	10,335 cps
39K (KED)	223.076 ppb	2.7 %	272,560 cps
44Ca (KED)	5,579.203 ppb	1.7 %	332,199 cps
45Sc (KED)	96.275 %	0.2 %	136,487 cps
47Ti (STD)	0.800 ppb	19.1 %	7,930 cps
51V (KED)	0.140 ppb	2.4 %	1,771 cps
52Cr (KED)	0.848 ppb	2.2 %	13,920 cps
54Fe (KED)	44.553 ppb	1.9 %	36,134 cps
55Mn (KED)	19.521 ppb	0.7 %	218,232 cps
56Fe (KED)	41.681 ppb	1.3 %	774,098 cps
59Co (KED)	0.144 ppb	3.5 %	5,284 cps
60Ni (KED)	0.473 ppb	1.8 %	5,791 cps
63Cu (KED)	0.478 ppb	0.8 %	14,451 cps
66Zn (KED)	25.637 ppb	1.6 %	109,219 cps
74Ge (KED)			17,858 cps
75As (KED)	0.047 ppb	13.1 %	213 cps
77Se (KED)			23 cps
78Se (KED)	0.104 ppb	43.0 %	9 cps
83Kr (KED)			33 cps
88Sr (KED)	13.505 ppb	2.5 %	168,322 cps
89Y (KED)	100.750 %	0.7 %	239,627 cps
95Mo (KED)	0.060 ppb	8.8 %	887 cps
109Ag (KED)	0.001 ppb	43.2 %	236 cps
111Cd (KED)	0.043 ppb	6.2 %	258 cps
115In (KED)	108.955 %	0.4 %	309,116 cps
118Sn (KED)	-0.032 ppb	62.2 %	5,011 cps
123Sb (KED)	-0.032 ppb	90.7 %	1,558 cps
125Te (KED)			0 cps
137Ba (KED)	12.662 ppb	3.6 %	86,273 cps
146Nd (KED)			3,110 cps
147Sm (KED)			600 cps
159Tb (KED)	118.184 %	1.0 %	518,332 cps
205Tl (KED)	0.007 ppb	4.8 %	784 cps
206Pb (KED)	0.126 ppb	3.4 %	4,672 cps
207Pb (KED)	0.121 ppb	2.0 %	3,797 cps
208Pb (KED)	0.121 ppb	2.6 %	17,727 cps
209Bi (KED)	115.070 %	0.6 %	348,693 cps
232Th (KED)	-0.029 ppb	4.1 %	3,057 cps
238U (KED)	0.039 ppb	2.3 %	5,585 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	J2200629009	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 12:38:27 PM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	94.900 %	1.4 %	197,900 cps
9Be (KED)	0.020 ppb	113.1 %	3 cps
11B (KED)	3.354 ppb	11.0 %	305 cps
23Na (KED)	648.835 ppb	4.9 %	1,420,082 cps
24Mg (KED)	691.735 ppb	0.8 %	619,870 cps
27Al (KED)	23.019 ppb	14.0 %	9,174 cps
39K (KED)	208.877 ppb	3.3 %	258,388 cps
44Ca (KED)	5,414.349 ppb	2.2 %	322,172 cps
45Sc (KED)	96.205 %	2.5 %	136,387 cps
47Ti (STD)	1.042 ppb	14.9 %	10,154 cps
51V (KED)	0.135 ppb	1.5 %	1,701 cps
52Cr (KED)	0.779 ppb	4.4 %	12,784 cps
54Fe (KED)	42.083 ppb	1.4 %	34,141 cps
55Mn (KED)	16.793 ppb	1.7 %	187,576 cps
56Fe (KED)	39.509 ppb	1.3 %	733,828 cps
59Co (KED)	0.125 ppb	2.4 %	4,586 cps
60Ni (KED)	0.434 ppb	1.8 %	5,404 cps
63Cu (KED)	0.369 ppb	2.3 %	11,858 cps
66Zn (KED)	12.816 ppb	1.4 %	57,219 cps
74Ge (KED)			18,013 cps
75As (KED)	0.035 ppb	30.1 %	183 cps
77Se (KED)			27 cps
78Se (KED)	0.030 ppb	87.7 %	-5 cps
83Kr (KED)			47 cps
88Sr (KED)	12.914 ppb	4.5 %	160,173 cps
89Y (KED)	100.185 %	2.3 %	238,283 cps
95Mo (KED)	0.070 ppb	22.9 %	980 cps
109Ag (KED)	0.001 ppb	50.3 %	217 cps
111Cd (KED)	0.044 ppb	2.9 %	259 cps
115In (KED)	108.092 %	1.8 %	306,667 cps
118Sn (KED)	-0.031 ppb	56.8 %	4,991 cps
123Sb (KED)	-0.048 ppb	26.0 %	1,378 cps
125Te (KED)			0 cps
137Ba (KED)	12.419 ppb	1.2 %	84,232 cps
146Nd (KED)			3,277 cps
147Sm (KED)			497 cps
159Tb (KED)	117.971 %	0.8 %	517,400 cps
205Tl (KED)	0.009 ppb	7.2 %	1,026 cps
206Pb (KED)	0.114 ppb	6.6 %	4,369 cps
207Pb (KED)	0.114 ppb	0.9 %	3,683 cps
208Pb (KED)	0.114 ppb	3.1 %	17,247 cps
209Bi (KED)	118.030 %	1.3 %	357,665 cps
232Th (KED)	-0.030 ppb	14.4 %	3,027 cps
238U (KED)	0.037 ppb	4.1 %	5,328 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	J2200629010	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 12:44:44 PM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	96.829 %	1.8 %	201,922 cps
9Be (KED)	0.012 ppb	3.3 %	2 cps
11B (KED)	-0.160 ppb	133.8 %	58 cps
23Na (KED)	-45.004 ppb	6.0 %	131,060 cps
24Mg (KED)	0.045 ppb	344.9 %	877 cps
27Al (KED)	-0.973 ppb	11.4 %	477 cps
39K (KED)	-33.335 ppb	1.3 %	21,165 cps
44Ca (KED)	-1.170 ppb	80.8 %	680 cps
45Sc (KED)	95.202 %	2.3 %	134,965 cps
47Ti (STD)	0.059 ppb	24.1 %	1,170 cps
51V (KED)	0.003 ppb	73.7 %	110 cps
52Cr (KED)	0.058 ppb	2.9 %	1,190 cps
54Fe (KED)	-0.637 ppb	11.2 %	911 cps
55Mn (KED)	-0.033 ppb	18.7 %	1,245 cps
56Fe (KED)	-0.365 ppb	8.4 %	21,686 cps
59Co (KED)	0.000 ppb	1,877.0 %	51 cps
60Ni (KED)	-0.075 ppb	4.1 %	545 cps
63Cu (KED)	-0.033 ppb	10.6 %	2,431 cps
66Zn (KED)	5.229 ppb	2.1 %	26,385 cps
74Ge (KED)			18,127 cps
75As (KED)	-0.004 ppb	34.8 %	97 cps
77Se (KED)			40 cps
78Se (KED)	0.006 ppb	627.6 %	-9 cps
83Kr (KED)			47 cps
88Sr (KED)	-0.010 ppb	56.7 %	267 cps
89Y (KED)	99.218 %	1.7 %	235,982 cps
95Mo (KED)	0.010 ppb	162.8 %	383 cps
109Ag (KED)	0.000 ppb	141.8 %	170 cps
111Cd (KED)	-0.001 ppb	42.6 %	3 cps
115In (KED)	106.343 %	1.7 %	301,705 cps
118Sn (KED)	-0.141 ppb	11.4 %	3,452 cps
123Sb (KED)	-0.090 ppb	8.8 %	922 cps
125Te (KED)			0 cps
137Ba (KED)	-0.051 ppb	6.0 %	266 cps
146Nd (KED)			13 cps
147Sm (KED)			3 cps
159Tb (KED)	114.224 %	0.9 %	500,965 cps
205Tl (KED)	0.000 ppb	392.5 %	127 cps
206Pb (KED)	-0.007 ppb	14.4 %	297 cps
207Pb (KED)	-0.004 ppb	38.9 %	253 cps
208Pb (KED)	-0.006 ppb	12.5 %	1,140 cps
209Bi (KED)	113.616 %	2.8 %	344,288 cps
232Th (KED)	-0.041 ppb	2.4 %	1,510 cps
238U (KED)	0.000 ppb	40.4 %	120 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	CCV J3MS-2842	Comment	LL
Dilution Factor	1	Sample Type:	QC
Date Collected:	1/18/2022 1:22:32 PM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	90.046 %	0.3 %	187,777 cps
9Be (KED)	19.427 ppb	3.1 %	2,150 cps
11B (KED)	19.679 ppb	2.1 %	1,372 cps
23Na (KED)	4,384.149 ppb	1.9 %	7,907,356 cps
24Mg (KED)	4,469.361 ppb	2.6 %	3,785,053 cps
27Al (KED)	4,383.743 ppb	2.7 %	1,505,757 cps
39K (KED)	4,474.702 ppb	2.5 %	4,194,542 cps
44Ca (KED)	4,379.262 ppb	3.2 %	246,714 cps
45Sc (KED)	91.052 %	2.5 %	129,082 cps
47Ti (STD)	18.488 ppb	3.5 %	161,080 cps
51V (KED)	19.372 ppb	1.0 %	221,871 cps
52Cr (KED)	19.013 ppb	1.3 %	290,336 cps
54Fe (KED)	4,709.661 ppb	3.5 %	3,482,613 cps
55Mn (KED)	20.122 ppb	1.8 %	213,514 cps
56Fe (KED)	4,375.559 ppb	0.7 %	74,376,547 cps
59Co (KED)	18.815 ppb	1.4 %	649,059 cps
60Ni (KED)	18.634 ppb	1.0 %	170,675 cps
63Cu (KED)	18.828 ppb	0.7 %	427,202 cps
66Zn (KED)	529.779 ppb	1.4 %	2,047,052 cps
74Ge (KED)			19,174 cps
75As (KED)	19.143 ppb	0.7 %	40,946 cps
77Se (KED)			5,598 cps
78Se (KED)	19.797 ppb	3.5 %	3,688 cps
83Kr (KED)			2,920 cps
88Sr (KED)	18.893 ppb	1.9 %	226,232 cps
89Y (KED)	96.909 %	2.4 %	230,490 cps
95Mo (KED)	19.021 ppb	3.8 %	180,068 cps
109Ag (KED)	19.465 ppb	3.1 %	720,287 cps
111Cd (KED)	19.823 ppb	3.6 %	108,729 cps
115In (KED)	103.329 %	2.9 %	293,155 cps
118Sn (KED)	19.488 ppb	1.1 %	255,649 cps
123Sb (KED)	21.526 ppb	2.2 %	214,037 cps
125Te (KED)			14 cps
137Ba (KED)	19.597 ppb	0.6 %	128,838 cps
146Nd (KED)			392,891 cps
147Sm (KED)			375,218 cps
159Tb (KED)	116.402 %	1.3 %	510,517 cps
205Tl (KED)	20.055 ppb	3.6 %	1,872,617 cps
206Pb (KED)	19.809 ppb	3.1 %	624,435 cps
207Pb (KED)	20.054 ppb	1.6 %	544,664 cps
208Pb (KED)	20.127 ppb	1.2 %	2,520,694 cps
209Bi (KED)	109.810 %	2.7 %	332,756 cps
232Th (KED)	20.659 ppb	9.0 %	2,687,530 cps
238U (KED)	22.638 ppb	2.4 %	2,958,076 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	CCB J3MS-2839 J3MS-2841	Comment	LL
Dilution Factor	1	Sample Type:	QC
Date Collected:	1/18/2022 1:28:50 PM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	98.945 %	2.3 %	206,334 cps
9Be (KED)	0.015 ppb	90.7 %	2 cps
11B (KED)	-0.101 ppb	71.6 %	62 cps
23Na (KED)	-39.580 ppb	9.0 %	141,793 cps
24Mg (KED)	4.887 ppb	13.3 %	5,188 cps
27Al (KED)	2.608 ppb	10.3 %	1,773 cps
39K (KED)	2.146 ppb	23.6 %	55,828 cps
44Ca (KED)	8.133 ppb	50.1 %	1,230 cps
45Sc (KED)	95.724 %	2.7 %	135,705 cps
47Ti (STD)	-0.002 ppb	221.5 %	610 cps
51V (KED)	0.013 ppb	9.0 %	238 cps
52Cr (KED)	0.014 ppb	7.8 %	494 cps
54Fe (KED)	3.489 ppb	9.1 %	4,130 cps
55Mn (KED)	0.189 ppb	40.3 %	3,710 cps
56Fe (KED)	3.223 ppb	9.3 %	86,036 cps
59Co (KED)	0.012 ppb	15.8 %	484 cps
60Ni (KED)	0.008 ppb	46.3 %	1,346 cps
63Cu (KED)	0.013 ppb	36.8 %	3,539 cps
66Zn (KED)	0.281 ppb	9.0 %	6,745 cps
74Ge (KED)			18,022 cps
75As (KED)	0.028 ppb	26.5 %	169 cps
77Se (KED)			33 cps
78Se (KED)	0.178 ppb	29.3 %	24 cps
83Kr (KED)			33 cps
88Sr (KED)	0.029 ppb	49.4 %	760 cps
89Y (KED)	101.533 %	2.6 %	241,489 cps
95Mo (KED)	0.144 ppb	10.4 %	1,730 cps
109Ag (KED)	0.013 ppb	10.0 %	679 cps
111Cd (KED)	0.010 ppb	21.1 %	69 cps
115In (KED)	110.846 %	1.8 %	314,481 cps
118Sn (KED)	0.076 ppb	32.0 %	6,601 cps
123Sb (KED)	-0.056 ppb	19.8 %	1,339 cps
125Te (KED)			0 cps
137Ba (KED)	0.029 ppb	16.7 %	843 cps
146Nd (KED)			270 cps
147Sm (KED)			200 cps
159Tb (KED)	123.935 %	4.1 %	543,557 cps
205Tl (KED)	0.014 ppb	7.2 %	1,511 cps
206Pb (KED)	0.017 ppb	11.4 %	1,107 cps
207Pb (KED)	0.019 ppb	5.7 %	930 cps
208Pb (KED)	0.018 ppb	3.9 %	4,290 cps
209Bi (KED)	117.893 %	2.1 %	357,250 cps
232Th (KED)	0.210 ppb	5.0 %	36,581 cps
238U (KED)	0.014 ppb	5.0 %	2,197 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	J2200629007 10X	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 2:19:18 PM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	95.998 %	1.4 %	200,188 cps
9Be (KED)	0.012 ppb	74.2 %	2 cps
11B (KED)	0.442 ppb	41.5 %	101 cps
23Na (KED)	228.186 ppb	0.8 %	642,087 cps
24Mg (KED)	340.148 ppb	2.2 %	306,336 cps
27Al (KED)	9.848 ppb	24.4 %	4,428 cps
39K (KED)	27.648 ppb	7.4 %	81,368 cps
44Ca (KED)	3,071.066 ppb	0.6 %	183,710 cps
45Sc (KED)	96.549 %	1.0 %	136,875 cps
47Ti (STD)	0.140 ppb	18.5 %	1,910 cps
51V (KED)	0.034 ppb	7.0 %	489 cps
52Cr (KED)	0.060 ppb	1.5 %	1,249 cps
54Fe (KED)	28.964 ppb	9.8 %	24,110 cps
55Mn (KED)	42.959 ppb	0.6 %	480,699 cps
56Fe (KED)	26.901 ppb	2.6 %	512,488 cps
59Co (KED)	0.109 ppb	0.4 %	4,025 cps
60Ni (KED)	-0.022 ppb	15.5 %	1,062 cps
63Cu (KED)	-0.054 ppb	9.0 %	1,980 cps
66Zn (KED)	0.515 ppb	12.2 %	7,742 cps
74Ge (KED)			17,846 cps
75As (KED)	0.023 ppb	26.6 %	160 cps
77Se (KED)			20 cps
78Se (KED)	0.006 ppb	1,625.8 %	-10 cps
83Kr (KED)			43 cps
88Sr (KED)	7.052 ppb	3.3 %	89,166 cps
89Y (KED)	101.986 %	1.1 %	242,566 cps
95Mo (KED)	0.076 ppb	23.1 %	1,053 cps
109Ag (KED)	-0.001 ppb	48.2 %	129 cps
111Cd (KED)	0.007 ppb	8.3 %	47 cps
115In (KED)	108.604 %	1.3 %	308,121 cps
118Sn (KED)	0.210 ppb	236.8 %	8,297 cps
123Sb (KED)	-0.051 ppb	41.9 %	1,361 cps
125Te (KED)			0 cps
137Ba (KED)	2.400 ppb	2.4 %	17,018 cps
146Nd (KED)			200 cps
147Sm (KED)			53 cps
159Tb (KED)	120.783 %	4.3 %	529,733 cps
205Tl (KED)	0.001 ppb	31.8 %	249 cps
206Pb (KED)	0.004 ppb	52.5 %	634 cps
207Pb (KED)	0.007 ppb	51.7 %	543 cps
208Pb (KED)	0.005 ppb	28.1 %	2,452 cps
209Bi (KED)	112.871 %	1.8 %	342,030 cps
232Th (KED)	-0.008 ppb	42.3 %	5,831 cps
238U (KED)	0.017 ppb	3.7 %	2,477 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	J2200629011 10X	Comment	LL 1723
Dilution Factor	1	Sample Type:	UNKNOWN
Date Collected:	1/18/2022 2:25:37 PM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	93.742 %	2.3 %	195,484 cps
9Be (KED)	0.000 ppb	1,767.2 %	1 cps
11B (KED)	0.178 ppb	59.6 %	81 cps
23Na (KED)	276.502 ppb	3.7 %	721,380 cps
24Mg (KED)	226.742 ppb	2.3 %	201,518 cps
27Al (KED)	17.127 ppb	10.8 %	6,972 cps
39K (KED)	178.875 ppb	2.0 %	226,588 cps
44Ca (KED)	2,145.707 ppb	2.7 %	126,705 cps
45Sc (KED)	95.169 %	2.2 %	134,919 cps
47Ti (STD)	6.494 ppb	157.0 %	58,014 cps
51V (KED)	0.057 ppb	23.5 %	767 cps
52Cr (KED)	0.059 ppb	6.9 %	1,217 cps
54Fe (KED)	42.419 ppb	5.2 %	34,252 cps
55Mn (KED)	25.168 ppb	1.6 %	279,079 cps
56Fe (KED)	39.537 ppb	13.1 %	732,389 cps
59Co (KED)	0.160 ppb	1.8 %	5,821 cps
60Ni (KED)	0.016 ppb	55.5 %	1,416 cps
63Cu (KED)	-0.041 ppb	1.0 %	2,269 cps
66Zn (KED)	0.638 ppb	5.5 %	8,179 cps
74Ge (KED)			17,956 cps
75As (KED)	0.013 ppb	64.6 %	137 cps
77Se (KED)			37 cps
78Se (KED)	0.061 ppb	111.2 %	1 cps
83Kr (KED)			40 cps
88Sr (KED)	5.046 ppb	0.7 %	63,797 cps
89Y (KED)	101.856 %	3.1 %	242,256 cps
95Mo (KED)	0.034 ppb	49.9 %	637 cps
109Ag (KED)	0.007 ppb	24.5 %	442 cps
111Cd (KED)	0.008 ppb	11.1 %	51 cps
115In (KED)	107.776 %	1.5 %	305,770 cps
118Sn (KED)	-0.120 ppb	20.9 %	3,800 cps
123Sb (KED)	-0.065 ppb	30.6 %	1,212 cps
125Te (KED)			0 cps
137Ba (KED)	2.282 ppb	2.2 %	16,256 cps
146Nd (KED)			597 cps
147Sm (KED)			130 cps
159Tb (KED)	122.270 %	1.2 %	536,255 cps
205Tl (KED)	0.002 ppb	24.6 %	293 cps
206Pb (KED)	0.016 ppb	14.0 %	1,034 cps
207Pb (KED)	0.019 ppb	8.5 %	901 cps
208Pb (KED)	0.017 ppb	14.8 %	4,109 cps
209Bi (KED)	112.977 %	1.1 %	342,351 cps
232Th (KED)	-0.019 ppb	13.3 %	4,364 cps
238U (KED)	0.017 ppb	7.6 %	2,410 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	CCV J3MS-2842	Comment	LL
Dilution Factor	1	Sample Type:	QC
Date Collected:	1/18/2022 2:31:56 PM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	91.610 %	1.6 %	191,038 cps
9Be (KED)	19.256 ppb	2.6 %	2,118 cps
11B (KED)	20.198 ppb	1.2 %	1,398 cps
23Na (KED)	4,360.455 ppb	1.9 %	7,816,554 cps
24Mg (KED)	4,595.696 ppb	2.6 %	3,867,915 cps
27Al (KED)	4,554.977 ppb	0.1 %	1,555,296 cps
39K (KED)	4,431.807 ppb	0.5 %	4,130,429 cps
44Ca (KED)	4,492.192 ppb	1.3 %	251,467 cps
45Sc (KED)	90.475 %	1.7 %	128,265 cps
47Ti (STD)	18.962 ppb	2.8 %	168,014 cps
51V (KED)	19.699 ppb	1.4 %	224,274 cps
52Cr (KED)	19.342 ppb	1.2 %	293,716 cps
54Fe (KED)	4,704.333 ppb	2.1 %	3,461,624 cps
55Mn (KED)	19.595 ppb	0.4 %	206,905 cps
56Fe (KED)	4,577.044 ppb	3.1 %	77,380,055 cps
59Co (KED)	19.174 ppb	0.4 %	658,337 cps
60Ni (KED)	18.816 ppb	1.3 %	171,508 cps
63Cu (KED)	19.251 ppb	1.9 %	434,814 cps
66Zn (KED)	541.244 ppb	1.8 %	2,082,453 cps
74Ge (KED)			19,299 cps
75As (KED)	19.749 ppb	0.7 %	42,105 cps
77Se (KED)			5,368 cps
78Se (KED)	20.413 ppb	8.2 %	3,795 cps
83Kr (KED)			3,190 cps
88Sr (KED)	20.283 ppb	3.3 %	242,474 cps
89Y (KED)	96.730 %	2.2 %	230,066 cps
95Mo (KED)	18.794 ppb	4.6 %	177,740 cps
109Ag (KED)	20.026 ppb	0.3 %	741,748 cps
111Cd (KED)	20.061 ppb	2.3 %	110,158 cps
115In (KED)	103.437 %	1.0 %	293,460 cps
118Sn (KED)	20.339 ppb	2.6 %	267,172 cps
123Sb (KED)	21.502 ppb	1.8 %	214,661 cps
125Te (KED)			22 cps
137Ba (KED)	19.599 ppb	1.3 %	129,918 cps
146Nd (KED)			435,728 cps
147Sm (KED)			359,973 cps
159Tb (KED)	118.125 %	0.8 %	518,075 cps
205Tl (KED)	20.580 ppb	4.8 %	1,878,346 cps
206Pb (KED)	20.729 ppb	3.2 %	638,237 cps
207Pb (KED)	20.743 ppb	1.2 %	549,794 cps
208Pb (KED)	21.070 ppb	1.3 %	2,572,696 cps
209Bi (KED)	106.978 %	2.4 %	324,173 cps
232Th (KED)	22.236 ppb	3.0 %	2,820,699 cps
238U (KED)	24.697 ppb	4.7 %	3,142,732 cps

Concentrations

2/17/2022 1:43:37 PM
Instrument: J3R
Method: EPA 6020A/B, 200.8

Advanced Environmental Laboratories, Inc.

Sample ID:	CCB J3MS-2839 J3MS-2841	Comment	LL
Dilution Factor	1	Sample Type:	QC
Date Collected:	1/18/2022 2:38:14 PM		

Labbook:	220118R.imexp	Configuration	iCAP RQ w ASX 560
Instruments	iCAP RQ, ASX-560	Template	200.8 Waters
Acquired by (User)	LAB-AELLAB\Jax-uICPMS3	Creation time	1/18/2022 9:19:16 AM
Last changed by (User)	LAB-AELLAB\Jax-uICPMS3	Last change time	2/17/2022 1:41:35 PM

Category	Concentration average	Concentration RSD	Intensity average
6Li (STD)	95.816 %	1.1 %	199,809 cps
9Be (KED)	0.023 ppb	56.7 %	3 cps
11B (KED)	-0.269 ppb	55.3 %	50 cps
23Na (KED)	-56.894 ppb	1.0 %	109,431 cps
24Mg (KED)	1.992 ppb	26.8 %	2,604 cps
27Al (KED)	1.334 ppb	30.2 %	1,307 cps
39K (KED)	-32.675 ppb	6.8 %	21,839 cps
44Ca (KED)	-3.849 ppb	35.3 %	523 cps
45Sc (KED)	95.330 %	0.6 %	135,147 cps
47Ti (STD)	-0.009 ppb	133.0 %	530 cps
51V (KED)	0.011 ppb	43.7 %	212 cps
52Cr (KED)	0.004 ppb	51.8 %	341 cps
54Fe (KED)	2.256 ppb	22.4 %	3,158 cps
55Mn (KED)	-0.038 ppb	4.7 %	1,199 cps
56Fe (KED)	2.268 ppb	12.3 %	68,664 cps
59Co (KED)	0.011 ppb	17.2 %	434 cps
60Ni (KED)	-0.057 ppb	10.3 %	723 cps
63Cu (KED)	-0.099 ppb	3.6 %	911 cps
66Zn (KED)	-0.183 ppb	36.5 %	4,851 cps
74Ge (KED)			17,778 cps
75As (KED)	0.020 ppb	20.4 %	152 cps
77Se (KED)			27 cps
78Se (KED)	0.111 ppb	104.3 %	11 cps
83Kr (KED)			33 cps
88Sr (KED)	-0.003 ppb	98.8 %	363 cps
89Y (KED)	101.220 %	2.3 %	240,744 cps
95Mo (KED)	0.151 ppb	14.1 %	1,793 cps
109Ag (KED)	0.010 ppb	15.0 %	568 cps
111Cd (KED)	0.009 ppb	13.1 %	61 cps
115In (KED)	110.425 %	2.7 %	313,287 cps
118Sn (KED)	2.345 ppb	174.6 %	38,296 cps
123Sb (KED)	-0.037 ppb	52.6 %	1,530 cps
125Te (KED)			0 cps
137Ba (KED)	-0.062 ppb	3.1 %	203 cps
146Nd (KED)			267 cps
147Sm (KED)			247 cps
159Tb (KED)	122.842 %	0.4 %	538,763 cps
205Tl (KED)	0.013 ppb	9.9 %	1,409 cps
206Pb (KED)	0.009 ppb	7.0 %	819 cps
207Pb (KED)	0.014 ppb	7.9 %	756 cps
208Pb (KED)	0.010 ppb	7.2 %	3,236 cps
209Bi (KED)	114.257 %	3.2 %	346,233 cps
232Th (KED)	0.194 ppb	7.0 %	33,261 cps
238U (KED)	0.013 ppb	10.6 %	1,937 cps

Metals Digestion Log for ICPMS

Prep Method		Matrix	
E200.8		Water	X
SW3010A	X	Soil	
SW3050A		TCLP	
		SPLP	

				Vol(mL)	Vol(mL)		ID
Date	1/17/2022	Reagent/Standard	ID	Soils	Waters	Digestion Tubes	JM3-9Q5a
Time	10 15	HNO3	JM3-10F2b	4	0.5	Filters	N/A
Analyst	LL	HCL	NA	1	NA	Pipetter	M19,M20
Digestion Batch	2711	H2O2	NA	2	NA	Teflon Chips (Soil)	N/A
Digestion HBN	73758	Water Spike VAR-CAL	JM3-3K1	N/A	0.1	Balance (Soil)	N/A
Analysis Batch		Water Spike 71A	JM3-3J1	N/A	0.1	Hot Block	J3P
Analysis HBN		Soil Spike	N/A	0.25	N/A	Thermometer	11614
Cap ID***	N38	Fortified Element Mix (FEM)	J3MS-2748	N/A	1.25	Timer	T8922
Block Temperature	95						

Acceptance Criteria 90-95°C

Start Time (1): 10 15 Stop Time (1): 14 40

DOD Prep Batch	X

AEL Lab Code #	Bottle Letter**	Initial Amount (g,mL)	Final Vol (mL)	Digestion Comments	Analyst Comments Qualifiers	Filtered
MB	NA	50	50	4170475.0		N
LCS	NA	50	50	4170476.0		N
J2200629002	F	50	50			N
J2200629003	F	50	50			N
J2200629004	F	50	50			N
J2200629004MS	F	50	50	4170477.0		N
J2200629004MSD	F	50	50	4170478.0		N
J2200629005	F	50	50			N
J2200629006	F	50	50			N
J2200629007	F	50	50			N
J2200629008	F	50	50			N
J2200629009	F	50	50			N
J2200629010	F	50	50			N
J2200629011	F	50	50			N
J2200709002	D	50	50			N
J2200715002	F	50	50			N
J2200716002	A	50	50			N
J2200716003	A	50	50			N

* pH checked in log in

**A Dash indicates there is only one container and therefore has no letter designation

*** Metals Dept. Tracking System for locating boxed sample digestions.

DCN: MET-D062

Eff: 10/22/2018; Rev: 09/14/2021

ICP Liquids Data Section

Result Summary Reports

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629002 **Client ID:** 263-1907-ACC3042

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6010C **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Aluminum	7429-90-5	100	ug/L			20	40	80	1	2716	1/17/22	10:15	1684	1/20/22	15:04
Iron	7439-89-6	400	ug/L	U		200	400	800	1	2716	1/17/22	10:15	1684	1/20/22	15:04

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629003 **Client ID:** 263-1903-ACC3037

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6010C **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Aluminum	7429-90-5	40	ug/L	U		20	40	80	1	2716	1/17/22	10:15	1684	1/20/22	15:08
Iron	7439-89-6	400	ug/L	U		200	400	800	1	2716	1/17/22	10:15	1684	1/20/22	15:08

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629004 **Client ID:** 263-2388-ACC3044

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6010C **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Aluminum	7429-90-5	40	ug/L	U		20	40	80	1	2716	1/17/22	10:15	1684	1/20/22	15:13
Iron	7439-89-6	400	ug/L	U		200	400	800	1	2716	1/17/22	10:15	1684	1/20/22	15:13

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629005 **Client ID:** 263-2389-ACC3046

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6010C **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Aluminum	7429-90-5	40	ug/L	U		20	40	80	1	2716	1/17/22	10:15	1684	1/20/22	15:34
Iron	7439-89-6	400	ug/L	U		200	400	800	1	2716	1/17/22	10:15	1684	1/20/22	15:34

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629006 **Client ID:** 263-1908-ACC3043

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6010C **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Aluminum	7429-90-5	40	ug/L	U		20	40	80	1	2716	1/17/22	10:15	1684	1/20/22	15:39
Iron	7439-89-6	400	ug/L	U		200	400	800	1	2716	1/17/22	10:15	1684	1/20/22	15:39

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629007 **Client ID:** 263-1905-ACC3039

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6010C **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Aluminum	7429-90-5	53	ug/L	J		20	40	80	1	2716	1/17/22	10:15	1684	1/20/22	15:43
Iron	7439-89-6	340	ug/L	J		200	400	800	1	2716	1/17/22	10:15	1684	1/20/22	15:43

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629008 **Client ID:** 263-1906-ACC3040

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6010C **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Aluminum	7429-90-5	40	ug/L	U		20	40	80	1	2716	1/17/22	10:15	1684	1/20/22	15:56
Iron	7439-89-6	400	ug/L	U		200	400	800	1	2716	1/17/22	10:15	1684	1/20/22	15:56

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629009 **Client ID:** 263-1906-ACC3041-FD

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6010C **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Aluminum	7429-90-5	40	ug/L	U		20	40	80	1	2716	1/17/22	10:15	1684	1/20/22	16:00
Iron	7439-89-6	400	ug/L	U		200	400	800	1	2716	1/17/22	10:15	1684	1/20/22	16:00

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629010 **Client ID:** 263-ACC8001-ER

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6010C **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Aluminum	7429-90-5	40	ug/L	U		20	40	80	1	2716	1/17/22	10:15	1684	1/20/22	16:04
Iron	7439-89-6	400	ug/L	U		200	400	800	1	2716	1/17/22	10:15	1684	1/20/22	16:04

Comments:

Advanced Environmental Laboratories, Inc.

- FORM 1 -
INORGANIC ANALYSIS DATA PACKAGE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629011 **Client ID:** 263-ACC9001

Matrix: WATER **Date Received:** 1/13/2022 **Date Collected:** 1/10/2022

% Solids:

TOTAL **Analytical Method:** SW-846 6010C **Preparation Method:** SW-846 3010A

Analyte	CAS No.	Result	Units	C	Q	MDL	LOD	LOQ	Dil	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Aluminum	7429-90-5	140	ug/L			20	40	80	1	2716	1/17/22	10:15	1684	1/20/22	16:09
Iron	7439-89-6	490	ug/L	J		200	400	800	1	2716	1/17/22	10:15	1684	1/20/22	16:09

Comments:

QC Summary Reports

- FORM 2a -

INITIAL AND CONTINUING CALIBRATION VERIFICATION

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Analytical Method: SW-846 6010C

Sample ID / Analyte	Result ug/L	True Value ug/L	% Recovery	Acceptance Window (%R)	Q	Analysis Date	Analysis Time	Run Number
ICV J3ICP-0099								
Aluminum	380	400	95.0	90 - 110		1/20/2022	13:55	220120A2
Iron	3900	4000	97.5	90 - 110		1/20/2022	13:55	220120A2
CCV J3ICP-0135								
Aluminum	378	400	94.6	90 - 110		1/20/2022	14:56	220120A2
Iron	4150	4000	104	90 - 110		1/20/2022	14:56	220120A2
CCV J3ICP-0135								
Aluminum	365	400	91.1	90 - 110		1/20/2022	15:47	220120A2
Iron	3870	4000	96.8	90 - 110		1/20/2022	15:47	220120A2
CCV J3ICP-0135								
Aluminum	389	400	97.3	90 - 110		1/20/2022	16:39	220120A2
Iron	3970	4000	99.2	90 - 110		1/20/2022	16:39	220120A2

Advanced Environmental Laboratories, Inc.

- FORM 2b -
PQL/RL STANDARD

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Analytical Method: SW-846 6010C

Sample ID	Analyte	Result ug/L	True Value ug/L	% Recovery	Q	Advisory Limits (%R)	Analysis Date	Analysis Time	Run Number
LLCCV J3ICP-0102									
	Aluminum	84.9	80.0	106		80 - 120	1/20/2022	14:04	220120A2
	Iron	814	800	102		80 - 120	1/20/2022	14:04	220120A2

Advanced Environmental Laboratories, Inc.

- FORM 3a -

INITIAL AND CONTINUING CALIBRATION BLANK SUMMARY

Client: Environmental Chemical Corporation (ECC)

Analytical Method: SW-846 6010C **SDG No.:** J2200629

Sample ID	Analyte	Result ug/L	Acceptance Limit	Conc Qual	MDL	LOD	LOQ	Analysis Date	Analysis Time	Run
IB J3ICP-0136										
	Aluminum	40	+/-40	U	20	40	80	1/20/2022	14:00	220120A2
	Iron	400	+/-400	U	200	400	800	1/20/2022	14:00	220120A2
CCB J3ICP-0136										
	Aluminum	40	+/-40	U	20	40	80	1/20/2022	15:00	220120A2
	Iron	400	+/-400	U	200	400	800	1/20/2022	15:00	220120A2
CCB J3ICP-0136										
	Aluminum	40	+/-40	U	20	40	80	1/20/2022	15:51	220120A2
	Iron	400	+/-400	U	200	400	800	1/20/2022	15:51	220120A2
CCB J3ICP-0136										
	Aluminum	40	+/-40	U	20	40	80	1/20/2022	16:43	220120A2
	Iron	400	+/-400	U	200	400	800	1/20/2022	16:43	220120A2

Advanced Environmental Laboratories, Inc.

- FORM 3b -
METHOD BLANK SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Analytical Method: SW-846 6010C **Preparation Method:** SW-846 3010A

Sample ID / Analyte	Result	C	Q	Units	Acceptance Limit	MDL	LOD	LOQ	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
4172367	**WATER**	**TOTAL**												
Aluminum	40	U		ug/L	+/-40	20	40	80	2716	1/17/22	10:15	1684	1/20/22	14:47
Iron	400	U		ug/L	+/-400	200	400	800	2716	1/17/22	10:15	1684	1/20/22	14:47

Advanced Environmental Laboratories, Inc.

- FORM 4 -
INTERFERENCE CHECK SAMPLE

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Instrument ID: J3A **Analytical Method:** SW-846 6010C

Sample ID	Analyte	Result mg/L	True Value mg/L	% Recovery	Acceptance Window	Q	Analysis Date	Analysis Time	Run Number
ICSA J3ICP-0100									
	Aluminum	52	50.0	105	80 - 120%		1/20/2022	14:09	220120A2
	Calcium	199	200	99.7	80 - 120%		1/20/2022	14:09	220120A2
	Iron	100	100	100	80 - 120%		1/20/2022	14:09	220120A2
	Magnesium	100	100	100.0	80 - 120%		1/20/2022	14:09	220120A2
	Sodium	485	500	97.0	80 - 120%		1/20/2022	14:09	220120A2

Advanced Environmental Laboratories, Inc.

- FORM 5a -

MATRIX SPIKE SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629004 **MS ID:** 4172369 **Client ID:** 263-2388-ACC3044

Matrix: WATER

Analytical Method: SW-846 6010C **Preparation Method:** SW-846 3010A

TOTAL Analyte	Units	Acceptance Limit %R	MS Result	C	Sample Result	C	Spike Added	% Recovery	Q	Analytical Batch	Analytical Date	Analytical Time
Aluminum	ug/L	86 - 115	**442**		40.0	U	400	111		1684	1/20/22	15:21
Iron	ug/L	87 - 115	**4120**		400	U	4000	103		1684	1/20/22	15:21

NC = Not Calculable - the spike concentration added has been diluted below the LOQ

Advanced Environmental Laboratories, Inc.

- FORM 5a -

MATRIX SPIKE DUPLICATE SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Sample ID: J2200629004 **MSD ID:** 4172370 **Client ID:** 263-2388-ACC3044

Matrix: WATER

Analytical Method: SW-846 6010C **Preparation Method:** SW-846 3010A

TOTAL Analyte	Units	Acceptance Limit %R	MSD Result	C	Sample Result	C	Spike Added	% Recovery	Q	Analytical Batch	Analytical Date	Analytical Time
Aluminum	ug/L	86 - 115	**446**		40.0	U	400	111		1684	1/20/22	15:26
Iron	ug/L	87 - 115	**4090**		400	U	4000	102		1684	1/20/22	15:26

NC = Not Calculable - the spike concentration added has been diluted below the LOQ

Advanced Environmental Laboratories, Inc.

- FORM 5b -

POST DIGEST SPIKE SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Matrix: WATER **Analytical Method:** SW-846 6010C

Sample ID: J2200629004 **PS ID:** J2200629004PS **Client ID:** 263-2388-ACC3044

TOTAL Analyte	Units	Acceptance Limit %R	PS Result	C	Sample Result	C	Spike Added	% Recovery	Q	Analytical Batch	Date	Time
Aluminum	ug/L	80 - 120	446		40	U	400	111		1684	1/20/22	15:30
Iron	ug/L	80 - 120	4130		400	U	4000	103		1684	1/20/22	15:30

Advanced Environmental Laboratories, Inc.

- FORM 6 -
MATRIX SPIKE DUPLICATE SAMPLE SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Matrix: WATER **MS ID:** 4172369 **Client ID:** 263-2388-ACC3044

Percent Solids: 0.00 **MSD ID:** 4172370

Parent Sample: J2200629004 **Analytical Method:** SW-846 6010C **Preparation Method:** SW-846 3010A

TOTAL Analyte	Units	Acceptance Limit	MS Result	C	MSD Result	C	RPD	Q	MS Batch	MS Date	MS Time	MSD Date	MSD Time
Aluminum	ug/L	0 - 20	442		446		0.80		1684	1/20/22	15:21	1/20/22	15:26
Iron	ug/L	0 - 20	4120		4090		0.80		1684	1/20/22	15:21	1/20/22	15:26

NC = Not Calculable - the spike concentration added has been diluted below the LOQ

Advanced Environmental Laboratories, Inc.

- FORM 7 -
LABORATORY CONTROL SAMPLE SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

LCS ID: 4172368 **Preparation Method:** SW-846 3010A **Analytical Method:** SW-846 6010C

TOTAL Analyte	Units	True Value	LCS RESULT	C	% Recovery	Q	Acceptance Limits	Prep Batch	Prep Date	Prep Time	Analytical Batch	Analytical Date	Analytical Time
Aluminum	ug/L	400	390		97.4		86 - 115	2716	1/17/22	10:15	1684	1/20/22	14:51
Iron	ug/L	4000	3880		96.9		87 - 115	2716	1/17/22	10:15	1684	1/20/22	14:51

Advanced Environmental Laboratories, Inc.

- FORM 9 -

SERIAL DILUTION SAMPLE SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Matrix: WATER **Client ID:** 263-2388-ACC3044

Sample ID: J2200629004 **Analytical Method:** SW-846 6010C **Serial Dilution ID:** J2200629004SD

TOTAL

Analyte	Initial Result ug/L	C	Serial Result ug/L	C	% Difference	Q	Acceptance Limits	Analytical Batch	Analytical Date	Analytical Time
Aluminum	40	U	200	U		N	10 %	1684	1/20/22	15:17
Iron	400	U	2000	U		N	10 %	1684	1/20/22	15:17

If Q Qualifier "N" the initial result was < 50 times the LOQ therefore the Results were not evaluated.

Advanced Environmental Laboratories, Inc.

Detection Limits

Client: Environmental Chemical Corporation (ECC) **SDG No.:** J2200629

Analytical Method: SW-846 6010C

Instrument: J3A **Matrix Category:** LIQUID

Analyte	MDL ug/L	LOD ug/L	LOQ ug/L
Aluminum	20	40	80
Iron	200	400	800

Advanced Environmental Laboratories, Inc.

LINEAR RANGES

Client: Environmental Chemical Corporation (ECC) **SDG ID:** J2200629

Instrument ID: J3A **Analytical Method:** SW-846 6010C

Analyte	LDR mg/L
Aluminum	200
Iron	200

Advanced Environmental Laboratories, Inc.

ANALYSIS RUN LOG

Client: Environmental Chemical Corporation (ECC) **SDG ID:** J2200629

Instrument: J3A **Run Number:** 220120A2

Start Date: 1/20/2022 **End Date:** 1/20/2022 **Analytical Method:** SW-846 6010C

Client Sample No.	DF	Time	Analytes																								
			AL	SB	AS	BA	BE	CD	CA	CR	CO	CU	FE	PB	MG	MN	NI	K	SE	AG	NA	TL	V	ZN	B	LI
CALB J3ICP-0136	1	1312	X										X													
ICAL1 J3ICP-0102	1	1316	X										X													
ICAL2 J3ICP-0103	1	1320	X										X													
ICAL3 J3ICP-0135	1	1325	X										X													
ICAL4 J3ICP-0105	1	1329	X										X													
ICAL5 J3ICP-0106	1	1333	X										X													
ICAL6 J3ICP-0107	1	1338	X										X													
ICAL7 J3ICP-0108	1	1342	X										X													
ZZZZZZ	1	1347																								
ZZZZZZ	1	1351																								
ICV J3ICP-0099	1	1355	X										X													
IB J3ICP-0136	1	1400	X										X													
LLCCV J3ICP-0102	1	1404	X										X													
ICSA J3ICP-0100	1	1409	X						X				X		X						X					
ZZZZZZ	1	1425																								
ZZZZZZ	1	1430																								
ZZZZZZ	1	1434																								
ZZZZZZ	1	1439																								
ZZZZZZ	1	1443																								
MB for HBN 74186 [DGMj/2716]	1	1447	X										X													
LCS for HBN 74186 [DGMj/2716]	1	1451	X										X													
CCV J3ICP-0135	1	1456	X										X													
CCB J3ICP-0136	1	1500	X										X													
263-1907-ACC3042	1	1504	X										X													
263-1903-ACC3037	1	1508	X										X													
263-2388-ACC3044	1	1513	X										X													
263-2388-ACC3044SD	5	1517	X										X													
263-2388-ACC3044MS	1	1521	X										X													
263-2388-ACC3044MSD	1	1526	X										X													
263-2388-ACC3044PS	1	1530	X										X													
263-2389-ACC3046	1	1534	X										X													
263-1908-ACC3043	1	1539	X										X													

Advanced Environmental Laboratories, Inc.

ANALYSIS RUN LOG

Client: Environmental Chemical Corporation (ECC) **SDG ID:** J2200629

Instrument: J3A **Run Number:** 220120A2

Start Date: 1/20/2022 **End Date:** 1/20/2022 **Analytical Method:** SW-846 6010C

Client Sample No.	DF	Time	Analytes																										
			AL	SB	AS	BA	BE	CD	CA	CR	CO	CU	FE	PB	MG	MN	NI	K	SE	AG	NA	TL	V	ZN	B	LI			
263-1905-ACC3039	1	1543	X										X																
CCV J3ICP-0135	1	1547	X										X																
CCB J3ICP-0136	1	1551	X										X																
263-1906-ACC3040	1	1556	X										X																
263-1906-ACC3041-FD	1	1600	X										X																
263-ACC8001-ER	1	1604	X										X																
263-ACC9001	1	1609	X										X																
ZZZZZZ	1	1613																											
ZZZZZZ	1	1617																											
ZZZZZZ	1	1622																											
ZZZZZZ	100	1626																											
ZZZZZZ	1	1630																											
ZZZZZZ	1	1635																											
CCV J3ICP-0135	1	1639	X										X																
CCB J3ICP-0136	1	1643	X										X																
ZZZZZZ	1	1648																											
ZZZZZZ	1	1652																											
ZZZZZZ	1	1656																											
ZZZZZZ	1	1701																											
ZZZZZZ	1	1705																											
ZZZZZZ	1	1709																											
ZZZZZZ	1	1713																											
ZZZZZZ	1	1718																											
ZZZZZZ	1	1722																											
ZZZZZZ	1	1726																											
ZZZZZZ	1	1731																											
ZZZZZZ	1	1735																											
ZZZZZZ	1	1739																											
ZZZZZZ	1	1744																											
ZZZZZZ	1	1748																											
ZZZZZZ	1	1752																											
ZZZZZZ	1	1757																											

Advanced Environmental Laboratories, Inc.

ANALYSIS RUN LOG

Client: Environmental Chemical Corporation (ECC)

SDG ID: J2200629

Instrument: J3A

Run Number: 220120A2

Start Date: 1/20/2022 **End Date:** 1/20/2022 **Analytical Method:** SW-846 6010C

Client Sample No.	DF	Time	Analytes																								
			AL	SB	AS	BA	BE	CD	CA	CR	CO	CU	FE	PB	MG	MN	NI	K	SE	AG	NA	TL	V	ZN	B	LI
ZZZZZZ	1	1801																								
ZZZZZZ	1	1805																								
ZZZZZZ	1	1810																								
ZZZZZZ	1	1814																								
ZZZZZZ	1	1819																								
ZZZZZZ	1	1823																								
ZZZZZZ	1	1827																								
ZZZZZZ	1	1832																								
ZZZZZZ	1	1836																								
ZZZZZZ	1	1840																								
ZZZZZZ	1	1845																								
ZZZZZZ	1	1849																								
ZZZZZZ	1	1853																								
ZZZZZZ	10	1858																								
ZZZZZZ	10	1902																								
ZZZZZZ	10	1907																								
ZZZZZZ	10	1911																								
ZZZZZZ	1	1915																								
ZZZZZZ	1	1920																								
ZZZZZZ	1	1924																								
ZZZZZZ	1	1928																								
ZZZZZZ	1	1933																								
ZZZZZZ	1	1937																								
ZZZZZZ	1	1942																								
ZZZZZZ	1	1946																								
ZZZZZZ	1	1951																								
ZZZZZZ	2	1955																								
ZZZZZZ	2	2000																								
ZZZZZZ	2	2004																								
ZZZZZZ	1	2009																								
ZZZZZZ	1	2013																								
ZZZZZZ	2	2017																								

Advanced Environmental Laboratories, Inc.

ANALYSIS RUN LOG

Client: Environmental Chemical Corporation (ECC)

SDG ID: J2200629

Instrument: J3A

Run Number: 220120A2

Start Date: 1/20/2022 **End Date:** 1/20/2022 **Analytical Method:** SW-846 6010C

Client Sample No.	DF	Time	Analytes																								
			AL	SB	AS	BA	BE	CD	CA	CR	CO	CU	FE	PB	MG	MN	NI	K	SE	AG	NA	TL	V	ZN	B	LI
ZZZZZZ	2	2022																									
ZZZZZZ	2	2026																									
ZZZZZZ	2	2031																									
ZZZZZZ	1	2035																									
ZZZZZZ	1	2040																									
ZZZZZZ	1	2044																									
ZZZZZZ	1	2048																									
ZZZZZZ	1	2053																									
ZZZZZZ	1	2057																									
ZZZZZZ	1	2101																									
ZZZZZZ	1	2105																									

Advanced Environmental Laboratories, Inc.

ANALYSIS RUN LOG

Client: Environmental Chemical Corporation (ECC) **SDG ID:** J2200629

Instrument: J3A **Run Number:** 220120A2

Start Date: 1/20/2022 **End Date:** 1/20/2022 **Analytical Method:** SW-846 6010C

Client Sample No.	DF	Time	Analytes																								
			HG	MO	SI	SN	SR	TI	U	TH																	
CALB J3ICP-0136	1	13:12																									
ICAL1 J3ICP-0102	1	13:16																									
ICAL2 J3ICP-0103	1	13:20																									
ICAL3 J3ICP-0135	1	13:25																									
ICAL4 J3ICP-0105	1	13:29																									
ICAL5 J3ICP-0106	1	13:33																									
ICAL6 J3ICP-0107	1	13:38																									
ICAL7 J3ICP-0108	1	13:42																									
ZZZZZZ	1	13:47																									
ZZZZZZ	1	13:51																									
ICV J3ICP-0099	1	13:55																									
IB J3ICP-0136	1	14:00																									
LLCCV J3ICP-0102	1	14:04																									
ICSA J3ICP-0100	1	14:09																									
ZZZZZZ	1	14:25																									
ZZZZZZ	1	14:30																									
ZZZZZZ	1	14:34																									
ZZZZZZ	1	14:39																									
ZZZZZZ	1	14:43																									
MB for HBN 74186 [DGMj/2716]	1	14:47																									
LCS for HBN 74186 [DGMj/2716]	1	14:51																									
CCV J3ICP-0135	1	14:56																									
CCB J3ICP-0136	1	15:00																									
263-1907-ACC3042	1	15:04																									
263-1903-ACC3037	1	15:08																									
263-2388-ACC3044	1	15:13																									
263-2388-ACC3044SD	5	15:17																									
263-2388-ACC3044MS	1	15:21																									
263-2388-ACC3044MSD	1	15:26																									
263-2388-ACC3044PS	1	15:30																									
263-2389-ACC3046	1	15:34																									
263-1908-ACC3043	1	15:39																									
263-1905-ACC3039	1	15:43																									
CCV J3ICP-0135	1	15:47																									

Advanced Environmental Laboratories, Inc.

ANALYSIS RUN LOG

Client: Environmental Chemical Corporation (ECC) **SDG ID:** J2200629

Instrument: J3A **Run Number:** 220120A2

Start Date: 1/20/2022 **End Date:** 1/20/2022 **Analytical Method:** SW-846 6010C

Client Sample No.	DF	Time	Analytes																								
			HG	MO	SI	SN	SR	TI	U	TH																	
CCB J3ICP-0136	1	15:51																									
263-1906-ACC3040	1	15:56																									
263-1906-ACC3041-FD	1	16:00																									
263-ACC8001-ER	1	16:04																									
263-ACC9001	1	16:09																									
ZZZZZZ	1	16:13																									
ZZZZZZ	1	16:17																									
ZZZZZZ	1	16:22																									
ZZZZZZ	100	16:26																									
ZZZZZZ	1	16:30																									
ZZZZZZ	1	16:35																									
CCV J3ICP-0135	1	16:39																									
CCB J3ICP-0136	1	16:43																									
ZZZZZZ	1	16:48																									
ZZZZZZ	1	16:52																									
ZZZZZZ	1	16:56																									
ZZZZZZ	1	17:01																									
ZZZZZZ	1	17:05																									
ZZZZZZ	1	17:09																									
ZZZZZZ	1	17:13																									
ZZZZZZ	1	17:18																									
ZZZZZZ	1	17:22																									
ZZZZZZ	1	17:26																									
ZZZZZZ	1	17:31																									
ZZZZZZ	1	17:35																									
ZZZZZZ	1	17:39																									
ZZZZZZ	1	17:44																									
ZZZZZZ	1	17:48																									
ZZZZZZ	1	17:52																									
ZZZZZZ	1	17:57																									
ZZZZZZ	1	18:01																									
ZZZZZZ	1	18:05																									
ZZZZZZ	1	18:10																									
ZZZZZZ	1	18:14																									

Advanced Environmental Laboratories, Inc.

ANALYSIS RUN LOG

Client: Environmental Chemical Corporation (ECC) **SDG ID:** J2200629

Instrument: J3A **Run Number:** 220120A2

Start Date: 1/20/2022 **End Date:** 1/20/2022 **Analytical Method:** SW-846 6010C

Client Sample No.	DF	Time	Analytes																								
			HG	MO	SI	SN	SR	TI	U	TH																	
ZZZZZZ	1	18:19																									
ZZZZZZ	1	18:23																									
ZZZZZZ	1	18:27																									
ZZZZZZ	1	18:32																									
ZZZZZZ	1	18:36																									
ZZZZZZ	1	18:40																									
ZZZZZZ	1	18:45																									
ZZZZZZ	1	18:49																									
ZZZZZZ	1	18:53																									
ZZZZZZ	10	18:58																									
ZZZZZZ	10	19:02																									
ZZZZZZ	10	19:07																									
ZZZZZZ	10	19:11																									
ZZZZZZ	1	19:15																									
ZZZZZZ	1	19:20																									
ZZZZZZ	1	19:24																									
ZZZZZZ	1	19:28																									
ZZZZZZ	1	19:33																									
ZZZZZZ	1	19:37																									
ZZZZZZ	1	19:42																									
ZZZZZZ	1	19:46																									
ZZZZZZ	1	19:51																									
ZZZZZZ	2	19:55																									
ZZZZZZ	2	20:00																									
ZZZZZZ	2	20:04																									
ZZZZZZ	1	20:09																									
ZZZZZZ	1	20:13																									
ZZZZZZ	2	20:17																									
ZZZZZZ	2	20:22																									
ZZZZZZ	2	20:26																									
ZZZZZZ	2	20:31																									
ZZZZZZ	1	20:35																									
ZZZZZZ	1	20:40																									
ZZZZZZ	1	20:44																									

Advanced Environmental Laboratories, Inc.

ANALYSIS RUN LOG

Client: Environmental Chemical Corporation (ECC) **SDG ID:** J2200629

Instrument: J3A **Run Number:** 220120A2

Start Date: 1/20/2022 **End Date:** 1/20/2022 **Analytical Method:** SW-846 6010C

Client Sample No.	DF	Time	Analytes																								
			HG	MO	SI	SN	SR	TI	U	TH																	
ZZZZZZ	1	20:48																									
ZZZZZZ	1	20:53																									
ZZZZZZ	1	20:57																									
ZZZZZZ	1	21:01																									
ZZZZZZ	1	21:05																									

Advanced Environmental Laboratories, Inc.

INTERNAL STANDARDS RELATIVE INTENSITY SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG NO.:** J2200629

Instrument: J3A **Run No.:** 220120A2

Start Time: 1312 **End Time:** 2105 **Method:** SW-846 6010C

Sample ID	Client ID	Time	Internal Standards %RI For: Element Y 371.03	Q	Element Y 371.03	Q	Element Y 224.306	Q	Element	Q	Element	Q	Element	Q
CALB J3ICP-	CALB J3ICP-0136	1312	100.0		100.0		100.0							
ICAL1 J3ICP	ICAL1 J3ICP-0102	1316	103.0		96.7		98.5							
ICAL2 J3ICP	ICAL2 J3ICP-0103	1320	104.9		98.1		99.1							
ICAL3 J3ICP	ICAL3 J3ICP-0135	1325	103.5		95.7		98.3							
ICAL4 J3ICP	ICAL4 J3ICP-0105	1329	102.2		94.3		97.1							
ICAL5 J3ICP	ICAL5 J3ICP-0106	1333	101.4		93.6		96.8							
ICAL6 J3ICP	ICAL6 J3ICP-0107	1338	99.8		87.7		91.3							
ICAL7 J3ICP	ICAL7 J3ICP-0108	1342	94.9		82.7		87.2							
ICV J3ICP-0	ICV J3ICP-0099	1355	96.5		91.5		94.4							
ICB1	IB J3ICP-0136	1400	96.4		94.5		98.3							
CRDL1	LLCCV J3ICP-0102	1404	98.0		94.4		96.9							
ICS-A1	ICSA J3ICP-0100	1409	91.3		83.3		85.7							
ZZZZZZ	ZZZZZZ	1425												
ZZZZZZ	ZZZZZZ	1430												
ZZZZZZ	ZZZZZZ	1434												
ZZZZZZ	ZZZZZZ	1439												
ZZZZZZ	ZZZZZZ	1443												
4172367	MB for HBN 74186	1447	93.8		92.1		93.6							
4172368	LCS for HBN 7418	1451	93.4		90.6		93.7							
CCV1	CCV J3ICP-0135	1456	88.6		89.3		92.3							
CCB1	CCB J3ICP-0136	1500	92.3		92.0		94.0							
J2200629002	263-1907-ACC3042	1504	92.0		90.5		92.6							
J2200629003	263-1903-ACC3037	1508	92.4		90.6		93.4							
J2200629004	263-2388-ACC3044	1513	92.9		89.9		94.0							
J2200629004	263-2388-ACC3044	1517	94.1		91.7		95.9							
4172369	263-2388-ACC3044	1521	93.1		90.2		93.4							
4172370	263-2388-ACC3044	1526	92.1		88.9		93.0							
J2200629004	263-2388-ACC3044	1530	92.2		89.0		92.6							
J2200629005	263-2389-ACC3046	1534	92.0		90.9		93.6							
J2200629006	263-1908-ACC3043	1539	92.0		91.3		94.0							
J2200629007	263-1905-ACC3039	1543	92.6		90.2		93.8							
CCV2	CCV J3ICP-0135	1547	93.0		90.4		94.0							
CCB2	CCB J3ICP-0136	1551	91.9		90.0		94.3							
J2200629008	263-1906-ACC3040	1556	93.3		91.4		94.2							
J2200629009	263-1906-ACC3041	1600	95.0		92.9		95.6							
J2200629010	263-ACC8001-ER	1604	91.7		91.4		93.6							

Comments: _____

Internal Standard Acceptance Criteria: 70-130 %

Advanced Environmental Laboratories, Inc.

INTERNAL STANDARDS RELATIVE INTENSITY SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG NO.:** J2200629

Instrument: J3A **Run No.:** 220120A2

Start Time: 1312 **End Time:** 2105 **Method:** SW-846 6010C

Sample ID	Client ID	Time	Internal Standards %RI For: Element Y 371.03	Q	Element Y 371.03	Q	Element Y 224.306	Q	Element	Q	Element	Q	Element	Q
J2200629011	263-ACC9001	1609	94.1		91.1		95.1							
ZZZZZZ	ZZZZZZ	1613												
ZZZZZZ	ZZZZZZ	1617												
ZZZZZZ	ZZZZZZ	1622												
ZZZZZZ	ZZZZZZ	1626												
ZZZZZZ	ZZZZZZ	1630												
ZZZZZZ	ZZZZZZ	1635												
CCV3	CCV J3ICP-0135	1639	88.6		88.1		91.4							
CCB3	CCB J3ICP-0136	1643	89.0		90.0		93.1							
ZZZZZZ	ZZZZZZ	1648												
ZZZZZZ	ZZZZZZ	1652												
ZZZZZZ	ZZZZZZ	1656												
ZZZZZZ	ZZZZZZ	1701												
ZZZZZZ	ZZZZZZ	1705												
ZZZZZZ	ZZZZZZ	1709												
ZZZZZZ	ZZZZZZ	1713												
ZZZZZZ	ZZZZZZ	1718												
ZZZZZZ	ZZZZZZ	1722												
ZZZZZZ	ZZZZZZ	1726												
ZZZZZZ	ZZZZZZ	1731												
ZZZZZZ	ZZZZZZ	1735												
ZZZZZZ	ZZZZZZ	1739												
ZZZZZZ	ZZZZZZ	1744												
ZZZZZZ	ZZZZZZ	1748												
ZZZZZZ	ZZZZZZ	1752												
ZZZZZZ	ZZZZZZ	1757												
ZZZZZZ	ZZZZZZ	1801												
ZZZZZZ	ZZZZZZ	1805												
ZZZZZZ	ZZZZZZ	1810												
ZZZZZZ	ZZZZZZ	1814												
ZZZZZZ	ZZZZZZ	1819												
ZZZZZZ	ZZZZZZ	1823												
ZZZZZZ	ZZZZZZ	1827												
ZZZZZZ	ZZZZZZ	1832												
ZZZZZZ	ZZZZZZ	1836												
ZZZZZZ	ZZZZZZ	1840												

Comments:

Internal Standard Acceptance Criteria: 70-130 %

Advanced Environmental Laboratories, Inc.

INTERNAL STANDARDS RELATIVE INTENSITY SUMMARY

Client: Environmental Chemical Corporation (ECC) **SDG NO.:** J2200629

Instrument: J3A **Run No.:** 220120A2

Start Time: 1312 **End Time:** 2105 **Method:** SW-846 6010C

Sample ID	Client ID	Time	Internal Standards %RI For: Element Y 371.03	Q	Element Y 371.03	Q	Element Y 224.306	Q	Element	Q	Element	Q	Element	Q
ZZZZZZ	ZZZZZZ	1845												
ZZZZZZ	ZZZZZZ	1849												
ZZZZZZ	ZZZZZZ	1853												
ZZZZZZ	ZZZZZZ	1858												
ZZZZZZ	ZZZZZZ	1902												
ZZZZZZ	ZZZZZZ	1907												
ZZZZZZ	ZZZZZZ	1911												
ZZZZZZ	ZZZZZZ	1915												
ZZZZZZ	ZZZZZZ	1920												
ZZZZZZ	ZZZZZZ	1924												
ZZZZZZ	ZZZZZZ	1928												
ZZZZZZ	ZZZZZZ	1933												
ZZZZZZ	ZZZZZZ	1937												
ZZZZZZ	ZZZZZZ	1942												
ZZZZZZ	ZZZZZZ	1946												
ZZZZZZ	ZZZZZZ	1951												
ZZZZZZ	ZZZZZZ	1955												
ZZZZZZ	ZZZZZZ	2000												
ZZZZZZ	ZZZZZZ	2004												
ZZZZZZ	ZZZZZZ	2009												
ZZZZZZ	ZZZZZZ	2013												
ZZZZZZ	ZZZZZZ	2017												
ZZZZZZ	ZZZZZZ	2022												
ZZZZZZ	ZZZZZZ	2026												
ZZZZZZ	ZZZZZZ	2031												
ZZZZZZ	ZZZZZZ	2035												
ZZZZZZ	ZZZZZZ	2040												
ZZZZZZ	ZZZZZZ	2044												
ZZZZZZ	ZZZZZZ	2048												
ZZZZZZ	ZZZZZZ	2053												
ZZZZZZ	ZZZZZZ	2057												
ZZZZZZ	ZZZZZZ	2101												
ZZZZZZ	ZZZZZZ	2105												

Comments: _____

Internal Standard Acceptance Criteria: 70-130 %

Raw Data

200.7 6010B (Sample List)

1/20/2022 9:10:06 PM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

LabBook 220120A2.imexp
Instruments iCAP OES, ASX-560

LabBook summary

Acquired by LAB-AELLAB\Jax-uICP2 Date 1/20/2022 2:25:43 PM
Last changed by LAB-AELLAB\Jax-uICP2 Date 1/20/2022 9:10:02 PM

Configuration iCAP ASX 560
Template 210806A-WATERS

Sample list

Sample List	Sample Type	Repeats	Start Time	Comments
CALB J3ICP-0136	BLK	3	1/20/2022 1:12:03 PM	AO
ICAL1 J3ICP-0102	STD	3	1/20/2022 1:16:24 PM	AO
ICAL2 J3ICP-0103	STD	3	1/20/2022 1:20:50 PM	AO
ICAL3 J3ICP-0135	STD	3	1/20/2022 1:25:14 PM	AO
ICAL4 J3ICP-0105	STD	3	1/20/2022 1:29:37 PM	AO
ICAL5 J3ICP-0106	STD	3	1/20/2022 1:33:56 PM	AO
ICAL6 J3ICP-0107	STD	3	1/20/2022 1:38:19 PM	AO
ICAL7 J3ICP-0108	STD	3	1/20/2022 1:42:45 PM	AO
RINSE	UNKNOWN	3	1/20/2022 1:47:16 PM	AO
RINSE	UNKNOWN	3	1/20/2022 1:51:32 PM	AO
ICV J3ICP-0099	QC	3	1/20/2022 1:55:54 PM	AO
IB J3ICP-0136	QC	3	1/20/2022 2:00:14 PM	AO
LLCCV J3ICP-0102	QC	3	1/20/2022 2:04:35 PM	AO
ICSA J3ICP-0100	QC	3	1/20/2022 2:09:00 PM	AO
4173951	UNKNOWN	3	1/20/2022 2:25:56 PM	AO 1680
4173952	UNKNOWN	3	1/20/2022 2:30:20 PM	AO 1680
S2200085001	UNKNOWN	3	1/20/2022 2:34:39 PM	AO 1680
4173953	UNKNOWN	3	1/20/2022 2:39:03 PM	AO 1680
4173954	UNKNOWN	3	1/20/2022 2:43:15 PM	AO 1680
4172367	UNKNOWN	3	1/20/2022 2:47:28 PM	AO 1684
4172368	UNKNOWN	3	1/20/2022 2:51:45 PM	AO 1684
CCV J3ICP-0135	QC	3	1/20/2022 2:56:00 PM	AO
CCB J3ICP-0136	QC	3	1/20/2022 3:00:15 PM	AO
J2200629002	UNKNOWN	3	1/20/2022 3:04:31 PM	AO 1684
J2200629003	UNKNOWN	3	1/20/2022 3:08:51 PM	AO 1684
J2200629004	UNKNOWN	3	1/20/2022 3:13:08 PM	AO 1684
J2200629004SD 5X	UNKNOWN	3	1/20/2022 3:17:31 PM	AO 1684
4172369	UNKNOWN	3	1/20/2022 3:21:59 PM	AO 1684
4172370	UNKNOWN	3	1/20/2022 3:26:22 PM	AO 1684
J2200629004PS	UNKNOWN	3	1/20/2022 3:30:36 PM	AO 1684
J2200629005	UNKNOWN	3	1/20/2022 3:34:47 PM	AO 1684
J2200629006	UNKNOWN	3	1/20/2022 3:39:01 PM	AO 1684
J2200629007	UNKNOWN	3	1/20/2022 3:43:15 PM	AO 1684
CCV J3ICP-0135	QC	3	1/20/2022 3:47:38 PM	AO
CCB J3ICP-0136	QC	3	1/20/2022 3:51:55 PM	AO
J2200629008	UNKNOWN	3	1/20/2022 3:56:20 PM	AO 1684
J2200629009	UNKNOWN	3	1/20/2022 4:00:38 PM	AO 1684

200.7 6010B (Sample List)

1/20/2022 9:10:06 PM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample List	Sample Type	Repeats	Start Time	Comments
J2200629010	UNKNOWN	3	1/20/2022 4:04:57 PM	AO 1684
J2200629011	UNKNOWN	3	1/20/2022 4:09:14 PM	AO 1684
J2200709002	UNKNOWN	3	1/20/2022 4:13:34 PM	AO 1684
4173914	UNKNOWN	3	1/20/2022 4:17:55 PM	AO 1685
4173915	UNKNOWN	3	1/20/2022 4:22:16 PM	AO 1685
A2200359001 100X	UNKNOWN	3	1/20/2022 4:26:34 PM	AO 1685
J2200503001	UNKNOWN	3	1/20/2022 4:30:49 PM	AO 1685
4173916	UNKNOWN	3	1/20/2022 4:35:11 PM	AO 1685
CCV J3ICP-0135	QC	3	1/20/2022 4:39:31 PM	AO
CCB J3ICP-0136	QC	3	1/20/2022 4:43:46 PM	AO
4173917	UNKNOWN	3	1/20/2022 4:48:05 PM	AO 1685
A2200359002	UNKNOWN	3	1/20/2022 4:52:25 PM	AO 1685
G2200502001	UNKNOWN	3	1/20/2022 4:56:47 PM	AO 1685
G2200502002	UNKNOWN	3	1/20/2022 5:01:03 PM	AO 1685
J2200440001	UNKNOWN	3	1/20/2022 5:05:22 PM	AO 1685
J2200472001	UNKNOWN	3	1/20/2022 5:09:37 PM	AO 1685
J2200472002	UNKNOWN	3	1/20/2022 5:13:54 PM	AO 1685
J2200489001	UNKNOWN	3	1/20/2022 5:18:11 PM	AO 1685
4173918	UNKNOWN	3	1/20/2022 5:22:26 PM	AO 1685
4173919	UNKNOWN	3	1/20/2022 5:26:48 PM	AO 1685
CCV J3ICP-0135	QC	3	1/20/2022 5:31:08 PM	AO
CCB J3ICP-0136	QC	3	1/20/2022 5:35:23 PM	AO
S2200137001	UNKNOWN	3	1/20/2022 5:39:47 PM	AO 1685
S2200137002	UNKNOWN	3	1/20/2022 5:44:11 PM	AO 1685
S2200137003	UNKNOWN	3	1/20/2022 5:48:34 PM	AO 1685
S2200137004	UNKNOWN	3	1/20/2022 5:52:58 PM	AO 1685
S2200137005	UNKNOWN	3	1/20/2022 5:57:14 PM	AO 1685
S2200137006	UNKNOWN	3	1/20/2022 6:01:38 PM	AO 1685
S2200137007	UNKNOWN	3	1/20/2022 6:05:53 PM	AO 1685
S2200137008	UNKNOWN	3	1/20/2022 6:10:15 PM	AO 1685
S2200137009	UNKNOWN	3	1/20/2022 6:14:37 PM	AO 1685
S2200137010	UNKNOWN	3	1/20/2022 6:19:01 PM	AO 1685
CCV J3ICP-0135	QC	3	1/20/2022 6:23:26 PM	AO
CCB J3ICP-0136	QC	3	1/20/2022 6:27:50 PM	AO
S2200137011	UNKNOWN	3	1/20/2022 6:32:14 PM	AO 1685
4173940	UNKNOWN	3	1/20/2022 6:36:30 PM	AO 1686
4173941	UNKNOWN	3	1/20/2022 6:40:55 PM	AO 1686
J2200524001	UNKNOWN	3	1/20/2022 6:45:17 PM	AO 1686
J2200529001	UNKNOWN	3	1/20/2022 6:49:45 PM	AO 1686
J2200530001	UNKNOWN	3	1/20/2022 6:53:59 PM	AO 1686
J2200623001 10X	UNKNOWN	3	1/20/2022 6:58:22 PM	AO 1686
J2200623002 10X	UNKNOWN	3	1/20/2022 7:02:47 PM	AO 1686
J2200623003 10X	UNKNOWN	3	1/20/2022 7:07:11 PM	AO 1686
J2200623004 10X	UNKNOWN	3	1/20/2022 7:11:33 PM	AO 1686
CCV J3ICP-0135	QC	3	1/20/2022 7:15:50 PM	AO
CCB J3ICP-0136	QC	3	1/20/2022 7:20:05 PM	AO
J2200772001	UNKNOWN	3	1/20/2022 7:24:30 PM	AO 1686
4173944	UNKNOWN	3	1/20/2022 7:28:52 PM	AO 1686
4173945	UNKNOWN	3	1/20/2022 7:33:11 PM	AO 1686

200.7 6010B (Sample List)

1/20/2022 9:10:06 PM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample List	Sample Type	Repeats	Start Time	Comments
J2200772003	UNKNOWN	3	1/20/2022 7:37:31 PM	AO 1686
J2200513002	UNKNOWN	3	1/20/2022 7:42:03 PM	AO 1686
4173942	UNKNOWN	3	1/20/2022 7:46:35 PM	AO 1686
4173943	UNKNOWN	3	1/20/2022 7:51:04 PM	AO 1686
J2200513003 2X	UNKNOWN	3	1/20/2022 7:55:34 PM	AO 1686
J2200513004 2X	UNKNOWN	3	1/20/2022 8:00:07 PM	AO 1686
J2200513005 2X	UNKNOWN	3	1/20/2022 8:04:39 PM	AO 1686
CCV J3ICP-0135	QC	3	1/20/2022 8:09:12 PM	AO
CCB J3ICP-0136	QC	3	1/20/2022 8:13:27 PM	AO
J2200513006 2X	UNKNOWN	3	1/20/2022 8:17:43 PM	AO 1686
J2200513007 2X	UNKNOWN	3	1/20/2022 8:22:16 PM	AO 1686
J2200513008 2X	UNKNOWN	3	1/20/2022 8:26:50 PM	AO 1686
J2200513015 2X	UNKNOWN	3	1/20/2022 8:31:23 PM	AO 1686
J2200513016	UNKNOWN	3	1/20/2022 8:35:57 PM	AO 1686
J2200513017	UNKNOWN	3	1/20/2022 8:40:13 PM	AO 1686
J2200623001	UNKNOWN	3	1/20/2022 8:44:28 PM	AO 1686
J2200623002	UNKNOWN	3	1/20/2022 8:48:44 PM	AO 1686
J2200623003	UNKNOWN	3	1/20/2022 8:53:00 PM	AO 1686
J2200623004	UNKNOWN	3	1/20/2022 8:57:15 PM	AO 1686
CCV J3ICP-0135	QC	3	1/20/2022 9:01:31 PM	AO
CCB J3ICP-0136	QC	3	1/20/2022 9:05:46 PM	AO

200.7 6010B (Cal)

1/21/2022 8:59:36 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

LabBook 220120A2.imexp
Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM

Configuration iCAP ASX 560
Template 210806A-WATERS

Calibration details

Calibration	ICAL1 J3ICP-0102	ICAL2 J3ICP-0103	ICAL3 J3ICP-0135
K 766.490 {44} (Radial)	2.00000 ppm	4.00000 ppm	10.00000 ppm
Co 228.616 {447} (Axial)	0.00400 ppm	0.00800 ppm	0.02000 ppm
Ag 328.068 {103} (Axial)	0.03200 ppm	0.06400 ppm	0.16000 ppm
Zn 213.856 {458} (Axial)	0.20000 ppm	0.40000 ppm	1.00000 ppm
Pb 220.353 {453} (Axial)	0.01200 ppm	0.02400 ppm	0.06000 ppm
As 189.042 {478} (Axial)	0.03200 ppm	0.06400 ppm	0.16000 ppm
Si 251.611 {134} (Axial)	0.80000 ppm	1.60000 ppm	4.00000 ppm
Tl 190.856 {477} (Axial)	0.04000 ppm	0.08000 ppm	0.20000 ppm
Se 196.090 {472} (Axial)	0.16000 ppm	0.32000 ppm	0.80000 ppm
Al 396.152 {85} (Radial)	0.08000 ppm	0.16000 ppm	0.40000 ppm
B 208.959 {461} (Axial)	0.40000 ppm	0.80000 ppm	2.00000 ppm
Ba 233.527 {445} (Axial)	0.01200 ppm	0.02400 ppm	0.06000 ppm
Ca 317.933 {106} (Radial)	0.80000 ppm	1.60000 ppm	4.00000 ppm
Cd 226.502 {449} (Axial)	0.00200 ppm	0.00400 ppm	0.01000 ppm
Cr 267.716 {126} (Axial)	0.02000 ppm	0.04000 ppm	0.10000 ppm
Fe 261.187 {129} (Radial)	0.80000 ppm	1.60000 ppm	4.00000 ppm
Na 589.592 {57} (Radial)	3.20000 ppm	6.40000 ppm	16.00000 ppm
Be 313.042 {108} (Axial)	0.00800 ppm	0.01600 ppm	0.04000 ppm
Sr 421.552 {80} (Axial)	0.04000 ppm	0.08000 ppm	0.20000 ppm
Ti 323.452 {104} (Axial)	0.00800 ppm	0.01600 ppm	0.04000 ppm
V 290.882 {116} (Axial)	0.00800 ppm	0.01600 ppm	0.04000 ppm
Mn 257.610 {131} (Axial)	0.02000 ppm	0.04000 ppm	0.10000 ppm
Mo 204.598 {465} (Axial)	0.01600 ppm	0.03200 ppm	0.08000 ppm
Ni 221.647 {452} (Axial)	0.04000 ppm	0.08000 ppm	0.20000 ppm
Cu 327.396 {103} (Axial)	0.04000 ppm	0.08000 ppm	0.20000 ppm
Sb 206.833 {463} (Axial)	0.01200 ppm	0.02400 ppm	0.06000 ppm
Mg 285.213 {118} (Radial)	0.40000 ppm	0.80000 ppm	2.00000 ppm
Sn 189.989 {478} (Axial)	0.16000 ppm	0.32000 ppm	0.80000 ppm
Li 670.784 {50} (Radial)	0.24000 ppm	0.48000 ppm	1.20000 ppm

Calibration	ICAL4 J3ICP-0105	ICAL5 J3ICP-0106	ICAL6 J3ICP-0107
K 766.490 {44} (Radial)	20.00000 ppm	40.00000 ppm	N/A
Co 228.616 {447} (Axial)	0.04000 ppm	0.08000 ppm	0.40000 ppm
Ag 328.068 {103} (Axial)	0.32000 ppm	0.64000 ppm	N/A
Zn 213.856 {458} (Axial)	2.00000 ppm	4.00000 ppm	20.00000 ppm
Pb 220.353 {453} (Axial)	0.12000 ppm	0.24000 ppm	1.20000 ppm
As 189.042 {478} (Axial)	0.32000 ppm	0.64000 ppm	3.20000 ppm
Si 251.611 {134} (Axial)	8.00000 ppm	16.00000 ppm	80.00000 ppm

200.7 6010B (Cal)

1/21/2022 8:59:36 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Calibration	ICAL4 J3ICP-0105	ICAL5 J3ICP-0106	ICAL6 J3ICP-0107
Tl 190.856 {477} (Axial)	0.40000 ppm	0.80000 ppm	N/A
Se 196.090 {472} (Axial)	1.60000 ppm	3.20000 ppm	16.00000 ppm
Al 396.152 {85} (Radial)	0.80000 ppm	1.60000 ppm	8.00000 ppm
B 208.959 {461} (Axial)	4.00000 ppm	8.00000 ppm	N/A
Ba 233.527 {445} (Axial)	0.12000 ppm	0.24000 ppm	1.20000 ppm
Ca 317.933 {106} (Radial)	8.00000 ppm	16.00000 ppm	80.00000 ppm
Cd 226.502 {449} (Axial)	0.02000 ppm	0.04000 ppm	0.20000 ppm
Cr 267.716 {126} (Axial)	0.20000 ppm	0.40000 ppm	2.00000 ppm
Fe 261.187 {129} (Radial)	8.00000 ppm	16.00000 ppm	80.00000 ppm
Na 589.592 {57} (Radial)	32.00000 ppm	64.00000 ppm	320.00000 ppm
Be 313.042 {108} (Axial)	0.08000 ppm	0.16000 ppm	N/A
Sr 421.552 {80} (Axial)	0.40000 ppm	0.80000 ppm	4.00000 ppm
Ti 323.452 {104} (Axial)	0.08000 ppm	0.16000 ppm	N/A
V 290.882 {116} (Axial)	0.08000 ppm	0.16000 ppm	0.80000 ppm
Mn 257.610 {131} (Axial)	0.20000 ppm	0.40000 ppm	2.00000 ppm
Mo 204.598 {465} (Axial)	0.16000 ppm	0.32000 ppm	N/A
Ni 221.647 {452} (Axial)	0.40000 ppm	0.80000 ppm	4.00000 ppm
Cu 327.396 {103} (Axial)	0.40000 ppm	0.80000 ppm	4.00000 ppm
Sb 206.833 {463} (Axial)	0.12000 ppm	0.24000 ppm	N/A
Mg 285.213 {118} (Radial)	4.00000 ppm	8.00000 ppm	40.00000 ppm
Sn 189.989 {478} (Axial)	1.60000 ppm	3.20000 ppm	N/A
Li 670.784 {50} (Radial)	2.40000 ppm	4.80000 ppm	24.00000 ppm

Calibration	ICAL7 J3ICP-0108
K 766.490 {44} (Radial)	N/A
Co 228.616 {447} (Axial)	0.80000 ppm
Ag 328.068 {103} (Axial)	N/A
Zn 213.856 {458} (Axial)	N/A
Pb 220.353 {453} (Axial)	2.40000 ppm
As 189.042 {478} (Axial)	6.40000 ppm
Si 251.611 {134} (Axial)	N/A
Tl 190.856 {477} (Axial)	N/A
Se 196.090 {472} (Axial)	32.00000 ppm
Al 396.152 {85} (Radial)	16.00000 ppm
B 208.959 {461} (Axial)	N/A
Ba 233.527 {445} (Axial)	2.40000 ppm
Ca 317.933 {106} (Radial)	160.00000 ppm
Cd 226.502 {449} (Axial)	0.40000 ppm
Cr 267.716 {126} (Axial)	4.00000 ppm
Fe 261.187 {129} (Radial)	N/A
Na 589.592 {57} (Radial)	N/A
Be 313.042 {108} (Axial)	N/A
Sr 421.552 {80} (Axial)	N/A
Ti 323.452 {104} (Axial)	N/A
V 290.882 {116} (Axial)	1.60000 ppm
Mn 257.610 {131} (Axial)	4.00000 ppm
Mo 204.598 {465} (Axial)	N/A
Ni 221.647 {452} (Axial)	N/A
Cu 327.396 {103} (Axial)	8.00000 ppm

200.7 6010B (Cal)

1/21/2022 8:59:36 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Calibration	ICAL7 J3ICP-0108
Sb 206.833 {463} (Axial)	N/A
Mg 285.213 {118} (Radial)	80.00000 ppm
Sn 189.989 {478} (Axial)	N/A
Li 670.784 {50} (Radial)	48.00000 ppm

Symbol	Wavelength (nm) / Order	Fit Type	Weighting	Forcing
Ag	328.068 {103}	Linear	None	Blank
Al	396.152 {85}	Linear	None	Blank
As	189.042 {478}	Linear	None	Blank
B	208.959 {461}	Linear	None	Blank
Ba	233.527 {445}	Linear	None	Blank
Be	313.042 {108}	Linear	None	Blank
Ca	317.933 {106}	Linear	None	Blank
Cd	226.502 {449}	Linear	None	Blank
Co	228.616 {447}	Linear	None	Blank
Cr	267.716 {126}	Linear	None	Blank
Cu	327.396 {103}	Linear	None	Blank
Fe	261.187 {129}	Linear	None	Blank
K	766.490 {44}	Linear	None	Blank
Li	670.784 {50}	Linear	None	Blank
Mg	285.213 {118}	Linear	None	Blank
Mn	257.610 {131}	Linear	None	Blank
Mo	204.598 {465}	Linear	None	Blank
Na	589.592 {57}	Linear	None	Blank
Ni	221.647 {452}	Linear	None	Blank
Pb	220.353 {453}	Linear	None	Blank
Sb	206.833 {463}	Linear	None	Blank
Se	196.090 {472}	Linear	None	Blank
Si	251.611 {134}	Linear	None	Blank
Sn	189.989 {478}	Linear	None	Blank
Sr	421.552 {80}	Linear	None	Blank
Ti	323.452 {104}	Linear	None	Blank
Tl	190.856 {477}	Linear	None	Blank
V	290.882 {116}	Linear	None	Blank
Y	224.306 {450}	Linear	None	Blank
Y	371.030 {91}	Linear	None	Blank
Y	371.030 {91}	Linear	None	Blank
Zn	213.856 {458}	Linear	None	Blank

200.7 6010B (Cal)

1/21/2022 8:59:36 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Ag 328.068 {103} (Axial)

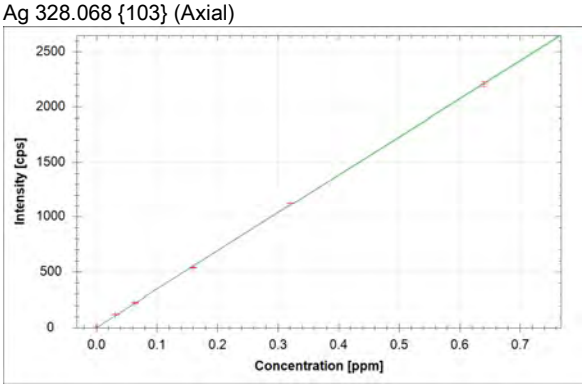

f(x) = 3455.5000*x + 0.0506
R^2 = 0.9998
BEC = 0.000 ppm
LoD = 0.0040 ppm

Al 396.152 {85} (Radial)

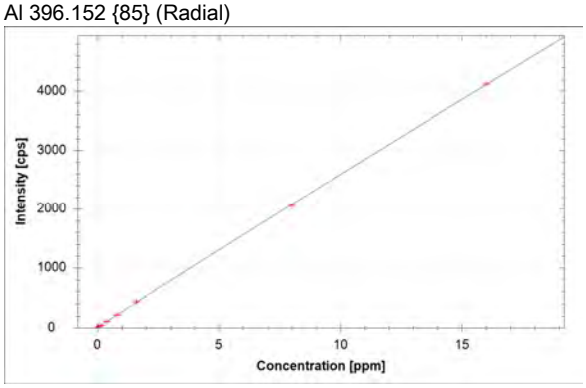

f(x) = -0.2733*x^2 + 261.1323*x + 4.6254
R^2 = 1.0000
BEC = 0.018 ppm
LoD = N/A

As 189.042 {478} (Axial)

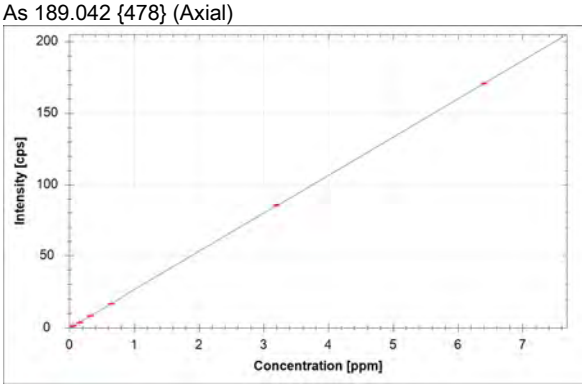

f(x) = 0.0052*x^2 + 26.6940*x + -0.3940
R^2 = 1.0000
BEC = 5167.344 ppm
LoD = N/A

B 208.959 {461} (Axial)

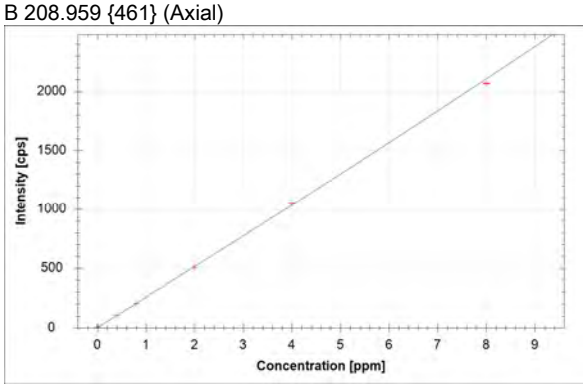

f(x) = 1.1504*x^2 + 253.8827*x + 1.1011
R^2 = 0.9994
BEC = 220.681 ppm
LoD = N/A

Ba 233.527 {445} (Axial)

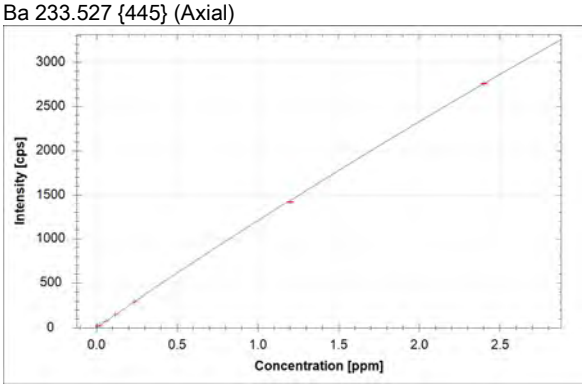

f(x) = -38.5012*x^2 + 1240.9083*x + 0.3928
R^2 = 1.0000
BEC = 0.000 ppm
LoD = N/A

Be 313.042 {108} (Axial)

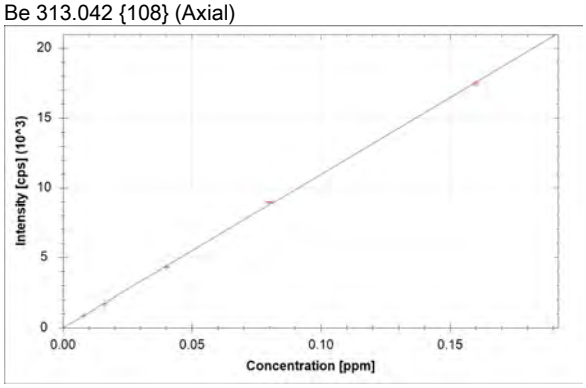

f(x) = 109871.5956*x + -21.5026
R^2 = 0.9997
BEC = 0.000 ppm
LoD = 0.0001 ppm

200.7 6010B (Cal)

1/21/2022 8:59:36 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Ca 317.933 {106} (Radial)

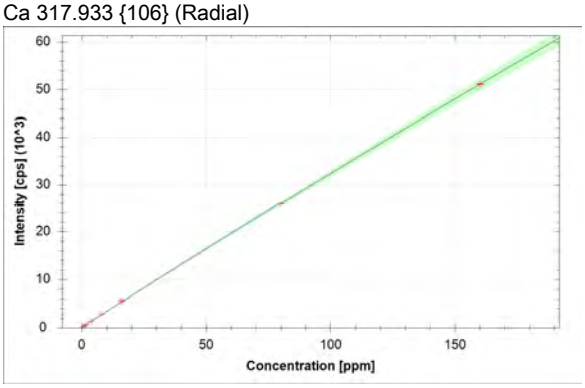

$f(x) = -0.0702*x^2 + 329.8907*x + 115.8716$
$R^2 = 1.0000$
BEC = 0.351 ppm
LoD = N/A

Cd 226.502 {449} (Axial)

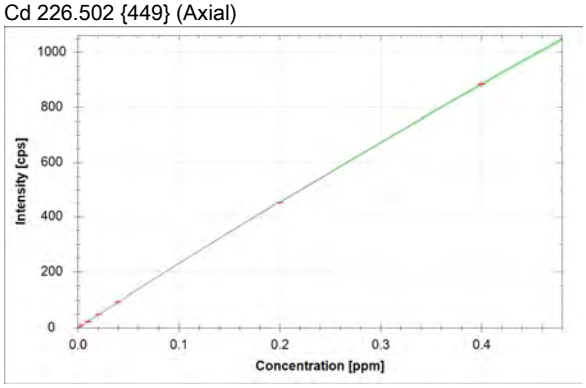

$f(x) = -323.9610*x^2 + 2339.4826*x + -0.1230$
$R^2 = 1.0000$
BEC = 0.000 ppm
LoD = N/A

Co 228.616 {447} (Axial)

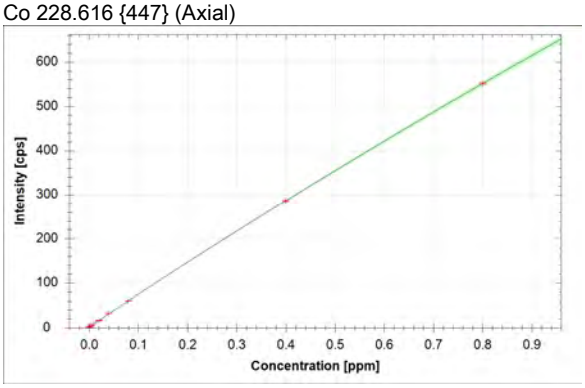

$f(x) = -61.0249*x^2 + 735.5083*x + 1.9914$
$R^2 = 1.0000$
BEC = 0.003 ppm
LoD = N/A

Cr 267.716 {126} (Axial)

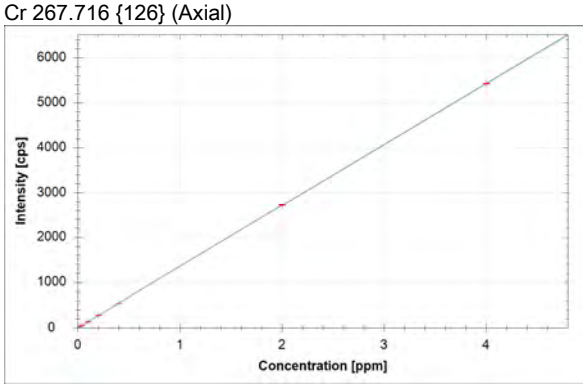

$f(x) = -0.5466*x^2 + 1358.2731*x + -0.8921$
$R^2 = 1.0000$
BEC = -0.001 ppm
LoD = N/A

Cu 327.396 {103} (Axial)

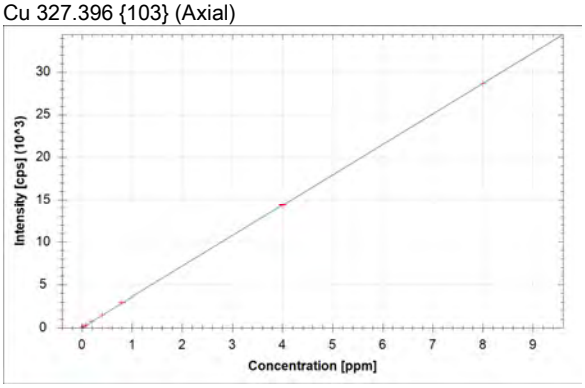

$f(x) = 3582.7252*x + 20.7114$
$R^2 = 1.0000$
BEC = 0.006 ppm
LoD = 0.0026 ppm

Fe 261.187 {129} (Radial)

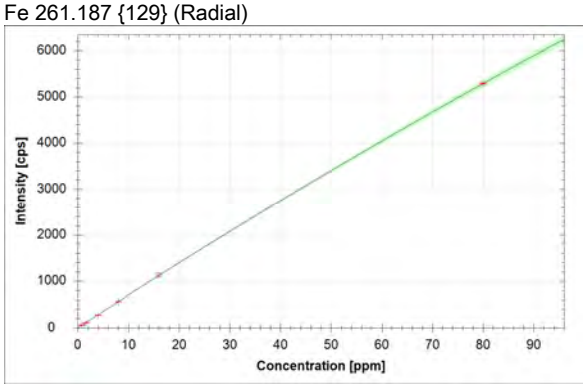

$f(x) = -0.0639*x^2 + 71.2075*x + -0.4138$
$R^2 = 1.0000$
BEC = -0.006 ppm
LoD = N/A

K 766.490 {44} (Radial)

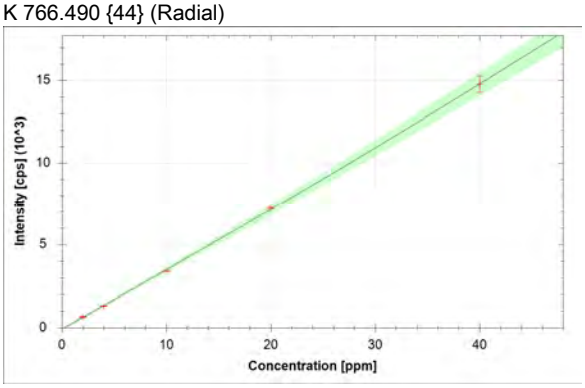

$f(x) = 0.5231*x^2 + 350.4941*x + -75.9246$
$R^2 = 0.9999$
BEC = 670.193 ppm
LoD = N/A

Li 670.784 {50} (Radial)

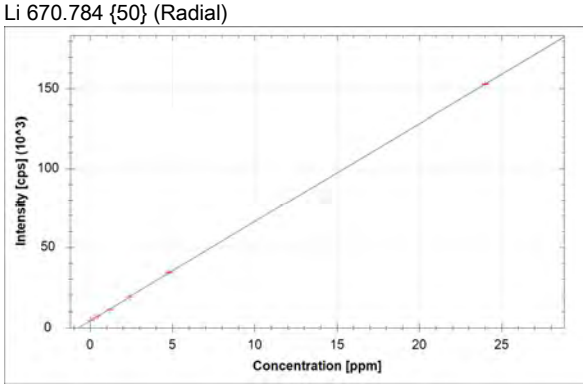

$f(x) = 6188.3550*x + 4387.5824$
$R^2 = 1.0000$
BEC = 0.709 ppm
LoD = 0.0026 ppm

Mg 285.213 {118} (Radial)

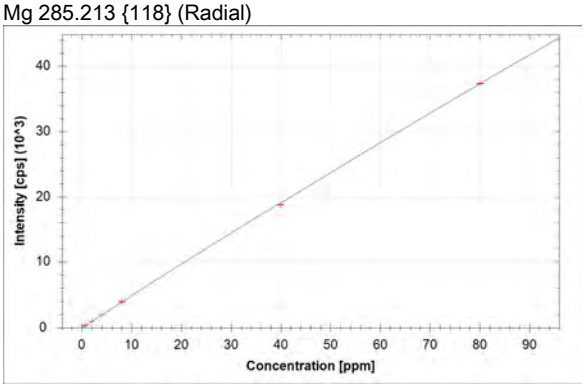

$f(x) = -0.2612*x^2 + 486.9358*x + 5.0475$
$R^2 = 0.9999$
BEC = 0.010 ppm
LoD = N/A

Mn 257.610 {131} (Axial)

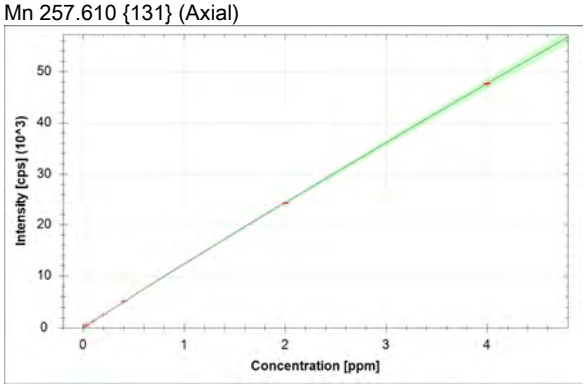

$f(x) = -121.5446*x^2 + 12377.5241*x + 75.7891$
$R^2 = 1.0000$
BEC = 0.006 ppm
LoD = N/A

Mo 204.598 {465} (Axial)

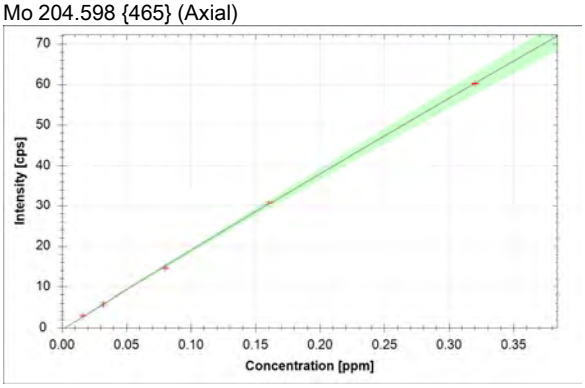

$f(x) = -18.5312*x^2 + 195.6700*x + -0.4480$
$R^2 = 0.9998$
BEC = -0.002 ppm
LoD = N/A

Na 589.592 {57} (Radial)

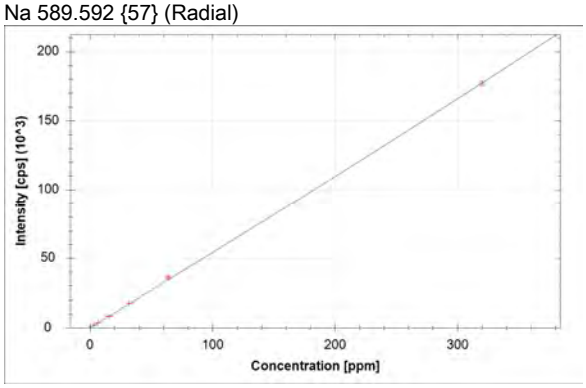

$f(x) = 0.0590*x^2 + 534.8880*x + 33.3105$
$R^2 = 0.9999$
BEC = 9058.312 ppm
LoD = N/A

Ni 221.647 {452} (Axial)

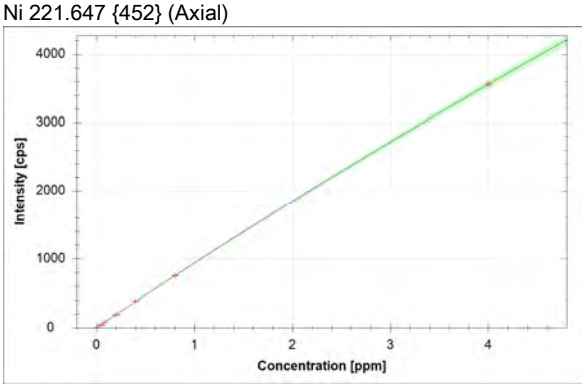

$f(x) = -15.6174*x^2 + 952.3366*x + 1.8892$
$R^2 = 1.0000$
BEC = 0.002 ppm
LoD = N/A

Pb 220.353 {453} (Axial)

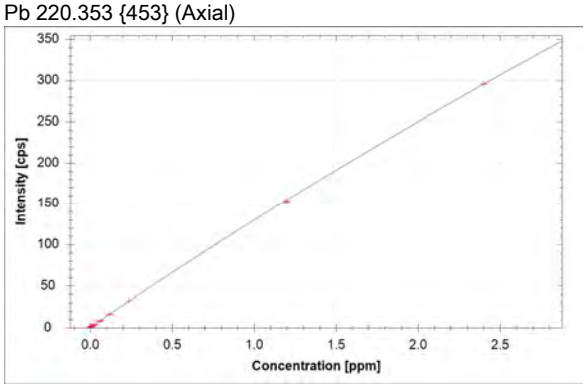

$f(x) = -4.5647*x^2 + 133.8855*x + 0.4599$
$R^2 = 1.0000$
BEC = 0.003 ppm
LoD = N/A

Sb 206.833 {463} (Axial)

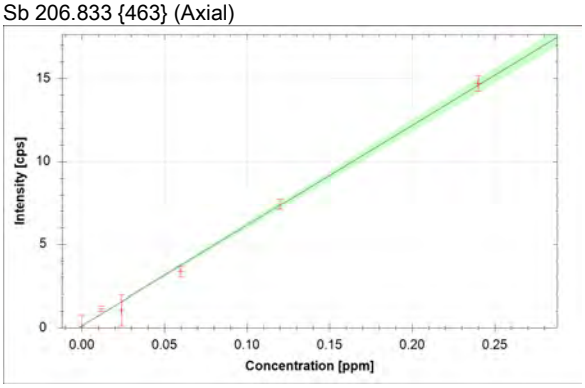

$f(x) = 60.3302*x + 0.1120$
$R^2 = 0.9966$
BEC = 0.002 ppm
LoD = 0.0326 ppm

Se 196.090 {472} (Axial)

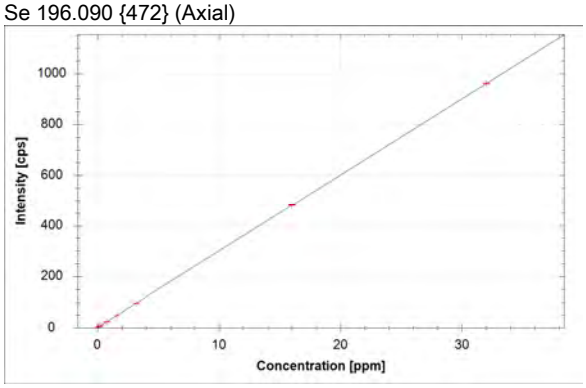

$f(x) = 30.0159*x + 0.1905$
$R^2 = 1.0000$
BEC = 0.006 ppm
LoD = 0.0229 ppm

Si 251.611 {134} (Axial)

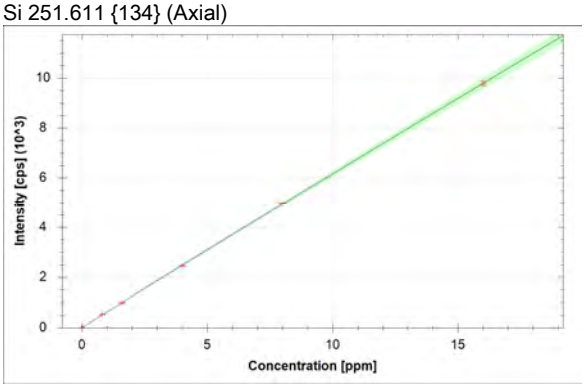

$f(x) = -0.6464*x^2 + 620.9425*x + 14.1466$
$R^2 = 1.0000$
BEC = 0.023 ppm
LoD = N/A

Sn 189.989 {478} (Axial)

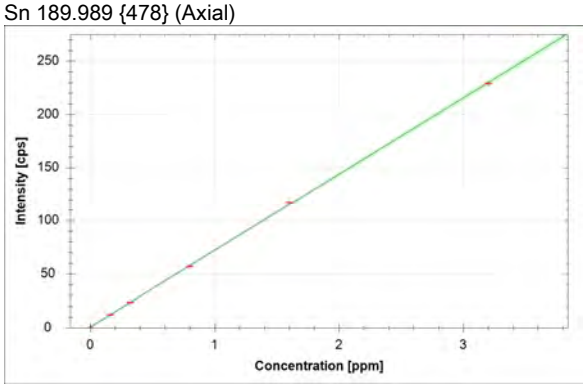

$f(x) = 71.6386*x + 0.6316$
$R^2 = 0.9998$
BEC = 0.009 ppm
LoD = 0.0032 ppm

200.7 6010B (Cal)

1/21/2022 8:59:36 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sr 421.552 {80} (Axial)

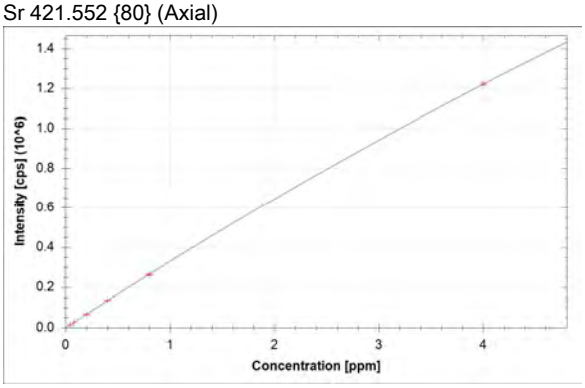

f(x) = -8296.1251*x^2 + 338598.6102*x + -59.6831
R² = 1.0000
BEC = 0.000 ppm
LoD = N/A

Ti 323.452 {104} (Axial)

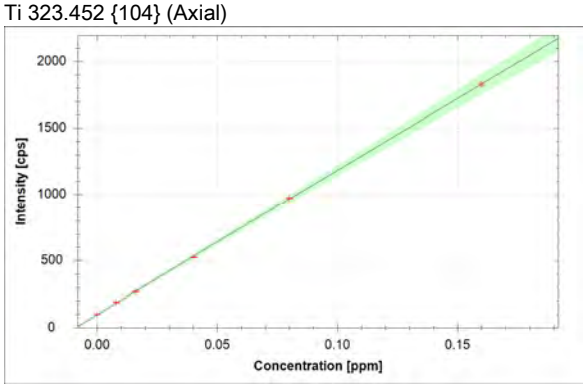

f(x) = -209.5808*x^2 + 10866.6899*x + 97.1556
R² = 0.9999
BEC = 0.009 ppm
LoD = N/A

Tl 190.856 {477} (Axial)

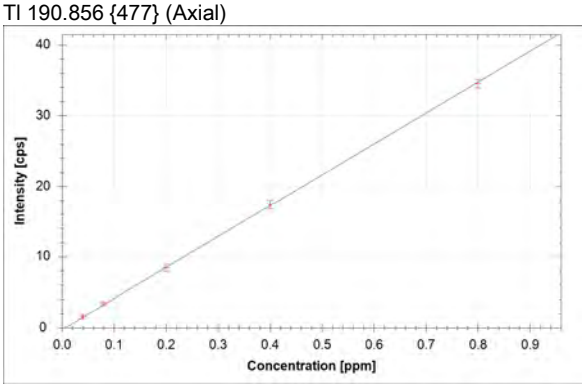

f(x) = 43.8066*x + -0.2931
R² = 0.9998
BEC = -0.007 ppm
LoD = 0.0151 ppm

V 290.882 {116} (Axial)

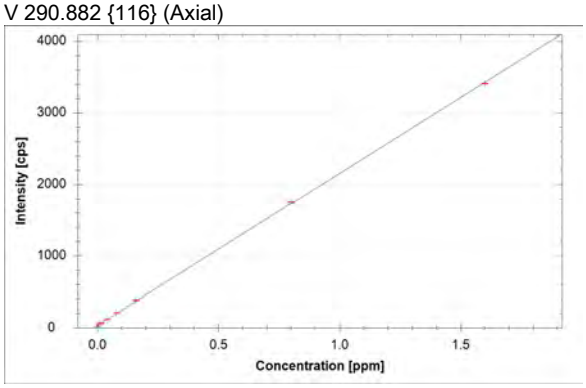

f(x) = 2122.0638*x + 29.1726
R² = 0.9999
BEC = 0.014 ppm
LoD = 0.0014 ppm

Zn 213.856 {458} (Axial)

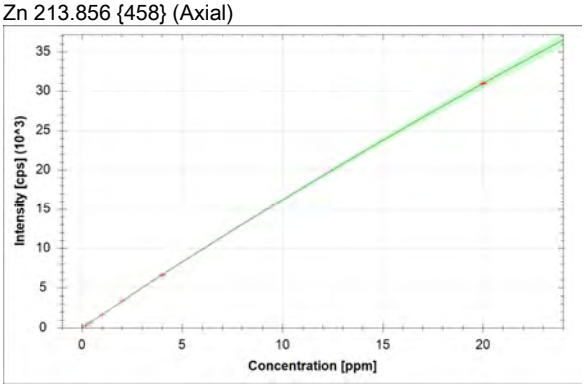

f(x) = -7.0151*x^2 + 1688.2875*x + 3.3096
R² = 1.0000
BEC = 0.002 ppm
LoD = N/A

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	CALB J3ICP-0136	Comments	AO
Dilution Factor	1	Sample Type	BLK
Analysis Date	1/20/2022 1:12:03 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.08894 ppm	N/A	-45 cps
Co 228.616 {447} (Axial)	-0.00080 ppm	N/A	1 cps
Ag 328.068 {103} (Axial)	0.00000 ppm	90.6 %	0 cps
Zn 213.856 {458} (Axial)	0.00211 ppm	N/A	7 cps
Pb 220.353 {453} (Axial)	0.00147 ppm	N/A	1 cps
As 189.042 {478} (Axial)	0.00956 ppm	N/A	0 cps
Si 251.611 {134} (Axial)	0.00000 ppm	N/A	14 cps
Tl 190.856 {477} (Axial)	-0.00470 ppm	107.0 %	0 cps
Se 196.090 {472} (Axial)	0.00000 ppm	1.2 %	0 cps
Al 396.152 {85} (Radial)	0.00136 ppm	N/A	5 cps
B 208.959 {461} (Axial)	0.00176 ppm	N/A	2 cps
Ba 233.527 {445} (Axial)	-0.00017 ppm	N/A	0 cps
Ca 317.933 {106} (Radial)	-0.26901 ppm	N/A	27 cps
Cd 226.502 {449} (Axial)	-0.00025 ppm	N/A	-1 cps
Cr 267.716 {126} (Axial)	-0.00051 ppm	N/A	-2 cps
Fe 261.187 {129} (Radial)	0.00000 ppm	N/A	0 cps
Na 589.592 {57} (Radial)	0.00000 ppm	N/A	33 cps
Y 371.030 {91} (Radial)	100.00000 %	N/A	19,880 cps
Be 313.042 {108} (Axial)	0.00000 ppm	-0.1 %	-22 cps
Sr 421.552 {80} (Axial)	0.00000 ppm	N/A	-60 cps
Ti 323.452 {104} (Axial)	0.00014 ppm	N/A	99 cps
V 290.882 {116} (Axial)	-0.00219 ppm	20.6 %	25 cps
Mn 257.610 {131} (Axial)	-0.00527 ppm	N/A	11 cps
Mo 204.598 {465} (Axial)	0.00000 ppm	N/A	0 cps
Ni 221.647 {452} (Axial)	-0.00078 ppm	N/A	1 cps
Cu 327.396 {103} (Axial)	0.00000 ppm	0.1 %	21 cps
Sb 206.833 {463} (Axial)	0.00000 ppm	5.8 %	0 cps
Y 371.030 {91} (Axial)	100.00000 %	N/A	314,385 cps
Y 224.306 {450} (Axial)	100.00000 %	N/A	4,624 cps
Mg 285.213 {118} (Radial)	-0.00675 ppm	N/A	2 cps
Sn 189.989 {478} (Axial)	-0.00708 ppm	15.1 %	0 cps
Li 670.784 {50} (Radial)	0.03356 ppm	2.6 %	4,595 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	ICAL1 J3ICP-0102	Comments	AO
Dilution Factor	1	Sample Type	STD
Analysis Date	1/20/2022 1:16:24 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	RSE	Intensity average
K 766.490 {44} (Radial)	2.06277 ppm	N/A	3.1 %	669 cps
Co 228.616 {447} (Axial)	0.00378 ppm	N/A	3.9 %	5 cps
Ag 328.068 {103} (Axial)	0.03450 ppm	1.5 %	4.9 %	115 cps
Zn 213.856 {458} (Axial)	0.20506 ppm	N/A	2.5 %	344 cps
Pb 220.353 {453} (Axial)	0.01136 ppm	N/A	3.7 %	2 cps
As 189.042 {478} (Axial)	0.04448 ppm	N/A	20.5 %	1 cps
Si 251.611 {134} (Axial)	0.83966 ppm	N/A	3.8 %	518 cps
Tl 190.856 {477} (Axial)	0.04265 ppm	14.5 %	4.6 %	2 cps
Se 196.090 {472} (Axial)	0.16511 ppm	7.7 %	1.9 %	5 cps
Al 396.152 {85} (Radial)	0.07080 ppm	N/A	8.5 %	24 cps
B 208.959 {461} (Axial)	0.41735 ppm	N/A	3.6 %	106 cps
Ba 233.527 {445} (Axial)	0.01221 ppm	N/A	1.5 %	15 cps
Ca 317.933 {106} (Radial)	0.76177 ppm	N/A	6.7 %	378 cps
Cd 226.502 {449} (Axial)	0.00187 ppm	N/A	3.8 %	4 cps
Cr 267.716 {126} (Axial)	0.02012 ppm	N/A	1.6 %	26 cps
Fe 261.187 {129} (Radial)	0.84026 ppm	N/A	4.3 %	61 cps
Na 589.592 {57} (Radial)	3.32472 ppm	N/A	4.0 %	1,868 cps
Y 371.030 {91} (Radial)	103.04521 %	N/A	0.0 %	20,485 cps
Be 313.042 {108} (Axial)	0.00821 ppm	0.8 %	2.5 %	851 cps
Sr 421.552 {80} (Axial)	0.04211 ppm	N/A	3.4 %	13,721 cps
Ti 323.452 {104} (Axial)	0.00842 ppm	N/A	4.2 %	183 cps
V 290.882 {116} (Axial)	0.00831 ppm	2.6 %	3.6 %	45 cps
Mn 257.610 {131} (Axial)	0.01616 ppm	N/A	11.3 %	267 cps
Mo 204.598 {465} (Axial)	0.01783 ppm	N/A	8.5 %	3 cps
Ni 221.647 {452} (Axial)	0.04125 ppm	N/A	2.4 %	41 cps
Cu 327.396 {103} (Axial)	0.04368 ppm	4.5 %	5.4 %	171 cps
Sb 206.833 {463} (Axial)	0.01710 ppm	15.5 %	32.9 %	1 cps
Y 371.030 {91} (Axial)	96.73600 %	N/A	0.0 %	304,124 cps
Y 224.306 {450} (Axial)	98.45392 %	N/A	0.0 %	4,553 cps
Mg 285.213 {118} (Radial)	0.41821 ppm	N/A	3.3 %	215 cps
Sn 189.989 {478} (Axial)	0.16255 ppm	2.9 %	1.8 %	12 cps
Li 670.784 {50} (Radial)	0.25289 ppm	1.8 %	3.8 %	5,953 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	ICAL2 J3ICP-0103	Comments	AO
Dilution Factor	1	Sample Type	STD
Analysis Date	1/20/2022 1:20:50 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	RSE	Intensity average
K 766.490 {44} (Radial)	3.92392 ppm	N/A	3.1 %	1,371 cps
Co 228.616 {447} (Axial)	0.00771 ppm	N/A	3.9 %	8 cps
Ag 328.068 {103} (Axial)	0.06504 ppm	2.0 %	4.9 %	221 cps
Zn 213.856 {458} (Axial)	0.39266 ppm	N/A	2.5 %	659 cps
Pb 220.353 {453} (Axial)	0.02407 ppm	N/A	3.7 %	4 cps
As 189.042 {478} (Axial)	0.07179 ppm	N/A	20.5 %	2 cps
Si 251.611 {134} (Axial)	1.58348 ppm	N/A	3.8 %	977 cps
Tl 190.856 {477} (Axial)	0.08349 ppm	6.2 %	4.6 %	3 cps
Se 196.090 {472} (Axial)	0.31881 ppm	2.9 %	1.9 %	10 cps
Al 396.152 {85} (Radial)	0.14319 ppm	N/A	8.5 %	44 cps
B 208.959 {461} (Axial)	0.80290 ppm	N/A	3.6 %	204 cps
Ba 233.527 {445} (Axial)	0.02378 ppm	N/A	1.5 %	30 cps
Ca 317.933 {106} (Radial)	1.44063 ppm	N/A	6.7 %	620 cps
Cd 226.502 {449} (Axial)	0.00391 ppm	N/A	3.8 %	9 cps
Cr 267.716 {126} (Axial)	0.03900 ppm	N/A	1.6 %	51 cps
Fe 261.187 {129} (Radial)	1.55849 ppm	N/A	4.3 %	116 cps
Na 589.592 {57} (Radial)	6.37734 ppm	N/A	4.0 %	3,615 cps
Y 371.030 {91} (Radial)	104.87537 %	N/A	0.0 %	20,849 cps
Be 313.042 {108} (Axial)	0.01568 ppm	0.7 %	2.5 %	1,669 cps
Sr 421.552 {80} (Axial)	0.07944 ppm	N/A	3.4 %	26,276 cps
Ti 323.452 {104} (Axial)	0.01571 ppm	N/A	4.2 %	263 cps
V 290.882 {116} (Axial)	0.01653 ppm	7.1 %	3.6 %	63 cps
Mn 257.610 {131} (Axial)	0.03570 ppm	N/A	11.3 %	508 cps
Mo 204.598 {465} (Axial)	0.03186 ppm	N/A	8.5 %	6 cps
Ni 221.647 {452} (Axial)	0.07945 ppm	N/A	2.4 %	77 cps
Cu 327.396 {103} (Axial)	0.08101 ppm	0.4 %	5.4 %	305 cps
Sb 206.833 {463} (Axial)	0.01527 ppm	100.0 %	32.9 %	1 cps
Y 371.030 {91} (Axial)	98.08976 %	N/A	0.0 %	308,380 cps
Y 224.306 {450} (Axial)	99.14622 %	N/A	0.0 %	4,585 cps
Mg 285.213 {118} (Radial)	0.80330 ppm	N/A	3.3 %	415 cps
Sn 189.989 {478} (Axial)	0.31859 ppm	1.6 %	1.8 %	23 cps
Li 670.784 {50} (Radial)	0.48195 ppm	0.5 %	3.8 %	7,370 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	ICAL3 J3ICP-0135	Comments	AO
Dilution Factor	1	Sample Type	STD
Analysis Date	1/20/2022 1:25:14 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	RSE	Intensity average
K 766.490 {44} (Radial)	9.77330 ppm	N/A	3.1 %	3,518 cps
Co 228.616 {447} (Axial)	0.01970 ppm	N/A	3.9 %	16 cps
Ag 328.068 {103} (Axial)	0.15592 ppm	0.6 %	4.9 %	516 cps
Zn 213.856 {458} (Axial)	0.97661 ppm	N/A	2.5 %	1,617 cps
Pb 220.353 {453} (Axial)	0.05731 ppm	N/A	3.7 %	8 cps
As 189.042 {478} (Axial)	0.15358 ppm	N/A	20.5 %	4 cps
Si 251.611 {134} (Axial)	3.93353 ppm	N/A	3.8 %	2,341 cps
Tl 190.856 {477} (Axial)	0.19927 ppm	5.7 %	4.6 %	8 cps
Se 196.090 {472} (Axial)	0.78048 ppm	3.4 %	1.9 %	23 cps
Al 396.152 {85} (Radial)	0.37917 ppm	N/A	8.5 %	107 cps
B 208.959 {461} (Axial)	1.97612 ppm	N/A	3.6 %	499 cps
Ba 233.527 {445} (Axial)	0.05927 ppm	N/A	1.5 %	73 cps
Ca 317.933 {106} (Radial)	3.77787 ppm	N/A	6.7 %	1,409 cps
Cd 226.502 {449} (Axial)	0.00980 ppm	N/A	3.8 %	22 cps
Cr 267.716 {126} (Axial)	0.09898 ppm	N/A	1.6 %	128 cps
Fe 261.187 {129} (Radial)	3.80392 ppm	N/A	4.3 %	279 cps
Na 589.592 {57} (Radial)	15.67743 ppm	N/A	4.0 %	8,728 cps
Y 371.030 {91} (Radial)	103.49494 %	N/A	0.0 %	20,575 cps
Be 313.042 {108} (Axial)	0.03930 ppm	0.5 %	2.5 %	4,111 cps
Sr 421.552 {80} (Axial)	0.19709 ppm	N/A	3.4 %	63,482 cps
Ti 323.452 {104} (Axial)	0.03922 ppm	N/A	4.2 %	500 cps
V 290.882 {116} (Axial)	0.04021 ppm	2.1 %	3.6 %	110 cps
Mn 257.610 {131} (Axial)	0.09800 ppm	N/A	11.3 %	1,232 cps
Mo 204.598 {465} (Axial)	0.07728 ppm	N/A	8.5 %	14 cps
Ni 221.647 {452} (Axial)	0.19612 ppm	N/A	2.4 %	185 cps
Cu 327.396 {103} (Axial)	0.20888 ppm	1.1 %	5.4 %	736 cps
Sb 206.833 {463} (Axial)	0.05357 ppm	9.9 %	32.9 %	3 cps
Y 371.030 {91} (Axial)	95.67596 %	N/A	0.0 %	300,791 cps
Y 224.306 {450} (Axial)	98.29048 %	N/A	0.0 %	4,545 cps
Mg 285.213 {118} (Radial)	1.98698 ppm	N/A	3.3 %	1,006 cps
Sn 189.989 {478} (Axial)	0.78694 ppm	0.7 %	1.8 %	56 cps
Li 670.784 {50} (Radial)	1.13847 ppm	0.3 %	3.8 %	11,433 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	ICAL4 J3ICP-0105	Comments	AO
Dilution Factor	1	Sample Type	STD
Analysis Date	1/20/2022 1:29:37 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	RSE	Intensity average
K 766.490 {44} (Radial)	20.17996 ppm	N/A	3.1 %	7,371 cps
Co 228.616 {447} (Axial)	0.04154 ppm	N/A	3.9 %	32 cps
Ag 328.068 {103} (Axial)	0.32476 ppm	0.6 %	4.9 %	1,059 cps
Zn 213.856 {458} (Axial)	2.03642 ppm	N/A	2.5 %	3,314 cps
Pb 220.353 {453} (Axial)	0.11802 ppm	N/A	3.7 %	16 cps
As 189.042 {478} (Axial)	0.32453 ppm	N/A	20.5 %	8 cps
Si 251.611 {134} (Axial)	8.04866 ppm	N/A	3.8 %	4,689 cps
Tl 190.856 {477} (Axial)	0.40394 ppm	3.8 %	4.6 %	17 cps
Se 196.090 {472} (Axial)	1.61758 ppm	0.2 %	1.9 %	47 cps
Al 396.152 {85} (Radial)	0.82136 ppm	N/A	8.5 %	224 cps
B 208.959 {461} (Axial)	4.06662 ppm	N/A	3.6 %	1,022 cps
Ba 233.527 {445} (Axial)	0.12202 ppm	N/A	1.5 %	147 cps
Ca 317.933 {106} (Radial)	8.20338 ppm	N/A	6.7 %	2,880 cps
Cd 226.502 {449} (Axial)	0.02051 ppm	N/A	3.8 %	46 cps
Cr 267.716 {126} (Axial)	0.20297 ppm	N/A	1.6 %	259 cps
Fe 261.187 {129} (Radial)	7.99626 ppm	N/A	4.3 %	577 cps
Na 589.592 {57} (Radial)	32.88736 ppm	N/A	4.0 %	18,082 cps
Y 371.030 {91} (Radial)	102.23077 %	N/A	0.0 %	20,323 cps
Be 313.042 {108} (Axial)	0.08190 ppm	0.6 %	2.5 %	8,469 cps
Sr 421.552 {80} (Axial)	0.40703 ppm	N/A	3.4 %	128,667 cps
Ti 323.452 {104} (Axial)	0.08061 ppm	N/A	4.2 %	917 cps
V 290.882 {116} (Axial)	0.08372 ppm	1.7 %	3.6 %	195 cps
Mn 257.610 {131} (Axial)	0.20656 ppm	N/A	11.3 %	2,479 cps
Mo 204.598 {465} (Axial)	0.16177 ppm	N/A	8.5 %	30 cps
Ni 221.647 {452} (Axial)	0.40639 ppm	N/A	2.4 %	375 cps
Cu 327.396 {103} (Axial)	0.42098 ppm	0.2 %	5.4 %	1,442 cps
Sb 206.833 {463} (Axial)	0.12092 ppm	4.4 %	32.9 %	7 cps
Y 371.030 {91} (Axial)	94.33994 %	N/A	0.0 %	296,591 cps
Y 224.306 {450} (Axial)	97.11392 %	N/A	0.0 %	4,491 cps
Mg 285.213 {118} (Radial)	4.11422 ppm	N/A	3.3 %	2,049 cps
Sn 189.989 {478} (Axial)	1.63142 ppm	0.3 %	1.8 %	114 cps
Li 670.784 {50} (Radial)	2.38249 ppm	0.4 %	3.8 %	19,131 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	ICAL5 J3ICP-0106	Comments	AO
Dilution Factor	1	Sample Type	STD
Analysis Date	1/20/2022 1:33:56 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	RSE	Intensity average
K 766.490 {44} (Radial)	39.97097 ppm	N/A	3.1 %	14,974 cps
Co 228.616 {447} (Axial)	0.08038 ppm	N/A	3.9 %	59 cps
Ag 328.068 {103} (Axial)	0.63841 ppm	0.9 %	4.9 %	2,065 cps
Zn 213.856 {458} (Axial)	3.98689 ppm	N/A	2.5 %	6,411 cps
Pb 220.353 {453} (Axial)	0.24257 ppm	N/A	3.7 %	32 cps
As 189.042 {478} (Axial)	0.63951 ppm	N/A	20.5 %	16 cps
Si 251.611 {134} (Axial)	15.99196 ppm	N/A	3.8 %	9,154 cps
Tl 190.856 {477} (Axial)	0.79552 ppm	1.7 %	4.6 %	33 cps
Se 196.090 {472} (Axial)	3.19017 ppm	1.0 %	1.9 %	93 cps
Al 396.152 {85} (Radial)	1.64784 ppm	N/A	8.5 %	440 cps
B 208.959 {461} (Axial)	7.85441 ppm	N/A	3.6 %	2,000 cps
Ba 233.527 {445} (Axial)	0.24022 ppm	N/A	1.5 %	287 cps
Ca 317.933 {106} (Radial)	16.68996 ppm	N/A	6.7 %	5,680 cps
Cd 226.502 {449} (Axial)	0.04031 ppm	N/A	3.8 %	91 cps
Cr 267.716 {126} (Axial)	0.39968 ppm	N/A	1.6 %	507 cps
Fe 261.187 {129} (Radial)	16.06431 ppm	N/A	4.3 %	1,143 cps
Na 589.592 {57} (Radial)	67.00594 ppm	N/A	4.0 %	36,640 cps
Y 371.030 {91} (Radial)	101.44223 %	N/A	0.0 %	20,167 cps
Be 313.042 {108} (Axial)	0.15918 ppm	0.6 %	2.5 %	16,351 cps
Sr 421.552 {80} (Axial)	0.79267 ppm	N/A	3.4 %	246,297 cps
Ti 323.452 {104} (Axial)	0.15990 ppm	N/A	4.2 %	1,712 cps
V 290.882 {116} (Axial)	0.16608 ppm	1.4 %	3.6 %	357 cps
Mn 257.610 {131} (Axial)	0.41329 ppm	N/A	11.3 %	4,840 cps
Mo 204.598 {465} (Axial)	0.31972 ppm	N/A	8.5 %	58 cps
Ni 221.647 {452} (Axial)	0.79752 ppm	N/A	2.4 %	727 cps
Cu 327.396 {103} (Axial)	0.82539 ppm	0.9 %	5.4 %	2,788 cps
Sb 206.833 {463} (Axial)	0.24177 ppm	3.3 %	32.9 %	14 cps
Y 371.030 {91} (Axial)	93.61090 %	N/A	0.0 %	294,299 cps
Y 224.306 {450} (Axial)	96.79430 %	N/A	0.0 %	4,476 cps
Mg 285.213 {118} (Radial)	8.27310 ppm	N/A	3.3 %	4,071 cps
Sn 189.989 {478} (Axial)	3.18757 ppm	0.3 %	1.8 %	222 cps
Li 670.784 {50} (Radial)	4.83247 ppm	0.7 %	3.8 %	34,293 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	ICAL6 J3ICP-0107	Comments	AO
Dilution Factor	1	Sample Type	STD
Analysis Date	1/20/2022 1:38:19 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	RSE	Intensity average
K 766.490 {44} (Radial)	N/A	N/A	3.1 %	74,373 cps
Co 228.616 {447} (Axial)	0.39959 ppm	N/A	3.9 %	261 cps
Ag 328.068 {103} (Axial)	N/A	N/A	4.9 %	4 cps
Zn 213.856 {458} (Axial)	20.00025 ppm	N/A	2.5 %	28,266 cps
Pb 220.353 {453} (Axial)	1.18500 ppm	N/A	3.7 %	139 cps
As 189.042 {478} (Axial)	3.20001 ppm	N/A	20.5 %	78 cps
Si 251.611 {134} (Axial)	0.19440 ppm	N/A	3.8 %	118 cps
Tl 190.856 {477} (Axial)	N/A	N/A	4.6 %	147 cps
Se 196.090 {472} (Axial)	15.99756 ppm	0.3 %	1.9 %	439 cps
Al 396.152 {85} (Radial)	7.94538 ppm	N/A	8.5 %	2,057 cps
B 208.959 {461} (Axial)	N/A	N/A	3.6 %	21 cps
Ba 233.527 {445} (Axial)	1.18688 ppm	N/A	1.5 %	1,295 cps
Ca 317.933 {106} (Radial)	79.73450 ppm	N/A	6.7 %	25,913 cps
Cd 226.502 {449} (Axial)	0.19981 ppm	N/A	3.8 %	415 cps
Cr 267.716 {126} (Axial)	1.99969 ppm	N/A	1.6 %	2,378 cps
Fe 261.187 {129} (Radial)	79.99771 ppm	N/A	4.3 %	5,275 cps
Na 589.592 {57} (Radial)	319.37284 ppm	N/A	4.0 %	176,480 cps
Y 371.030 {91} (Radial)	99.76848 %	N/A	0.0 %	19,834 cps
Be 313.042 {108} (Axial)	N/A	N/A	2.5 %	77,128 cps
Sr 421.552 {80} (Axial)	3.99999 ppm	N/A	3.4 %	1,070,785 cps
Ti 323.452 {104} (Axial)	N/A	N/A	4.2 %	137 cps
V 290.882 {116} (Axial)	0.81176 ppm	0.4 %	3.6 %	1,536 cps
Mn 257.610 {131} (Axial)	1.99423 ppm	N/A	11.3 %	21,279 cps
Mo 204.598 {465} (Axial)	N/A	N/A	8.5 %	1 cps
Ni 221.647 {452} (Axial)	4.00005 ppm	N/A	2.4 %	3,251 cps
Cu 327.396 {103} (Axial)	4.00188 ppm	0.3 %	5.4 %	12,586 cps
Sb 206.833 {463} (Axial)	N/A	N/A	32.9 %	1 cps
Y 371.030 {91} (Axial)	87.65558 %	N/A	0.0 %	275,576 cps
Y 224.306 {450} (Axial)	91.28726 %	N/A	0.0 %	4,221 cps
Mg 285.213 {118} (Radial)	39.27799 ppm	N/A	3.3 %	18,684 cps
Sn 189.989 {478} (Axial)	N/A	N/A	1.8 %	1 cps
Li 670.784 {50} (Radial)	23.99816 ppm	0.2 %	3.8 %	152,897 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	ICAL7 J3ICP-0108	Comments	AO
Dilution Factor	1	Sample Type	STD
Analysis Date	1/20/2022 1:42:45 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	RSE	Intensity average
K 766.490 {44} (Radial)	N/A	N/A	3.1 %	141,313 cps
Co 228.616 {447} (Axial)	0.80010 ppm	N/A	3.9 %	481 cps
Ag 328.068 {103} (Axial)	N/A	N/A	4.9 %	-25 cps
Zn 213.856 {458} (Axial)	N/A	N/A	2.5 %	49,081 cps
Pb 220.353 {453} (Axial)	2.40023 ppm	N/A	3.7 %	258 cps
As 189.042 {478} (Axial)	6.40000 ppm	N/A	20.5 %	149 cps
Si 251.611 {134} (Axial)	N/A	N/A	3.8 %	21 cps
Tl 190.856 {477} (Axial)	N/A	N/A	4.6 %	269 cps
Se 196.090 {472} (Axial)	32.00180 ppm	0.4 %	1.9 %	838 cps
Al 396.152 {85} (Radial)	16.01619 ppm	N/A	8.5 %	3,907 cps
B 208.959 {461} (Axial)	N/A	N/A	3.6 %	6 cps
Ba 233.527 {445} (Axial)	2.40181 ppm	N/A	1.5 %	2,406 cps
Ca 317.933 {106} (Radial)	160.06108 ppm	N/A	6.7 %	48,509 cps
Cd 226.502 {449} (Axial)	0.40005 ppm	N/A	3.8 %	771 cps
Cr 267.716 {126} (Axial)	4.00007 ppm	N/A	1.6 %	4,484 cps
Fe 261.187 {129} (Radial)	N/A	N/A	4.3 %	9,999 cps
Na 589.592 {57} (Radial)	N/A	N/A	4.0 %	339,639 cps
Y 371.030 {91} (Radial)	94.89202 %	N/A	0.0 %	18,864 cps
Be 313.042 {108} (Axial)	N/A	N/A	2.5 %	145,722 cps
Sr 421.552 {80} (Axial)	N/A	N/A	3.4 %	1,872,909 cps
Ti 323.452 {104} (Axial)	N/A	N/A	4.2 %	153 cps
V 290.882 {116} (Axial)	1.59247 ppm	0.2 %	3.6 %	2,818 cps
Mn 257.610 {131} (Axial)	4.00135 ppm	N/A	11.3 %	39,398 cps
Mo 204.598 {465} (Axial)	N/A	N/A	8.5 %	1 cps
Ni 221.647 {452} (Axial)	N/A	N/A	2.4 %	5,961 cps
Cu 327.396 {103} (Axial)	7.99522 ppm	0.0 %	5.4 %	23,698 cps
Sb 206.833 {463} (Axial)	N/A	N/A	32.9 %	3 cps
Y 371.030 {91} (Axial)	82.67139 %	N/A	0.0 %	259,907 cps
Y 224.306 {450} (Axial)	87.20055 %	N/A	0.0 %	4,032 cps
Mg 285.213 {118} (Radial)	80.11251 ppm	N/A	3.3 %	35,431 cps
Sn 189.989 {478} (Axial)	N/A	N/A	1.8 %	0 cps
Li 670.784 {50} (Radial)	44.50644 ppm	1.4 %	3.8 %	279,809 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	ICV J3ICP-0099	Comments	AO
Dilution Factor	1	Sample Type	QC
Analysis Date	1/20/2022 1:55:54 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	9.81176 ppm	0.1 %	3,293 cps
Co 228.616 {447} (Axial)	0.01987 ppm	2.1 %	16 cps
Ag 328.068 {103} (Axial)	0.15520 ppm	1.2 %	491 cps
Zn 213.856 {458} (Axial)	0.96571 ppm	0.4 %	1,536 cps
Pb 220.353 {453} (Axial)	0.06259 ppm	8.9 %	8 cps
As 189.042 {478} (Axial)	0.15397 ppm	8.5 %	4 cps
Si 251.611 {134} (Axial)	3.88829 ppm	0.6 %	2,214 cps
Tl 190.856 {477} (Axial)	0.18462 ppm	3.9 %	7 cps
Se 196.090 {472} (Axial)	0.76225 ppm	1.6 %	22 cps
Al 396.152 {85} (Radial)	0.38009 ppm	2.4 %	100 cps
B 208.959 {461} (Axial)	1.91645 ppm	0.3 %	464 cps
Ba 233.527 {445} (Axial)	0.06032 ppm	0.6 %	71 cps
Ca 317.933 {106} (Radial)	3.97090 ppm	1.3 %	1,375 cps
Cd 226.502 {449} (Axial)	0.00973 ppm	1.4 %	21 cps
Cr 267.716 {126} (Axial)	0.10041 ppm	1.8 %	124 cps
Fe 261.187 {129} (Radial)	3.89993 ppm	1.2 %	267 cps
Na 589.592 {57} (Radial)	15.99325 ppm	0.8 %	8,300 cps
Y 371.030 {91} (Radial)	96.47490 %	1.1 %	19,179 cps
Be 313.042 {108} (Axial)	0.04013 ppm	0.8 %	4,016 cps
Sr 421.552 {80} (Axial)	0.20036 ppm	0.6 %	61,734 cps
Ti 323.452 {104} (Axial)	0.04055 ppm	0.7 %	492 cps
V 290.882 {116} (Axial)	0.03841 ppm	2.0 %	101 cps
Mn 257.610 {131} (Axial)	0.10114 ppm	0.9 %	1,214 cps
Mo 204.598 {465} (Axial)	0.07820 ppm	0.4 %	14 cps
Ni 221.647 {452} (Axial)	0.19768 ppm	0.6 %	179 cps
Cu 327.396 {103} (Axial)	0.20515 ppm	1.1 %	692 cps
Sb 206.833 {463} (Axial)	0.05699 ppm	12.5 %	3 cps
Y 371.030 {91} (Axial)	91.52745 %	0.5 %	287,749 cps
Y 224.306 {450} (Axial)	94.37471 %	0.5 %	4,364 cps
Mg 285.213 {118} (Radial)	2.02656 ppm	0.7 %	956 cps
Sn 189.989 {478} (Axial)	0.78849 ppm	0.3 %	54 cps
Li 670.784 {50} (Radial)	1.09491 ppm	1.5 %	11,163 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	IB J3ICP-0136	Comments	AO
Dilution Factor	1	Sample Type	QC
Analysis Date	1/20/2022 2:00:14 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.26002 ppm	3.3 %	15 cps
Co 228.616 {447} (Axial)	-0.00025 ppm	260.1 %	2 cps
Ag 328.068 {103} (Axial)	0.00128 ppm	53.5 %	4 cps
Zn 213.856 {458} (Axial)	0.00450 ppm	26.8 %	11 cps
Pb 220.353 {453} (Axial)	-0.00106 ppm	241.8 %	0 cps
As 189.042 {478} (Axial)	0.00721 ppm	72.0 %	0 cps
Si 251.611 {134} (Axial)	0.03531 ppm	30.2 %	34 cps
Tl 190.856 {477} (Axial)	-0.00256 ppm	175.4 %	0 cps
Se 196.090 {472} (Axial)	-0.01431 ppm	74.1 %	0 cps
Al 396.152 {85} (Radial)	-0.01153 ppm	215.0 %	2 cps
B 208.959 {461} (Axial)	0.01410 ppm	12.0 %	5 cps
Ba 233.527 {445} (Axial)	0.00013 ppm	450.2 %	1 cps
Ca 317.933 {106} (Radial)	-0.24763 ppm	3.1 %	33 cps
Cd 226.502 {449} (Axial)	-0.00009 ppm	57.5 %	0 cps
Cr 267.716 {126} (Axial)	0.00058 ppm	151.5 %	0 cps
Fe 261.187 {129} (Radial)	0.06138 ppm	10.3 %	4 cps
Na 589.592 {57} (Radial)	0.21873 ppm	11.1 %	145 cps
Y 371.030 {91} (Radial)	96.36000 %	0.4 %	19,156 cps
Be 313.042 {108} (Axial)	0.00028 ppm	25.8 %	9 cps
Sr 421.552 {80} (Axial)	0.00163 ppm	24.2 %	465 cps
Ti 323.452 {104} (Axial)	0.00109 ppm	24.5 %	103 cps
V 290.882 {116} (Axial)	0.00099 ppm	110.9 %	30 cps
Mn 257.610 {131} (Axial)	-0.00450 ppm	4.5 %	19 cps
Mo 204.598 {465} (Axial)	0.00207 ppm	52.2 %	0 cps
Ni 221.647 {452} (Axial)	-0.00125 ppm	13.2 %	1 cps
Cu 327.396 {103} (Axial)	0.00142 ppm	140.4 %	24 cps
Sb 206.833 {463} (Axial)	-0.00301 ppm	215.8 %	0 cps
Y 371.030 {91} (Axial)	94.51330 %	0.8 %	297,136 cps
Y 224.306 {450} (Axial)	98.34789 %	0.9 %	4,548 cps
Mg 285.213 {118} (Radial)	0.01637 ppm	12.2 %	13 cps
Sn 189.989 {478} (Axial)	-0.00244 ppm	281.8 %	0 cps
Li 670.784 {50} (Radial)	0.05878 ppm	4.4 %	4,751 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	LLCCV J3ICP-0102	Comments	AO
Dilution Factor	1	Sample Type	QC
Analysis Date	1/20/2022 2:04:35 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	2.12888 ppm	0.5 %	659 cps
Co 228.616 {447} (Axial)	0.00344 ppm	18.0 %	4 cps
Ag 328.068 {103} (Axial)	0.03399 ppm	0.8 %	111 cps
Zn 213.856 {458} (Axial)	0.20451 ppm	0.2 %	337 cps
Pb 220.353 {453} (Axial)	0.01092 ppm	13.5 %	2 cps
As 189.042 {478} (Axial)	0.03469 ppm	7.5 %	1 cps
Si 251.611 {134} (Axial)	0.83745 ppm	0.9 %	504 cps
Tl 190.856 {477} (Axial)	0.03598 ppm	16.7 %	1 cps
Se 196.090 {472} (Axial)	0.15560 ppm	2.6 %	5 cps
Al 396.152 {85} (Radial)	0.08486 ppm	25.1 %	26 cps
B 208.959 {461} (Axial)	0.42081 ppm	0.4 %	105 cps
Ba 233.527 {445} (Axial)	0.01241 ppm	1.5 %	15 cps
Ca 317.933 {106} (Radial)	0.74129 ppm	1.8 %	353 cps
Cd 226.502 {449} (Axial)	0.00197 ppm	14.3 %	4 cps
Cr 267.716 {126} (Axial)	0.01943 ppm	3.5 %	24 cps
Fe 261.187 {129} (Radial)	0.81347 ppm	2.6 %	56 cps
Na 589.592 {57} (Radial)	3.24448 ppm	0.5 %	1,733 cps
Y 371.030 {91} (Radial)	97.95171 %	0.7 %	19,473 cps
Be 313.042 {108} (Axial)	0.00823 ppm	1.1 %	833 cps
Sr 421.552 {80} (Axial)	0.04160 ppm	0.9 %	13,233 cps
Ti 323.452 {104} (Axial)	0.00833 ppm	2.2 %	177 cps
V 290.882 {116} (Axial)	0.00800 ppm	8.5 %	44 cps
Mn 257.610 {131} (Axial)	0.01662 ppm	1.4 %	266 cps
Mo 204.598 {465} (Axial)	0.01706 ppm	11.4 %	3 cps
Ni 221.647 {452} (Axial)	0.04035 ppm	1.0 %	39 cps
Cu 327.396 {103} (Axial)	0.04199 ppm	1.7 %	162 cps
Sb 206.833 {463} (Axial)	0.01279 ppm	42.8 %	1 cps
Y 371.030 {91} (Axial)	94.43518 %	0.3 %	296,890 cps
Y 224.306 {450} (Axial)	96.85792 %	0.3 %	4,479 cps
Mg 285.213 {118} (Radial)	0.40769 ppm	1.5 %	199 cps
Sn 189.989 {478} (Axial)	0.16943 ppm	0.9 %	12 cps
Li 670.784 {50} (Radial)	0.25962 ppm	1.0 %	5,994 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	ICSA J3ICP-0100	Comments	AO
Dilution Factor	1	Sample Type	QC
Analysis Date	1/20/2022 2:09:00 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.26827 ppm	8.5 %	17 cps
Co 228.616 {447} (Axial)	-0.00087 ppm	194.9 %	1 cps
Ag 328.068 {103} (Axial)	0.00019 ppm	594.1 %	1 cps
Zn 213.856 {458} (Axial)	0.01293 ppm	1.9 %	22 cps
Pb 220.353 {453} (Axial)	-0.00478 ppm	81.2 %	0 cps
As 189.042 {478} (Axial)	0.00047 ppm	944.4 %	0 cps
Si 251.611 {134} (Axial)	0.01641 ppm	23.5 %	20 cps
Tl 190.856 {477} (Axial)	-0.00065 ppm	2,152.8 %	0 cps
Se 196.090 {472} (Axial)	-0.01225 ppm	49.4 %	0 cps
Al 396.152 {85} (Radial)	52.38261 ppm	0.4 %	11,807 cps
B 208.959 {461} (Axial)	0.01006 ppm	20.4 %	3 cps
Ba 233.527 {445} (Axial)	0.00217 ppm	14.3 %	3 cps
Ca 317.933 {106} (Radial)	199.36474 ppm	0.5 %	57,599 cps
Cd 226.502 {449} (Axial)	0.00027 ppm	190.9 %	0 cps
Cr 267.716 {126} (Axial)	0.00169 ppm	84.2 %	1 cps
Fe 261.187 {129} (Radial)	100.26917 ppm	0.6 %	5,931 cps
Na 589.592 {57} (Radial)	484.99083 ppm	1.4 %	249,531 cps
Y 371.030 {91} (Radial)	91.28982 %	0.1 %	18,148 cps
Be 313.042 {108} (Axial)	-0.00008 ppm	49.3 %	-25 cps
Sr 421.552 {80} (Axial)	0.00227 ppm	0.9 %	590 cps
Ti 323.452 {104} (Axial)	0.00384 ppm	5.5 %	116 cps
V 290.882 {116} (Axial)	-0.00085 ppm	154.5 %	23 cps
Mn 257.610 {131} (Axial)	-0.00484 ppm	0.8 %	13 cps
Mo 204.598 {465} (Axial)	0.00499 ppm	42.3 %	0 cps
Ni 221.647 {452} (Axial)	-0.00113 ppm	106.6 %	1 cps
Cu 327.396 {103} (Axial)	-0.00184 ppm	66.5 %	12 cps
Sb 206.833 {463} (Axial)	-0.00410 ppm	300.0 %	0 cps
Y 371.030 {91} (Axial)	83.26181 %	0.6 %	261,763 cps
Y 224.306 {450} (Axial)	85.66551 %	0.5 %	3,961 cps
Mg 285.213 {118} (Radial)	99.95337 ppm	0.5 %	42,054 cps
Sn 189.989 {478} (Axial)	-0.01094 ppm	55.5 %	0 cps
Li 670.784 {50} (Radial)	0.01623 ppm	22.6 %	4,488 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	4172367	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 2:47:28 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.24420 ppm	32.8 %	9 cps
Co 228.616 {447} (Axial)	0.00010 ppm	230.4 %	2 cps
Ag 328.068 {103} (Axial)	0.00154 ppm	62.2 %	5 cps
Zn 213.856 {458} (Axial)	0.00352 ppm	23.1 %	9 cps
Pb 220.353 {453} (Axial)	-0.00118 ppm	360.3 %	0 cps
As 189.042 {478} (Axial)	0.01027 ppm	77.0 %	0 cps
Si 251.611 {134} (Axial)	0.04172 ppm	40.6 %	37 cps
Tl 190.856 {477} (Axial)	-0.00120 ppm	1,044.2 %	0 cps
Se 196.090 {472} (Axial)	0.00587 ppm	191.1 %	0 cps
Al 396.152 {85} (Radial)	-0.01436 ppm	153.4 %	1 cps
B 208.959 {461} (Axial)	0.01141 ppm	21.7 %	4 cps
Ba 233.527 {445} (Axial)	0.00018 ppm	60.4 %	1 cps
Ca 317.933 {106} (Radial)	0.92599 ppm	34.3 %	396 cps
Cd 226.502 {449} (Axial)	-0.00034 ppm	59.9 %	-1 cps
Cr 267.716 {126} (Axial)	0.00120 ppm	42.6 %	1 cps
Fe 261.187 {129} (Radial)	0.06061 ppm	60.7 %	4 cps
Na 589.592 {57} (Radial)	0.29383 ppm	19.5 %	179 cps
Y 371.030 {91} (Radial)	93.77658 %	0.9 %	18,643 cps
Be 313.042 {108} (Axial)	0.00018 ppm	38.1 %	-1 cps
Sr 421.552 {80} (Axial)	0.00168 ppm	34.2 %	468 cps
Ti 323.452 {104} (Axial)	0.00102 ppm	54.6 %	100 cps
V 290.882 {116} (Axial)	0.00041 ppm	219.3 %	28 cps
Mn 257.610 {131} (Axial)	-0.00510 ppm	4.6 %	12 cps
Mo 204.598 {465} (Axial)	0.00226 ppm	76.9 %	0 cps
Ni 221.647 {452} (Axial)	-0.00129 ppm	42.0 %	1 cps
Cu 327.396 {103} (Axial)	0.00080 ppm	103.2 %	22 cps
Sb 206.833 {463} (Axial)	0.00352 ppm	129.1 %	0 cps
Y 371.030 {91} (Axial)	92.09753 %	0.3 %	289,541 cps
Y 224.306 {450} (Axial)	93.61549 %	0.6 %	4,329 cps
Mg 285.213 {118} (Radial)	0.05598 ppm	32.8 %	30 cps
Sn 189.989 {478} (Axial)	-0.00135 ppm	279.8 %	1 cps
Li 670.784 {50} (Radial)	0.05181 ppm	4.5 %	4,708 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Sample	4172368	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 2:51:45 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	9.58160 ppm	3.0 %	3,109 cps
Co 228.616 {447} (Axial)	0.01991 ppm	3.2 %	16 cps
Ag 328.068 {103} (Axial)	0.15813 ppm	0.8 %	495 cps
Zn 213.856 {458} (Axial)	0.98640 ppm	0.3 %	1,556 cps
Pb 220.353 {453} (Axial)	0.06130 ppm	2.8 %	8 cps
As 189.042 {478} (Axial)	0.15877 ppm	2.8 %	4 cps
Si 251.611 {134} (Axial)	3.89402 ppm	0.1 %	2,195 cps
Tl 190.856 {477} (Axial)	0.19161 ppm	3.2 %	8 cps
Se 196.090 {472} (Axial)	0.73863 ppm	1.9 %	21 cps
Al 396.152 {85} (Radial)	0.38973 ppm	9.1 %	99 cps
B 208.959 {461} (Axial)	1.92291 ppm	0.1 %	462 cps
Ba 233.527 {445} (Axial)	0.05891 ppm	0.5 %	69 cps
Ca 317.933 {106} (Radial)	3.65564 ppm	2.9 %	1,233 cps
Cd 226.502 {449} (Axial)	0.00957 ppm	2.4 %	21 cps
Cr 267.716 {126} (Axial)	0.09978 ppm	0.8 %	122 cps
Fe 261.187 {129} (Radial)	3.87690 ppm	2.7 %	256 cps
Na 589.592 {57} (Radial)	15.77473 ppm	2.8 %	7,921 cps
Y 371.030 {91} (Radial)	93.35293 %	0.9 %	18,558 cps
Be 313.042 {108} (Axial)	0.04049 ppm	0.4 %	4,013 cps
Sr 421.552 {80} (Axial)	0.19653 ppm	0.3 %	59,969 cps
Ti 323.452 {104} (Axial)	0.03930 ppm	0.5 %	475 cps
V 290.882 {116} (Axial)	0.04022 ppm	6.0 %	104 cps
Mn 257.610 {131} (Axial)	0.09941 ppm	0.6 %	1,183 cps
Mo 204.598 {465} (Axial)	0.07851 ppm	2.6 %	14 cps
Ni 221.647 {452} (Axial)	0.19631 ppm	0.5 %	176 cps
Cu 327.396 {103} (Axial)	0.19905 ppm	1.1 %	665 cps
Sb 206.833 {463} (Axial)	0.05681 ppm	11.7 %	3 cps
Y 371.030 {91} (Axial)	90.63433 %	0.3 %	284,941 cps
Y 224.306 {450} (Axial)	93.65037 %	0.1 %	4,331 cps
Mg 285.213 {118} (Radial)	1.98974 ppm	3.5 %	908 cps
Sn 189.989 {478} (Axial)	0.78081 ppm	0.5 %	53 cps
Li 670.784 {50} (Radial)	1.05120 ppm	2.3 %	10,893 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	CCV J3ICP-0135	Comments	AO
Dilution Factor	1	Sample Type	QC
Analysis Date	1/20/2022 2:56:00 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	10.36954 ppm	5.7 %	3,194 cps
Co 228.616 {447} (Axial)	0.02109 ppm	3.8 %	16 cps
Ag 328.068 {103} (Axial)	0.15776 ppm	0.7 %	487 cps
Zn 213.856 {458} (Axial)	1.00010 ppm	0.6 %	1,555 cps
Pb 220.353 {453} (Axial)	0.06002 ppm	4.0 %	8 cps
As 189.042 {478} (Axial)	0.15845 ppm	6.9 %	4 cps
Si 251.611 {134} (Axial)	4.02209 ppm	0.2 %	2,234 cps
Tl 190.856 {477} (Axial)	0.20936 ppm	2.6 %	8 cps
Se 196.090 {472} (Axial)	0.75901 ppm	1.0 %	21 cps
Al 396.152 {85} (Radial)	0.37829 ppm	8.5 %	91 cps
B 208.959 {461} (Axial)	1.97943 ppm	0.4 %	469 cps
Ba 233.527 {445} (Axial)	0.06089 ppm	0.9 %	70 cps
Ca 317.933 {106} (Radial)	3.97177 ppm	6.5 %	1,259 cps
Cd 226.502 {449} (Axial)	0.00993 ppm	3.7 %	21 cps
Cr 267.716 {126} (Axial)	0.10332 ppm	1.4 %	125 cps
Fe 261.187 {129} (Radial)	4.14730 ppm	6.8 %	260 cps
Na 589.592 {57} (Radial)	17.05857 ppm	6.0 %	8,107 cps
Y 371.030 {91} (Radial)	88.55119 %	5.4 %	17,604 cps
Be 313.042 {108} (Axial)	0.04071 ppm	0.1 %	3,976 cps
Sr 421.552 {80} (Axial)	0.20037 ppm	0.3 %	60,249 cps
Ti 323.452 {104} (Axial)	0.04007 ppm	0.9 %	475 cps
V 290.882 {116} (Axial)	0.03981 ppm	2.7 %	102 cps
Mn 257.610 {131} (Axial)	0.09977 ppm	0.3 %	1,170 cps
Mo 204.598 {465} (Axial)	0.07714 ppm	1.3 %	13 cps
Ni 221.647 {452} (Axial)	0.20135 ppm	0.9 %	178 cps
Cu 327.396 {103} (Axial)	0.20129 ppm	0.8 %	663 cps
Sb 206.833 {463} (Axial)	0.06059 ppm	9.0 %	3 cps
Y 371.030 {91} (Axial)	89.32233 %	0.2 %	280,816 cps
Y 224.306 {450} (Axial)	92.30438 %	0.2 %	4,268 cps
Mg 285.213 {118} (Radial)	2.11880 ppm	5.8 %	915 cps
Sn 189.989 {478} (Axial)	0.79378 ppm	1.1 %	53 cps
Li 670.784 {50} (Radial)	1.08697 ppm	1.1 %	11,114 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	CCB J3ICP-0136	Comments	AO
Dilution Factor	1	Sample Type	QC
Analysis Date	1/20/2022 3:00:15 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.24791 ppm	3.3 %	10 cps
Co 228.616 {447} (Axial)	-0.00016 ppm	135.5 %	2 cps
Ag 328.068 {103} (Axial)	0.00118 ppm	62.3 %	4 cps
Zn 213.856 {458} (Axial)	0.00295 ppm	19.6 %	8 cps
Pb 220.353 {453} (Axial)	-0.00040 ppm	865.0 %	0 cps
As 189.042 {478} (Axial)	0.00748 ppm	188.0 %	0 cps
Si 251.611 {134} (Axial)	0.02198 ppm	36.8 %	26 cps
Tl 190.856 {477} (Axial)	-0.00151 ppm	298.7 %	0 cps
Se 196.090 {472} (Axial)	-0.00123 ppm	1,224.9 %	0 cps
Al 396.152 {85} (Radial)	-0.01577 ppm	44.2 %	0 cps
B 208.959 {461} (Axial)	0.01258 ppm	10.5 %	4 cps
Ba 233.527 {445} (Axial)	0.00005 ppm	742.0 %	0 cps
Ca 317.933 {106} (Radial)	-0.24753 ppm	9.9 %	32 cps
Cd 226.502 {449} (Axial)	-0.00003 ppm	360.6 %	0 cps
Cr 267.716 {126} (Axial)	0.00076 ppm	138.9 %	0 cps
Fe 261.187 {129} (Radial)	0.06689 ppm	36.0 %	4 cps
Na 589.592 {57} (Radial)	0.19680 ppm	38.3 %	128 cps
Y 371.030 {91} (Radial)	92.25475 %	1.7 %	18,340 cps
Be 313.042 {108} (Axial)	0.00014 ppm	79.1 %	-6 cps
Sr 421.552 {80} (Axial)	0.00102 ppm	36.3 %	264 cps
Ti 323.452 {104} (Axial)	0.00100 ppm	69.5 %	99 cps
V 290.882 {116} (Axial)	-0.00002 ppm	7,958.7 %	27 cps
Mn 257.610 {131} (Axial)	-0.00491 ppm	6.5 %	14 cps
Mo 204.598 {465} (Axial)	0.00272 ppm	39.3 %	0 cps
Ni 221.647 {452} (Axial)	-0.00135 ppm	36.1 %	1 cps
Cu 327.396 {103} (Axial)	0.00058 ppm	250.8 %	21 cps
Sb 206.833 {463} (Axial)	0.00086 ppm	1,020.9 %	0 cps
Y 371.030 {91} (Axial)	91.99385 %	0.3 %	289,215 cps
Y 224.306 {450} (Axial)	93.98476 %	0.3 %	4,346 cps
Mg 285.213 {118} (Radial)	0.02006 ppm	34.8 %	14 cps
Sn 189.989 {478} (Axial)	-0.00493 ppm	111.5 %	0 cps
Li 670.784 {50} (Radial)	0.05960 ppm	2.5 %	4,756 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Sample	J2200629002	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 3:04:31 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.83608 ppm	7.2 %	200 cps
Co 228.616 {447} (Axial)	-0.00040 ppm	215.1 %	2 cps
Ag 328.068 {103} (Axial)	0.00024 ppm	434.3 %	1 cps
Zn 213.856 {458} (Axial)	0.01086 ppm	3.8 %	20 cps
Pb 220.353 {453} (Axial)	-0.00049 ppm	744.9 %	0 cps
As 189.042 {478} (Axial)	0.00796 ppm	110.3 %	0 cps
Si 251.611 {134} (Axial)	4.66731 ppm	0.5 %	2,623 cps
Tl 190.856 {477} (Axial)	-0.00244 ppm	272.5 %	0 cps
Se 196.090 {472} (Axial)	0.00339 ppm	279.6 %	0 cps
Al 396.152 {85} (Radial)	0.09986 ppm	17.7 %	28 cps
B 208.959 {461} (Axial)	0.01031 ppm	23.5 %	3 cps
Ba 233.527 {445} (Axial)	0.01676 ppm	4.1 %	20 cps
Ca 317.933 {106} (Radial)	22.03762 ppm	1.7 %	6,761 cps
Cd 226.502 {449} (Axial)	-0.00008 ppm	368.0 %	0 cps
Cr 267.716 {126} (Axial)	0.00317 ppm	28.5 %	3 cps
Fe 261.187 {129} (Radial)	0.08247 ppm	25.7 %	5 cps
Na 589.592 {57} (Radial)	5.27272 ppm	2.3 %	2,626 cps
Y 371.030 {91} (Radial)	91.96896 %	0.9 %	18,283 cps
Be 313.042 {108} (Axial)	0.00000 ppm	769.8 %	-19 cps
Sr 421.552 {80} (Axial)	0.04792 ppm	0.4 %	14,610 cps
Ti 323.452 {104} (Axial)	0.00275 ppm	15.1 %	115 cps
V 290.882 {116} (Axial)	0.00079 ppm	34.5 %	28 cps
Mn 257.610 {131} (Axial)	0.00635 ppm	2.1 %	140 cps
Mo 204.598 {465} (Axial)	0.00333 ppm	72.5 %	0 cps
Ni 221.647 {452} (Axial)	-0.00059 ppm	89.9 %	1 cps
Cu 327.396 {103} (Axial)	0.00039 ppm	339.0 %	20 cps
Sb 206.833 {463} (Axial)	0.00007 ppm	3,503.0 %	0 cps
Y 371.030 {91} (Axial)	90.48747 %	0.1 %	284,479 cps
Y 224.306 {450} (Axial)	92.61817 %	2.0 %	4,283 cps
Mg 285.213 {118} (Radial)	1.49275 ppm	1.7 %	673 cps
Sn 189.989 {478} (Axial)	-0.00765 ppm	29.9 %	0 cps
Li 670.784 {50} (Radial)	0.04885 ppm	8.1 %	4,690 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	J2200629003	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 3:08:51 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.78773 ppm	7.9 %	185 cps
Co 228.616 {447} (Axial)	-0.00010 ppm	301.8 %	2 cps
Ag 328.068 {103} (Axial)	0.00018 ppm	389.4 %	1 cps
Zn 213.856 {458} (Axial)	0.01539 ppm	3.0 %	27 cps
Pb 220.353 {453} (Axial)	-0.00252 ppm	170.8 %	0 cps
As 189.042 {478} (Axial)	0.01709 ppm	23.3 %	0 cps
Si 251.611 {134} (Axial)	3.31731 ppm	0.4 %	1,873 cps
Tl 190.856 {477} (Axial)	-0.00399 ppm	87.4 %	0 cps
Se 196.090 {472} (Axial)	-0.00189 ppm	597.9 %	0 cps
Al 396.152 {85} (Radial)	0.00976 ppm	260.8 %	7 cps
B 208.959 {461} (Axial)	0.01510 ppm	0.9 %	5 cps
Ba 233.527 {445} (Axial)	0.02114 ppm	3.1 %	25 cps
Ca 317.933 {106} (Radial)	22.43412 ppm	1.5 %	6,911 cps
Cd 226.502 {449} (Axial)	-0.00006 ppm	127.0 %	0 cps
Cr 267.716 {126} (Axial)	0.00029 ppm	325.4 %	0 cps
Fe 261.187 {129} (Radial)	0.06254 ppm	19.1 %	4 cps
Na 589.592 {57} (Radial)	9.14700 ppm	1.6 %	4,555 cps
Y 371.030 {91} (Radial)	92.37851 %	0.7 %	18,365 cps
Be 313.042 {108} (Axial)	-0.00002 ppm	100.1 %	-21 cps
Sr 421.552 {80} (Axial)	0.05182 ppm	0.6 %	15,829 cps
Ti 323.452 {104} (Axial)	0.00159 ppm	36.7 %	104 cps
V 290.882 {116} (Axial)	0.00011 ppm	1,757.7 %	27 cps
Mn 257.610 {131} (Axial)	0.02193 ppm	1.0 %	315 cps
Mo 204.598 {465} (Axial)	0.00326 ppm	24.3 %	0 cps
Ni 221.647 {452} (Axial)	0.00070 ppm	75.0 %	2 cps
Cu 327.396 {103} (Axial)	0.00106 ppm	88.0 %	22 cps
Sb 206.833 {463} (Axial)	-0.00214 ppm	572.0 %	0 cps
Y 371.030 {91} (Axial)	90.63221 %	0.2 %	284,934 cps
Y 224.306 {450} (Axial)	93.40436 %	0.4 %	4,319 cps
Mg 285.213 {118} (Radial)	3.05005 ppm	1.9 %	1,374 cps
Sn 189.989 {478} (Axial)	-0.00791 ppm	42.7 %	0 cps
Li 670.784 {50} (Radial)	0.04939 ppm	3.9 %	4,693 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	J2200629004	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 3:13:08 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.34197 ppm	5.8 %	41 cps
Co 228.616 {447} (Axial)	-0.00029 ppm	223.2 %	2 cps
Ag 328.068 {103} (Axial)	-0.00062 ppm	99.9 %	-2 cps
Zn 213.856 {458} (Axial)	0.01225 ppm	1.2 %	23 cps
Pb 220.353 {453} (Axial)	0.00236 ppm	86.8 %	1 cps
As 189.042 {478} (Axial)	0.00668 ppm	89.2 %	0 cps
Si 251.611 {134} (Axial)	4.83605 ppm	0.3 %	2,700 cps
Tl 190.856 {477} (Axial)	-0.00047 ppm	793.2 %	0 cps
Se 196.090 {472} (Axial)	-0.00029 ppm	8,269.1 %	0 cps
Al 396.152 {85} (Radial)	0.01061 ppm	246.3 %	7 cps
B 208.959 {461} (Axial)	0.00841 ppm	2.6 %	3 cps
Ba 233.527 {445} (Axial)	0.01384 ppm	6.5 %	17 cps
Ca 317.933 {106} (Radial)	24.54750 ppm	1.4 %	7,594 cps
Cd 226.502 {449} (Axial)	0.00006 ppm	210.4 %	0 cps
Cr 267.716 {126} (Axial)	0.00024 ppm	356.5 %	-1 cps
Fe 261.187 {129} (Radial)	0.08134 ppm	8.4 %	5 cps
Na 589.592 {57} (Radial)	1.23502 ppm	1.6 %	645 cps
Y 371.030 {91} (Radial)	92.94032 %	0.4 %	18,476 cps
Be 313.042 {108} (Axial)	-0.00002 ppm	128.2 %	-22 cps
Sr 421.552 {80} (Axial)	0.05350 ppm	0.5 %	16,215 cps
Ti 323.452 {104} (Axial)	0.00199 ppm	7.6 %	107 cps
V 290.882 {116} (Axial)	0.00110 ppm	146.0 %	28 cps
Mn 257.610 {131} (Axial)	0.03225 ppm	1.7 %	427 cps
Mo 204.598 {465} (Axial)	0.00096 ppm	128.0 %	0 cps
Ni 221.647 {452} (Axial)	0.00050 ppm	190.8 %	2 cps
Cu 327.396 {103} (Axial)	0.00066 ppm	291.0 %	21 cps
Sb 206.833 {463} (Axial)	0.00301 ppm	55.4 %	0 cps
Y 371.030 {91} (Axial)	89.92749 %	0.3 %	282,719 cps
Y 224.306 {450} (Axial)	94.04027 %	0.2 %	4,349 cps
Mg 285.213 {118} (Radial)	2.24603 ppm	0.5 %	1,020 cps
Sn 189.989 {478} (Axial)	-0.00719 ppm	90.4 %	0 cps
Li 670.784 {50} (Radial)	0.04950 ppm	0.4 %	4,694 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	J2200629004SD 5X	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 3:17:31 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.17780 ppm	14.8 %	-13 cps
Co 228.616 {447} (Axial)	-0.00040 ppm	176.3 %	2 cps
Ag 328.068 {103} (Axial)	-0.00017 ppm	132.8 %	-1 cps
Zn 213.856 {458} (Axial)	0.00219 ppm	12.8 %	7 cps
Pb 220.353 {453} (Axial)	0.00022 ppm	1,269.8 %	0 cps
As 189.042 {478} (Axial)	0.00659 ppm	223.7 %	0 cps
Si 251.611 {134} (Axial)	0.88882 ppm	9.8 %	519 cps
Tl 190.856 {477} (Axial)	-0.00530 ppm	109.8 %	-1 cps
Se 196.090 {472} (Axial)	0.00525 ppm	185.4 %	0 cps
Al 396.152 {85} (Radial)	-0.02852 ppm	45.0 %	-3 cps
B 208.959 {461} (Axial)	0.00405 ppm	36.0 %	2 cps
Ba 233.527 {445} (Axial)	0.00296 ppm	12.4 %	4 cps
Ca 317.933 {106} (Radial)	3.05803 ppm	8.9 %	1,057 cps
Cd 226.502 {449} (Axial)	-0.00019 ppm	236.9 %	-1 cps
Cr 267.716 {126} (Axial)	-0.00026 ppm	448.0 %	-1 cps
Fe 261.187 {129} (Radial)	0.02473 ppm	64.1 %	1 cps
Na 589.592 {57} (Radial)	0.10373 ppm	4.6 %	84 cps
Y 371.030 {91} (Radial)	94.09075 %	0.9 %	18,705 cps
Be 313.042 {108} (Axial)	0.00000 ppm	883.3 %	-20 cps
Sr 421.552 {80} (Axial)	0.01011 ppm	9.3 %	3,086 cps
Ti 323.452 {104} (Axial)	0.00085 ppm	57.7 %	98 cps
V 290.882 {116} (Axial)	0.00073 ppm	260.1 %	28 cps
Mn 257.610 {131} (Axial)	0.00105 ppm	76.2 %	82 cps
Mo 204.598 {465} (Axial)	0.00231 ppm	40.5 %	0 cps
Ni 221.647 {452} (Axial)	-0.00118 ppm	30.2 %	1 cps
Cu 327.396 {103} (Axial)	0.00049 ppm	127.2 %	21 cps
Sb 206.833 {463} (Axial)	-0.00190 ppm	36.6 %	0 cps
Y 371.030 {91} (Axial)	91.72819 %	1.1 %	288,380 cps
Y 224.306 {450} (Axial)	95.88077 %	0.3 %	4,434 cps
Mg 285.213 {118} (Radial)	0.29807 ppm	8.1 %	141 cps
Sn 189.989 {478} (Axial)	-0.00821 ppm	13.1 %	0 cps
Li 670.784 {50} (Radial)	0.05264 ppm	6.1 %	4,713 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	4172369	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 3:21:59 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	10.71829 ppm	1.1 %	3,484 cps
Co 228.616 {447} (Axial)	0.02156 ppm	3.8 %	17 cps
Ag 328.068 {103} (Axial)	0.16983 ppm	1.6 %	529 cps
Zn 213.856 {458} (Axial)	1.07695 ppm	0.9 %	1,694 cps
Pb 220.353 {453} (Axial)	0.06642 ppm	6.9 %	9 cps
As 189.042 {478} (Axial)	0.16913 ppm	4.7 %	4 cps
Si 251.611 {134} (Axial)	9.07045 ppm	1.3 %	5,043 cps
Tl 190.856 {477} (Axial)	0.20391 ppm	4.6 %	8 cps
Se 196.090 {472} (Axial)	0.81601 ppm	1.3 %	23 cps
Al 396.152 {85} (Radial)	0.44205 ppm	4.5 %	112 cps
B 208.959 {461} (Axial)	2.12171 ppm	0.6 %	509 cps
Ba 233.527 {445} (Axial)	0.07756 ppm	1.6 %	90 cps
Ca 317.933 {106} (Radial)	29.02523 ppm	1.8 %	8,970 cps
Cd 226.502 {449} (Axial)	0.01087 ppm	3.2 %	24 cps
Cr 267.716 {126} (Axial)	0.10969 ppm	3.4 %	134 cps
Fe 261.187 {129} (Radial)	4.12034 ppm	1.8 %	272 cps
Na 589.592 {57} (Radial)	17.98795 ppm	1.6 %	9,010 cps
Y 371.030 {91} (Radial)	93.14508 %	1.1 %	18,517 cps
Be 313.042 {108} (Axial)	0.04363 ppm	1.7 %	4,302 cps
Sr 421.552 {80} (Axial)	0.26251 ppm	1.2 %	79,569 cps
Ti 323.452 {104} (Axial)	0.04394 ppm	2.6 %	518 cps
V 290.882 {116} (Axial)	0.04361 ppm	2.7 %	110 cps
Mn 257.610 {131} (Axial)	0.14295 ppm	1.9 %	1,661 cps
Mo 204.598 {465} (Axial)	0.08508 ppm	6.3 %	15 cps
Ni 221.647 {452} (Axial)	0.21389 ppm	1.1 %	191 cps
Cu 327.396 {103} (Axial)	0.21014 ppm	1.2 %	697 cps
Sb 206.833 {463} (Axial)	0.06150 ppm	8.9 %	4 cps
Y 371.030 {91} (Axial)	90.16418 %	0.8 %	283,463 cps
Y 224.306 {450} (Axial)	93.40923 %	0.5 %	4,320 cps
Mg 285.213 {118} (Radial)	4.34980 ppm	1.4 %	1,973 cps
Sn 189.989 {478} (Axial)	0.86227 ppm	0.8 %	58 cps
Li 670.784 {50} (Radial)	1.12967 ppm	0.9 %	11,378 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	4172370	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 3:26:22 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	10.47753 ppm	1.7 %	3,365 cps
Co 228.616 {447} (Axial)	0.02113 ppm	0.9 %	16 cps
Ag 328.068 {103} (Axial)	0.16871 ppm	1.1 %	518 cps
Zn 213.856 {458} (Axial)	1.04211 ppm	0.5 %	1,632 cps
Pb 220.353 {453} (Axial)	0.06228 ppm	2.3 %	8 cps
As 189.042 {478} (Axial)	0.17014 ppm	2.0 %	4 cps
Si 251.611 {134} (Axial)	8.97695 ppm	1.1 %	4,919 cps
Tl 190.856 {477} (Axial)	0.20289 ppm	1.7 %	8 cps
Se 196.090 {472} (Axial)	0.76705 ppm	2.8 %	22 cps
Al 396.152 {85} (Radial)	0.44566 ppm	3.7 %	111 cps
B 208.959 {461} (Axial)	2.05877 ppm	0.2 %	491 cps
Ba 233.527 {445} (Axial)	0.07516 ppm	1.5 %	87 cps
Ca 317.933 {106} (Radial)	28.43210 ppm	2.2 %	8,691 cps
Cd 226.502 {449} (Axial)	0.01060 ppm	3.6 %	23 cps
Cr 267.716 {126} (Axial)	0.10712 ppm	1.1 %	128 cps
Fe 261.187 {129} (Radial)	4.08837 ppm	1.5 %	267 cps
Na 589.592 {57} (Radial)	17.82441 ppm	1.3 %	8,828 cps
Y 371.030 {91} (Radial)	92.10297 %	1.7 %	18,310 cps
Be 313.042 {108} (Axial)	0.04300 ppm	0.8 %	4,179 cps
Sr 421.552 {80} (Axial)	0.25830 ppm	0.5 %	77,167 cps
Ti 323.452 {104} (Axial)	0.04313 ppm	1.2 %	502 cps
V 290.882 {116} (Axial)	0.04363 ppm	1.3 %	108 cps
Mn 257.610 {131} (Axial)	0.14106 ppm	0.7 %	1,617 cps
Mo 204.598 {465} (Axial)	0.08175 ppm	0.9 %	14 cps
Ni 221.647 {452} (Axial)	0.20573 ppm	0.7 %	183 cps
Cu 327.396 {103} (Axial)	0.20698 ppm	0.9 %	677 cps
Sb 206.833 {463} (Axial)	0.06181 ppm	6.2 %	4 cps
Y 371.030 {91} (Axial)	88.85843 %	1.0 %	279,358 cps
Y 224.306 {450} (Axial)	92.96355 %	0.3 %	4,299 cps
Mg 285.213 {118} (Radial)	4.28940 ppm	2.3 %	1,923 cps
Sn 189.989 {478} (Axial)	0.84140 ppm	0.7 %	57 cps
Li 670.784 {50} (Radial)	1.10541 ppm	0.7 %	11,228 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	J2200629004PS	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 3:30:36 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	10.45955 ppm	1.8 %	3,362 cps
Co 228.616 {447} (Axial)	0.02111 ppm	5.1 %	16 cps
Ag 328.068 {103} (Axial)	0.16817 ppm	0.4 %	517 cps
Zn 213.856 {458} (Axial)	1.04179 ppm	0.1 %	1,624 cps
Pb 220.353 {453} (Axial)	0.06346 ppm	5.8 %	8 cps
As 189.042 {478} (Axial)	0.17927 ppm	3.2 %	4 cps
Si 251.611 {134} (Axial)	8.96379 ppm	0.2 %	4,922 cps
Tl 190.856 {477} (Axial)	0.21336 ppm	7.7 %	8 cps
Se 196.090 {472} (Axial)	0.79313 ppm	1.2 %	22 cps
Al 396.152 {85} (Radial)	0.44565 ppm	5.9 %	111 cps
B 208.959 {461} (Axial)	2.04675 ppm	0.2 %	486 cps
Ba 233.527 {445} (Axial)	0.07466 ppm	0.9 %	86 cps
Ca 317.933 {106} (Radial)	28.63500 ppm	1.9 %	8,761 cps
Cd 226.502 {449} (Axial)	0.01065 ppm	0.7 %	23 cps
Cr 267.716 {126} (Axial)	0.10631 ppm	0.4 %	128 cps
Fe 261.187 {129} (Radial)	4.13478 ppm	1.5 %	270 cps
Na 589.592 {57} (Radial)	17.91818 ppm	1.9 %	8,882 cps
Y 371.030 {91} (Radial)	92.18243 %	1.0 %	18,326 cps
Be 313.042 {108} (Axial)	0.04301 ppm	0.3 %	4,188 cps
Sr 421.552 {80} (Axial)	0.25796 ppm	0.1 %	77,220 cps
Ti 323.452 {104} (Axial)	0.04361 ppm	0.7 %	508 cps
V 290.882 {116} (Axial)	0.04261 ppm	2.9 %	106 cps
Mn 257.610 {131} (Axial)	0.13877 ppm	0.6 %	1,595 cps
Mo 204.598 {465} (Axial)	0.08532 ppm	0.9 %	15 cps
Ni 221.647 {452} (Axial)	0.20671 ppm	0.1 %	183 cps
Cu 327.396 {103} (Axial)	0.20869 ppm	0.7 %	684 cps
Sb 206.833 {463} (Axial)	0.06629 ppm	4.8 %	4 cps
Y 371.030 {91} (Axial)	89.03145 %	0.1 %	279,902 cps
Y 224.306 {450} (Axial)	92.55874 %	0.3 %	4,280 cps
Mg 285.213 {118} (Radial)	4.32233 ppm	1.9 %	1,940 cps
Sn 189.989 {478} (Axial)	0.83598 ppm	0.7 %	56 cps
Li 670.784 {50} (Radial)	1.11199 ppm	1.3 %	11,269 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	J2200629005	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 3:34:47 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.68890 ppm	8.2 %	152 cps
Co 228.616 {447} (Axial)	-0.00042 ppm	212.8 %	2 cps
Ag 328.068 {103} (Axial)	0.00172 ppm	45.8 %	5 cps
Zn 213.856 {458} (Axial)	0.01532 ppm	1.8 %	27 cps
Pb 220.353 {453} (Axial)	0.00024 ppm	1,128.6 %	0 cps
As 189.042 {478} (Axial)	0.01016 ppm	22.0 %	0 cps
Si 251.611 {134} (Axial)	5.64427 ppm	0.5 %	3,178 cps
Tl 190.856 {477} (Axial)	-0.00865 ppm	88.8 %	-1 cps
Se 196.090 {472} (Axial)	-0.00445 ppm	297.3 %	0 cps
Al 396.152 {85} (Radial)	-0.01067 ppm	103.2 %	2 cps
B 208.959 {461} (Axial)	0.01456 ppm	21.5 %	4 cps
Ba 233.527 {445} (Axial)	0.02163 ppm	0.2 %	25 cps
Ca 317.933 {106} (Radial)	17.44870 ppm	0.7 %	5,380 cps
Cd 226.502 {449} (Axial)	-0.00014 ppm	135.2 %	0 cps
Cr 267.716 {126} (Axial)	0.00114 ppm	154.3 %	1 cps
Fe 261.187 {129} (Radial)	0.10392 ppm	11.8 %	6 cps
Na 589.592 {57} (Radial)	2.40727 ppm	1.8 %	1,215 cps
Y 371.030 {91} (Radial)	91.96224 %	0.3 %	18,282 cps
Be 313.042 {108} (Axial)	0.00021 ppm	32.1 %	1 cps
Sr 421.552 {80} (Axial)	0.03949 ppm	0.7 %	12,082 cps
Ti 323.452 {104} (Axial)	0.00159 ppm	4.1 %	104 cps
V 290.882 {116} (Axial)	0.00065 ppm	244.5 %	28 cps
Mn 257.610 {131} (Axial)	0.00456 ppm	7.9 %	120 cps
Mo 204.598 {465} (Axial)	0.00056 ppm	130.5 %	0 cps
Ni 221.647 {452} (Axial)	0.00057 ppm	117.4 %	2 cps
Cu 327.396 {103} (Axial)	0.00156 ppm	29.1 %	24 cps
Sb 206.833 {463} (Axial)	-0.00826 ppm	67.7 %	0 cps
Y 371.030 {91} (Axial)	90.85655 %	0.4 %	285,640 cps
Y 224.306 {450} (Axial)	93.61679 %	0.2 %	4,329 cps
Mg 285.213 {118} (Radial)	1.86644 ppm	0.5 %	840 cps
Sn 189.989 {478} (Axial)	-0.00717 ppm	64.8 %	0 cps
Li 670.784 {50} (Radial)	0.06894 ppm	4.1 %	4,814 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	J2200629006	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 3:39:01 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.51596 ppm	7.7 %	97 cps
Co 228.616 {447} (Axial)	-0.00035 ppm	73.4 %	2 cps
Ag 328.068 {103} (Axial)	-0.00035 ppm	279.5 %	-1 cps
Zn 213.856 {458} (Axial)	0.01249 ppm	0.6 %	23 cps
Pb 220.353 {453} (Axial)	0.00147 ppm	172.5 %	1 cps
As 189.042 {478} (Axial)	0.01464 ppm	43.5 %	0 cps
Si 251.611 {134} (Axial)	4.11404 ppm	0.4 %	2,336 cps
Tl 190.856 {477} (Axial)	0.00098 ppm	727.2 %	0 cps
Se 196.090 {472} (Axial)	-0.00875 ppm	95.9 %	0 cps
Al 396.152 {85} (Radial)	-0.01106 ppm	152.4 %	2 cps
B 208.959 {461} (Axial)	0.01021 ppm	7.9 %	3 cps
Ba 233.527 {445} (Axial)	0.01773 ppm	1.4 %	21 cps
Ca 317.933 {106} (Radial)	14.62452 ppm	1.3 %	4,533 cps
Cd 226.502 {449} (Axial)	0.00004 ppm	124.3 %	0 cps
Cr 267.716 {126} (Axial)	-0.00054 ppm	140.1 %	-1 cps
Fe 261.187 {129} (Radial)	0.01973 ppm	124.6 %	1 cps
Na 589.592 {57} (Radial)	4.09864 ppm	1.4 %	2,049 cps
Y 371.030 {91} (Radial)	92.03803 %	0.9 %	18,297 cps
Be 313.042 {108} (Axial)	-0.00005 ppm	19.3 %	-25 cps
Sr 421.552 {80} (Axial)	0.03586 ppm	0.3 %	11,025 cps
Ti 323.452 {104} (Axial)	0.00106 ppm	27.6 %	99 cps
V 290.882 {116} (Axial)	-0.00107 ppm	72.5 %	25 cps
Mn 257.610 {131} (Axial)	-0.00317 ppm	4.4 %	33 cps
Mo 204.598 {465} (Axial)	0.00282 ppm	31.9 %	0 cps
Ni 221.647 {452} (Axial)	0.00042 ppm	80.0 %	2 cps
Cu 327.396 {103} (Axial)	0.00042 ppm	244.8 %	20 cps
Sb 206.833 {463} (Axial)	-0.00419 ppm	37.8 %	0 cps
Y 371.030 {91} (Axial)	91.33239 %	0.2 %	287,136 cps
Y 224.306 {450} (Axial)	93.97491 %	0.1 %	4,346 cps
Mg 285.213 {118} (Radial)	1.74050 ppm	1.2 %	784 cps
Sn 189.989 {478} (Axial)	-0.00695 ppm	77.7 %	0 cps
Li 670.784 {50} (Radial)	0.05514 ppm	8.3 %	4,729 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	J2200629007	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 3:43:15 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.78743 ppm	6.0 %	186 cps
Co 228.616 {447} (Axial)	0.00096 ppm	65.7 %	3 cps
Ag 328.068 {103} (Axial)	0.00140 ppm	104.7 %	4 cps
Zn 213.856 {458} (Axial)	0.00878 ppm	6.9 %	17 cps
Pb 220.353 {453} (Axial)	0.00138 ppm	232.7 %	1 cps
As 189.042 {478} (Axial)	0.00030 ppm	5,216.1 %	0 cps
Si 251.611 {134} (Axial)	3.37737 ppm	0.6 %	1,899 cps
Tl 190.856 {477} (Axial)	-0.00629 ppm	292.1 %	-1 cps
Se 196.090 {472} (Axial)	-0.00340 ppm	509.9 %	0 cps
Al 396.152 {85} (Radial)	0.05267 ppm	38.2 %	17 cps
B 208.959 {461} (Axial)	0.01388 ppm	16.4 %	4 cps
Ba 233.527 {445} (Axial)	0.02735 ppm	1.4 %	32 cps
Ca 317.933 {106} (Radial)	35.00557 ppm	0.6 %	10,724 cps
Cd 226.502 {449} (Axial)	-0.00009 ppm	379.3 %	0 cps
Cr 267.716 {126} (Axial)	0.00102 ppm	71.2 %	0 cps
Fe 261.187 {129} (Radial)	0.33567 ppm	8.2 %	22 cps
Na 589.592 {57} (Radial)	3.23019 ppm	0.3 %	1,632 cps
Y 371.030 {91} (Radial)	92.62448 %	0.5 %	18,414 cps
Be 313.042 {108} (Axial)	-0.00004 ppm	91.1 %	-23 cps
Sr 421.552 {80} (Axial)	0.08079 ppm	0.9 %	24,582 cps
Ti 323.452 {104} (Axial)	0.00260 ppm	6.5 %	113 cps
V 290.882 {116} (Axial)	-0.00075 ppm	184.6 %	25 cps
Mn 257.610 {131} (Axial)	0.51044 ppm	0.7 %	5,741 cps
Mo 204.598 {465} (Axial)	0.00465 ppm	61.6 %	0 cps
Ni 221.647 {452} (Axial)	-0.00051 ppm	136.0 %	1 cps
Cu 327.396 {103} (Axial)	0.00159 ppm	132.0 %	24 cps
Sb 206.833 {463} (Axial)	-0.00153 ppm	128.9 %	0 cps
Y 371.030 {91} (Axial)	90.24085 %	0.1 %	283,704 cps
Y 224.306 {450} (Axial)	93.82340 %	0.2 %	4,339 cps
Mg 285.213 {118} (Radial)	3.69533 ppm	0.8 %	1,668 cps
Sn 189.989 {478} (Axial)	-0.00824 ppm	35.8 %	0 cps
Li 670.784 {50} (Radial)	0.05668 ppm	4.3 %	4,738 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	CCV J3ICP-0135	Comments	AO
Dilution Factor	1	Sample Type	QC
Analysis Date	1/20/2022 3:47:38 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	9.83225 ppm	2.1 %	3,179 cps
Co 228.616 {447} (Axial)	0.01973 ppm	0.8 %	15 cps
Ag 328.068 {103} (Axial)	0.15589 ppm	0.4 %	487 cps
Zn 213.856 {458} (Axial)	0.99961 ppm	0.2 %	1,582 cps
Pb 220.353 {453} (Axial)	0.05845 ppm	7.6 %	8 cps
As 189.042 {478} (Axial)	0.17188 ppm	7.4 %	4 cps
Si 251.611 {134} (Axial)	3.99790 ppm	0.8 %	2,247 cps
Tl 190.856 {477} (Axial)	0.19345 ppm	4.2 %	8 cps
Se 196.090 {472} (Axial)	0.77101 ppm	1.7 %	22 cps
Al 396.152 {85} (Radial)	0.36449 ppm	7.5 %	93 cps
B 208.959 {461} (Axial)	1.98147 ppm	0.1 %	478 cps
Ba 233.527 {445} (Axial)	0.06024 ppm	1.0 %	70 cps
Ca 317.933 {106} (Radial)	3.83086 ppm	2.9 %	1,281 cps
Cd 226.502 {449} (Axial)	0.01042 ppm	1.1 %	23 cps
Cr 267.716 {126} (Axial)	0.10354 ppm	1.0 %	126 cps
Fe 261.187 {129} (Radial)	3.87043 ppm	3.0 %	255 cps
Na 589.592 {57} (Radial)	15.93003 ppm	2.4 %	7,964 cps
Y 371.030 {91} (Radial)	92.95659 %	1.0 %	18,480 cps
Be 313.042 {108} (Axial)	0.04063 ppm	1.2 %	4,015 cps
Sr 421.552 {80} (Axial)	0.19803 ppm	0.9 %	60,255 cps
Ti 323.452 {104} (Axial)	0.04016 ppm	2.1 %	482 cps
V 290.882 {116} (Axial)	0.04010 ppm	2.8 %	103 cps
Mn 257.610 {131} (Axial)	0.10148 ppm	1.4 %	1,203 cps
Mo 204.598 {465} (Axial)	0.07855 ppm	2.0 %	14 cps
Ni 221.647 {452} (Axial)	0.20076 ppm	0.1 %	181 cps
Cu 327.396 {103} (Axial)	0.20253 ppm	0.7 %	675 cps
Sb 206.833 {463} (Axial)	0.05470 ppm	2.9 %	3 cps
Y 371.030 {91} (Axial)	90.38456 %	0.4 %	284,156 cps
Y 224.306 {450} (Axial)	93.95260 %	0.2 %	4,345 cps
Mg 285.213 {118} (Radial)	1.99865 ppm	2.8 %	908 cps
Sn 189.989 {478} (Axial)	0.82016 ppm	1.7 %	56 cps
Li 670.784 {50} (Radial)	1.07049 ppm	1.3 %	11,012 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	CCB J3ICP-0136	Comments	AO
Dilution Factor	1	Sample Type	QC
Analysis Date	1/20/2022 3:51:55 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.13015 ppm	55.1 %	-28 cps
Co 228.616 {447} (Axial)	0.00020 ppm	326.6 %	2 cps
Ag 328.068 {103} (Axial)	0.00111 ppm	95.3 %	4 cps
Zn 213.856 {458} (Axial)	0.00148 ppm	10.3 %	5 cps
Pb 220.353 {453} (Axial)	-0.00276 ppm	127.8 %	0 cps
As 189.042 {478} (Axial)	-0.00023 ppm	7,052.8 %	0 cps
Si 251.611 {134} (Axial)	0.00499 ppm	58.3 %	16 cps
Tl 190.856 {477} (Axial)	0.00621 ppm	90.4 %	0 cps
Se 196.090 {472} (Axial)	-0.00188 ppm	163.0 %	0 cps
Al 396.152 {85} (Radial)	-0.02833 ppm	16.6 %	-3 cps
B 208.959 {461} (Axial)	0.00778 ppm	21.7 %	3 cps
Ba 233.527 {445} (Axial)	0.00027 ppm	27.2 %	1 cps
Ca 317.933 {106} (Radial)	-0.30682 ppm	3.1 %	13 cps
Cd 226.502 {449} (Axial)	-0.00014 ppm	37.2 %	0 cps
Cr 267.716 {126} (Axial)	0.00196 ppm	107.0 %	2 cps
Fe 261.187 {129} (Radial)	0.02961 ppm	67.7 %	2 cps
Na 589.592 {57} (Radial)	-0.01165 ppm	127.1 %	25 cps
Y 371.030 {91} (Radial)	91.89045 %	1.1 %	18,268 cps
Be 313.042 {108} (Axial)	-0.00002 ppm	222.9 %	-21 cps
Sr 421.552 {80} (Axial)	0.00013 ppm	47.9 %	-13 cps
Ti 323.452 {104} (Axial)	0.00122 ppm	41.2 %	99 cps
V 290.882 {116} (Axial)	0.00021 ppm	1,117.3 %	27 cps
Mn 257.610 {131} (Axial)	-0.00551 ppm	1.7 %	7 cps
Mo 204.598 {465} (Axial)	0.00194 ppm	86.8 %	0 cps
Ni 221.647 {452} (Axial)	-0.00100 ppm	31.1 %	1 cps
Cu 327.396 {103} (Axial)	0.00129 ppm	70.2 %	23 cps
Sb 206.833 {463} (Axial)	0.00080 ppm	583.1 %	0 cps
Y 371.030 {91} (Axial)	89.99577 %	1.1 %	282,934 cps
Y 224.306 {450} (Axial)	94.26287 %	0.2 %	4,359 cps
Mg 285.213 {118} (Radial)	-0.00420 ppm	129.5 %	3 cps
Sn 189.989 {478} (Axial)	-0.00271 ppm	36.7 %	0 cps
Li 670.784 {50} (Radial)	0.06556 ppm	1.9 %	4,793 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	J2200629008	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 3:56:20 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.36674 ppm	16.6 %	49 cps
Co 228.616 {447} (Axial)	-0.00057 ppm	59.3 %	1 cps
Ag 328.068 {103} (Axial)	0.00029 ppm	140.1 %	1 cps
Zn 213.856 {458} (Axial)	0.02225 ppm	0.4 %	38 cps
Pb 220.353 {453} (Axial)	0.00157 ppm	108.4 %	1 cps
As 189.042 {478} (Axial)	0.00939 ppm	154.1 %	0 cps
Si 251.611 {134} (Axial)	4.74136 ppm	0.8 %	2,690 cps
Tl 190.856 {477} (Axial)	-0.00811 ppm	51.5 %	-1 cps
Se 196.090 {472} (Axial)	0.01213 ppm	47.8 %	1 cps
Al 396.152 {85} (Radial)	0.00674 ppm	180.7 %	6 cps
B 208.959 {461} (Axial)	0.00939 ppm	12.4 %	3 cps
Ba 233.527 {445} (Axial)	0.01325 ppm	1.2 %	16 cps
Ca 317.933 {106} (Radial)	5.60831 ppm	2.1 %	1,833 cps
Cd 226.502 {449} (Axial)	-0.00012 ppm	129.2 %	0 cps
Cr 267.716 {126} (Axial)	-0.00058 ppm	64.9 %	-2 cps
Fe 261.187 {129} (Radial)	0.05242 ppm	25.1 %	3 cps
Na 589.592 {57} (Radial)	0.72452 ppm	2.0 %	393 cps
Y 371.030 {91} (Radial)	93.32627 %	0.9 %	18,553 cps
Be 313.042 {108} (Axial)	-0.00001 ppm	400.8 %	-21 cps
Sr 421.552 {80} (Axial)	0.01414 ppm	1.1 %	4,319 cps
Ti 323.452 {104} (Axial)	0.00175 ppm	7.6 %	106 cps
V 290.882 {116} (Axial)	-0.00046 ppm	237.7 %	26 cps
Mn 257.610 {131} (Axial)	0.01363 ppm	1.6 %	223 cps
Mo 204.598 {465} (Axial)	0.00141 ppm	97.3 %	0 cps
Ni 221.647 {452} (Axial)	-0.00034 ppm	142.3 %	1 cps
Cu 327.396 {103} (Axial)	0.00192 ppm	88.4 %	25 cps
Sb 206.833 {463} (Axial)	0.00396 ppm	96.0 %	0 cps
Y 371.030 {91} (Axial)	91.37335 %	0.2 %	287,264 cps
Y 224.306 {450} (Axial)	94.16822 %	0.2 %	4,355 cps
Mg 285.213 {118} (Radial)	0.70114 ppm	2.1 %	323 cps
Sn 189.989 {478} (Axial)	-0.00769 ppm	122.5 %	0 cps
Li 670.784 {50} (Radial)	0.05730 ppm	2.4 %	4,742 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Sample	J2200629009	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 4:00:38 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.33170 ppm	3.6 %	38 cps
Co 228.616 {447} (Axial)	-0.00002 ppm	4,602.1 %	2 cps
Ag 328.068 {103} (Axial)	0.00075 ppm	110.4 %	2 cps
Zn 213.856 {458} (Axial)	0.01373 ppm	2.8 %	25 cps
Pb 220.353 {453} (Axial)	-0.00133 ppm	276.7 %	0 cps
As 189.042 {478} (Axial)	0.00552 ppm	141.7 %	0 cps
Si 251.611 {134} (Axial)	4.60811 ppm	0.4 %	2,658 cps
Tl 190.856 {477} (Axial)	-0.00709 ppm	7.8 %	-1 cps
Se 196.090 {472} (Axial)	0.01213 ppm	166.4 %	1 cps
Al 396.152 {85} (Radial)	-0.00046 ppm	5,903.6 %	4 cps
B 208.959 {461} (Axial)	0.00727 ppm	38.8 %	3 cps
Ba 233.527 {445} (Axial)	0.01273 ppm	2.1 %	15 cps
Ca 317.933 {106} (Radial)	5.61113 ppm	4.5 %	1,865 cps
Cd 226.502 {449} (Axial)	-0.00025 ppm	61.4 %	-1 cps
Cr 267.716 {126} (Axial)	-0.00062 ppm	441.8 %	-2 cps
Fe 261.187 {129} (Radial)	0.07296 ppm	17.7 %	5 cps
Na 589.592 {57} (Radial)	0.66125 ppm	4.2 %	368 cps
Y 371.030 {91} (Radial)	94.99747 %	2.3 %	18,885 cps
Be 313.042 {108} (Axial)	-0.00002 ppm	231.7 %	-22 cps
Sr 421.552 {80} (Axial)	0.01403 ppm	0.2 %	4,356 cps
Ti 323.452 {104} (Axial)	0.00212 ppm	11.0 %	112 cps
V 290.882 {116} (Axial)	0.00001 ppm	11,956.1 %	27 cps
Mn 257.610 {131} (Axial)	0.01347 ppm	2.1 %	225 cps
Mo 204.598 {465} (Axial)	0.00163 ppm	87.6 %	0 cps
Ni 221.647 {452} (Axial)	-0.00068 ppm	109.5 %	1 cps
Cu 327.396 {103} (Axial)	0.00131 ppm	114.9 %	24 cps
Sb 206.833 {463} (Axial)	-0.00195 ppm	135.3 %	0 cps
Y 371.030 {91} (Axial)	92.86273 %	0.3 %	291,947 cps
Y 224.306 {450} (Axial)	95.59934 %	0.4 %	4,421 cps
Mg 285.213 {118} (Radial)	0.67464 ppm	4.4 %	317 cps
Sn 189.989 {478} (Axial)	-0.00406 ppm	122.6 %	0 cps
Li 670.784 {50} (Radial)	0.05685 ppm	6.0 %	4,739 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	J2200629010	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 4:04:57 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.13602 ppm	12.8 %	-26 cps
Co 228.616 {447} (Axial)	-0.00021 ppm	315.6 %	2 cps
Ag 328.068 {103} (Axial)	0.00017 ppm	276.6 %	1 cps
Zn 213.856 {458} (Axial)	0.00446 ppm	3.2 %	10 cps
Pb 220.353 {453} (Axial)	0.00007 ppm	4,412.7 %	0 cps
As 189.042 {478} (Axial)	0.01362 ppm	91.2 %	0 cps
Si 251.611 {134} (Axial)	0.02849 ppm	23.7 %	29 cps
Tl 190.856 {477} (Axial)	-0.00239 ppm	543.4 %	0 cps
Se 196.090 {472} (Axial)	-0.00761 ppm	14.2 %	0 cps
Al 396.152 {85} (Radial)	-0.03257 ppm	18.4 %	-4 cps
B 208.959 {461} (Axial)	0.00521 ppm	5.4 %	2 cps
Ba 233.527 {445} (Axial)	-0.00034 ppm	81.3 %	0 cps
Ca 317.933 {106} (Radial)	-0.23770 ppm	3.3 %	34 cps
Cd 226.502 {449} (Axial)	-0.00043 ppm	60.5 %	-1 cps
Cr 267.716 {126} (Axial)	0.00068 ppm	104.4 %	0 cps
Fe 261.187 {129} (Radial)	0.02505 ppm	97.5 %	1 cps
Na 589.592 {57} (Radial)	-0.02196 ppm	125.6 %	20 cps
Y 371.030 {91} (Radial)	91.65666 %	1.8 %	18,221 cps
Be 313.042 {108} (Axial)	-0.00003 ppm	96.4 %	-22 cps
Sr 421.552 {80} (Axial)	-0.00001 ppm	281.1 %	-56 cps
Ti 323.452 {104} (Axial)	0.00117 ppm	19.4 %	101 cps
V 290.882 {116} (Axial)	-0.00118 ppm	12.1 %	24 cps
Mn 257.610 {131} (Axial)	0.01342 ppm	1.8 %	221 cps
Mo 204.598 {465} (Axial)	0.00160 ppm	158.9 %	0 cps
Ni 221.647 {452} (Axial)	-0.00167 ppm	65.8 %	0 cps
Cu 327.396 {103} (Axial)	0.00030 ppm	453.2 %	20 cps
Sb 206.833 {463} (Axial)	-0.00443 ppm	56.4 %	0 cps
Y 371.030 {91} (Axial)	91.43537 %	0.3 %	287,459 cps
Y 224.306 {450} (Axial)	93.57460 %	0.4 %	4,327 cps
Mg 285.213 {118} (Radial)	0.00335 ppm	161.4 %	6 cps
Sn 189.989 {478} (Axial)	-0.00877 ppm	16.4 %	0 cps
Li 670.784 {50} (Radial)	0.05742 ppm	9.6 %	4,743 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	J2200629011	Comments	AO 1684
Dilution Factor	1	Sample Type	UNKNOWN
Analysis Date	1/20/2022 4:09:14 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	2.14074 ppm	2.8 %	637 cps
Co 228.616 {447} (Axial)	0.00182 ppm	79.7 %	3 cps
Ag 328.068 {103} (Axial)	0.00082 ppm	55.9 %	3 cps
Zn 213.856 {458} (Axial)	0.01233 ppm	1.7 %	23 cps
Pb 220.353 {453} (Axial)	0.00246 ppm	237.2 %	1 cps
As 189.042 {478} (Axial)	0.00344 ppm	173.5 %	0 cps
Si 251.611 {134} (Axial)	4.36201 ppm	1.2 %	2,470 cps
Tl 190.856 {477} (Axial)	-0.00036 ppm	2,889.0 %	0 cps
Se 196.090 {472} (Axial)	-0.00191 ppm	955.1 %	0 cps
Al 396.152 {85} (Radial)	0.14206 ppm	8.2 %	39 cps
B 208.959 {461} (Axial)	0.00799 ppm	3.9 %	3 cps
Ba 233.527 {445} (Axial)	0.02413 ppm	1.1 %	29 cps
Ca 317.933 {106} (Radial)	22.53774 ppm	4.6 %	7,066 cps
Cd 226.502 {449} (Axial)	-0.00011 ppm	143.0 %	0 cps
Cr 267.716 {126} (Axial)	0.00049 ppm	237.2 %	0 cps
Fe 261.187 {129} (Radial)	0.48515 ppm	1.8 %	32 cps
Na 589.592 {57} (Radial)	3.28357 ppm	4.3 %	1,683 cps
Y 371.030 {91} (Radial)	94.11644 %	3.2 %	18,710 cps
Be 313.042 {108} (Axial)	-0.00001 ppm	422.9 %	-20 cps
Sr 421.552 {80} (Axial)	0.05265 ppm	1.2 %	16,171 cps
Ti 323.452 {104} (Axial)	0.00595 ppm	36.8 %	148 cps
V 290.882 {116} (Axial)	0.00129 ppm	27.2 %	29 cps
Mn 257.610 {131} (Axial)	0.27573 ppm	1.1 %	3,171 cps
Mo 204.598 {465} (Axial)	0.00200 ppm	98.7 %	0 cps
Ni 221.647 {452} (Axial)	-0.00033 ppm	192.8 %	1 cps
Cu 327.396 {103} (Axial)	0.00035 ppm	375.3 %	20 cps
Sb 206.833 {463} (Axial)	-0.00216 ppm	461.3 %	0 cps
Y 371.030 {91} (Axial)	91.14179 %	0.3 %	286,536 cps
Y 224.306 {450} (Axial)	95.09509 %	0.6 %	4,397 cps
Mg 285.213 {118} (Radial)	2.27988 ppm	4.5 %	1,047 cps
Sn 189.989 {478} (Axial)	-0.00909 ppm	48.8 %	0 cps
Li 670.784 {50} (Radial)	0.05889 ppm	4.5 %	4,752 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	CCV J3ICP-0135	Comments	AO
Dilution Factor	1	Sample Type	QC
Analysis Date	1/20/2022 4:39:31 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	10.02078 ppm	0.5 %	3,092 cps
Co 228.616 {447} (Axial)	0.02049 ppm	4.7 %	16 cps
Ag 328.068 {103} (Axial)	0.15518 ppm	0.9 %	472 cps
Zn 213.856 {458} (Axial)	0.98858 ppm	0.1 %	1,523 cps
Pb 220.353 {453} (Axial)	0.06412 ppm	6.8 %	8 cps
As 189.042 {478} (Axial)	0.15285 ppm	12.3 %	3 cps
Si 251.611 {134} (Axial)	4.05375 ppm	0.4 %	2,220 cps
Tl 190.856 {477} (Axial)	0.20333 ppm	1.6 %	8 cps
Se 196.090 {472} (Axial)	0.75227 ppm	2.7 %	21 cps
Al 396.152 {85} (Radial)	0.38927 ppm	6.8 %	94 cps
B 208.959 {461} (Axial)	1.93960 ppm	0.2 %	455 cps
Ba 233.527 {445} (Axial)	0.05959 ppm	0.4 %	68 cps
Ca 317.933 {106} (Radial)	5.58857 ppm	7.5 %	1,734 cps
Cd 226.502 {449} (Axial)	0.01005 ppm	2.1 %	21 cps
Cr 267.716 {126} (Axial)	0.10289 ppm	0.4 %	122 cps
Fe 261.187 {129} (Radial)	3.96771 ppm	1.4 %	249 cps
Na 589.592 {57} (Radial)	17.47516 ppm	1.6 %	8,330 cps
Y 371.030 {91} (Radial)	88.63612 %	0.5 %	17,621 cps
Be 313.042 {108} (Axial)	0.04058 ppm	0.2 %	3,909 cps
Sr 421.552 {80} (Axial)	0.20064 ppm	0.3 %	59,498 cps
Ti 323.452 {104} (Axial)	0.04079 ppm	0.4 %	476 cps
V 290.882 {116} (Axial)	0.03832 ppm	3.6 %	97 cps
Mn 257.610 {131} (Axial)	0.09925 ppm	0.2 %	1,148 cps
Mo 204.598 {465} (Axial)	0.07946 ppm	1.4 %	14 cps
Ni 221.647 {452} (Axial)	0.19900 ppm	0.5 %	174 cps
Cu 327.396 {103} (Axial)	0.20166 ppm	1.6 %	655 cps
Sb 206.833 {463} (Axial)	0.05490 ppm	12.0 %	3 cps
Y 371.030 {91} (Axial)	88.08786 %	0.4 %	276,935 cps
Y 224.306 {450} (Axial)	91.42385 %	0.1 %	4,228 cps
Mg 285.213 {118} (Radial)	2.15030 ppm	1.1 %	931 cps
Sn 189.989 {478} (Axial)	0.80034 ppm	0.9 %	53 cps
Li 670.784 {50} (Radial)	1.04873 ppm	0.8 %	10,877 cps

200.7 6010B (Concentration)

1/21/2022 8:59:49 AM
Instrument ID: J3A
Method: 200.7/6010B,C,D

Advanced Environmental Laboratories, Inc.

Sample	CCB J3ICP-0136	Comments	AO
Dilution Factor	1	Sample Type	QC
Analysis Date	1/20/2022 4:43:46 PM		

LabBook 220120A2.imexp Instruments iCAP OES, ASX-560

LabBook summary

Acquired by	LAB-AELLAB\Jax-uICP2	Date	1/20/2022 2:25:43 PM
Last changed by	LAB-AELLAB\Jax-uICP2	Date	1/21/2022 8:40:54 AM
Configuration	iCAP ASX 560	Template	210806A-WATERS

Analyte List	Concentration average	Concentration RSD	Intensity average
K 766.490 {44} (Radial)	0.13786 ppm	22.1 %	-25 cps
Co 228.616 {447} (Axial)	-0.00011 ppm	392.9 %	2 cps
Ag 328.068 {103} (Axial)	0.00043 ppm	124.1 %	1 cps
Zn 213.856 {458} (Axial)	0.00156 ppm	5.9 %	6 cps
Pb 220.353 {453} (Axial)	-0.00241 ppm	143.6 %	0 cps
As 189.042 {478} (Axial)	0.01174 ppm	91.4 %	0 cps
Si 251.611 {134} (Axial)	0.00359 ppm	31.7 %	15 cps
Tl 190.856 {477} (Axial)	-0.00055 ppm	209.9 %	0 cps
Se 196.090 {472} (Axial)	0.00472 ppm	156.7 %	0 cps
Al 396.152 {85} (Radial)	-0.02219 ppm	111.3 %	-1 cps
B 208.959 {461} (Axial)	0.00945 ppm	6.6 %	3 cps
Ba 233.527 {445} (Axial)	0.00012 ppm	14.6 %	1 cps
Ca 317.933 {106} (Radial)	-0.30160 ppm	2.1 %	15 cps
Cd 226.502 {449} (Axial)	-0.00026 ppm	42.2 %	-1 cps
Cr 267.716 {126} (Axial)	0.00033 ppm	616.6 %	0 cps
Fe 261.187 {129} (Radial)	0.01259 ppm	215.9 %	0 cps
Na 589.592 {57} (Radial)	0.01333 ppm	76.7 %	36 cps
Y 371.030 {91} (Radial)	89.03182 %	0.4 %	17,699 cps
Be 313.042 {108} (Axial)	0.00000 ppm	920.3 %	-19 cps
Sr 421.552 {80} (Axial)	0.00009 ppm	50.0 %	-28 cps
Ti 323.452 {104} (Axial)	0.00135 ppm	16.1 %	101 cps
V 290.882 {116} (Axial)	-0.00103 ppm	160.7 %	24 cps
Mn 257.610 {131} (Axial)	-0.00542 ppm	3.1 %	8 cps
Mo 204.598 {465} (Axial)	0.00084 ppm	148.8 %	0 cps
Ni 221.647 {452} (Axial)	-0.00131 ppm	26.8 %	1 cps
Cu 327.396 {103} (Axial)	-0.00096 ppm	110.4 %	16 cps
Sb 206.833 {463} (Axial)	-0.00454 ppm	146.5 %	0 cps
Y 371.030 {91} (Axial)	90.03229 %	0.4 %	283,048 cps
Y 224.306 {450} (Axial)	93.07154 %	0.1 %	4,304 cps
Mg 285.213 {118} (Radial)	-0.00282 ppm	50.4 %	3 cps
Sn 189.989 {478} (Axial)	-0.00660 ppm	48.4 %	0 cps
Li 670.784 {50} (Radial)	0.06754 ppm	3.4 %	4,806 cps

Metals Digestion Log for ICP

Prep Method	
E200.7	
SW3010A	X
SW3050A	
SW3005A	

Matrix	
Water	X
Soil	
TCLP	
SPLP	

								ID
				Vol(mL)	Vol(mL)	Vol(mL)	Digestion Tubes	JM3-9Q5d
Date	1/17/2022	Reagent/Standard	ID	Soils	Waters	3005A	Filters	NA
Time	10 15	HNO3	JM3-10F2b	7.5	1.5+2.5	1	Pipetter	M27
Analyst	AO	HCL	JM3-9G4c	5	2.5	2.5	Teflon Chips (Soil)	NA
Digestion Batch	2716	H2O2	NA	3	NA	NA	Balance (Soil)	NA
Digestion HBN	74186	Soil Spike A	NA	0.25	NA	NA	Hot Block	J3P
Analysis Batch		Soil Spike B	NA	0.25	NA	NA	Thermometer	11614
Analysis HBN		Soil Spike c	NA	0.25	NA	NA	Timer	T8922
Cap ID***	2716	Water Spike A	JM3-9J1	NA	0.25	0.25		
Block Temperature	95	Water Spike B	JM3-9K1	NA	0.25	0.25		

Acceptance Criteria 90-95°C

Start Time (1):	10 15	Stop Time (1):	14 40
Start Time (2):	14 42	Stop Time (2):	14 57
Start Time (3):	15 00	Stop Time (3):	15 15

DOD Prep Batch	X

AEL Lab Code #	Bottle Letter**	Initial Amount (g,mL)	Final Vol (mL)	Digestion Comments	Analyst Comments Qualifiers	Filtered
MB	N/A	50	50	4172367		N
LCS	N/A	50	50	4172368		N
J2200629002	F	50	50			N
J2200629003	F	50	50	4172369		N
J2200629004	F	50	50	4172370		N
J2200629004 MS	F	50	50			N
J2200629004 MSD	F	50	50			N
J2200629005	F	50	50			N
J2200629006	F	50	50			N
J2200629007	F	50	50			N
J2200629008	F	50	50			N
J2200629009	F	50	50			N
J2200629010	F	50	50			N
J2200629011	F	50	50			N
J2200709002	D	50	50			N

* pH checked in log in

**A Dash indicates there is only one container and therefore has no letter designation

*** Metals Dept. Tracking System for locating boxed sample digestions.

DCN: MET-D063

Eff: 10/12/2018; Rev: 4/29/2020

Last Page of Report

APPENDIX C

2022 PRE-DESIGN SAMPLING EVENT DATA VALIDATION PACKAGE

This page intentionally left blank.

ECC Data Review Worksheet **QAPP Metals 6020A/6010C**
Project: Redstone Arsenal **Review Criteria: RSA Site SAP**

Data Validation Level	Matrix	Preservation	Temperature Sample Receipt	Laboratory	SDG Number
Tier I+	Groundwater (GW)	HNO_3	3.0 ºC	AEL Jacksonville, FL	J2200629

FIELD IDENTIFICATION OF SAMPLES EVALUATED:

Field Identification (ID)	Sample Date	Laboratory (lab) Sample Number
263-1907-ACC3042	01/10/22	J2200629002
263-1903-ACC3037	01/10/22	J2200629003
263-2388-ACC3044	01/10/22	J2200629004
263-2389-ACC3046	01/10/22	J2200629005
263-1908-ACC3043	01/10/22	J2200629006
263-1905-ACC3039	01/10/22	J2200629007
263-1906-ACC3040	01/10/22	J2200629008
263-1906-ACC3041-FD	01/10/22	J2200629009
263-ACC8001-ER	01/10/22	J2200629010
263-ACC9001	01/10/22	J22006290011

Note: Samples are described below in the data worksheets by reference to the last three digits of the Lab Sample Number or field ID. Only Al, Fe, and Mn reported.

REVIEW ITEMS	ACCEPTANCE CRITERIA	SAMPLES AFFECTED Narrative	Inven-tory	QUAL	BIAS
COC	Unbroken custody (accept or if broken R) Temp≤6° (Soil-J detects, R –non-detects Preserved per method (amber bottles, temperature. J, UJ, or R (function of HT and compound)	Cooler temperature < 6 ºC. Sample custody transferred from Field Team Leader to lab sample custodian. Unbroken Chain of Custody. Sample preservation within limits. No samples qualified.	X	-	
Holding Time	180 days (6010/6020), Hg 28 Days to analysis J –detects, UJ or R –non-detects (function of time)	All samples analyzed within holding times. No samples qualified.	X	-	
Field Dup RPD	RPD ≤ 30% water for (50% solids) Results > X PQL (FD pair only) J-detects (both > X PQL) If one >X PQL, other ND, J-detections, UJ non-detect	Primary Sample Field Duplicate -008 -009 FD RPD = 0% for all metals except Mn. See table below.	X	-	
% Solids Check (SOLIDS)	30%<Solids: if no sample weight adjustment made <10% R entire sample 10%.> and <30%; J-detects, NDs –R	Not collected/analyzed with this SDG.	-	-	
Results > Cal Range or <Cal Range	>Upper Cal Range J-detects - ensure instrument blank performed <LOQ but >DL – J –detects (estimated)	Results that were < LOQ but > DL were qualified J.	X	Results < LOQ but > DL qualified J.	
Lab Blanks (method	No target compounds > ½ LOQ No analytes detected > 1/2 RL and > 1/10 the	All method blanks were within MPC for all metal methods.	X	-	

REVIEW ITEMS	ACCEPTANCE CRITERIA	SAMPLES AFFECTED Narrative	Inven-tory	QUAL	BIAS
blank or preparation blank)	amount measured in any sample or 1/10 the regulatory limit (whichever is greater). For common laboratory contaminants, no analytes detected > RL and > 1/10 the amount measured in any sample or 1/10 the regulatory limit (whichever is greater). Blank result must not otherwise affect sample results.				
LCS Recovery	Lab limits as Measurement Performance Criteria (MPC) >UCL% J detects <LCL% J detects, and UJ NDs.	All LCS %R's were within MPC for all metal methods.	X	-	
LCS/LCSD RPD	Lab limits as MPC RPD<20%	Not collected/analyzed with this SDG.	-	-	
MS Recovery	Lab limits as MPC >UCL% J detects <LCL% J detects, and UJ NDs.	Native Sample 004 All MS recoveries within MPC for method 6020A and 6010C.	X	-	
MS/MSD RPD	Lab limits as MPC MS/MSD RPD<20%	Native Sample 004 All MS RPDs within MPC for method 6020A and 6010C.	X	-	
Laboratory Replicate RPD	Lab limits as MPC RPD < 20%	Not analyzed/collected for this SDG.	-	-	
Internal Standard	Lab limits as MPC 70-130%	All internal standard results in limits.	X	-	
Sensitivity	Sample results will be reported to the detection limit (DL) Sample Results that are < LOQ, but >DL, will be reported as J Dilution factors for samples – impacts to sensitivity	Dilution factor = 1x for Mn except sample -007 and -011 at 10x.	X	-	
Equip Blank	Detections < LOQ No analytes detected > 1/2 RL and > 1/10 the amount measured in any sample or 1/10 the regulatory limit (whichever is greater). For common laboratory contaminants, no analytes detected > RL and > 1/10 the amount measured in any sample or 1/10 the regulatory limit (whichever is greater). Blank result must not otherwise affect sample results.	EB (sample 10) was ND for all metals.	X	-	
Initial Cal Multipoint	Lab limits as MPC Daily initial calibration prior to sample analysis r > 0.995	All calibrations within MPC limits.	X	-	
Low Level Calibration Check	Lab limits as MPC Daily, after one-point ICAL. Within + 20% of true value. %R 80-120%	All methods in MPC limits.	X	-	
Tune Check (6020)	Method SOP	Within limits.	X	-	
Initial Calibration Blanks (ICB)	Lab limits as MPC Ical blank after Ical No analytes detected > LOD Apply U-flag to analytes detected in field samples < 5X blank contamination.	ICB results were non-detect.	X	-	

REVIEW ITEMS	ACCEPTANCE CRITERIA	SAMPLES AFFECTED Narrative	Inven-tory	QUAL	BIAS
Continuing Calibration Blanks (CCB)	Lab limits as MPC CCB every 10 samples end of run No analytes detected > LOD Apply U-flag to analytes detected in field samples < 5X blank contamination.	CCB results were non-detect.	X	-	
Serial Dilution	Lab limits as MPC once per digestion batch %D<10% %D not evaluated if element results is <50X IDL (<LOD) J detects, UJ non-detects.	Native Sample 004 All within limits.	X	-	
Inter-element checks ICS-A, ICS-AB Instrument performance check	Lab limits as MPC ICS-A: Absolute value of concentration for all nonspiked analytes < LOD (unless they are a verified trace impurity from one of the spiked analytes). ICSAB: Within + 20% of expected value.	ICS-A %R's within MPC.	X	-	
2nd Source ICV	Lab limits as MPC Once after each initial calibration, prior to sample analysis 90- 110% Recovery	ICV results within limits all metals.	X	-	
CCV	Lab limits as MPC every 10 samples and end of run 90- 110% Recovery	CCV results were within limits all metals.	X	-	
Post Digestion Spike	Lab limits as MPC Analyze if MS >MPC 75-125%R	Native Sample 004 All recoveries within MPC for method 6020A and 6010C.	X	-	
Overall Evaluation of Data	Appropriate method Evaluate any analytical problems Evaluate sampling errors – field contamination, sample hold times	<u>Analytical Error Evaluation:</u> The laboratory accuracy is acceptable. Method Blanks were within limits. ICB was ND. CCB was ND. LCS %R were within limits. MS %R were within limits. RPD within limits. Low level calibration was within limits. IS within limits. PDS within limits. ICAL: per method. ICV: in limits. CCV: in limits. Primary Sample Field Duplicate -008 -009 FD RPD = 0% for all metals except Mn. See table below. No qualifications needed. EB within limits.	X	-	

Completeness Check: Inventory Check Sheet___X_Sample Quantitation Calculations (TIER III DATA VALIDATION ONLY):

Field Duplicate Table

Sample ID	Compound	Result	Qual	Sample ID	Compound	Result	Qual	% RPD
J2200629008	Mn	20		J2200629009	Mn	17		16.2

Project Role	Name	Signature	Date
Data Validator	Courtney Bigelow	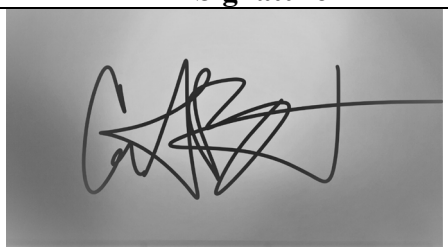	2/25/22
Chemistry QA Manager	Jackson Kiker	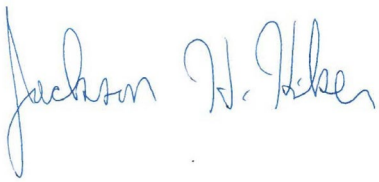	25 Mar 2022

ECC Region 9 Data Review Worksheet **SVOCs Method SW846 8270D/SIM**
Project: Redstone Arsenal **Review Criteria: RSA Site SAP**

Data Validation Level	Matrix	Preservation	Temp Sample Receipt	Laboratory	SDG Number
Tier I+	Groundwater (GW)	None	3.0ºC	AEL Jacksonville, FL	J2200629

Field Identification and Laboratory Number of Samples Evaluated:

Field Identification (ID)	Sample Date	Laboratory (lab) Sample Number
263-1907-ACC3042	01/10/22	J2200629002
263-1903-ACC3037	01/10/22	J2200629003
263-2388-ACC3044	01/10/22	J2200629004
263-2389-ACC3046	01/10/22	J2200629005
263-1908-ACC3043	01/10/22	J2200629006
263-1905-ACC3039	01/10/22	J2200629007
263-1906-ACC3040	01/10/22	J2200629008
263-1906-ACC3041-FD	01/10/22	J2200629009
263-ACC8001-ER	01/10/22	J2200629010
263-ACC9001	01/10/22	J22006290011

Note: Samples are described below in the data worksheets by reference to the last few digits of the Lab Sample Number. Only benzo(a)anthracene reported.

REVIEW ITEMS	ACCEPTANCE CRITERIA	SAMPLES AFFECTED/RATIONALE	INVENT-ORY	QUAL	BIAS
Chain of Custody (COC)	Unbroken custody (accept or if broken Reject [R]) Temp≤6°C (degrees Celsius) Soil-J detects, R-nondetects (ND) preserved per method (amber bottles, temperature) (J, UJ, or R (function of hold time and compound)	Cooler temperatures < 6 ºC. Sample preservation adequate. Sample custody transferred from Field Team Leader to lab sample custodian. Unbroken COC. No samples qualified.	X	-	
Holding Time (HT)	7 days to extract - 40 days to analyze J –detects, UJ or R – flag/NDs to samples >2x HT criteria	All reported samples analyzed within holding time.	X	-	
% Solids Check (SOLIDS)	30 percent (%) < Solids: if no sample weight adjustment made. <10% R entire sample 10%.> and <30%; J-detects, R-NDs	Not analyzed (NA)/collected with this sample data group (SDG).	-	-	
Equipment Blank (EB) and Ambient Blank (AB)	Detections greater than 5X the blank results are not qualified. Detections less than 5X the blank level are qualified as non-detect.	EB (sample 10) was ND.	X	-	
Results > Cal Range or <Cal Range	>Upper Calibration (Cal) Range J-detects - ensure instrument blank performed <LOQ but >detection limit (DL)– J –detects (estimated) listed on data summary sheet. Data reported down to detection limit (DL) but ND (U) set at limit of detection (LOD)/or MRL.	All results were ND	X	-	

REVIEW ITEMS	ACCEPTANCE CRITERIA	SAMPLES AFFECTED/RATIONALE	INVENT-ORY	QUAL	BIAS
Surrogates	See Quality Assurance Project Plan (QAPP) Appendix I and Worksheet #12 >UCL% J detects <LCL% J detects, and UJ NDs.	Surrogate recovery within Measurement Performance Criteria (MPC) limits.	X	-	
Lab Blanks (method blanks)	No target compounds > ½ LOQ No analytes detected > 1/2 RL and > 1/10 the amount measured in any sample or 1/10 the regulatory limit (whichever is greater). For common laboratory contaminants, no analytes detected > RL and > 1/10 the amount measured in any sample or 1/10 the regulatory limit (whichever is greater). Blank result must not otherwise affect sample results.	Associated method blanks were non-detect	X	-	
Laboratory Control Sample (LCS) Recovery	See QAPP Appendix I and Worksheet #12 >UCL% J detects <LCL% J detects, and UJ NDs.	All LCS recoveries within MPC limits.	X	-	
LCS/LCSD Relative Percent Difference (RPD)	<30% QAPP	Not collected/analyzed with this SDG	-	-	
Matrix Spike/Matrix Spike Duplicate (MS/MSD) Recovery	See QAPP Appendix I and Worksheet #12 >UCL% J detects <LCL% J detects, and UJ NDs.	Native Sample 004 All MS recoveries within limits.	X	-	
MS/MSD RPD	RPD ≤30% (when MS >LOQ) J –detects in MS sample UJ- NDs * recalculate RPD	Native Sample 004 All RPD recoveries within limits.	X	-	
Laboratory Duplicate	RPD < 30%	Not collected/analyzed with this SDG	-	-	
Field Duplicate RPD	RPD ≤ 30% aq. ≤ 50 soil for Results > project quantitation limit (PQL) (FD pair only) J-detects (both > PQL) If one >PQL, other ND, J-detections, UJ non-detect Other conditions use judgment Determine RPD for detects only. *Recalculate the concentrations for one compound and the PQL	Primary Sample Field Duplicate -008 -009 FD RPD = 0% for benzo[a]anthracene.	X	-	
Internal standards (IS)	Retention time ± 30 seconds from retention time of the midpoint standard in the CV Extracted ion current profile (EICP) area within - 50% to + 100% of ICAL midpoint standard relative retention time (RRT) <0.06 (30 seconds [sec])	IS within limits.	X	-	
Sensitivity	Sample results will be reported to the detection limit (DL) Sample Results that are < LOQ, but >DL, will be reported as J Dilution factors for samples – impacts to sensitivity	All samples analyzed at 1x dilution. Analytical sensitivity meets project objectives.	X	-	
Tune check	ion abundance with method limits	Tunes were within MPC limits. No sample qualifications.	X	-	

REVIEW ITEMS	ACCEPTANCE CRITERIA	SAMPLES AFFECTED/RATIONALE	INVENT-ORY	QUAL	BIAS
	every 12 hours *check for co-elution /proper background subtraction *compare reported data to raw data				
Initial Cal Multipoint (instrument evaluation)	correct calibration standards (stds) within 12 hours of the tune check 1. Average relative response factor (RRF) for system performance check compounds (SPCCs): SVOCs ≥ 0.050 2. Relative standard deviation (RSD) for RFs for Calibration check compounds (CCCs): SVOCs ≤ 30% and one option below; Option 1: RSD for each analyte < 15% Option 2: linear least squares regression r > 0.995 Option 3: non-linear regression - coefficient of determination (COD) r2 > 0.99 (6 points shall be used for second order, 7 points shall be used for third order)	Instrument: Gas Chromatography Mass Spectrometry(GCMS) J7P Date: 1/13/22 RRF's within MPC limits for all SVOCs of concern.	X	-	
2nd Source Initial Calibration Verification (ICV)	%Deviation (%D) <20%	Instrument: J7P Date: 1/14/22 ICV%D within MPC limits for all SVOCs of concern.	X	-	
Breakdown Degradation check	Tailing factor and breakdown percentage in method limits	NA	-	-	
CCV	Average RF for System performance check compounds (SPCCs): SVOCs ≥ 0.050. % Difference/Drift (%D) for all target compounds and surrogates: SVOCs < 20%D (Note: D < difference when using RFs or drift when using least squares regression or non linear calibration.) Apply J-flag to detects and UJ-flag to NDs if average RF not met	Instrument: J7P Date: 1/20//22 CCV%D within MPC limits for all SVOCs.	X	-	
Overall Evaluation of Data	Appropriate method Evaluate any analytical problems Evaluate sampling errors – field contamination, sample hold times	Laboratory precision and accuracy acceptable. No apparent sample bias. Sample results are usable for making project decisions, as qualified. Applicable method blanks were free of SVOC COC contamination. LCS recoveries were within MPC limits.. MS/MSD recoveries were in limits. RPDs within limits. Surrogates were inside MPC limits. ICAL: within MPC limits. ICV: %D within MPC limits. CCV: %D within MPC limits.	X	-	

REVIEW ITEMS	ACCEPTANCE CRITERIA	SAMPLES AFFECTED/RATIONALE	INVENT-ORY	QUAL	BIAS
		Primary Sample -008 Field Duplicate -009 FD RPD = 0% for benzo[a]anthracene. AB not collected. EB within limits. Overall precision is acceptable.			

* Tier II review items only.
Completeness Check: Inventory Check Sheet_____X__. Sample Quantitation Calculations (TIER II only):
Lab Correspondence: None.

Project Role	Name	Signature	Date
Data Validator	Courtney Bigelow	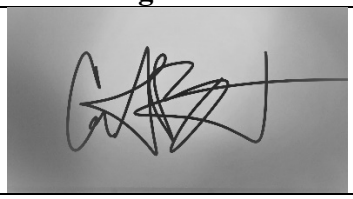	2/25/22
Chemistry QA Manager	Jackson Kiker	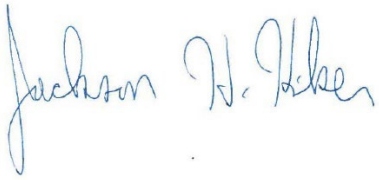	25 Mar 2022

ECC Data Review Worksheet **VOCs Method SW846 8260C**
Project: Redstone Arsenal **Review Criteria: RSA Site SAP**

Data Validation Level	Matrix	Preservation	Temp Sample Receipt	Laboratory	SDG Number
Tier I+	Groundwater (GW)	HCl	3.0 °C	AEL Jacksonville, FL	J2200629

Field Identification and Laboratory Number of Samples Evaluated:

Field Identification (ID)	Sample Date	Laboratory (lab) Sample Number
263-TB7001-TB	01/10/22	J2200629001
263-1907-ACC3042	01/10/22	J2200629002
263-1903-ACC3037	01/10/22	J2200629003
263-2388-ACC3044	01/10/22	J2200629004
263-2389-ACC3046	01/10/22	J2200629005
263-1908-ACC3043	01/10/22	J2200629006
263-1905-ACC3039	01/10/22	J2200629007
263-1906-ACC3040	01/10/22	J2200629008
263-1906-ACC3041-FD	01/10/22	J2200629009
263-ACC8001-ER	01/10/22	J2200629010
263-ACC9001	01/10/22	J22006290011

Note: Samples are described below in the data worksheets by reference to the last few digits of the Lab Sample Number. Only carbon tetrachloride reported.

REVIEW ITEMS	ACCEPTANCE CRITERIA	SAMPLES AFFECTED/RATIONALE	INVENT-ORY	QUAL	BIAS
Chain of Custody (COC)	Unbroken custody (accept or if broken Reject [R]) Temp≤6°C (degrees Celsius) Soil-J detects, R-nondetects (ND) preserved per method (amber bottles, temperature, hydrochloric acid (HCl, aqueous [aq]), methanol/sodium hydrogen sulfate (MeOH/NaHSO4, soils) (J, UJ, or R (function of hold time and compound)	Cooler temperatures < 6 °C. Sample preservation adequate. Sample custody transferred from Field Team Leader to lab sample custodian. Unbroken COC.	X	-	
Holding Time (HT)	14 Days to analysis, if preserved to hydrogen ion concentration (pH) ≤2 7 days to analysis if unpreserved or pH>2 J –detects, UJ or R – flag Non-Detects (ND) to samples >2x HT criteria	All reported samples analyzed within holding time.	X	-	
% Solids Check (SOLIDS)	30 percent (%) < Solids: if no sample weight adjustment made. <10% R entire sample 10%.> and <30%; J-detects, R-NDs	Not analyzed (NA)/collected with this sample data group (SDG).	-	-	
Trip Blank (TB)	Detections greater than 5X the blank results are not qualified. Detections less than 5X the blank level are qualified as non-detect.	TB (Sample 001) was ND.	X	-	
Equipment Blank (EB)	Detections greater than 5X the blank results are not qualified. Detections less than 5X the blank level are qualified as non-detect.	EB (sample 10) was ND.	X	-	

REVIEW ITEMS	ACCEPTANCE CRITERIA	SAMPLES AFFECTED/RATIONALE	INVENT-ORY	QUAL	BIAS
Results > Cal Range or <Cal Range	>Upper Calibration (Cal) Range J-detects - ensure instrument blank performed <Limit of quantitation (LOQ) but > detection limit (DL)– J –detects (estimated) listed on data summary sheet. Data reported down to detection limit (DL) but ND (U) set at limit of detection (LOD)/or LOQ.	Results <LOQ and >DL qualified as estimated.	X	-	
Surrogates	Lab limits as Measurement Performance Criteria (MPC) >Upper Control Limit (UCL)% J detects <Lower Control Limit (LCL)% J detects, and UJ NDs.	Surrogate recovery within MPC limits. No qual, results were ND.	X	-	
Lab Blanks (method blanks)	No target compounds > ½ LOQ No analytes detected > 1/2 LOQ and > 1/10 the amount measured in any sample or 1/10 the regulatory limit (whichever is greater). For common laboratory contaminants, no analytes detected >LOQ and > 1/10 the amount measured in any sample or 1/10 the regulatory limit (whichever is greater). Blank result must not otherwise affect sample results.	Associated method blanks were non-detect.	X	-	
Laboratory Control Sample (LCS) Recovery	Lab limits as MPC >UCL% J detects <LCL% J detects, and UJ NDs.	All LCS recoveries within MPC limits.	X	-	
LCS/LCSD Relative Percent Difference (RPD)	Lab limits as MPC <30% QAPP	All RPDs within limits.	X	-	
Matrix Spike/Matrix Spike Duplicate (MS/MSD) Recovery	Lab limits as MPC >UCL% J detects <LCL% J detects, and UJ NDs.	Native sample 004 MS recovery outside of limits: Carbon tetrachloride <LCL.	X	Qualify carbon tetrachloride as UJ for sample 004.	
MS/MSD RPD	Lab limits as MPC RPD ≤30% (when MS >LOQ) J –detects in MS sample UJ- NDs	Native sample -004. RPDs outside of limits: Carbon tetrachloride >LOQ	X	Qualify carbon tetrachloride as UJ for sample 004.	
Laboratory Duplicate	Lab limits as MPC RPD < 30%	Not collected/analyzed with this SDG.	-	-	
Field Duplicate RPD	RPD ≤ 30% aq. ≤ 50% soil for Results > project quantitation limit (PQL) (FD pair only) J-detects (both > PQL) If one >PQL, other ND, J-detections, UJ non-detect Other conditions use judgment Determine RPD for detects only. *Recalculate the concentrations for one compound and the PQL	Primary Sample -008 Field Duplicate -009 FD RPD = 0% for carbon tetrachloride.	X	-	
Internal standards (IS)	Lab limits as MPC Retention time ± 30 seconds from retention time of the midpoint standard in the CV Extracted ion current profile (EICP) area within	IS within limits.	X	-	

REVIEW ITEMS	ACCEPTANCE CRITERIA	SAMPLES AFFECTED/RATIONALE	INVENT-ORY	QUAL	BIAS
	- 50% to + 100% of ICAL midpoint standard relative retention time (RRT) <0.06 (30 seconds [sec])				
Sensitivity	Sample results will be reported to the detection limit (DL) Sample Results that are < LOQ, but >DL, will be reported as J Dilution factors for samples – impacts to sensitivity	All samples analyzed at 1x dilution. Analytical sensitivity meets project objectives. No qualification.	X	-	
Tune check	Lab limits as MPC ion abundance with method limits every 12 hours	Tunes were within MPC limits. No sample qualifications.	X	-	
Initial Cal Multipoint (instrument evaluation)	Lab limits as MPC correct calibration standards (stds) within 12 hours of the tune check 1. Average relative response factor (RRF) for system performance check compounds (SPCCs): VOCs > 0.30 2. Relative standard deviation (RSD) for RFs for Calibration check compounds (CCCs): VOCs ≤ 30% and one option below; Option 1: RSD for each analyte < 15% Option 2: linear least squares regression r > 0.995 Option 3: non-linear regression - coefficient of determination (COD) r2 > 0.99 (6 points shall be used for second order, 7 points shall be used for third order)	Instrument: Gas Chromatography Mass Spectrometry (GCMS) J1N Date: 1/19/22 %RSD and R2 in limits.	X	-	
2nd Source Initial Calibration Verification (ICV)	Lab limits as MPC %Deviation (%D) <20% Apply J-flag to detects and UJ-flag to NDs	Instrument: GCMS-J1N Date: 1/19/22 ICV%D within MPC limits for all VOCs of concern.	X	-	
CCV	Lab limits as MPC %D <20% Ending CCV - %D <50% Apply J-flag to detects and UJ-flag to NDs if average RF not met	Instrument: GCMS-J1N Date: 1/21/22 CCV%D within MPC limits for all VOCs of concern.	X	-	
Overall Evaluation of Data	Appropriate method Evaluate any analytical problems Evaluate sampling errors – field contamination, sample hold times	Laboratory precision and accuracy acceptable. No apparent sample bias. Sample results are usable for making project decisions, as qualified. Method blanks were free of VOC COC contamination. LCS recoveries were within MPC limits. RPDs within limits. MS recovery out of limits for Carbon tetrachloride. RPD out of limits for carbon tetrachloride. Surrogates were inside MPC limits. ICAL: within MPC limits. ICV: %D within MPC limits. CCV: %D within MPC limits.	X	-	

REVIEW ITEMS	ACCEPTANCE CRITERIA	SAMPLES AFFECTED/RATIONALE	INVENT-ORY	QUAL	BIAS
		Primary Sample -008 Field Duplicate -009 FD RPD = 0% for carbon tetrachloride. TB was ND. EB was ND. Overall precision is acceptable.			

Completeness Check: Inventory Check Sheet_____X__.
Lab Correspondence: None.

Project Role	Name	Signature	Date
Data Validator	Courtney Bigelow		2/25/22
Chemistry QA Manager	Jackson Kiker		25 Mar 2022

APPENDIX D

REGULATORY CONCURRENCE LETTERS

This page intentionally left blank.

LANCE R. LEFLEUR
DIRECTOR

ROBERT J. BENTLEY
GOVERNOR

Alabama Department of Environmental Management
adem.alabama.gov

1400 Coliseum Blvd. 36110-2400 ■ Post Office Box 301463
Montgomery, Alabama 36130-1463
(334) 271-7700 ■ FAX (334) 271-7950

February 3, 2016

CERTIFIED MAIL # 91 7108 2133 3936 7153 6248

Mr. Terry Hazle, Director
Directorate of Environmental Management
DEPARTMENT OF THE ARMY
Installation Restoration Division
(AMSAM-RA-DEM-IR)
US Army Aviation and Missile Command
Building 4488
Redstone Arsenal, AL 35898

Re: **ADEM Review and Concurrence:** *Revision 1 RCRA Facility Investigation Report RSA-263, Petroleum, Oil, and Lubricants Program Site, CWS Depot Motor Pool (B-8017)/Change House (B-8020) OU-20,* dated October 28, 2015 (Reissued January, 27 2016)
Redstone Arsenal (RSA) DSMOA Environmental Restoration Program
U.S. EPA I.D. No. AL 7 210 020 742

Dear Mr. Hazle:

The Alabama Department of Environmental Management (ADEM or the Department) has reviewed the *Revision 1 RCRA Facility Investigation Report RSA-263, Petroleum, Oil, and Lubricants Program Site, CWS Depot Motor Pool (B-8017)/Change House (B-8020) OU-20,* dated October 28, 2015 (Reissued January 2016). Based on this review, the Department has determined that RSA's RFI report for RSA-263 is complete.

As stated in the report, the findings of this RFI indicate that an action is needed to address contamination in groundwater. The Department concurs with the RSA's recommendation of no further action at this time for surface media with corrective measures to be conducted for groundwater as part of RSA-263.

The Department will move RSA-263 to Table VI.6 (Sites requiring a CMI Plan) of RSA's Alabama Hazardous Wastes Management and Minimization Act (AHWMMA) Permit as part of the next permit modification requiring no further action for surface media with corrective measures to be conducted for groundwater as part of RSA-263. Therefore, in accordance with Permit Condition VI.E.2, a Corrective Measures Implementation (CMI) Plan that addresses the contaminated groundwater at the site should be submitted to the Department for review within 120 days of receipt of this letter. The CMI Plan should be submitted along with a request to modify RSA's Permit to incorporate the CMI Plan.

Birmingham Branch
110 Vulcan Road
Birmingham, AL 35209-4702
(205) 942-6168
(205) 941-1603 (FAX)

Decatur Branch
2715 Sandlin Road, S.W.
Decatur, AL 35603-1333
(256) 353-1713
(256) 340-9359 (FAX)

Mobile Branch
2204 Perimeter Road
Mobile, AL 36615-1131
(251) 450-3400
(251) 479-2593 (FAX)

Mobile-Coastal
3664 Dauphin Street, Suite B
Mobile, AL 36608
(251) 304-1176
(251) 304-1189 (FAX)

If any questions or comments should arise concerning this matter, please contact Daniel Arthur of the Remediation Engineering Section of the Governmental Hazardous Waste Branch at (334) 271-7786 or via e-mail at daniel.arthur@adem.state.al.us.

Sincerely,

Stephen A. Cobb, Chief
Governmental Hazardous Waste Branch
Land Division

SAC/ATM/RDA/akr

cc: Terry de la Paz, Redstone Arsenal
Brian Roberson, NASA MSFC

cc (via email): Robert Morris, US EPA Region 4
Michelle Thornton, US EPA Region 4
Salee Downey, Redstone Arsenal
Jason Wilson, ADEM
Ashley Mastin, ADEM

APPENDIX E

REDSTONE ARSENAL RCRA PERMIT MODIFICATION REQUEST

This page intentionally left blank.

REQUEST FOR PERMIT MODIFICATION
RSA-263, CWS DEPOT MOTOR POOL (BUILDING 8017),
CHANGE HOUSE (BUILDING 8020)
OPERABLE UNIT 20
U.S. ARMY GARRISON – REDSTONE MADISON COUNTY, ALABAMA
August 2023

1.0 INTRODUCTION

As specified in Section VI.E.3 of the United States Army Garrison–Redstone's (hereinafter referred to as the Army) Alabama Hazardous Wastes Management and Minimization Act (AHWMMA) Hazardous Waste Storage Facility/Thermal Treatment/Solid Waste Management Unit (SWMU) Corrective Action Permit, Modification No. 0 (hereafter referred to as the Permit) (dated 19 July 2021) (Alabama Department of Environmental Management [ADEM], 2021), a request for permit modification is to be submitted along with a Corrective Measures Implementation (CMI) Work Plan. Therefore, the Army has prepared this request for modification to the Permit for RSA-263, Chemical Warfare Station (CWS) Depot Motor Pool (Building 8017), Change House (Building 8020), Operable Unit (OU) 20, at Redstone Arsenal (RSA) in Madison County, Alabama.

A Resource Conservation and Recovery Act (RCRA) Facility Investigation (RFI) (CB&I Federal Services, LLC [CB&I], 2016) was prepared for RSA-263 to determine the nature and extent of contamination. The RFI report received concurrence from ADEM on 3 February 2016. The Army has prepared the CMI Work Plan and is ready to implement the remaining corrective measures (monitored natural attenuation [MNA] for groundwater) to evaluate the MNA effectiveness and permanence.

ADEM has listed RSA-263 in Table VI.6 in the Permit as requiring corrective measures for groundwater. Following approval of the CMI Work Plan, the Army requests that ADEM list in Table VI.6 that groundwater beneath RSA-263 will be addressed with the RSA-154 corrective measures. As specified in Section VI.E.3 of the Permit, this modification will serve to incorporate the proposed remedy, including all procedures necessary to implement and monitor the final corrective measure for RSA-263, into the Permit in accordance with Alabama Administrative Code (AAC) R. 335-14-8-.04(2).

2.0 FACILITY AND SITE DESCRIPTION

RSA is located in the southwestern portion of Madison County, which is in the northern portion of Alabama. RSA is an Army facility that encompasses approximately 38,300 acres and is approximately 10 miles long from north to south and six miles wide from east to west. The Army controls 36,459 acres of the total acreage, of which approximately 15,500 acres are woodlands, 5,360 acres are leased for agricultural use, and approximately 12,000 acres are managed as military test areas/ranges. Development within RSA has largely centered on the historical production (and later disposal) of conventional and chemical munitions and, more recently, development and testing of missiles and rockets. These processes have produced chemical wastes since operations began in the early-1940s.

RSA-263 is located in the southern-central portion of RSA, north of Buxton Road (see Figure 1 of CMIP). The site covers approximately three acres within the RSA-154 groundwater unit. An abrupt topographic break, running approximately east-west, is present which divides the site into northern and southern sections. The difference in ground elevation between the two sections is approximately nine to 10 feet higher in the southern section. Each of the sections is itself relatively flat. All buildings at the site have been demolished. The site is mostly vegetated with mowed grass. Wooded areas are located to the west and north of the site.

The Army constructed Building B-8017 in 1943 for use as a Motor Repair Shop to support the CWS area. According to historical building lists, it was used as a Storage and Repair Shop after 1957 before being used as dry boat storage for the RSA Recreation Department. The building was demolished between 2007 and 2010.

The Army constructed Building B-8020 in 1943 as a change house for Gulf Chemical Warfare Depot workers. Over time, building lists indicate that the building became a laboratory and testing building. Very little is known about these operations; however, typically, these types of buildings at RSA were rarely chemical laboratories but rather equipment testing areas. The building was demolished between 1997 and 2000.

The Army constructed Buildings B-8015 and B-8016 in 1943. The two buildings were located approximately 150 feet north of Building B-8017 and across the main driveway to the facility. The buildings shared the same foundation and were used as a Gasoline Pump Station (B-8015) and a Motor Grease and Wash Stall (B-8016). A gasoline underground storage tank (UST) was located to the east of the building. The UST (size unknown) was removed during the 1980s; a depression in the soil marks its former location. Based on aerial photographs, the buildings were demolished between 1977 and 1979.

3.0 INVESTIGATIVE HISTORY AND INTERIM REMEDIAL ACTIONS

Environmental investigations have been conducted at RSA-263 since 2005. This section describes the data collection efforts that contributed to the RFI at RSA-263. Results utilized in the RSA-263 RFI.

- RSA-150/153/154/155 potential source area (PSA) investigation in 2005 (Shaw Environmental, Inc. [Shaw], 2006)
- RFI Phase I field investigation (Shaw, 2012)
- RFI Phase II field investigation (Shaw, 2013a)
- RFI Phase III field investigation (Shaw, 2013b)
- RFI Phase IV field investigation (CB&I, 2014).
- 2022 Pre-Design Sampling Event

4.0 SCOPE OF THE CORRECTIVE MEASURES FOR RSA-263

The overall strategy for cleanup at RSA has been presented to the regulators in two cleanup strategy documents, the *Installation-Wide Groundwater (IWGW) Cleanup Strategy* (Shaw, 2009)

and the *Installation-Wide Strategy for Cleanup of Impacted Wetlands* (Shaw, 2010a). The overall RSA cleanup strategy includes the following elements:

1. Expedite evaluation and release of surface media sites to allow for efficient, mission-related property reuse.
2. Expedite cleanup of sources area at surface media sites and secondary sources of ongoing groundwater contamination, including dense nonaqueous-phase liquid (DNAPL).
3. At SWMUs without approved decision documents, exposures to surface media will be managed through the use of the Army's Site Access Control (SAC) program, and exposure to groundwater that may result in unacceptable risks will be prevented or managed as required by RSA's IWGW Interim Record of Decision (IROD).
4. Coordinate the evaluation of groundwater units and their associated surface sites so that approval of groundwater RFIs is not delayed by unresolved surface media site issues.
5. Design and implement an IWGW monitoring network to monitor remedial progress and ensure that the selected remedies are protective of human health and the environment on a long-term basis.

The media and contaminant scope covered by the corrective measures at RSA-263 are limited to carbon tetrachloride (CT), manganese, and benzo(a)pyrene groundwater contamination. Exposure to soil does not result in unacceptable health threats to human health or ecological receptors. Groundwater contaminants would pose unacceptable risk to potable users including construction worker, commercial worker, and hypothetical residential receptors both now and in the future. Potable groundwater use is currently restricted by the IWGW IROD (Shaw, 2007) and the Army's SAC program (Army, 2012). The Army has elected to perform corrective measures to address groundwater contamination:

- MNA for groundwater until all constituents of concern (COCs) (CT, manganese, and benzo(a)anthracene have attained cleanup goals (CG) for three consecutive years.
- Administrative controls currently in place for groundwater include the IWGW IROD (Shaw, 2007) as implemented using the RSA SAC program (Army, 2012). While this IROD is interim in nature, it will apply to groundwater at RSA-263 until groundwater at the site meets CGs.
- The decision to implement permanent LUC for groundwater will occur in conjunction with the RSA-154 groundwater unit.

5.0 SITE CHARACTERISTICS

RSA-263 includes the former sites of Buildings B-8015, B-8016, B-8017, and B-8020 north of Buxton Road. The administrative boundary of RSA-263 covers approximately three acres. The area immediately surrounding the site is either wooded or grassed. The two areas divided by the topographic break described in **Section 2.0** are generally flat. There are no wetlands or surface water in the vicinity of RSA-263 and the site is not within the 100-year floodplain. Drainage of the area is through a series of engineered ditches to collection points and infiltration areas.

The following summarizes the RSA-263 site characteristics, including the Conceptual Site Model (CSM):

- The potential release locations and potential contaminants for soil and groundwater include the following: Overflows, leaks, and spills of fuel-related volatile organic compounds (VOCs), semivolatile organic compounds (SVOCs) (i.e., polycyclic aromatic hydrocarbons [PAHs]), and the metal lead from the UST on the east side of Buildings 8015/8016.
- Historical activities in the buildings included: a motor repair shop, dry boat storage, equipment testing, chemical laboratories, gasoline pump station, and a motor grease wash stall. A former UST was located to the east of former B-8015 and B-8016.
- The following COCs were identified in the 2016 RFI (CB&I, 2016): CT, manganese, and benzo(a)anthracene.
- Potential receptors could be exposed to contaminated groundwater at the site. Current human receptors are limited to commercial and construction workers. Future potential receptors include all current receptors plus, under a land reuse scenario, hypothetical child and adult residents.

6.0 INVESTIGATIVE RESULTS

A complete discussion of the previous site investigations is available in the RSA-263 RFI report (CB&I, 2016) and within Section 2.0 of the CMI Work Plan. 29 surface soil samples, 68 subsurface samples, and 22 groundwater samples were collected during the RFI phase. Soil and groundwater samples were analyzed for metals, VOC, SVOCs with PAHs, polychlorinated biphenyls (PCBs), and total petroleum hydrocarbons (TPH). The RFI concluded that exposure to RSA-263 soils poses no unacceptable health risk to any of the receptors evaluated herein under commercial/industrial or residential site use. Groundwater is contaminated with manganese, benzo(a)anthracene, and CT which have been identified as COCs that pose a threat if groundwater is developed as a potable source. Dibenz(a,h)anthracene was previously identified as a COC requiring action, but revisions to the dibenz(a,h)anthracene toxicity values resulted in dibenz(a,h)anthracene no longer being identified as a groundwater COC requiring further action at RSA-263.

In order to confirm the findings of the 2016 RFI and current contaminant concentrations of the three remaining COCs (CT, manganese, and benzo(a)anthracene), a pre-design sampling event was performed in January 2022 that included the collection of groundwater samples from seven monitoring wells (263-RS1903, 263-RS 1905, 263-RS 1906, 263-RS 1907, 263-RS 1908, 263-RS2388 and 263-RS2389). Table 1 within the CMIP presents the analytical results for site COCs from both the January 2022 groundwater sampling event and the historical groundwater sampling events presented in RFI (CB&I, 2016). CT, manganese, and benzo(a)anthracene were not detected above the site background screening values (BSVs) or preliminary screening values (PSVs). A summary of the contaminant fate and transport evaluation for CT, manganese, and benzo(a)anthracene is presented below. COCs in site wells are summarized in Table 1 of the CMI Work Plan.

6.1 Volatile Organic Compounds

VOCs were not detected above PSVs in surface or subsurface soil. CT was detected at 7.7 micrograms per liter (µg/L) above the PSV of 5 µg/L in one well (263-RS1908) in June 2012 as part of the Phase I RFI. Subsequent sampling events (June 2013, June 2014 and January 2022) indicate that the carbon tetrachloride has already attenuated to below the PSV.

6.2 Metals

Metals present in surface and subsurface soil media were determined to be background related or at concentrations less than screening criteria. As such, no metals were determined to represent COCs in soil. Because manganese in groundwater exceeds human health screening criteria, it was carried forward to the RFI human health risk evaluation (CB&I, 2016). As of the 2022 Pre-Design sampling event, all manganese values were below the BSV.

6.3 Semivolatile Organic Compounds/Polycyclic Aromatic Hydrocarbons

The following PAHs were detected above PSVs in 11 surface and seven subsurface soil locations: benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, Dibenz(a,h)anthracene, Indeno (1,2,3,-cd)pyrene. The highest detections were found in borings 263-RS1905, 263-RS2388, or 263-SB014 (surface soils) and in 263-RS1905 (subsurface soils). These soil borings are all located in the northeast of the site. One SVOC/PAH (benzo(a)anthracene) was detected above the PSV in a groundwater sample collected from monitoring well 263-RS1905 in July 2013 and 263-RS1906 in June 2012. No PAHs were detected during the 2022 sampling event.

6.4 Fate and Transport

Potential release mechanisms and migration routes for contaminants were identified and evaluated at RSA-263 in a fate and transport evaluation in the RFI report (CB&I, 2016). At RSA-263, the major potential contaminant migration pathway is the dissolution of site-related chemicals from soil to form leachate and the subsequent transport to the water table resulting from the downward percolation of infiltrating rainfall. Overland transport of soil contaminants by water runoff is plausible at RSA-263 because of the 10-foot difference in elevation between the site into northern and southern sections of RSA-263; however, drainage is controlled by unlined ditches (Figure 2 of CMI Work Plan). No chemicals were present in soil at concentrations that could cause a groundwater impact due to leaching and migration to the water table.

7.0 CURRENT AND POTENTIAL FUTURE LAND AND RESOURCES USE

The land use zone surrounding RSA-263 is classified as industrial. The current operations at RSA-263 are identified as supply and storage. The projected future land use is described as supply and storage as well as research, development, testing, and evaluation.

7.1 Land Use

The current and future land use within the boundary of the RSA-263 site is industrial. The residential scenario was included in the Alabama Risk-Based Corrective Action (ARBCA) evaluation in order to evaluate this potential future use and determine if this site is eligible for unrestricted reuse in accordance with ADEM requirements. In RSA's Permit, issued under the AHWMMA, ADEM has specified that investigations must comply with Alabama Environmental Investigation and Remediation Guidance (AEIRG) and ARBCA) guidance. In order to determine if this site is eligible for unrestricted reuse as defined in Alabama Administrative Code (ACC) 335-5 (ADEM, 2013), risks to a residential site user were assessed.

7.2 Current Groundwater Use

There is no current potable use of groundwater at RSA-263. An IWGW IROD was instituted and implemented by the Army's SAC program to prevent potable use and provide management control over nonpotable uses of all groundwater beneath RSA (Shaw, 2007).

7.3 Future Groundwater Use

Future use of groundwater beneath RSA-263 is possible. Currently, under the provisions of the IWGW IROD (Shaw, 2007) and the Army's SAC program (Army, 2012), groundwater resources beneath RSA-263 and elsewhere on RSA may not be developed for potable purposes without a final remedy, and groundwater withdrawals for nonpotable uses are subject to Army review and approval. The IWGW IROD is interim in nature and is not a final remedy. RSA's SAC program was designed to be used at sites that have not implemented a final remedy. This interim remedy will remain in place for groundwater under RSA-263 until a final remedy has been selected in a decision document for the RSA-154 groundwater unit.

As part of the Permit, ADEM has required that the Army perform ongoing annual and semiannual monitoring of wells located within the RSA perimeter (ADEM, 2021). This annual and semiannual monitoring will allow the Army and ADEM to assess rate of long-term groundwater recovery and also to ensure protection for residents living outside of the boundary of RSA (CB&I, 2016). Following regulatory approval of the CMI Work Plan, the Army will begin groundwater monitoring for RSA-263 (as detailed in Appendix I to the CMI Work Plan) to evaluate the effectiveness and permanence of the MNA corrective action to protect human health and the environment.

8.0 SITE RISKS

An ARBCA Human Health Risk Assessment (HHRA) which includes a vapor intrusion evaluation, as well as a Screening-Level Ecological Risk Assessment (SLERA) was performed for RSA-263 (CB&I, 2016). The complete ARBCA evaluation for human health and the ecological risk evaluation is provided in the RFI report. The site risks are summarized below.

8.1 Human Health Risk Assessment

The HHRA for RSA-263 was prepared and presented in the RSA-263 RFI (CB&I, 2016) in accordance with the ARBCA guidance (ADEM, 2017). It consisted of a three-tiered process: the preliminary screening level (PSL) evaluation (Tier 1), the Risk Management (RM) -1 evaluation (Tier 2), and the RM-2 evaluation (Tier 3).

In the case of RSA-263, the RM-1 evaluation was not performed; instead, the evaluation proceeded directly from the PSL evaluation to the cumulative risk assessment in the RM-2 evaluation. The PSL evaluation consists of a simple comparison of site concentrations with PSVs, which generally were the USEPA (USEPA, 2013) regional screening levels (RSL), based on the lower of an individual excess lifetime cancer risk (IELCR) of 1E-06 and a noncancer hazard index (HI) of 0.1. In the case of groundwater, maximum contaminant levels (MCL) are used as the PSVs, if available. Otherwise, tap water RSLs (USEPA, 2013) were used. Residential PSVs were selected for the evaluation of this site in order to consider alternatives to attain unrestricted land use. The tap water RSLs address drinking water ingestion of potable water, dermal uptake during bathing, and, depending on the chemical, inhalation of airborne VOCs.

The PSL evaluation is conducted for all chemicals that are determined to be site-related. Inorganics with maximum detected concentrations that do not exceed their BSVs or shown in a site-to-background evaluation to be naturally occurring are judged not to be site related and not evaluated further. All other detected chemicals are initially identified as chemicals of potential concern (COPC), and site concentrations are compared to PSVs in the PSL evaluation. A COPC is identified as a COC if the maximum detected concentration is greater than a PSV.

The soil and groundwater COCs identified in the PSL evaluation were brought forward for evaluation in the cumulative risk assessment (RM-2 evaluation). In addition, bis(2-chloroethyl) ether, dibenz(a,h)anthracene, n-nitroso-di-n-propylamine, 4,6-dinitro-2-methylphenol, and 3-3'-dichlorobenzidine were included in the HHRA for the hypothetical resident and assumed to be present at its method detection limit (MDL), since its MDL exceeded the published PSV during development of the RFI (CB&I, 2016) and the RFI report concluded that no corrective measures were required for these chemicals. Since completion and concurrence of the RFI report in 2016, toxicity values for PAHs were revised (USEPA, 2017) and remained the same through the May 2022 update (USEPA, 2022). These revisions result in changes to the conclusions of the risk assessment for dibenz(a,h)anthracene. Dibenz(a,h)anthracene was only included in the RM-2 evaluation in the RFI report because its MDL was greater than its PSV. Based on the 2017 toxicity values, the groundwater PSV for this compound is 0.025 µg/L. The RFI MDL for dibenz(a,h)anthracene in groundwater was 0.021 µg/L, which is below the 2017 and current PSV. Based on this comparison, dibenz(a,h)anthracene was removed as a groundwater COC requiring action for RSA-263.

Receptor scenarios evaluated in the cumulative risk assessment included a commercial worker, a construction worker, and a hypothetical residential receptor. A hypothetical future residential receptor was evaluated as required by ADEM (2008) to evaluate future use without restrictions

and determine whether or not remedial measures and/or land-use controls (LUC) are warranted to achieve no-further-action status.

Groundwater was evaluated as if developed as a source of potable water in the future. Risks from exposure to groundwater were assessed even though groundwater use at this site is currently precluded by the terms of the IROD (Shaw, 2007) and nonpotable uses are managed by RSA's SAC program Army, 2012). The ARBCA guidance considers an IELCR of 1E-05 to be the target cumulative risk. The target cumulative noncancer hazard is an HI of 1.0. Estimated cumulative risks/hazards at or below these targets do not require additional action.

Cumulative IELCR and HI estimates for all receptor scenarios for RSA-263 are summarized in Table 2 of the CMI Work Plan. The cumulative IELCR did not exceed the ADEM trigger of 1E-05 for any receptor for exposure to soil alone (Table 2 of the CMI Work Plan). Similarly, the cumulative HI for soil did not exceed the threshold level of 1.0 for any receptor. Therefore, no chemicals in soil were identified as relevant COCs warranting further action. The cumulative IELCR for exposure to groundwater hypothetically developed as a potable source exceeded the ADEM trigger level of 1E-5 for the hypothetical lifetime resident only, and the cumulative HI exceeded the threshold level of 1.0 for all receptors (Table 2 of the CMI Work Plan). Relevant COCs in groundwater are CT and manganese for all receptors and benzo(a)anthracene for only the hypothetical residential receptor (Table 3 of the CMI Work Plan). Dibenz(a,h)anthracene was identified as a chemical of analytical concern for the residential receptor because its minimum detection limit exceeded the PSV (Table 3 of the CMI Work Plan). Exposure to groundwater developed as a potable source may pose an unacceptable health threat to commercial/industrial or residential receptors. The conclusions of the RM-2 risk assessment and relevant COCs in groundwater are summarized in Table 3 of the CMI Work Plan.

The RM-2 evaluation of human health for RSA-263 is summarized in Table 3 of the CMI Work Plan. It shows the relevant COCs identified through the ARBCA evaluation that require action. No relevant COCs were identified in soil. CT and manganese were identified as relevant COCs in groundwater for the commercial worker, construction worker, and hypothetical residential receptor. Benzo(a)anthracene was identified as a relevant COC in groundwater for the hypothetical residential receptor. As noted above, dibenz(a,h)anthracene was not detected in RSA-263 groundwater but was included in the RM-2 evaluation because its minimum detection limit was greater than its PSV. However, it no longer represents a COC requiring action in groundwater.

A screening-level vapor intrusion evaluation was conducted to determine whether there has been a release of VOCs to groundwater at RSA-263 that may volatilize and migrate upward to pose an unacceptable risk to occupants of future commercial/industrial buildings or a future hypothetical residential building. The screening-level evaluation showed that concentrations of VOCs in soil gas, soil, and groundwater are unlikely to pose an unacceptable health threat to occupants of future buildings (including residential buildings) erected on the site.

8.2 Screening-Level Ecological Risk Assessment

The SLERA for RSA-263 (CB&I, 2016) was conducted in accordance with the guidelines set forth in the ARBCA guidance manual (ADEM, 2008), the RSA Installation-Wide Work Plan (IT Corporation [IT], 2002), and the final SLERA supplements to the Installation-Wide Work Plan (Shaw, 2010b). The Army and (frequently) USEPA and other State risk assessment practices find SLERAs to be unnecessary for very small sites (sites two to three acres in size or less). Such sites do not support populations of those species for which site cleanups could realistically proceed (e.g., foxes, songbirds, but no earthworms, etc.). The SLERA was included in the subject report only to comply with administrative requirements.

The surface soil data were compared to their respective BSVs (as applicable) and ecological screening values (ESV). Comparisons of surface soil data to their respective BSVs and ESVs identified nine metals (barium, calcium, cobalt, lead, magnesium, manganese, mercury, potassium, and zinc) and total high molecular weight (HMW) PAHs requiring further evaluation.

The weight-of-evidence evaluation concluded that all concentrations of the nine metals were naturally occurring. Based on the results of the screening evaluation and refinement of chemicals of potential ecological concern, the HMW PAHs warranted a community-level assessment and a food chain assessment. The results of the community-level assessment and food-chain assessment indicated that HMW PAHs in surface soil at RSA-263 are unlikely to pose hazards to terrestrial invertebrate and plant communities or to terrestrial food chain populations. Based on the results of this ecological evaluation, no further ecological assessment is warranted at RSA-263.

9.0 CORRECTIVE MEASURE OBJECTIVES

Based on the results of the RFI (CB&I, 2016) and the subsequent 2022 pre-design groundwater sampling event, the Corrective Measures Objective (CMO) for RSA-263 is to reduce or prevent human exposure to groundwater used for potable purposes contaminated with COCs requiring action such that regulatory limits are achieved, or no unacceptable hazard or risk is present.

While the above is the overarching goal, the Army has additional objectives that will be considered in the selection of corrective measures, in particular, because it is recognized that the achievement of the above goal may require an extended period of time. These additional objectives are oriented towards the selection of corrective measures that will reduce, to the extent feasible, the time to achieve the above objective. The additional objectives that were considered in the development and selection of corrective measures are as follows:

- Reduce contaminant mass (through source reduction)
- Minimize the footprint of contamination (plumes)
- Minimize life-cycle costs associated with long-term monitoring and maintaining institutional controls (e.g., SAC program)

The corrective measure objective for RSA-263 subsurface soil and groundwater will be accomplished by MNA of groundwater for CT, manganese, and benzo(a)anthracene and ongoing

implementation of existing administrative controls for groundwater to protect potential receptors until CGs are attained for the COCs in groundwater.

The Army intends to achieve site closure for groundwater and protect human health through implementation of corrective measures that are needed to reduce the concentrations of COCs requiring action to the CGs. For relevant COCs in groundwater with MCLs, the MCLs are selected as the CGs. CT is the only COC that has an MCL, which is identified below as the CG. The CG for manganese is based on background because the risk-based value at an HI of 1 shown in Table D21 of the RFI report (322 µg/L) is lower than the BSV for groundwater of 3,220 µg/L. Benzo(a)anthracene's PSV is the USEPA RSL value (EPA, 2022).

10.0 DESCRIPTION AND COMPARISON OF ALTERNATIVES

The following information summarizes the analysis of technologies and alternatives and the selection of the corrective measures for RSA-263. Considering the limited area of the site and the relatively low COC concentrations found in the subsurface soil and groundwater, alternatives to address these COCs were developed.

The following process options were evaluated for alternative development to meet the CMOs for the groundwater at RSA-263:

- CT, Manganese, and Benzo(a)anthracene in Groundwater
  - **Alternative 1:** No Action
  - **Alternative 2:** MNA

10.1.1 Groundwater

The following two alternatives were evaluated for groundwater: 1) no action for groundwater contamination and 2) MNA as summarized below:

10.1.1.1 Alternative 1 – No Action

Evaluation of the no action alternative will serve as a baseline for evaluating other corrective measures.

10.1.1.2 Alternative 2 – MNA

Alternative 2 – MNA Alternative 2 involves documenting the passive reduction in the COC concentrations via natural attenuation. Natural attenuation monitoring would be implemented to track COC trends in groundwater until CGs were attained. Groundwater monitoring and reporting would be conducted for three consecutive years to verify that concentrations remain below CGs (Years 0 through 2).

11.0 SELECTED CORRECTIVE MEASURE

Alternative 2, MNA, most appropriately addresses the contaminated groundwater at RSA-263.

Alternative 2 involves documenting the passive reduction in the COC concentrations via natural attenuation. MNA would be implemented to track COC trends in groundwater until CGs were attained.

It is believed that elevated manganese concentrations in well 263-RS1905 are related to reducing conditions in groundwater that are mobilizing natural manganese in saturated soil. There has been a significant downward trend in the manganese concentrations in this well. Table 1 of the CMI Work Plan presents natural attenuation parameters for manganese in the impacted and immediately downgradient wells. The trend of geochemical parameters in impacted well 263-RS1905 is not conclusive. There is a negligible increase in dissolved oxygen and a slight increase in oxidation-reduction potential measurements in the well over the monitoring period, indicating slightly more oxic conditions. However, the ratios of iron to aluminum are increasing, which indicates redox conditions are becoming more reducing. The iron to aluminum ratios in 2012, 2013, and 2014 are 10.7, 55.1, and 63, respectively. Redox conditions at downgradient wells 263-RS1904 and 263-RS2388 are clearly becoming more oxic over time, as indicated by increasing dissolved oxygen and oxidation-reduction potential measurements and decreasing iron-to-aluminum ratios in both wells. It is expected that the groundwater in manganese-impacted well 263-RS1905 will become more oxic in the future as any minor petroleum constituents from the UST leak are consumed via intrinsic biodegradation processes and the geochemistry in the well returns to its natural state, as evidenced by the trend in geochemical conditions in the two downgradient wells. Such a change in redox conditions in the impacted well should promote further reductions in manganese concentrations.

The major components of the corrective measures in Alternative 2 include the following:

- Natural attenuation monitoring at eight monitoring wells (Figure 9 of the CMI Work Plan).
  - Baseline groundwater sampling (Year 0) of COCs requiring monitoring (CT, manganese, and benzo(a)anthracene).
  - Semiannual groundwater sampling in Years 1 through 3 (eight wells) with analysis of the groundwater chemicals of interest (CT, benzo(a)anthracene, and manganese).
- Annual reporting
- Well closure (eight wells).

12.0 PUBLIC PARTICIPATION

Public participation requirements specified under AAC 335-14-8-.08(6) will be met during the permit modification process for the RSA-263 corrective measures.

13.0 REFERENCES

Alabama Department of Environmental Management (ADEM). 2008. *Alabama Risk-Based Corrective Action Guidance Manual, Revision 2*. April.

ADEM. 2013. *Administrative Code r.335-5, Land Division – Uniform Environmental Covenants Program*. March.

ADEM. 2017. *Alabama Environmental Investigation and Remediation Guidance.* September.

ADEM. 2021. *Redstone Arsenal's Alabama Hazardous Wastes Management and Minimization Act Hazardous Waste Storage Facility, Thermal Treatment, Solid Waste Management Unit Corrective Action Permit*. 19 July.

CB&I Federal Services LLC (CB&I). 2014. *Phase IV Sampling Work Plan, Petroleum, Oil, and Lubricants Program Site RSA-263, CWS Depot Motor Pool (B-8017)/Change House (B-8020), and RSA-154 Groundwater Site*, U.S. Army Garrison-Redstone, Madison County, Alabama. June.

CB&I. 2016. *Revision 1 RCRA Facility Investigation Report RSA-263, CWS Depot Motor Pool (B-8017)/Change House (B-8020), Operable Unit 20.* January.

IT Corporation (IT). 2002. *Draft Final Installation-Wide Work Plan, Revision 2,* Redstone Arsenal, Madison County, Alabama, prepared for the U.S. Army Corps of Engineers, Savannah District, Savannah, Georgia. June.

Shaw Environmental, Inc. (Shaw). 2006. *RSA-150/153/154/155 Potential Source Area Investigation,* Redstone Arsenal, Madison County, Alabama. Draft. April.

Shaw. 2007. *Final Interim Record of Decision, Interim Remedial Action for Installation-Wide Groundwater,* Redstone Arsenal, Madison County, Alabama, prepared for the U.S. Army Corps of Engineers, Savannah District. September.

Shaw. 2009. *Installation-Wide Groundwater Land-Use Control Remedial Design, Redstone Arsenal,* Madison County, Alabama, prepared for U.S. Army Corps of Engineers-Savannah District, February.

Shaw. 2010a. *Final Installation-Wide Strategy for Cleanup of Impacted Wetlands*, Redstone Army-Garrison, Madison County, Alabama. Rev. 1. May.

Shaw. 2010b. *Installation-Wide Work Plan, Final Appendices B, C, D, E, F,* Redstone Arsenal, Madison County, Alabama. September.

Shaw. 2012. *Site-Specific Field Sampling Plan for RCRA Facility– Additional Investigation Petroleum, Oil, and Lubricants Site RSA-263, CWS Depot Motor Pool (B 8017)/Change House (B 8020), Operable Unit 20,* U.S. Army Garrison-Redstone, Madison County, Alabama. November.

Shaw. 2013a. *RCRA Facility Investigation Report, RSA-145 Groundwater Site, Groundwater Unit GW-01, Operable Unit 19,* Redstone Arsenal, Madison County, Alabama. May.

Shaw. 2013b; *Phase III Site-Specific Field Sampling Plan for RCRA Facility Investigation, Petroleum, Oil, and Lubricants Program Site RSA-263, CWS Depot Motor Pool (B-8017)/Change House (B-8020), Operable Unit 20,* U.S. Army Garrison-Redstone, Madison County, Alabama. November.

U.S. Army Garrison-Redstone (Army), 2012. *Redstone Arsenal Environmental Site Access Control Program, Redstone Arsenal Regulation 200-7*. September.

USEPA. 2013. *Regional Screening Table.* May.

USEPA, 2017. *Regional Screening Table*. June.

USEPA, 2022. *Regional Screening Table.* May.

This page intentionally left blank.

APPENDIX F

CORRECTIVE MEASURES IMPLEMENTATION SCHEDULE

This page intentionally left blank.

ID	Task Name	Duration	Start	Finish	% Comple
1	**Environmental Remediation Multiple Award Indefinite Delivery Indefinite Quantity (IDIQ) Contract Redstone Arsenal, AL**	**1025 days**	**Thu 2/16/23**	**Fri 2/26/27**	**8%**
2	**CLIN 0015 - Achieve Corrective Measures Implementation – Construction (CMI-C) and Corrective Measures Implementation Report (CMIR) for Site RSA-263 - OPTION (24 Months)**	**396 days**	**Thu 2/16/23**	**Tue 9/10/24**	**20%**
3	**RSA-263- NTP**	**1 day**	**Thu 2/16/23**	**Thu 2/16/23**	**100%**
4	Notice to Proceed	1 day	Thu 2/16/23	Thu 2/16/23	100%
5	**Corrective Measures Implementation – Construction (CMI-C) - Field Work**	**88 days**	**Wed 5/10/23**	**Thu 9/14/23**	**77%**
6	Procurement and Subcontracting	60 days	Wed 5/10/23	Fri 8/4/23	100%
7	Baseline Sampling	3 days	Mon 8/7/23	Wed 8/9/23	100%
8	Laboratory Analysis	10 days	Thu 8/10/23	Wed 8/23/23	50%
9	Data Validation	15 days	Thu 8/24/23	Thu 9/14/23	0%
10	**Corrective Measures Implantation Report (CMIR)**	**249 days**	**Fri 9/15/23**	**Tue 9/10/24**	**0%**
11	Prepare and Develop Draft CMIR	90 days	Fri 9/15/23	Fri 1/26/24	0%
12	Army Review of Draft CMIR	21 days	Mon 1/29/24	Mon 2/26/24	0%
13	OPSEC Review of Draft CMIR	21 days	Tue 2/27/24	Tue 3/26/24	0%
14	Respond to Army Comments on Draft CMIR	10 days	Wed 3/27/24	Tue 4/9/24	0%
15	Army approve of Draft CMIR	0 days	Tue 4/9/24	Tue 4/9/24	0%
16	Submit Draft Final CMIR to ADEM / EPA	1 day	Wed 4/10/24	Wed 4/10/24	0%
17	ADEM / EPA Review of Draft Final CMIR	85 days	Thu 4/11/24	Fri 8/9/24	0%
18	Develop response to ADEM / EPA Comments on Draft Final CMIR	10 days	Mon 8/12/24	Fri 8/23/24	0%
19	Army Review of RTCs	10 days	Mon 8/26/24	Fri 9/6/24	0%
20	Submit Final (Revision 1) CMIR	1 day	Tue 9/10/24	Tue 9/10/24	0%
21	ADEM / EPA Approval of Final (Revision 1) CMIR	0 days	Tue 9/10/24	Tue 9/10/24	0%
22	**CLIN 00XXXX - Achieve Corrective Measures Implementation – Operations (CMI-O) Option Year 1 for site RSA-263 (Outside of Contract POP)**	**270 days**	**Mon 2/12/24**	**Thu 3/6/25**	**0%**
23	**RSA-263 NTP Year 1**	**1 day**	**Mon 2/12/24**	**Mon 2/12/24**	**0%**
24	Notice to Proceed	1 day	Mon 2/12/24	Mon 2/12/24	0%
25	**CMI-O Field Work**	**157 days**	**Tue 2/13/24**	**Mon 9/23/24**	**0%**
26	**Annual Sampling and Reporting**	**157 days**	**Tue 2/13/24**	**Mon 9/23/24**	**0%**
27	**Groundwater 1st Semi-Annual Sampling Event**	**30 days**	**Tue 2/13/24**	**Mon 3/25/24**	**0%**
28	**Field Work**	**30 days**	**Tue 2/13/24**	**Mon 3/25/24**	**0%**
29	Mobilization	1 day	Tue 2/13/24	Tue 2/13/24	0%
30	Groundwater Monitoring	3 days	Wed 2/14/24	Fri 2/16/24	0%
31	Demobilization	1 day	Mon 2/19/24	Mon 2/19/24	0%
32	Laboratory Analysis	10 days	Tue 2/20/24	Mon 3/4/24	0%
33	Data Validation	15 days	Tue 3/5/24	Mon 3/25/24	0%
34	**Groundwater 2nd Semi-Annual Sampling Event**	**30 days**	**Mon 8/12/24**	**Mon 9/23/24**	**0%**
35	**Field Work**	**30 days**	**Mon 8/12/24**	**Mon 9/23/24**	**0%**
36	Mobilization	1 day	Mon 8/12/24	Mon 8/12/24	0%
37	Groundwater Monitoring	3 days	Tue 8/13/24	Thu 8/15/24	0%
38	Demobilization	1 day	Fri 8/16/24	Fri 8/16/24	0%
39	Laboratory Analysis	10 days	Mon 8/19/24	Fri 8/30/24	0%
40	Data Validation	15 days	Mon 9/2/24	Mon 9/23/24	0%
41	**Annual Corrective Measures Implementation Operations (CMI-O) Report**	**112 days**	**Tue 9/24/24**	**Thu 3/6/25**	**0%**
42	Prepare and Develop Draft Annual CMI-O Report	30 days	Tue 9/24/24	Mon 11/4/24	0%
43	Army Review of Draft Annual CMI-O Report	21 days	Tue 11/5/24	Fri 12/6/24	0%
44	OPSEC Review of Draft Annual CMI-O Report	21 days	Tue 11/5/24	Fri 12/6/24	0%
45	Respond to Army Comments on Draft Annual CMI-O Report	10 days	Mon 12/9/24	Fri 12/20/24	0%
46	Army approval of Draft CMI-O Report	0 days	Fri 12/20/24	Fri 12/20/24	0%
47	Submit Draft Final Annual CMI-O Report to ADEM / EPA	1 day	Mon 12/23/24	Mon 12/23/24	0%
48	ADEM Review of Draft Final CMI-O Report	30 days	Tue 12/24/24	Thu 2/6/25	0%
49	Prepare Responses to ADEM comments	14 days	Fri 2/7/25	Wed 2/26/25	0%
50	Army review of RTCs	5 days	Thu 2/27/25	Wed 3/5/25	0%
51	Submit Final CMI-O Report	1 day	Thu 3/6/25	Thu 3/6/25	0%
52	ADEM approval of Final annual Report	0 days	Thu 3/6/25	Thu 3/6/25	0%
53	**CLIN 00XXXX - Achieve Corrective Measures Implementation – Operations (CMI-O) Option Year 2 for site RSA-263 (Outside of Contract Pop)**	**267 days**	**Wed 2/12/25**	**Tue 3/3/26**	**0%**
54	**RSA-263 NTP Year 2**	**1 day**	**Wed 2/12/25**	**Wed 2/12/25**	**0%**
55	Notice to Proceed	1 day	Wed 2/12/25	Wed 2/12/25	0%
56	**CMI-O Field Work**	**154 days**	**Thu 2/13/25**	**Mon 9/22/25**	**0%**

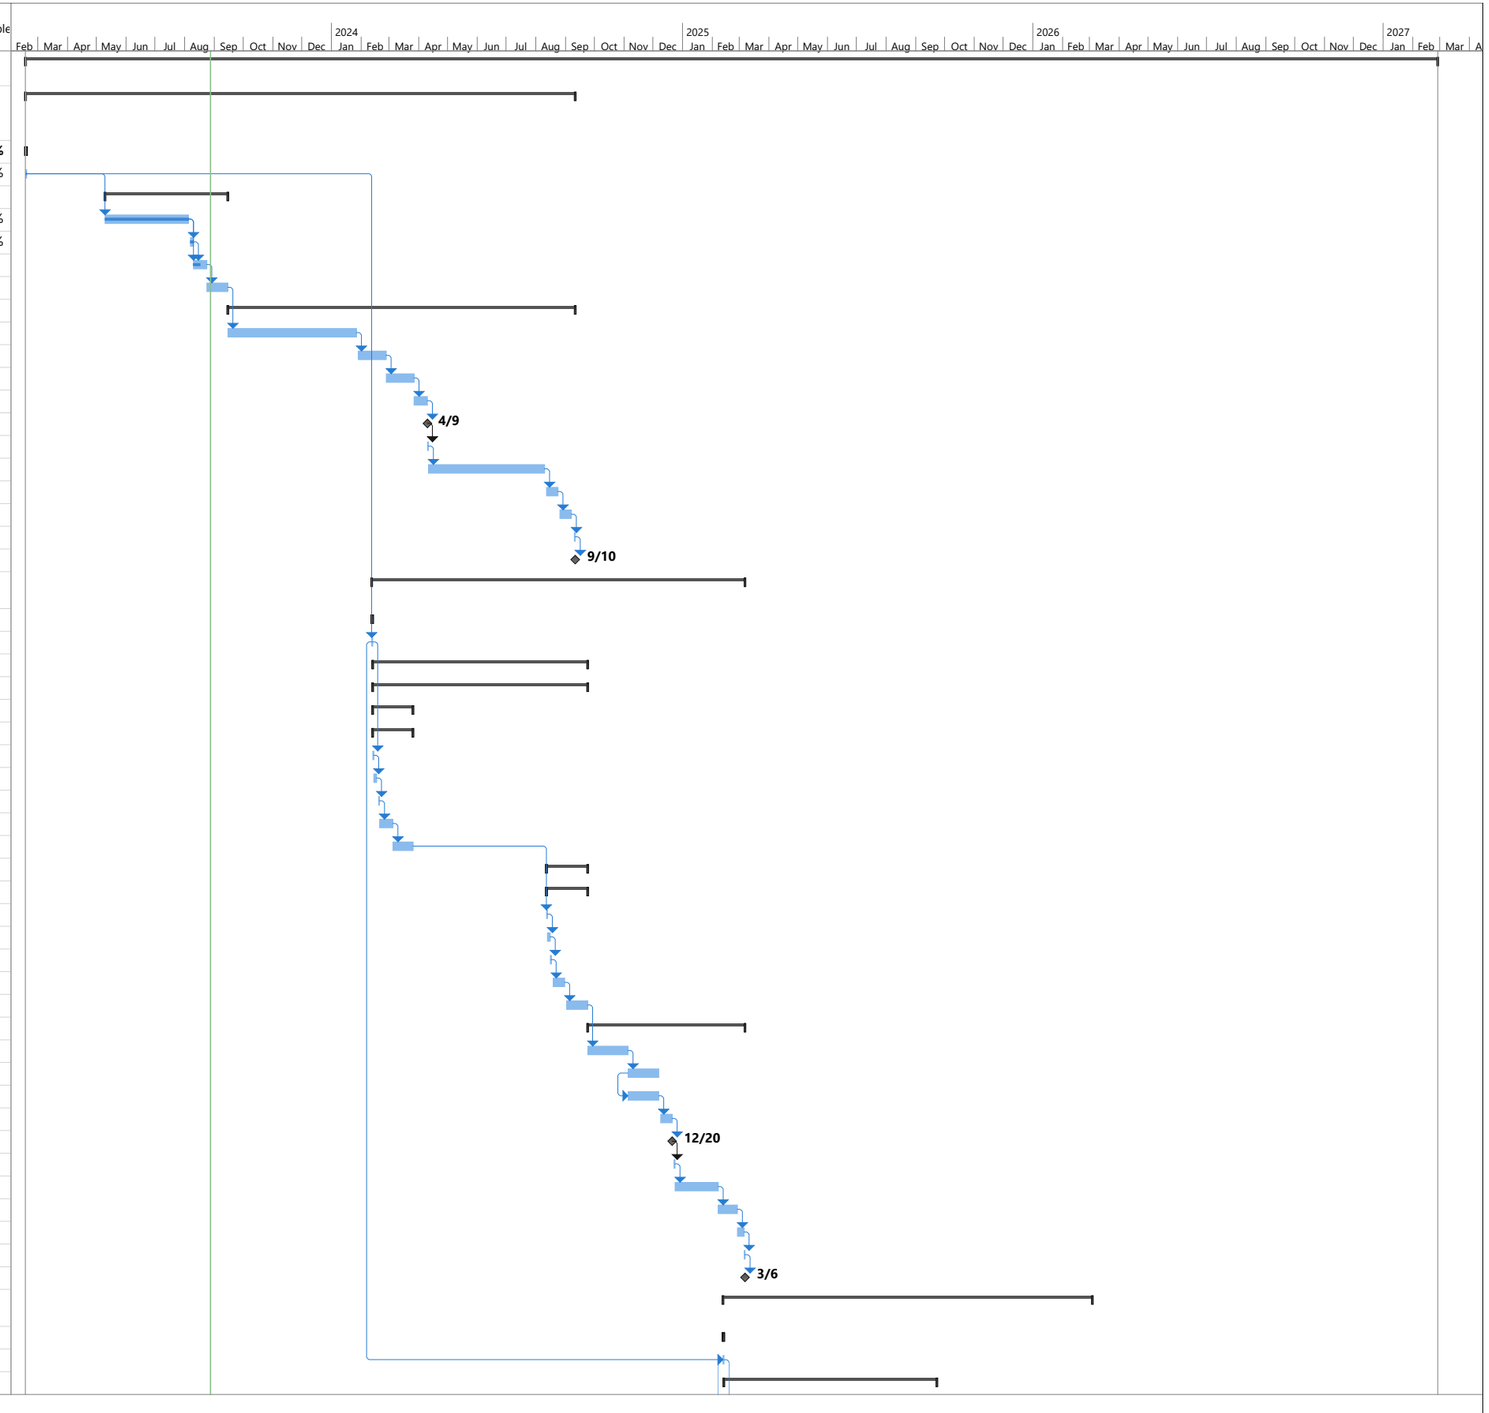

Project: RSA-263_ 06 08 2022
Date: Mon 8/28/23

Task
Split
Milestone
Summary
Project Summary
Inactive Task
Inactive Milestone
Inactive Summary
Manual Task
Duration-only
Manual Summary Rollup
Manual Summary
Start-only
Finish-only
External Tasks
External Milestone
Deadline
Progress
Manual Progress

ID	Task Name	Duration	Start	Finish	% Comple
57	**Annual Sampling and Reporting**	**154 days**	**Thu 2/13/25**	**Mon 9/22/25**	**0%**
58	**Groundwater 1st Semi-Annual Sampling Event**	**30 days**	**Thu 2/13/25**	**Wed 3/26/25**	**0%**
59	**Field Work**	**30 days**	**Thu 2/13/25**	**Wed 3/26/25**	**0%**
60	Mobilization	1 day	Thu 2/13/25	Thu 2/13/25	0%
61	Groundwater Monitoring	3 days	Fri 2/14/25	Tue 2/18/25	0%
62	Demobilization	1 day	Wed 2/19/25	Wed 2/19/25	0%
63	Laboratory Analysis	10 days	Thu 2/20/25	Wed 3/5/25	0%
64	Data Validation	15 days	Thu 3/6/25	Wed 3/26/25	0%
65	**Groundwater 2nd Semi-Annual Sampling Event**	**30 days**	**Mon 8/11/25**	**Mon 9/22/25**	**0%**
66	**Field Work**	**30 days**	**Mon 8/11/25**	**Mon 9/22/25**	**0%**
67	Mobilization	1 day	Mon 8/11/25	Mon 8/11/25	0%
68	Groundwater Monitoring	3 days	Tue 8/12/25	Thu 8/14/25	0%
69	Demobilization	1 day	Fri 8/15/25	Fri 8/15/25	0%
70	Laboratory Analysis	10 days	Mon 8/18/25	Fri 8/29/25	0%
71	Data Validation	15 days	Mon 9/1/25	Mon 9/22/25	0%
72	**Annual Corrective Measures Implementation Operations (CMI-O) Report**	**112 days**	**Tue 9/23/25**	**Tue 3/3/26**	**0%**
73	Prepare and Develop Draft Annual CMI-O Report	30 days	Tue 9/23/25	Mon 11/3/25	0%
74	Army Review of Draft Annual CMI-O Report	21 days	Tue 11/4/25	Fri 12/5/25	0%
75	OPSEC Review of Draft Annual CMI-O Report	21 days	Tue 11/4/25	Fri 12/5/25	0%
76	Respond to Army Comments on Draft Annual CMI-O Report	10 days	Mon 12/8/25	Fri 12/19/25	0%
77	Army approval of Draft CMI-O Report	0 days	Fri 12/19/25	Fri 12/19/25	0%
78	Submit Draft Final Annual CMI-O Report to ADEM / EPA	1 day	Mon 12/22/25	Mon 12/22/25	0%
79	ADEM Review of Draft Final CMI-O Report	30 days	Tue 12/23/25	Tue 2/3/26	0%
80	Prepare Responses to ADEM comments	14 days	Wed 2/4/26	Mon 2/23/26	0%
81	Army review of RTCs	5 days	Tue 2/24/26	Mon 3/2/26	0%
82	Submit Final CMI-O Report	1 day	Tue 3/3/26	Tue 3/3/26	0%
83	ADEM approval of Final annual Report	0 days	Tue 3/3/26	Tue 3/3/26	0%
84	**CLIN 00XXXX - Achieve Corrective Measures Implementation – Operations (CMI-O) Option Year 3 for site RSA-263 (Outside of Contract POP)**	**272 days**	**Thu 2/12/26**	**Fri 2/26/27**	**0%**
85	**RSA-263 Year 3**	**1 day**	**Thu 2/12/26**	**Thu 2/12/26**	**0%**
86	Notice to Proceed	1 day	Thu 2/12/26	Thu 2/12/26	0%
87	**CMI-O Field Work**	**159 days**	**Fri 2/13/26**	**Wed 9/23/26**	**0%**
88	**Annual Sampling and Reporting**	**159 days**	**Fri 2/13/26**	**Wed 9/23/26**	**0%**
89	**Groundwater 1st Semi-Annual Sampling Event**	**30 days**	**Fri 2/13/26**	**Thu 3/26/26**	**0%**
90	**Field Work**	**30 days**	**Fri 2/13/26**	**Thu 3/26/26**	**0%**
91	Mobilization	1 day	Fri 2/13/26	Fri 2/13/26	0%
92	Groundwater Monitoring	3 days	Mon 2/16/26	Wed 2/18/26	0%
93	Demobilization	1 day	Thu 2/19/26	Thu 2/19/26	0%
94	Laboratory Analysis	10 days	Fri 2/20/26	Thu 3/5/26	0%
95	Data Validation	15 days	Fri 3/6/26	Thu 3/26/26	0%
96	**Groundwater 2nd Semi-Annual Sampling Event**	**30 days**	**Thu 8/13/26**	**Wed 9/23/26**	**0%**
97	**Field Work**	**30 days**	**Thu 8/13/26**	**Wed 9/23/26**	**0%**
98	Mobilization	1 day	Thu 8/13/26	Thu 8/13/26	0%
99	Groundwater Monitoring	3 days	Fri 8/14/26	Tue 8/18/26	0%
100	Demobilization	1 day	Wed 8/19/26	Wed 8/19/26	0%
101	Laboratory Analysis	10 days	Thu 8/20/26	Wed 9/2/26	0%
102	Data Validation	15 days	Thu 9/3/26	Wed 9/23/26	0%
103	**Annual Corrective Measures Implementation Operations (CMI-O) Report**	**112 days**	**Thu 9/24/26**	**Fri 2/26/27**	**0%**
104	Prepare and Develop Draft Annual CMI-O Report	30 days	Thu 9/24/26	Wed 11/4/26	0%
105	Army Review of Draft Annual CMI-O Report	21 days	Thu 11/5/26	Thu 12/3/26	0%
106	OPSEC Review of Draft Annual CMI-O Report	21 days	Thu 11/5/26	Thu 12/3/26	0%
107	Respond to Army Comments on Draft Annual CMI-O Report	10 days	Fri 12/4/26	Thu 12/17/26	0%
108	Army approval of Draft CMI-O Report	0 days	Thu 12/17/26	Thu 12/17/26	0%
109	Submit Draft Final Annual CMI-O Report to ADEM / EPA	1 day	Fri 12/18/26	Fri 12/18/26	0%
110	ADEM Review of Draft Final CMI-O Report	30 days	Mon 12/21/26	Fri 1/29/27	0%
111	Prepare Responses to ADEM comments	14 days	Mon 2/1/27	Thu 2/18/27	0%
112	Army review of RTCs	5 days	Fri 2/19/27	Thu 2/25/27	0%
113	Submit Final CMI-O Report	1 day	Fri 2/26/27	Fri 2/26/27	0%
114	ADEM approval of Final annual Report	0 days	Fri 2/26/27	Fri 2/26/27	0%

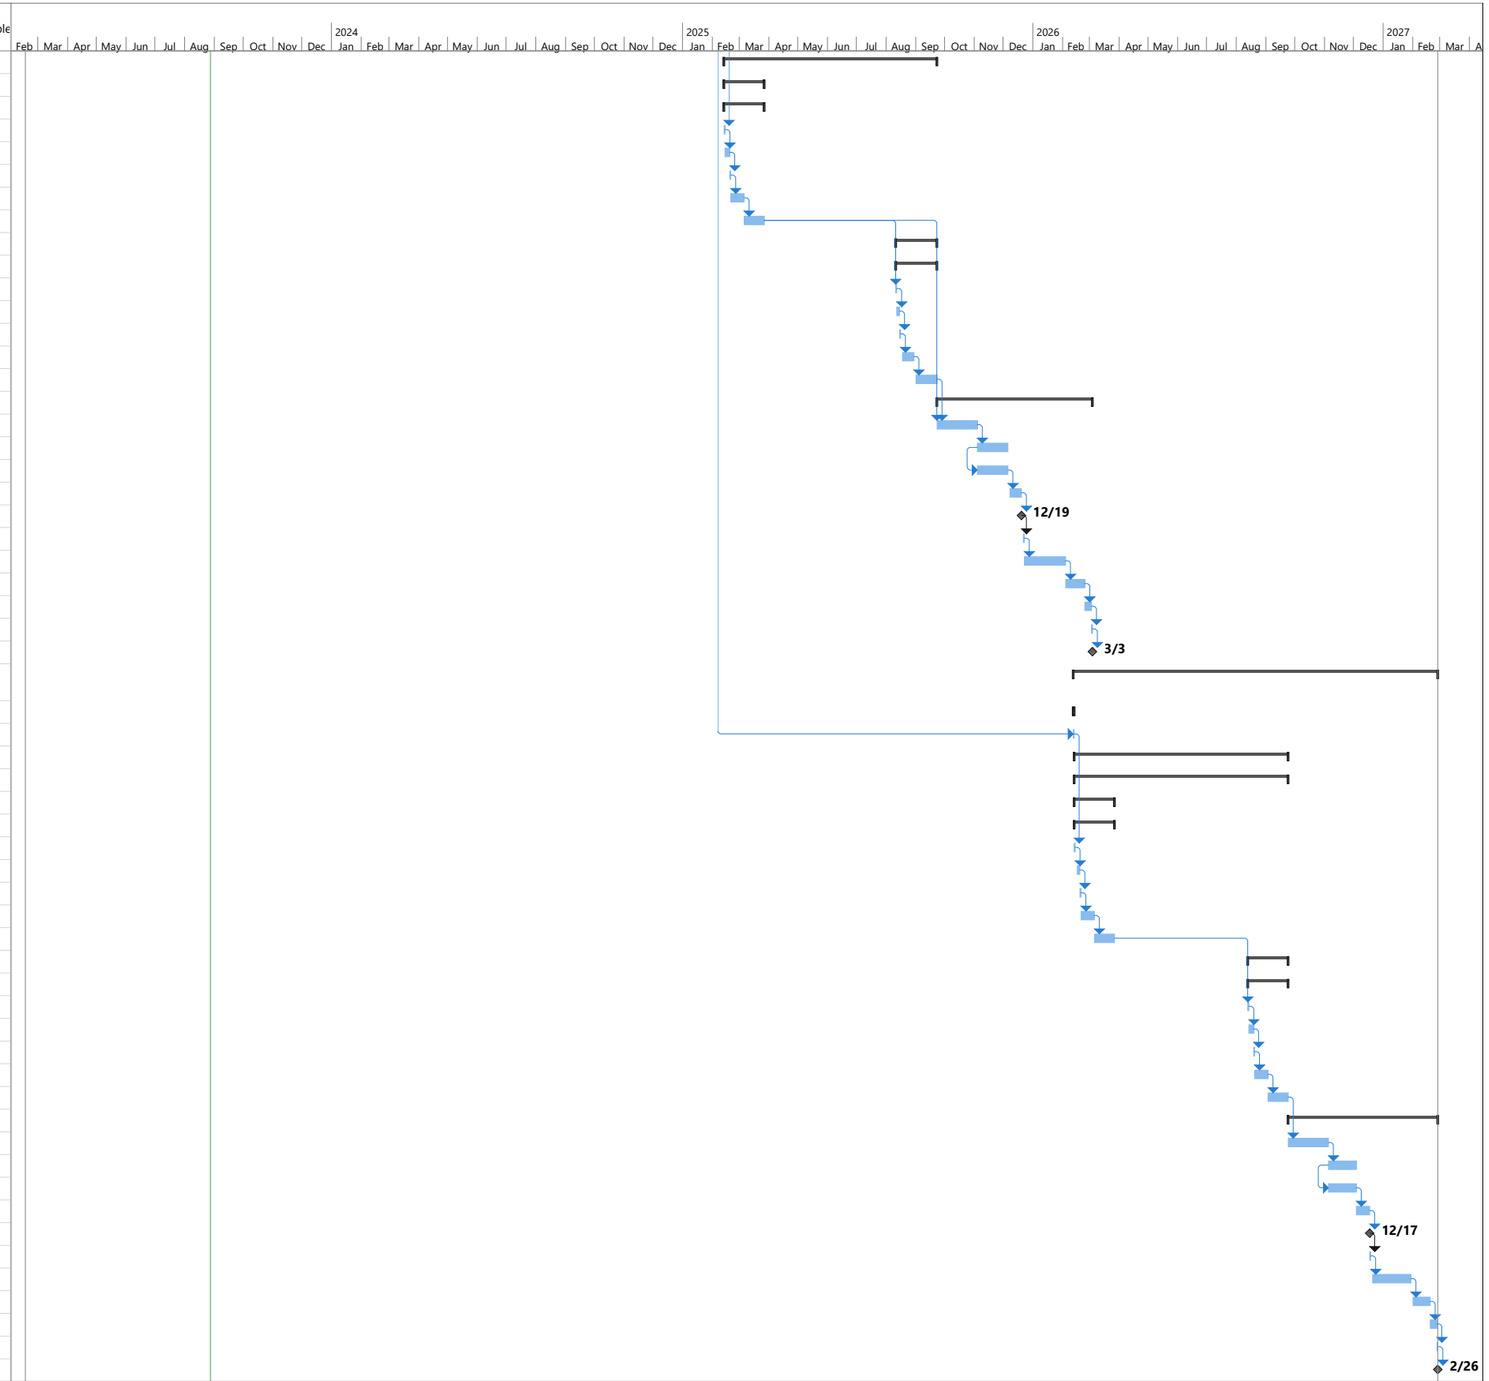

Project: RSA-263_ 06 08 2022
Date: Mon 8/28/23

Task
Split
Milestone
Summary
Project Summary
Inactive Task
Inactive Milestone
Inactive Summary
Manual Task
Duration-only
Manual Summary Rollup
Manual Summary
Start-only
Finish-only
External Tasks
External Milestone
Deadline
Progress
Manual Progress

APPENDIX G

QUALITY CONTROL PLAN

This page intentionally left blank.

RSA-263 PROJECT QUALITY CONTROL PLAN

ENVIRONMENTAL REMEDIATION SERVICES

REDSTONE ARSENAL

June 2022

Prepared for:

U.S. ARMY ENVIRONMENTAL COMMAND
Southeast-Environmental Service and Support Division
2450 Connell Road, Building 2264
Fort Sam Houston, TX 78234-7664

Contract No.: W9124J-18-D-0004, Delivery Order W9124J21F0020

This page intentionally left blank.

RSA-263 PROJECT QUALITY CONTROL PLAN

ENVIRONMENTAL REMEDIATION SERVICES REDSTONE ARSENAL

June 2022

Prepared for:

U.S. ARMY ENVIRONMENTAL COMMAND
Southeast-Environmental Service and Support Division
2450 Connell Road, Building 2264
Fort Sam Houston, TX 78234-7664

Prepared by:

ECC
9200 Church St
Suite 305
Manassas, VA 20110

Contract No.: W9124J-18-D-0004, Delivery Order W9124J21F0020

This page intentionally left blank.

QUALITY CONTROL PLAN

ENVIRONMENTAL REMEDIATION SERVICES AT

REDSTONE ARSENAL

W9124J-18-D-0004

I hereby certify that the enclosed Quality Control Plan (QCP) is in compliance with contract specifications and is submitted for Army approval. Once approved, the QCP will be implemented during the project W9124J-18-D-0004 execution of "*Environmental Remediation Services at Redstone Arsenal, Alabama".*

Approvals



Date: June 30, 2022

Deputy Program Manager,
Pam Foti, Certified Hazardous Materials Manager (CHMM), Project Management Professional (PMP)

Date: June 30, 2022

Quality Assurance/ Quality Control Manger.
Leili Arjomand, Professional Engineer (PE), Certified Quality Manager (CQM), PMP

This page intentionally left blank.

TABLE OF CONTENTS

LIST OF ABBREVIATIONS AND ACRONYMS iii

1.0 INTRODUCTION 1-1

1.1 Quality Control Objectives 1-1

2.0 QUALITY CONTROL ORGANIZATION 2-1

2.1 Program Manager 2-1
2.2 Project Manger 2-2
2.3 Program Quality Assurance/Quality Control Manager 2-2
2.4 Quality Control Manager 2-2
2.5 Site Superintendent 2-2
2.6 Field Personnel and Subcontractor 2-2

3.0 MEETINGS 3-1

3.1 Coordination and Mutual Understanding Meeting 3-1
3.2 On-site Meetings 3-1
3.3 Meeting Minutes 3-1

4.0 QUALITY CONTROL REQUIREMENTS 4-1

4.1 Definable Features of Work 4-1
4.2 Three-Phase Control System 4-1

4.2.1 Preparatory Phase 4-1
4.2.2 Initial Phase 4-2
4.2.3 Follow-up Phase 4-2

4.3 Additional Preparatory and Initial Phases 4-2
4.4 Control for Off-Post Work 4-3
4.5 Deficiency Management 4-3

4.5.1 Preventive Measures 4-3

5.0 TESTING AND INSPECTION 5-1

5.1 Analytical Testing 5-1
5.2 Inspection 5-1

5.2.1 Punch-Out Inspection 5-1
5.2.2 Pre-Final Inspection 5-1
5.2.3 Final Acceptance Inspection 5-1

5.3 Instrumentation/Equipment Testing, Inspection, and Maintenance 5-2

6.0 QUALITY CONTROL DOCUMENTATION 6-1

6.1 Reporting Requirements 6-1

6.1.1 Daily Reports 6-1
6.1.2 Monthly Summary Report 6-1
6.1.3 Quality Control Meeting Minutes 6-1
6.1.4 Field Logbook 6-1

6.2 Records Management 6-2

7.0 SUBMITTALS 7-1

7.1 Transmittal Form 7-1
7.2 Comment Response Matrix 7-1

TABLE OF CONTENTS

8.0 NONCONFORMANCE REPORTING 8-1

8.1 Nonconformance Definition 8-1
8.2 Deficiency Identification 8-1
8.3 Nonconformance Determination 8-1
8.4 Planning and Implementing the Corrective Action 8-1
8.5 Accepting Corrective Action 8-1
8.6 Verifying Corrective Action 8-1

9.0 AUDITS AND ASSESSMENTS 9-1

9.1 Management System Reviews 9-1
9.2 Project Audits 9-1
9.3 Project Self-Assessments 9-1

LIST OF FIGURES

Figure 2-1 Project Quality Control Plan Organizational Structure

LIST OF APPENDICES

Appendix A Quality Control Plan Forms

Appendix B ECC Causal Analysis System

ACRONYMS AND ABBREVIATIONS

AHA	Activity Hazard Analysis
APP	Accident Prevention Plan
CHHM	Certified Hazardous Materials Manager
COC	Chain of Custody
COR	Contracting Officer's Representative
CMI	Corrective Measures Implementation
CQM	Certified Quality Manager
DoD	Department of Defense
DFW	Definable Feature of Work
DQCR	Daily Quality Control Report
ECC	Environmental Chemical Corporation
ERMA	Environmental Remediation Multiple Award
IW-QAPP	Installation-Wide Quality Assurance Program Plan
LSP	Licensed Site Professional
NCR	Nonconformance Report
PE	Professional Engineer
PGM	Program Manager
PM	Project Manager
PMP	Project Management Professional
POD	Plan of the Day
QA	Quality Assurance
QAPP	Quality Assurance Project Plan
QC	Quality Control
QCM	Quality Control Manager
QCP	Quality Control Plan
QMS	Quality Management System
RSA	Redstone Arsenal
SSHP	Site Safety and Health Plan
SSHO	Site Safety and Health Officer
USAEC	United States Army Environmental Command
USEPA	United States Environmental Protection Agency

This page intentionally left blank.

1.0 INTRODUCTION

Environmental Chemical Corporation (ECC) will implement a Quality Management System (QMS) to ensure all activities, products, information, data, and decisions resulting from quality-affecting activities are technically sound and defensible. The quality system and implementing procedures form the basis of ECC's QMS. The System was developed and is maintained per applicable State and Federal laws, rules, standards, guidance, contractual requirements and sound risk management practices.

The project consists of environmental services at Redstone Arsenal (RSA). The following are the definable features of work (DFWs) identified for RSA-263:

- Procurement and Subcontracting
- Mobilization/Demobilization
- Groundwater Monitoring
- Record Keeping
- Decontamination
- Corrective Measures Implementation (CMI) Reporting

1.1 Quality Control Objectives

ECC's QMS consist of plans, procedures, and an organization that will produce an end product that complies with the requirements of the contract. The QMS covers all environmental operations, both on-site and off-site.

This Quality Control Plan (QCP) defines the procedures to manage and control activities of ECC personnel, subcontractors, and suppliers and to ensure that the completed project complies with all contract documents.

ECC will maintain responsibility for its work and the work of its subcontractors. To ensure compliance with contract requirements and maintain responsibility of all work performed under this deliverable, ECC will provide a continuous Three Phase Control inspection program to examine the quality of work, maintain standards of workmanship, ensure environmental quality standards of excellence, evaluate performances, identify and correct deficiencies, and provide finished work products which meet or exceed the requirements, while maintaining qualified personnel and equipment, and facilities which are necessary for the completion of the project.

The objective of this QCP is to ensure that the project activities are conducted and documented in an organized, efficient, and safe manner. This plan will define the management structure, organization, responsibilities, and authorities necessary for successful completion of the project. Performing quality work, implementing an effective quality control (QC) system and to ensure project compliance is the responsibility of all ECC staff members and subcontractors and can be achieved through a cooperative effort and commitment to quality by all program personnel.

All QC and quality assurance (QA) procedures related to sampling and analytical methods are included in the *Revision 4 Installation-Wide Quality Assurance Program Plan (IW-QAPP)*, completed by HydroGeoLogic, Inc. in 2019, and the site-specific work plans being prepared by ECC, as needed.

This page intentionally left blank.

2.0 QUALITY CONTROL ORGANIZATION

The functions of the QC staff are to describe, integrate, monitor, evaluate, and document all QC practices of ECC and its subcontractors, and to ensure safety and contract compliance. The quality staff has the full support of management and has independent and delegated authority to accomplish assigned tasks, including stop work authority. The ECC QC organizational structure, functional responsibilities, level of authority, lines of communication, and interfaces for activities affecting quality are identified and documented for assigned work tasks in the following sections.

Changes to ECC's QC staff organization requires the Army's Contracting Officer acceptance. Changes will be submitted in writing prior to the proposed change. Requests will include the names, qualifications, duties, and responsibilities of each proposed replacement.

Figure 2-1 shows the project organization chart identifying key personnel, responsibilities, and lines of authority for the QC personnel.

Figure 2-1: Quality Control Plan Organization Structure

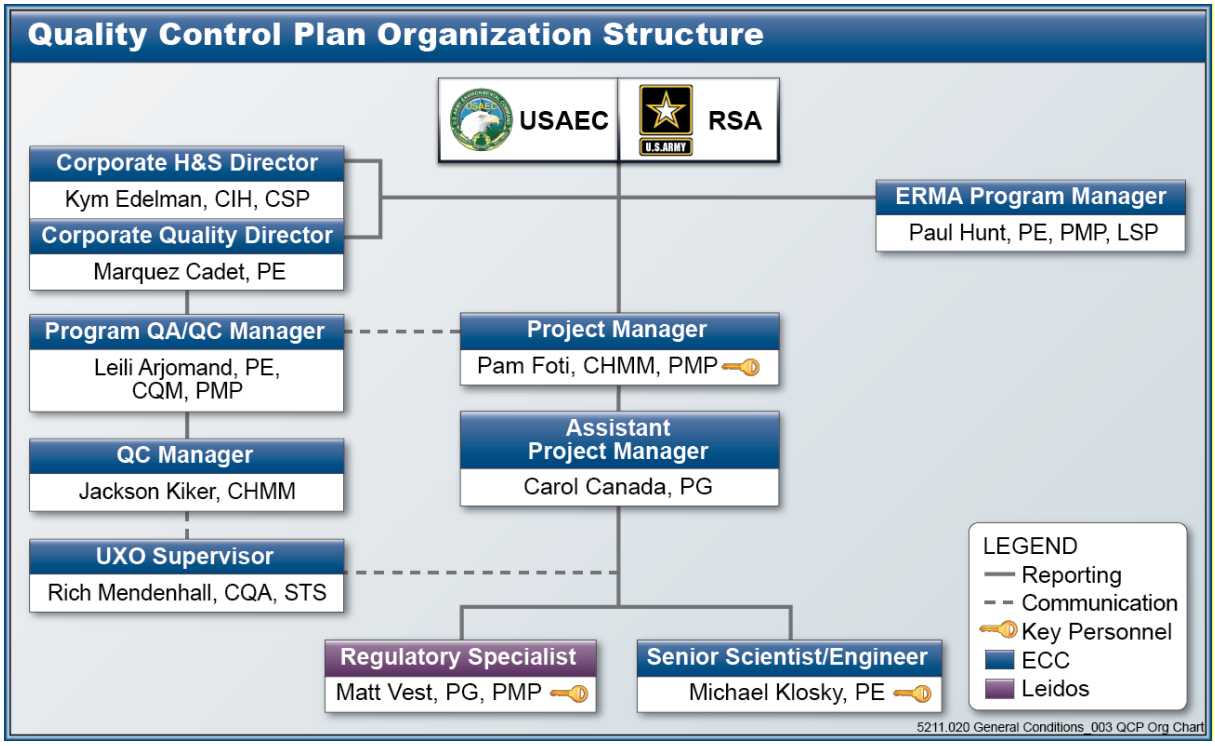

2.1 Program Manager

The Environmental Remediation Multiple Award (ERMA) Program Manager (PGM), Mr. Paul Hunt, Professional Engineer (PE), Project Management Professional (PMP), Licensed Site Professional (LSP), is responsible for the quality of work performed by the assigned project staff. He is responsible for all operations associated with the implementation of the project and will ensure quality and schedule compliance. He will also be responsible for addressing all customer complaints and/or feedback.

2.2 Project Manger

The Project Manager (PM), Ms. Pam Foti, Certified Hazardous Materials Manager (CHMM), PMP, controls the budget and schedule with the concurrence of the PGM, ensuring the contract requirements are met. The PM is responsible for all environmental services related to the requirements of the contract and specifications, including subcontractors. The PM reports directly to the PGM and is responsible for ensuring that all project activities conform to requirements and specifications. The PM's duties also include the assignment of responsibilities for the preparation of various reports and the review of each form/report for accuracy and content. In addition to monitoring and appraising performance of staff and subcontractors, the PM has the primary responsibility of tracking any proposed changes to the contract and for the overall project and will report any proposed changes to the PGM.

2.3 Program Quality Assurance/Quality Control Manager

The Program QA/QC Manager, Ms. Leili Arjomand, PE, Certified Quality Manager (CQM), PMP, will have overall responsibility for the control and implementation of the approved QC program. She will be responsible for the management, training, and performance of all QC personnel and will serve as a technical resource to the QC officer and QC staff. All project QC records and activities are subject to review by the QA/QC Manger.

2.4 Quality Control Manager

The QC Manager (QCM), Mr. Jackson Kiker, is responsible for supervising all QC aspects of the project to ensure compliance with contract plans and specifications. The QCM has indirect reporting responsibilities to the PM so that the required authority and organizational freedom is provided, including sufficient independence from cost and schedule implications. The QCM has the authority to act in all QC matters for ECC. The QCM has overall responsibility and authority for the administration of all QC Program-related activities. The QCM will conduct QC project surveillances throughout the life of the project and ensure that the reporting requirements as defined in this QCP are implemented.

2.5 Site Superintendent

The Site Superintendent, Mr. Aaron Glad, reports to the PM. He will manage field operations and monitor and oversee field personnel, subcontractors, QC, and safety activities to ensure compliant work. He will host the plan of the day (POD) meetings and participate in preconstruction meetings, preparatory meetings, initial inspections, final acceptance inspections, and ensure that substandard work is corrected as soon as possible.

2.6 Field Personnel and Subcontractor

All field personnel and subcontractors will be required to adhere to the procedures set forth in this QCP. The Site Superintendent will be responsible for overall management and coordination of field personnel and subcontractors and ensuring they perform all aspects of the work in accordance with the Work Plans, the Site Safety and Health Plan (SSHP), and this QCP. The QCM will be responsible for ensuring the field personnel and subcontractors perform all aspects of the work in accordance with this QCP. The Site Safety and Health Officer (SSHO) will be responsible for ensuring the field personnel and subcontractors perform all aspects of the work in compliance with the SSHP.

3.0 MEETINGS

While performing work, ECC will take part in various meetings during which they will update the client, and when applicable, other stakeholders, on the progress, results, deviations or modifications, and recommendations for the fulfillment of the scope of work.

3.1 Coordination and Mutual Understanding Meeting

If needed, and in addition to the meetings specified in the Project Management Plan, the QCM shall meet with the Contracting Officer's Representative (COR) and/or RSA Army Environmental Coordinator or designated representative prior to the start of the site work to discuss the QC Project Plan required by this project.

During the meeting, a mutual understanding of the system details will be developed, including the forms for recording the QC operations, administration of the system for both on-site and off-site work, coordination of ECC's management, and the interrelationship of ECC's management and control with the Army's QA, production, and the QCM's duties with the COR.

As a minimum, ECC's personnel required to attend will include the PM, Site Superintendent, and QCM.

3.2 On-site Meetings

When field activities are being performed, meetings may take place, whether planned or unplanned, at the site to discuss specific issues or concerns. The QCM or her designated representative will be responsible for documenting discussions and decisions made at the meeting on the Daily Quality Control Report (DQCR).

3.3 Meeting Minutes

Minutes of all meetings will be prepared describing the general discussion, decisions, changes in approach, and action items. If requested, ECC will submit the meeting minutes to participants.

This page intentionally left blank.

4.0 QUALITY CONTROL REQUIREMENTS

4.1 Definable Features of Work

To ensure quality, ECC will implement the QC program, including the Three Phase Control Process for each DFW. A DFW is any task, which is separate and distinct from other tasks, has separate control requirements, or is identified by different disciplines. There may be more than one DFW in each activity. The Three Phase Control Process is used to ensure that all project activities comply with the approved plans and procedures. The DFWs for this project are included in **Section 1.0**.

4.2 Three-Phase Control System

The Three Phases of Control process assures control of work at every stage of an activity, from planning through execution and completion. The process includes the preparatory, initial, and follow-up phases. Work will only begin on a DFW when successful preparatory and initial phases are completed.

Additional preparatory and/or initial phases may be conducted on the same DFW if new crews or subcontractors are added to a DFW, when acceptable levels of quality are not being met, if there are changes in the applicable QC organization, if work on a DFW is resumed after a substantial period of inactivity, or if other problems develop.

4.2.1 Preparatory Phase

The preparatory phase will be performed prior to the beginning of work on each DFW after all required submittals have been approved and is typically conducted by the SSHO with other applicable site personnel in attendance (e.g., field personnel, subcontractors, etc.). The United States Army Environmental Command (USAEC) COR and Army Environmental Coordinator will also be invited to attend the meeting. Any subcontractors involved in the DFW will participate in this review as well. The QCM or designated representative will give the Army 48-hours' notice prior to the preparatory phase meeting. The results of the preparatory phase actions will be documented in the DQCR.

During this phase, it is imperative to review the specifications and drawings to ensure all preparatory steps have been taken, to verify that submittals have been prepared and reviewed, qualified manpower is assigned, and safety issues have been identified and addressed. Specifically, this phase will include, if applicable:

- Review each paragraph of applicable specifications and drawings
- Review of the applicable work plans, etc. including discussion of procedures for controlling quality of the work and how deficiencies are corrected
- Review provisions that have been made to provide required control testing and inspection
- Concurrence that required project training and qualifications are complete (QC, health and safety, technical, etc.)
- Review to ensure that all materials and/or equipment have been tested, submitted, and approved
- Review of applicable permit status and requirements
- Examine the work area to ensure that all required preliminary work has been completed and is in compliance with the contract
- Review the appropriate Activity Hazard Analysis (AHA) to ensure safety requirements are met
- Discuss sampling methods, applicable standard operating procedures, and the testing facility

- Check to ensure the portion of the plan for the work to be performed has been accepted by the client
- Discuss the initial control phase

4.2.2 Initial Phase

This phase of inspection will document the completeness and acceptability of the particular items at the beginning of the work activity after a representative portion of the items has been completed is typically conducted by the SSHO or Site Superintendent.

This is the time to ensure that ECC's and our subcontractor's personnel/workers understand, through immediate inspection, the contract standards, and the standards of workmanship desired. If there is a difference of opinion in the interpretation of contract requirements, this is the time to settle the issue. The initial inspection phase is a practical method of performing preventive inspection and resolving conflicts. The following will be accomplished during this phase, if applicable:

- Review minutes of the preparatory meeting for open items
- Check the work to ensure it is in full compliance with the project requirements
- Establish level of workmanship and verify it meets the desired acceptable workmanship standards.
- Resolve all differences between personnel and subcontractors
- Check safety to include compliance with and upgrading (if necessary) of the Accident Prevention Plan (APP)/SSHP and AHA. Review the AHA with each worker, if deemed necessary.
- Prepare documentation of the initial phase inspection, including a narrative description of detailed inspection procedures, minutes of meetings, inspection results, corrective measures, etc., using forms presented in **Appendix A** of this QCP or included in the field book.
- The initial phase will be repeated for each new crew member arriving to work on-site or any time acceptable specified quality standards are not being met.

4.2.3 Follow-up Phase

Follow-up inspection is geared toward a level of effort to verify the continuation of project compliance and standards of workmanship established during the previous two phases. This inspection is typically conducted periodically by the SSHO, or Site Superintendent to ensure a continuation of satisfactory quality standards. Follow-up inspections will be made a matter of record in the DQCR. The QCM will verify proper procedure technique, sample handling, and Chain of Custody (COC), if required. The SSHO or Site Superintendent will monitor testing results and compare them with the project requirements, and if acceptable, document the results and provide a timely authorization to proceed with subsequent work. If the QCM determines the work is otherwise, not acceptable, he will notify the PM for stopping work and initiating a conformance action. Final follow-up checks will be conducted, and all deficiencies will be corrected before the start of additional DFWs.

4.3 Additional Preparatory and Initial Phases

Additional preparatory and initial phases will be conducted on the same DFW if the quality of ongoing work is unacceptable; if there are changes in the applicable QC staff, on-site supervision, or work crew; if work on a DFW is resumed after a substantial period of inactivity; or if other problems develop.

4.4 Control for Off-Post Work

When necessary to complete the objectives required in the PWS and as acknowledged in Table 1-1 of the Project Management Plan, work may take place off-post (laboratory analysis). To the extent practicable, ECC will monitor the quality and workmanship of products developed off-site by implementing the same control measures as work that takes place at a project site to ensure the products and/or materials meet the overall quality and technical standards (i.e., Work Plans or equivalent documents with Quality Assurance Project Plan [QAPP]-like requirements). Should any off-Post work be of a complexity that would warrant an effort beyond these measures (and those referenced in **Section 5.1** below), it would be discussed and agreed to by the ECC PM and the Army COR.

4.5 Deficiency Management

The ECC quality program evaluates the effectiveness of our QC program and ensures continuous improvement in the quality of our work. The primary goals of our quality program are to prevent non-conformances and to facilitate continual process improvement. If the first goal is not achieved, the identified deficiencies or non-conformances will be corrected in a timely and cost-effective manner in order to prevent their recurrence. This QCP includes provisions for preventing quality issues, facilitating process improvements, as well as identifying, documenting, and tracking deficiencies until corrective actions have been verified.

4.5.1 Preventive Measures

While the entire QC program is directed toward problem prevention, certain elements of the program have greater potential to be pro-active. The primary tools for preventing problems include:

- Employee qualification and training
- Preparatory, initial, and follow-up inspections
- Equipment calibration and maintenance.

This page intentionally left blank.

5.0 TESTING AND INSPECTION

5.1 Analytical Testing

ECC will procure the services of an independent analytical laboratory with Department of Defense (DoD) Environmental Laboratory Accreditation Program certification to perform analytical testing required by this project. The testing laboratory will have an established and documented quality system in compliance with the DoD Quality Systems Manual for Environmental Laboratories.

Laboratories must possess any required state or host nation certification and/or be accredited for each applicable method by a nationally recognized laboratory accreditation body.

Changes to the Laboratory Accreditation Status will be notified in writing to the Army within 30 calendar days of the change.

Chemical analysis will be performed using current United States Environmental Protection Agency (USEPA) procedures and in conformance with DoD Quality Systems Manual for Environmental Laboratories and State agency requirements unless otherwise specified in the project Performance Work Statement.

ECC will provide the analytical results citing applicable contract requirements or test procedures used. Analytical results will also provide a statement indicated if the analysis performed "conforms" or "does not conform" to the requirements.

5.2 Inspection

Inspection activities involve the evaluation of a characteristic as it relates to a specific requirement. ECC may perform the following inspections below, as appropriate to the DFW.

5.2.1 Punch-Out Inspection

A "punch list" of items that do not conform to the approved work plan, specifications, etc. will be prepared and included in the QC documentation. The list of deficiencies will include the estimated date by which the deficiencies will be corrected. The QCM or staff will make a second inspection to ascertain that all deficiencies have been corrected. Once this is accomplished, ECC will notify the Army that the item(s) is ready for their pre-final inspection.

5.2.2 Pre-Final Inspection

ECC will notify the Army when all of the items from the Punch-Out Inspection have been corrected and a Pre-Final Inspection will be scheduled. The Army will conduct the Pre-Final Inspection and a Pre-Final punch list may be developed if deficiencies are noted. The punch list will include estimated dates of completion that will ensure the deficiencies are completed timely and within the contract dates. When the punch list items are completed and verified by the QCM (or designee), the Army will be notified that a final inspection can be scheduled.

5.2.3 Final Acceptance Inspection

ECC will notify the Army 14 days prior to the Final Acceptance Inspection and the Army will formally schedule this inspection. The notification will include assurance that all items previously identified as being unacceptable along with all remaining work performed under the project will be complete and acceptable

by the date scheduled for the final acceptance inspection. The QCM, Site Superintendent, or other primary management person will represent ECC at the final acceptance inspection. Army personnel will be present as required.

5.3 Instrumentation/Equipment Testing, Inspection, and Maintenance

All equipment used at a project site shall be manufacturer-calibrated to national standards. Each time the instrument is about to be used, the calibration shall be verified and tested for functionality in accordance with *Final Revision 4 IW-QAPP* completed by HydroGeoLogic, Inc. (HGL) in 2019. Equipment found to be damaged, inoperable, or out of calibration shall not be used until the discrepancy is corrected and verified by the QCM (or designated representative). As necessary, a detector sensitivity or test grid may be used to test the functionality prior to daily use and results documented in the field logbook. Once equipment has been used, it shall be maintained following manufacturer's recommendations. The QCM, SSHO or Site Superintendent will make periodic verification/audits of the logs and procedures and report the findings in the DQCR.

6.0 QUALITY CONTROL DOCUMENTATION

The QCM serves a critical role in documenting, reporting, and storing data in support of the QC process and its effectiveness in attaining a high-quality work product.

6.1 Reporting Requirements

The QCM will complete and maintain the QC records to provide factual evidence of compliance with project requirements and to document all QC activities, including maintaining a record of all tests and inspections performed. These records include all work performed by subcontractors and suppliers. The QCM will sign each report and provide copies to the PM and USAEC, if requested. The primary QC reports are listed below.

6.1.1 Daily Reports

During field operations, DQCRs will be prepared describing QC and operations activities performed each day as well as the resources on-site and activities performed, including work performed by subcontractors. The reports will present an accurate and complete picture of QC and operations activities and site management. The report will include both conforming and deficient conditions in a precise, factual, legible, and objective manner. Copies of supporting documentation such as checklists and test reports will be attached as required, if requested. Work will be reported by terminology consistent with the work schedule.

The DQCR will be prepared, signed, and dated by the QCM (or her designated representative) and maintained on ECC's project SharePoint site. A copy of the DQCR will be submitted to RSA and the COR on a daily basis.

6.1.2 Monthly Summary Report

When field activities are being performed, the PM will submit a monthly summary report electronically to the client.

6.1.3 Quality Control Meeting Minutes

The QCM shall submit one copy of the meeting minutes within seven calendar days of the meeting.

6.1.4 Field Logbook

The QCM (or designee) shall be assigned a QC logbook for documenting details of field activities during QC monitoring activities. The logbook will be a bound manuscript with pre-printed page numbers. The QCM (or designated representative) will document his/her daily duties, summarize field activities, including arrival and departure time, note QC tests and results, depict the site layout, and other data. The information in the QC logbook will serve as a detailed description of events to aid in the preparation of the DQCR and in addressing follow-up questions that may arise.

All entries made in the QC logbook shall be made in ink. Any changes shall be made by a single strike through the error and initials. At the beginning of each day, notes will begin on the following page in the logbook. Descriptions shall be made in coherent English and in a manner, that would allow others to recreate the daily events in the absence of the QCM. At the end of each day, the QCM (or designee) will mark the remainder of the page with a single line and sign across or under it.

6.2 Records Management

Records are considered completed documents, validated data, and other materials that provide objective evidence of the quality of items or activities. A document that contains objective information can become a record once it is complete and identified as a record. Records include, but are not limited to:

- Work plans, technical proposals, and other work assignment planning documents
- Field plans and procedures
- Training records
- Project reports, including letter reports
- Field logbooks and project notebooks
- Three phase inspection records
- DQCR and Production Reports
- COC records
- Audit, surveillance, and independent project self-assessment reports
- Field change notices
- Laboratory data

The PM will define work assignment documents that are expected to become records.

Records will be maintained in the project office in a manner that prevents deterioration and provides for the safeguarding of the records. A record indexing system that allows for easy retrieval and provides sufficient information to permit the correlation of records with the items or activities to which they apply will be used. Inactive records will be stored for the mutually agreed upon time after which they are either archived or properly disposed

Disposition of records is controlled and documented. Records are destroyed only after the proper notification to USAEC and the approval of the ERMA PGM.

7.0 SUBMITTALS

Preparation of submittals is the responsibility of the PM at the project level using project staff resources. For preparation of technical submittals, the appropriate staff will be chosen; those who have the background and knowledge required for assuring the technical submittal is complete and accurate. Additionally, the PM will perform a separate technical peer review for highly technical submittals.

The QCM will review submittals for acceptance with QC requirements before transmitting to the client or other required approval authorities. Submittals requiring modifications or changes will be returned to the originator, subcontractor, or vendor for correction and resubmission. Submittals from subcontractors and vendors will be reviewed for technical content and accepted as a part of this submittal preparation procedure.

7.1 Transmittal Form

Transmittals by ECC to the Army will be documented via email correspondence and/or Project Portal upload (with corresponding email to notify the parties of document availability). The transmittal and distribution of documents to Regulators will be managed directly by RSA and supported by ECC as discussed in Section 3.4.2.3 of the Project Management Plan.

7.2 Comment Response Matrix

Upon receiving comments from Army, regulatory, or other outside reviewers, ECC will prepare a comment response matrix to document each reviewer's comment along with a response describing how the comment will be resolved, incorporated, or addressed. To expedite reviews of the comment responses, ECC may request that the Army schedule a conference call or meeting with reviewers to discuss their comments. The completed comment response matrix will then be submitted to the client for review and approval prior to submitting elsewhere, as appropriate and applicable. At such a time when all responses are accepted, ECC will incorporate changes into the document.

This page intentionally left blank.

8.0 NONCONFORMANCE REPORTING

8.1 Nonconformance Definition

The definition of a nonconforming condition can be a deviation from product, process, procedure or compliance specifications. All items determined to be nonconforming must be corrected through systematic corrective actions. Any time a condition exists not in compliance with drawings, specifications, codes, workmanship standards, facility requirements, or Army requirements, the nonconformity must be documented, corrected, and closed-out through the following means. All personnel are responsible for identifying deficiencies and the QCM is responsible for ensuring the proper tracking and documentation of deficiencies, including those identified by the Army. ECC will implement the ECC Causal Analysis System (see **Appendix B**) to determine the root causes of quality related incidents and non-conformances. We will perform trend analyses at least annually by reviewing all incidents and identifying common basic causes that need to be addressed to prevent similar occurrences.

8.2 Deficiency Identification

The QCM (or designee) will be responsible for managing the nonconformance process. All nonconforming items must be reported to the QA/QC Manager. Anyone finding a deficient item is responsible for reporting it to the appropriate management staff.

8.3 Nonconformance Determination

During routine site activities, the majority of corrective actions can be implemented immediately (within 48 hours) by the field personnel and documented in field logbook. If the condition is not quickly corrected, the individual initiates a Nonconformance Report (NCR) as shown in **Appendix A** and submits it to the QCM (or designee). The QCM (or designee will notify the PM and identify the person responsible for implementing corrective action (often the Site Superintendent), sets a date on which the response is due, and distributes the NCR.

8.4 Planning and Implementing the Corrective Action

The responsible person to initiate corrective actions should identify the cause of the problem, if known or suspected, on the NCR. The responsible person will develop a Corrective Action Plan, identify the date the corrective action has been or will be accomplished, describe the action taken on the form, and return the form to QCM (or designee) by the response due date. If possible, objective evidence that the corrective action has been completed should be included with the NCR response. If this is not possible, the responsible person should return the NCR by the due date and provide the evidence as soon as possible.

8.5 Accepting Corrective Action

The QCM (or designee) will review the NCR response to determine the adequacy of the corrective action. If the stated corrective action is unacceptable, the NCR will be returned to the responsible person for further discussion and corrective action.

8.6 Verifying Corrective Action

If the evidence provided to the QCM (or designee) concerning completed corrective action is acceptable, the NCR will be signed and dated. If evidence is obtained through an audit, surveillance, or follow-up

review, the individual conducting the follow-up will sign and date the form once the corrective action has been verified.

A distribution list for NCRs will be determined at the initial project-planning meeting. At a minimum, distribution will include the USAEC Representative, QCM, PGM, QA/QC Manager, PM, Site Superintendent, and any other applicable client-related individuals.

9.0 AUDITS AND ASSESSMENTS

Assessments are a learning process intended to increase the user's understanding of the program or system being assessed and to provide a basis for improving such programs or systems. The purpose of assessments is to improve the quality of work by comparing the system or element to the specified requirements. Assessments are conducted at all levels: corporate, contract, project, and activity. Response refers to the actions taken by the assessed organization as a result of the assessment. Typically, responses involve corrective actions to rectify the deficiencies identified in the assessment.

Project assignments will be monitored and assessed as deemed appropriate by the QCM (or designee) and QA/QC Manager. The following sections identify and describe many assessment types. Not all types may be applicable for this project. The requirement to conduct applicable assessment types may be further defined in the work plans and field plans. The ERMA PGM, PM, or the QA/QC Manager may specify additional assessments, as necessary, to ensure that the quality of work meets the Army and ECC's expectations. Assessment reports generated under this project will be made available to the Army, upon request.

9.1 Management System Reviews

Management systems reviews are self-assessments conducted annually, or as determined appropriate by the QA/QC Manager, to establish whether the quality management structure, policies, and procedures are adequate to ensure quality data. Management systems reviews may cover multiple contracts and quality plans. The primary focus of the management systems review is performance improvement through:

- Fostering individual ownership of the quality program by increasing employee involvement in quality
- Encouraging employees to routinely identify opportunities for quality improvement
- Meeting with management, technical, and QA staff to solicit specific suggestions to improve quality, such as more practical implementation methods, procedural modifications, etc.
- Training the management, technical, and QC staff on quality plan requirements
- Communicating lessons learned from other management systems reviews
- Checking on implementation and effectiveness of the quality program within the office.

9.2 Project Audits

Project audits may be conducted on ECC and subcontractor work activities by QC staff independent of the work activities or the appropriate staff appointed by RSA or the USAEC. The implementation and use of appropriate quality measures identified in this QCP, work plans, field plans, specifications, procedures, and any other applicable document specifying requirements can be used for checking during the audit. The auditor will also ensure that obsolete documentation has been removed from project work areas and check briefly on preparation of required deliverables and the condition of project files.

Project auditors will be trained in auditing procedures and authorized by the QA/QC Manager.

9.3 Project Self-Assessments

Project self-assessments are evaluations of work activities conducted by project personnel who are knowledgeable in the project requirements to determine if the technical requirements are being met. They are intended to provide rapid feedback to the project staff to facilitate timely corrective action.

The ERMA PGM makes the selection of project assignments or activities for project self-assessment and the personnel to conduct them with the assistance of the QA/QC Manger or QCM. Project self-assessments are conducted using a standardized or customized checklist.

Appendix A

QCP Forms

This page intentionally left blank.

DAILY SITE REPORT

Project Title: Redstone Arsenal
Date: _____
Activity Name: _____
Location: _____
Contract No.: W9124J-18-D-0004, DO W9124J21F0020

Weather	Sunny	Clear	Overcast	Rain	Snow
Temperature	< 32	32 – 50	50 – 70	70-85	> 85
Wind	Still	Moderate	High		
Humidity	Dry	Moderate	Humid		

Personnel On Site:

Name	Hrs.	Affiliation	Location/ Description of Work

Field Changes: YES _____ NO _____

If yes, filed Nonconformance and Corrective Action Report number (NCR No.):_____

Work Performed:	
Equipment Used:	
Health & Safety (Briefing held, PPE, injuries, near misses, etc.):	
Samples Collected/ Shipped:	
IDW Generated and Disposition:	
Verbal Instructions Received/Given:	
Changed Conditions/ Delays/ Conflicts Encountered or Resolved:	
Other Comments or Additional Information:	
Next Day's Planned Activities:	

Contractor Verification: On behalf of the contractor, ECC, I certify this report is complete and correct, and all materials and equipment used and work performed during this reporting period are in compliance with the contract plans and specifications, to the best of my knowledge, except as may be noted above.

_____ _____ _____ _____
Signature Date Reviewer Signature Date

INSTRUMENT CALIBRATION LOG

Project: Redstone Arsenal **Site:** **Date**

Calibrated By Instrument Serial Number

Weather:

Parameters	Calibration	Calibration Temp	Post Calibration	Comments
Conductivity (mS/cm^{c})				
pH (7)				
pH (4)				
pH (10)				
ORP (mV)				
Dissolved Oxygen (%)				
Barometric Pressure (mmHg)				
Turbidity	**<0.10 NTU**	**15.0 NTU**	**100 NTU**	**750 NTU**
PID		**Isobutylene / 100ppm**		

	Environmental Chemical Corporation	EQUIPMENT DAILY CHECK LIST

Equipment Name /Number _____ **Date** _____

Engine Hrs/Mileage _____ **Project Name** _____

BRAKES	COOLING WATER
AIR SYSTEM	OPERATING CONTROLS
TIRES/TRACKS	LIGHTS/REFLECTORS
HORN	WINDSHIELD WIPERS
SAFETY DEVICES	FIRE EXTINGUISHER
GLASS	BACKUP ALARM
MIRRORS	ENGINE OIL Add/Check
DEFROSTER	EXHAUST SYSTEM
STEERING SYSTEM	FLUID LEVELS
WIRE ROPE	ELECTRICAL SYSTEM
APPEARANCE	BREATHING AIR BOTTLES

These items are to be checked each shift before operating this piece of equipment.
Report ALL items requiring repair to supervisor prior to operation of equipment.

Note:

_____

_____

_____

_____

_____

_____

_____

_____

_____

OPERATOR'S NAME	
	(Please Print Name)

	Environmental Chemical Corporation	**FIELD WORK VARIANCE**

Project Name _____ Variance No _____

Project No _____ Page ____ of ____

Contract No. _____ CTO No. _____ Date: _____

Variance (include justification and present requirements) Requested by: _____

Proposed Change

Technical Justification

Cost/Schedule Impact

Reason for Change ☐ Addition ☐ Deletion

Change Order Required ☐ No ☐ Yes Change Order No. _____

Applicable Document

Approved By		
	Project Manager	**Date**
Approved By		
	CQC Manager	**Date**
Approved By		
	Contracting Officer	**Date**

	Environmental Chemical Corporation	MATERIALS DELIVERIES STORAGE CHECKLIST

Project Name:	Date:	Serial No.	
Building Name:		Control #	
Specified Location:		Reference #	
Drawing Reference:			

Description of Activities	Disposition			Inspection Date (Initials)
	ACCEPT	REJECT	HOLD	
1 Material:				
2 Date of Delivery				
3 Handling method				
4 Storage method				
5 Protection				

Remarks:

Checked By:	Inspected By:	Witnessed By:
Contractor Representative	Q.C. Inspector, Contractor	Prime Contractor Representative
Date:	Date:	Date:

	Environmental Chemical Corporation	NON-CONFORMANCE REPORT TRACKING

Contract _____ **Project No** _____

CTO No _____ **NCR Number** _____

Nonconformance Description (include specific requirement violated):	
Identified By	**Date**
Root Cause of Nonconforming Action:	
Corrective Action(s) to be Taken (include date when action(s) will be complete):	
To Be Performed By	**Date**
Action(s) to be Taken to Preclude Recurrence:	
To Be Performed By	**Date**

Acceptance By		
	Project Manager	**Date**
	CQC Manager	**Date**

Corrective Action(s) Completed by and Date:	Verification Completed by and Date:

	Environmental Chemical Corporation	NON-CONFORMANCE REPORT TRACKING LOG

Contract _____ **Project Name** _____

CTO No _____ **Page** ____ **Of** ____

NCR No.	Orig. Date	Initiated By	Nonconformance Description			Status	
Project No.	Close Date	Close By		Resp. Party	C/A Due	C/A Recommended And Approved	Re-inspection Results

	Environmental Chemical Corporation	RECORD OF TESTING ON -OR- OFF SITE

To: _____

Testing To Be Carried Out By: _____

Contract Number: _____ **Contractor:** _____

Item or Work for Test: _____

_____

Location of Test: _____

Proposed Date & Time of Test: _____

Specified Testing Requirements: _____

_____

Notified By: _____ **Date:** _____

To Be Inspected By: _____ ☐ _____ ☐ _____ ☐

_____ ☐ _____ ☐ _____ ☐

Test Record

Date of Test: _____ **Location or Grid Ref.** _____

Type of Test: _____

Test Conditions Maintained: **Start** ☐ **Finish** ☐

Accepted ☐ **Rejected** ☐

Test Result

Comments/Observations: _____

_____

_____

_____

Test Witnessed By:

_____ _____

QC Inspector (Signature) **Supplier (Signature)**

_____ _____

Contractor Repr (Signature) **Prime Contractor Repr (Signature)**

	Environmental Chemical Corporation	REWORK ITEMS LIST

Contract _____ **Project No** _____

CTO No _____

Item	Date Identified	Date Corrected
1.		
2.		
3.		
4.		
5.		
6.		
7.		
8.		
9.		
10.		
11.		
12.		
13.		
14.		
15.		
16.		
17.		
18.		
20. 21.		
22.		
23.		
24.		

	Environmental Chemical Corporation	STATUS SUMMARY ON NON-CONFORMANCE NOTICES

PROJECT: _____ DATE: _____

SEQUENTIAL SERIAL NO.	DATE OF ISSUE	DESCRIPTION	DATE RECEIVED BY CONTRACTOR	DATE RETURNED BY CONTRACTOR	Q.C. ENGINEER		COMMENTS
					ACCEPTED DATE	REJECTED DATE	

	Environmental Chemical Corporation	STOP WORK ORDER

Project Name		**Date**	
SWO No.		**Page**	
Contract No.		**CTO Number**	

1. Written Notice			
Issued to:		P.O. # or Activity:	
Name:		Location:	
Title:		Issued by (name):	
Origination:		Issued by (title):	
2. Verbal Notice			
Issued to:		Date:	
Title:		Time	

3. Associated NCR No.	**4. Associated CAR No.**
5. Stop Work Order Condition Description	
6. Remedial Action Required:	

By Whom		By When	

7. Required Remedial Action Determined by:	
Project Manager	Date
CQC Manager	Date

8. Follow-up of Remedial Action Taken:

Verbal Notice to Resume Operations Given to:

Name	Title	Date	Time

Stop Work Order Cancellation Authorized by:

Program CQC Manager:	Date

This page intentionally left blank.

Appendix B

ECC Causal Analysis System

This page intentionally left blank.

ECC CAUSAL ANALYSIS SYSTEM

Step 1. Incident Description

Type of incident:

- Quality
- Vehicle/property loss >$500
- Environmental release or permit exceedance
- Injury or illness
- UXO-related
- Security
- High loss potential (HiPo)

Describe what happened:

_____

Evaluation of future risk if not controlled:

Probability of Recurrence	Severity of Loss Potential: Minor	Serious	Major
Will probably occur soon	Medium	High	High
Reasonable likelihood in future	Low	Medium	High
Unlikely	Low	Low	Medium

Step 2. Select Event Type

- Fall from elevation
- Fall on same level
- Struck by vehicle, equipment, load or moving object
- Struck against or bump into
- Caught in, between or under
- Caught on, snagged or hung
- Contact with harmful agent (chemical, biological, radiological, noise, temperature extreme, vibration)
- Ergonomic, overexertion, stress, strain, sprain
- Overpressurization, excessive temperature
- Equipment failure
- Environmental release
- Permit exceedence
- Product or process non-conformity
- Customer/stakeholder complaint, poor project performance rating
- Cost/schedule overrun

ECC Core Values

Step 3. Identify the Immediate Cause(s)

Identify those behaviors or conditions that directly resulted in the event or loss.

Substandard Acts or Behaviors

- Failure to follow established procedure
- Operating equipment without authority
- Exceeding the boundaries of the task envelope
- Operating at improper speed
- Failure to warn or secure
- Failure to control hazardous energy (de-energize, secure, lockout)
- Making safety devices inoperable (including jumpering interlocks)
- Using wrong or defective tools or equipment
- Poor lifting, pulling, turning technique
- Poor body positioning
- Using tools or equipment improperly
- Substance abuse or working under influence of prescription medication
- Inappropriate behavior
- Failure to check/monitor
- Failure to coordinate work activity
- Failure to identify customer/stakeholder expectations
- Failure to identify and reject non-conforming parts, materials or workmanship

Substandard Conditions

- Exposure to chemical, physical or biological agents
- Inadequate engineering controls
- Inadequate administrative controls
- Inadequate PPE
- Inadequate warning system or barricade
- Inadequate site layout or design
- Defective tools or equipment
- Congestion/restricted action
- Housekeeping/disorder
- Fire or explosion hazard
- Hazardous weather conditions
- Improper maintenance of infrastructure or plant facilities
- Failure to comply with designs, stakeholder expectations
- Inadequate resources on project
- Inadequate identification of regulations, codes, standards, specifications, permits to operate
- Inadequate communications equipment, software or process controls

Step 4. Identification of Root Cause(s)

Identify the system or personal factors that caused or permitted the immediate causes to be present.

System Factors

1. Leadership and Management

- Management commitment
  - to processes, policies and procedures
  - lead by example
- Management involvement
  - in ESQ activities (meetings, inspections, audits)
  - visible leadership
- Supervision
  - employee tasking, direction, follow-up
  - subcontractor oversight
- Line management accountability
- Adequate budgeting
- Assessment of risks and hazards
- Qualifications of supervisors and managers
- Performance evaluations and feedback
- Reporting relationships
- Employee involvement/inclusion in hazard evaluation and decision making

2. Communications and Training

- Training
  - Formal
  - OJT
- Evaluation of training effectiveness
  - Testing
  - Demonstration
  - OJE
- Competency determination
- Communications with client
- Communications with stakeholders
- Communications with employees
- Communications between organizations
- Communications between work groups or shifts
- Communications between individuals
- Communications with subcontractors

3. Project Development and Planning *(Plan)*

- Project Development
  - Understand SOW
  - Understand contract
  - Understand client and stakeholder relationships
  - Understand client and stakeholder expectations
- Risk analysis and management plan
  - PIP
  - Bid analysis
  - Process Safety Reviews
- Identification of codes, standards, specifications, SOPs
- Engineering and task planning
  - Multi-disciplinary, SME involvement
  - Review procedures
  - Value engineering
  - Site layout
  - Work task planning
- Project plans
- AHAs/JSAs
- Submittal process
- Hazardous work permits
- Regulatory permits
- Procurement
  - Subcontractor evaluation and selection
  - Requirements in RFP/SOW
  - Material specifications

4. Project or Work Task Execution *(Do)*

- Implementation of plan/procedure
- Schedule/work sequence
- Tools/equipment/PPE
  - Tools
  - Construction equipment
  - Infrastructure
  - Facilities
  - Process equipment
- Qualified personnel
- Compliance with codes/standards
- Documentation
- Document control
- Incident identification, notification, investigation and reporting

5. Measuring and Monitoring of Work Activities and Products *(Check)*

- Document reviews
- Design reviews
- Readiness reviews
- Four phase process
- Subcontractor oversight
- Exposure monitoring procedures
- Testing
  - Materials
  - Process equipment
  - Alarms and interlocks
  - Commissioning
  - Pilot and bench scale
  - Weights and measures
  - Calibration
- Inspections
  - Tools
  - Equipment
  - PPE
  - Competent person
  - Hazardous work activities
  - Materials receipt
  - Workmanship
  - Superintendent weekly safety
  - PM monthly safety
- Audits
- Customer feedback solicitation
- Employee feedback solicitation
- Internal Project Management Reviews
- Change identification, notification and impact assessment

6. Follow Through and Improvement *(Act/React)*

- Corrective action follow up
- Lessons learned
  - Develop
  - Communicate
  - Consult
  - Implement
- Response to client, user and employee feedback
- Emergency response
- Change management/risk management

Personal Factors

7. Capabilities

- Size, strength, reach
- Pre-existing physical limitations or medical conditions
- Sensory deficiency
- Intelligence
- Aptitude
- Memory
- Emotional disturbance
- Mental illness
- Fears/phobias

8. Stress

- Fatigue due to task load, duration or repetition
- Fatigue due to extended work schedule/ lack of rest
- Boredom
- Sensory overload
- Emotional overload
- Conflicting demands/confusion
- Frustration

9. Knowledge or Skills

- Experience
- Training
- Orientation
- Infrequent activity/lack of practice
- Coaching, evaluation and feedback

10. Motivation

- Convenience – save time or effort
- Improper behavior is approved, allowed, condoned or rewarded
- Proper behavior is ignored or punished by intended or unintended consequences
- Inadequate reinforcement of proper behavior
- Peer pressure
- Inadequate discipline
- Resistance to change

11. Abuse or Misuse

- Intended
- Unintended

Step 5. Corrective Action Plan

Development of an Action Plan to correct the root cause(s). Consider various systems, and whether or not 1) we have a process [P]; 2) our process consists of adequate standards [S]; and 3) whether we have sufficient compliance with our standards [C].

Improvement Action Guide

	P	S	C
1. Leadership			
Core values			
Mission			
Policies			
Balanced score card			
Client alignment			
Business processes			
Visible leadership			
Lead by example			
2. Management, Supervision, and Employee Involvement			
Operations management responsibilities and accountability			
Project management procedures			
Qualified supervision			
Adequate resources			
Involvement of SMEs			
Employee involvement activities			
Standard operating procedures			
3. Risk Evaluation			
PIP			
Incorporation of PIP/RMP into project plans			
Hazard identification and evaluation			
Environmental impact assessment			
Customers and stakeholders expectations and change probability			
Process risk or hazard analysis			
Activity hazard analysis			

	P	S	C
4. Project Development			
Understanding requirements			
Understanding the contract			
Estimating procedures			
Bid/proposal review procedures			
Inclusion of SMEs			
5. Planning			
Understanding requirements			
Understanding the contract			
Handoff and tasking			
Integration of risk management plans			
Identification of requirements			
Project plans and plan reviews			
Client alignment meetings			
Kickoff, MUM, pre-construction meetings			
Schedule procedures			
Engineering design and review procedures			
Submittal development and review			
Site layout, facility arrangement and task design			
Means and methods			
Communication of plans and procedures			

	P	S	C
6. Procurement and Subcontractor Management			
Subcontractor pre-qualification			
RFP/SOW			
Materials and equipment specifications			
Selection			
Integration			
Oversight			
Evaluation			
7. Risk Controls			
Risk management plans			
Standard operating procedures			
Quality control system			
Engineering controls			
Administrative controls			
PPE procedures			
Permit procedures			
Environmental policies, procedures and controls			
Process controls			
Accident prevention signs, tags and barricades			
Hazardous work permits			
Preventive maintenance			
Rules			
Security controls			

	P	S	C
8. Human Resources			
Hiring			
Placement/assignment			
Training			
Competency			
Evaluation and feedback			
Incentive plans			
Level of effort requirements and resource allocation			
9. Emergency Procedures			
Analysis			
Plans			
Communication and training			
Drills and tests			
Critique and follow-up			
Dedicated supplies			
Warnings and alarm systems			
10. Communications and Promotions			
ECCONET postings			
Meetings			
Tailgates			
Orientation, new employee and site-specific			
Postings			
Promotion campaigns			

	P	S	C
11. Monitoring and Measuring			
Progress meetings and reporting			
Four-phase process			
Inspections			
Audits and surveillances			
Testing			
Exposure monitoring			
BSC progress reporting			
Client feedback solicitation			
Employee perception surveys			
Hotline and reporting mechanisms			
ECCOSLIPS			
PMRs			
12. Continuous Improvement			
Incident reporting			
Lessons learned			
Action item tracking			
Client and stakeholder feedback and follow-through			
Employee feedback system			
Consultation of LL and incident databases			
Change management procedures			
13. Management Reviews			
PMR process			
Audit tracking			
BSC progress monitoring			
Client reporting			

Never Compromising Safety

Never Compromising Quality

This page intentionally left blank.

APPENDIX H

ACCIDENT PREVENTION PLAN

This page intentionally left blank.

ACCIDENT PREVENTION PLAN

ENVIRONMENTAL REMEDIATION SERVICES
U.S. ARMY GARRISON-REDSTONE ARSENAL

June 2021

Prepared for:

U.S. ARMY ENVIRONMENTAL COMMAND
Southeast-Environmental Service and Support Division
2450 Connell Road, Building 2264
Fort Sam Houston, TX 78234-7664

Contract No.: W9124J-18-D-0004, Delivery Order W9124J21F0020

This page intentionally left blank.

ACCIDENT PREVENTION PLAN

ENVIRONMENTAL REMEDIATION SERVICES
U.S. ARMY GARRISON- REDSTONE ARSENAL, REDSTONE ARSENAL, ALABAMA

June 2021

Prepared for:

U.S. ARMY ENVIRONMENTAL COMMAND
Southeast-Environmental Service and Support Division
2450 Connell Road, Building 2264
Fort Sam Houston, TX 78234-7664

Prepared by:

ECC
9300 West Courthouse Rd
Ste 303
Manassas. VA 20110

Contract No.: W9124J-18-D-0004, Delivery Order W9124J21F0020

This page intentionally left blank.

TABLE OF CONTENTS

1.0 INTRODUCTION AND SIGNATURES 1-1

2.0 BACKGROUND INFORMATION 2-1
2.1 RSA History and Description 2-1
2.2 Site Descriptions and Scope of Work 2-1
2.2.1 Anticipated High Risk Activities 2-4
2.3 Major Phases of Work Anticipated 2-5
2.4 Contractor Accident Experience 2-5
2.5 Key Field Personnel 2-6

3.0 STATEMENT OF SAFETY AND HEALTH POLICY 3-1

4.0 ORGANIZATION, RESPONSIBILITIES, AND LINES OF AUTHORITY 4-1
4.1 Health and Safety Responsibilities 4-1
4.1.1 ECC Project Manager 4-2
4.1.2 ECC Safety and Health manager 4-2
4.1.3 Site Safety and Health Officer 4-2
4.1.4 Site Superintendent 4-3
4.1.5 Field Personnel 4-4
4.1.6 Subcontractors 4-4
4.1.7 Site Visitors 4-5
4.2 Lines of Authority 4-5
4.3 Competent Persons 4-5
4.4 Disciplinary Procedures 4-5
4.5 Manager and Supervisor Accountability 4-5

5.0 SUBCONTRACTORS AND SUPPLIERS 5-1
5.1 Identification of Subcontractors and Suppliers 5-1
5.2 Managing Subcontractors 5-1
5.3 Supplier Control 5-1

6.0 MEETINGS AND TRAINING REQUIREMENTS 6-3
6.1 Project Meetings and Training Requirements 6-3
6.2 Safety Indoctrination Training for New Employees 6-5
6.3 Periodic Safety and Health Training for Supervisors and Employees 6-4
6.4 Visitor Indoctrination Policy 6-4
6.5 Site Orientation 6-4
6.6 Emergency Response Training 6-4
6.7 Personal Protective Equipment and Safety Equipment Training 6-4

7.0 SAFETY AND HEALTH INSPECTIONS 7-1
7.1 General Inspection Procedures 7-1
7.2 External Inspections and Certifications 7-2
7.3 Follow-up Procedures for Inspection Deficiencies 7-2

8.0 MISHAP REPORTING AND INVESTIGATION 8-1
8.1 Mishap Investigation, Reports, Logs 8-1
8.2 Immediate Notification of Major Mishaps 8-2

9.0 PLANS, PROGRAMS, AND PROCEDURES 9-1

10.0 RISK MANAGEMENT PROCESSES 10-1
10.1 Activity Hazard Analyses – Policy and Procedure 10-1

LIST OF TABLES

Table 2-1	Hazardous Activities Anticipated in the Scope of Work
Table 2-2	ECC OSHA Recordable Injuries and Illnesses through Quarter 2 2020
Table 2-3	Key Personnel
Table 5-1	Subcontractors
Table 6-1	Project Meetings and Training Requirements
Table 7-1	General Inspection Requirements
Table 9-1	Plans, Programs, and Procedures

LIST OF FIGURES

Figure 2-1	Installation Location Map
Figure 3-1	ECC Corporate Environment, Safety, and Quality Statement
Figure 4-1	Safety Organization

LIST OF APPENDICES

Appendix A	Activity Hazard Analyses
Appendix B	Resumes of Key Safety and Health Personnel and Competent Persons
Appendix C	ECC COVID-19 Prevention Program
Appendix D	ECC Corporate Environment, Safety, and Quality Standard Operating Procedures (Table of Contents)

LIST OF ATTACHMENTS (Supplemental Plans)

Attachment 1	Emergency Action Plan
Attachment 2	Fire Prevention and Protection Plan
Attachment 3	Medical Support Plan
Attachment 4	Drug and Alcohol Abuse Prevention
Attachment 5	Site Sanitation Plan
Attachment 6	Bloodborne Pathogens Program and Exposure Control Plan
Attachment 7	Site Layout Plans
Attachment 8	Access and Haul Road Plan
Attachment 9	Hearing Conservation Program
Attachment 10	Health Hazard Control Plan
Attachment 11	Hazard Communication Program
Attachment 12A and 12B	Heat and Cold Stress Monitoring Plan
Attachment 13	Crystalline Silica Assessment
Attachment 14	Hazardous Energy Control Plan
Attachment 15	Excavation and Trenching Plan
Attachment 16	Site Safety and Health Plan (Hazardous, Toxic, and Radioactive Waste [HRTW]

ACRONYMS AND ABBREVIATIONS

ºF	degrees Fahrenheit
ºC	degrees Celsius
<	less than
>	greater than
%	percent
µg/L	micrograms per liter
µg/m^3	micrograms per cubic meter
Abs	skin absorption
ACGIH	American Conference of Governmental Industrial Hygienists
ADEM	Alabama Department of Environmental Management
AED	Automated External Defibrillator
Ag	Silver
AHA	Activity Hazard Analysis
ANSI	American National Standards Institute
APP	Accident Prevention Plan
ASTM	American Society for Testing Materials
BBP	Bloodborne Pathogen
Beta-BHC	Beta-hexachlorocyclohexane
BLS	Bureau of Labor Statistics
bpm	beats per minute
C	Ceiling limit value which should not be exceeded at any time
Ca	carcinogen
Cd	Cadmium
CFR	Code of Federal Regulations
CHHM	Certified Hazardous Materials Manager
CIH	Certified Industrial Hygienist
CMDS	Corrective Measures Design Study
CMI-O	Corrective Measures Implementation - Operations
CMIP	Corrective Measures Implementation Plan
CMIR	Corrective Measures Implementation Report
CMS	Corrective Measures Study
Co	cobalt
CO	carbon monoxide
Con	skin and/or eye contact
COC	contaminant of concern
COR	Contracting Officer's Representative
CP	Competent Person
CPR	Cardiopulmonary Resuscitation
CSP	Certified Safety Professional
CWM	chemical warfare materiel
Cr	Chromium
CRC	Contamination Reduction Corridor
CRZ	Contamination Reduction Zone
DA	Department of the Army
DART	Days Away, Restricted, or Transferred
dB	decibel
dBA	decibels adjusted
DCE	Dichloroethene
DD	Decision Document
DDT	Dichlorodiphenyltrichloroethane
DFOW	Definable Feature of Work

ACRONYMS AND ABBREVIATIONS

DIA	Defense Intelligence Agency
DNT	dinitrotoluene
DoD	Department of Defense
DPT	Direct Push Technology
ECC	Environmental Chemical Corporation
EDGN	ethylene glycol dinitrate
EMR	Experience Modification Rate
ESQ	Environment, Safety, and Quality
EU	European Union
EZ	Exclusion Zone
GCWD	Gulf Chemical Warfare Depot
GDA	Government Designated Authority
HAZWOPER	Hazardous Waste Operations and Emergency Response
HBV	Hepatitis B Virus
HEPA	high-efficiency particulate air
Hg	mercury
HIV	Human Immunodeficiency Virus
HAS	Hollow Stem Auger
HTRW	Hazardous, Toxic and Radioactive Waste
Hz	Hertz
I/C	Impact/Compression
IDLH	Immediately Dangerous to Life and Health
IDW	Investigation Derived Waste
Inh	inhalation
Ing	ingestion
ISEA	Industrial Safety Equipment Association
ISEB	In-Situ Enhanced Bioremediation
LEL	lower explosive limit
LUC	Land Use Control
MEC	munitions and explosives of concern
mg/kg	milligrams per kilogram
mg/m^3	milligrams per cubic meter
MIP	Membrane-Interface Probe
Mn	manganese
MNA	Monitored Natural Attenuation
NA	Not applicable
NAICS	North American Industrial Classification System
ND	Not determined
NFPA	National Fire Protection Association
NIOSH	National Institute for Occupational Safety and Health
O&M	Operations and Maintenance
OEL	Occupational Exposure Limit
OSHA	Occupational Safety and Health Administration
OWS	oil/water separator
PAH	polycyclic aromatic hydrocarbon
Pb	Lead
PCE	tetrachloroethene
PEL	Permissible Exposure Limit
PG	Professional Geologist
PID	Photoionization detector
PM	Program/Project Manager

ACRONYMS AND ABBREVIATIONS

PMP	Project Management Professional
PPE	Personal Protective Equipment
ppm	parts per million
PWS	Performance Work Statement
QC	Quality Control
QCM	Quality Control Manager
QCP	Quality Control Plan
QP	Qualified Person
RAC	Risk Assessment Code
RDX	1,3,5-trinitro-1,3,5-triazine
REL	NIOSH Recommended Exposure Limit
RIR	Recordable Injury Rate
RSA	Redstone Arsenal
SAMHSA	Substance Abuse and Mental Health Services Administration
SDS	Safety Data Sheet
SHM	Safety and Health Manager
SOH	Safety and Occupational Health
SOP	Standard Operating Procedure
SOW	Scope of Work
SSHO	Site Safety and Health Officer
SSHP	Site Safety and Health Plan
STEL	Short term exposure limit
SVOC	semivolatile organic compounds
SZ	Support Zone
TBD	To Be Determined
TCE	Trichloroethene
TCRA	time-critical removal action
TLV	Threshold Limit Value
TSCA	Toxic Substances Control Act
TWA	Time-weighted Average
UL	Underwriters Laboratories
USACE	United States Army Corps of Engineers
USAEC	United States Army Environmental Command
UST	underground storage tank
UXO	unexploded ordnance
VC	vinyl chloride
VOC	volatile organic compound
WBGT	Wet Bulb – Globe Temperature
WWII	World War II

This page intentionally left blank.

WORKER ACKNOWLEDGEMENT OF THE ACCIDENT PREVENTION PLAN/SITE SAFETY AND HEALTH PLAN AND SITE ORIENTATION

I have read or been trained to the contents of this Accident Prevention Plan (APP). I understand the contents, and I agree to abide by its requirements. I understand that failure to comply with the provisions of this plan can lead to disciplinary action and possible termination from the project. Documentation of worker acknowledgment will be placed in the Project Records.

APP/Site Safety and Health Plan (SSHP)/Site Orientation Acknowledgment Form

Printed Name	Signature	Date

This page intentionally left blank.

1.0 INTRODUCTION AND SIGNATURES

This Accident Prevention Plan (APP) has been prepared by Environmental Chemical Corporation (ECC) to describe how ECC's Safety and Occupational Health (SOH) Program is tailored to the processes, hazards and requirements for environmental remediation services at Redstone Arsenal (RSA), Alabama. Work conducted under this contract will be performed in accordance with applicable Federal, State, and local SOH laws and regulations including: Occupational Safety and Health Administration (OSHA) standards (including 29 Code of Federal Regulations [CFR] 1910 and 29 CFR 1926) and the United States Army Corps of Engineers (USACE) Safety and Health Requirements Manual (EM 385-1-1, 15 November 2014). The contents of the APP are subject to review and revision as new information becomes available.

Plan Preparer:

Lauren Sparkman Digitally signed by Lauren Sparkman DN: cn=Lauren Sparkman, o=ECC, ou, email=lsparkman@ecc.net, c=US Date: 2021.06.08 16:06:58 -05'00'

8 June 2021	(808) 479-0668
Lauren Sparkman Environmental Engineer	Date	Phone Number

Plan Concurrence:

Kym Edelman

8 June 2021	(757) 435-5384
Kym Edelman, Certified Industrial Hygienist (CIH), Certified Safety Professional (CSP) Safety and Health Manager (SHM)	Date	Phone Number

Plan Approval:

Pamela Foti

8 June 2021	(508) 274-3084
Pam Foti, Certified Hazardous Material Manager (CHMM), Project Management Professional (PMP) Project Manager (PM)	Date	Phone Number

This page intentionally left blank.

2.0 BACKGROUND INFORMATION

This section presents a brief description of the project including site descriptions, Scope Of Work (SOW), and key personnel.

Contractor:	ECC
Contract number:	W9124J-18-D-0004
Delivery Order:	W9124J-21F0020
Project Name:	Environmental Remediation Services, RSA, Alabama

2.1 RSA History and Description

The RSA occupies approximately 38,300 acres in Madison County, Alabama (**Figure 2-1**). The RSA is bounded on the north and east by the city of Huntsville, on the west by the city of Madison, on the west and southwest by Wheeler National Wildlife Refuge, and on the south by the Tennessee River. Huntsville has a population of nearly 165,000; Madison County population is about 320,000. Approximately 330 military families reside in government quarters on RSA and approximately 40,000 government employees and contractors work at the facility. The primary mission of RSA is the development, acquisition, testing, fielding, and sustainment of aviation and missile weapon systems. Most of the installation tenants support this effort; however, RSA is also home to such diverse activities as training for handling explosives and ordnance devices, Defense Intelligence Agency (DIA) activities, and the production of iron carbonyl. The RSA is home to over 70 different tenant organizations.

2.2 Site Descriptions and Scope of Work

The SOW under Contract W9124J-18-D-0004 is to perform environmental remediation services at RSA. Site descriptions and their associated SOWs are discussed below.

RSA-156 Groundwater Site, Groundwater Unit #13 and RSA-157 Groundwater Site, Groundwater Unit #14

RSA-156 is a 1,400-acre groundwater unit that includes the RSA-116 surface media site and hundreds of igloo-style magazines used for storage of explosives, conventional munitions, and chemical munitions (historically), as well as various small-scale testing and conditioning facilities. The SOW includes the following:

- Respond to Alabama Department of Environmental Management (ADEM) comments and finalize Corrective Measures Study (CMS).
- Prepare Corrective Measures Implementation Plan (CMIP) and Decision Document (DD)/Statement of Basis and permit modification for the implementation of the groundwater corrective measures.
- Implementation of Corrective Measures (Monitored Natural Attenuation [MNA] and Land Use Controls [LUCs]) including installation up to three bedrock wells, installation of LUC signs, and preform groundwater and spring sampling.
- Prepare Corrective Measures Implementation Report (CMIR).

RSA-262, CSW Warehouse Area

RSA-262 is the former Gulf Chemical Warfare Depot (GCWD) area. Five of seven warehouses originally located at RSA-262 remain and are used for storage/administrative purposes. Two buildings were demolished in 2004. The warehouses were constructed in October 1942 and historically used for storage

of inert materials, such as spare parts and shipping crates, and for rehabilitation of unserviceable munitions/equipment. The SOW includes the following:

- Respond to United States Army Environmental Command (USAEC)/RSA comments and finalize CMS.
- Develop CMIP with a permit modification.
- Finalize DD/Statement of Basis.
- Implement CMIP including excavation and transport and disposal of polycyclic aromatic hydrocarbon (PAH)-impacted soil, confirmation sampling, and site restoration. Additionally, install monitoring wells, perform groundwater sampling, and perform groundwater injection event.
- Prepare CMIR.

RSA-263 CWS Depot Motor Pool (Building 8017)/Change House (Building 8020)

RSA-263 is a 3.3-acre site located within the RSA-154 groundwater site. Building 8017 was used as a motor repair shop to support chemical warfare materiel (CWM) operations until 1957, when it was converted to storage, repair shop, and dry boat storage. Building 8020 was originally used as a change house for CWM Services personnel and later converted to a laboratory/equipment testing mission. Buildings 8015 and 8016 existed on the same foundation and were comprised of a gasoline pump station and a motor greasing and wash stall. A gasoline UST was located at the east side of the building and was removed in the 1980s. The four former buildings B-8015, B-8016, B-8020, and B-8017 have been demolished. The SOW includes the following:

- Prepare CMIP, DD/Statement of Basis and permit for modification for the implementation of groundwater corrective measures (MNA).
- Implement MNA including sampling monitoring wells.

CCSWMU-306, Steam Heating Plant, Building 7291

RSA-306 is comprised of Building 07291. The facility is an active steam heating plant which includes an oil/water separator (OWS) and concrete sump to the northwest, two former underground storage tanks (USTs) to the northeast, and a water conditioning vault with steam pipelines to the southwest. The SOW includes the following:

- Prepare Corrective Measures Design Study (CMDS) including Membrane-Interface Probe (MIP) survey and groundwater sampling.
- Prepare CMIP.
- Prepare DD/Statement of Basis.
- Implement remedy, which is unknown as this time.
- Prepare CMIR.
- Perform one year of quarterly Corrective Measures Implementation- Operations (CMI-O) sampling with reporting.

RSA-308, Exterior Sump at Building 7120

RSA-308 is a 0.01-acre site located in the southeastern portion of RSA. The exterior sump and drainage channel associated with Building 7120 collected propellant wastes from floor drains located within the test bays. The SOW includes the following:

- Prepare CMIP, permit modification, and DD.
- Install interface wells and perform sampling motoring wells.

- Prepare CMIR
- Perform one year of semiannual groundwater sampling and reporting

MSFC-033A, Surface Soils East of Building 4816; RSA-056, Closed Arsenic Waste Ponds (South) Area U; RSA-139, Closed Arsenic Waste Ponds (North) Area U; RSA-282/ RSA-072-R-01, Former Mortar Test Site

MSFC-033A was the result of the inadvertent placement of PAH-contaminated surface soil to the east side of Building 4816. The contaminated soils were partially covered with a new foundation for building expansion and a concrete pad for an electrical generator. RSA-056 and RSA-139 are located adjacent to each other and both were unlined surface impoundments that received arsenic-contaminated sludge/wastewater in the early-1940s. The sites are fenced and overlain by a compacted clay cap. RSA-282 was part of the RSA-072 mortar-tube proofing range. Munitions and explosives of concern (MEC) were found and removed prior to and during a time-critical removal action (TCRA) in 2008 and 2009. The probability of encountering unexploded ordnance (UXO) has been determined to be low; however, since the site was once part of an active range and MEC was historically detected, the site is not eligible for unrestricted use as defined in Alabama Administrative Code r. 335-5. The SOW includes the following:

- Implement corrective measures at all sites including a version of LUCs with fencing and groundwater monitoring at RSA-056/RSA-139.
- Prepare CMIRs.

RSA-009, Inactive Sewage Treatment Plan #3 and RSA-140, Inactive Disposal Area Near T/S Tower

RSA-009 is an inactive sewage treatment plant located on 3.4 acres that was constructed in 1942. It is not in use but is fully operational. The site includes both Toxic Substances Control Act (TSCA)-regulated and non-hazardous solid waste streams. RSA-140 is an inactive disposal area located on three acres that consists of two disposal mound areas comprised of construction materials that cover an area of 320 square feet. The SOW includes the following:

- Perform excavation, confirmations sampling, site restoration, groundwater sampling (RSA-009 only), and well abandonment (RSA-009 only).
- Prepare CMIRs.

RSA-058, Inactive Rubble Fill/Waste Pile Area W

RSA-058 is a historical rubble fill area. It was reportedly used for disposal of ash from ordnance demolition in the 1940s/1950s and for rubble and other fill during the 1960s/1970s. The SOW includes the following:

- Perform geophysical survey, delineation sampling, excavation, confirmation sampling, and site restoration.
- Update wetlands delineation.
- Prepare Construction Best Management Practices Plan, Well Closure Plan, CMIR, and Survey Plat.

RSA-083 Inactive Spray Booth Sump

RSA-083 occupies approximately 5.9 acres within Test Area 10, along Eagle Road. Building 7344 was used for large rocket motor preparation/assembly and painting of missile casings. Trichloroethene (TCE), the primary contaminant of concern (COC), has been steadily decreasing in groundwater, accompanied by increases in TCE degradation products (cis-1,2-dichloroethene [DCE]/vinyl chloride [VC]), suggesting that natural attenuation is reducing COCs in site groundwater. The SOW includes the following:

- Perform well inspection, groundwater sampling, and reporting

CCSWMU-003 (RSA-003), In-Ground Oil/Water Separator, Building 3617

Building 3617 was constructed during World War II (WWII) as a warehouse/shipping facility. During the 1960s, it became the Auto Skills Center, where military personnel performed maintenance on personal vehicles. RSA-003 is the location of a former in-ground OWS. The former OWS (removed in 2000) received waste lubricant oils, grease, solvents, and detergents until 1997 and when it was replaced by a new in-ground OWS. Historical spills/leaks resulted in groundwater contamination. The SOW includes the following:

- Perform dye tracer study.
- Prepare Design Optimization Summary Report
- Perform In-Situ Enhanced Bioremediation (ISEB) injections.
- Perform two years of quarterly performance monitoring and reporting.

RSA-048, Inactive Closed sanitary Landfill and RSA-059 Inactive Construction Rubble Fill

Sites RSA-048 and RSA-059 are surface disposal areas/landfills. RSA-048 is a 5.5-acre site that was active from 1947 through the early 1950s and received construction rubble. Limited previous sampling indicates the presence of industrial waste constituents such as metals, semivolatile organic compounds (SVOCs) (including PAHs), and volatile organic compounds (VOCs) in soil, sediment and groundwater. The nature/extent of these waste materials is unknown. The disposal area was not formally capped but has a thin layer of soil covering the waste piles/trenches. Environmental concerns are driven by the potential of contaminant release to the wetland. Current land usage is for non-intrusive surface use only.

RSA-059 is an approximately 11.8-acre site located in the central portion of RSA that is bounded on the north, east, and south sides by wetlands and the southern and eastern portions of the site are within the 100-year flood zone. A major sewage lift station is located in the western portion of this site. The site was active from the late-1940s to the mid-1970s and was used for disposal of rubble, construction debris (primarily railroad ties), sanitary and industrial waste. The SOW includes the following:

- Finalize CMIPs.
- Perform geophysical survey, test pits and sampling of all media.
- Prepare CMS, CMIP, and DD/Statement of Basis for each site.

RSA-255 Former Manganese Ore Storage Area

RSA-255 is an 8.3-acre site located within the former GCWD Area in the south-central portion of RSA; was used for the stockpiling of strategic minerals (i.e., manganese ore). The SOW includes the following:

- Perform mechanically disc plow and rake the soil to remove and collect visible manganese ore, transportation and disposal, and site restoration.
- Perform soil sampling if necessary.

2.2.1 Anticipated High Risk Activities

Anticipated high risk activities for this project include excavation and trenching. Competent persons (CPs) will be designated on the Activity Hazard Analysis (AHA) for this respective activity, and will be present on site, as required by USACE EM 385 1-1 during the activity.

2.3 Major Phases of Work Anticipated

To achieve the aforementioned SOWs, this project will include the following anticipated definable features of work (DFOW) listed in **Table 2-1** below.

Table 2-1: Hazardous Activities Anticipated in the Scope of Work

Hazardous Activities (Require Activity Hazard Analyses)
Mobilization, Site Inspection and Site Preparation[(a)]
Environmental Sampling[(a)]
Well Installation, Maintenance, and Abandonment[(a)]
Landfill Repair and Maintenance[(a)]
Land Use Control (LUC) Inspections and Geophysical Survey[(a)]
Direct Push Technology (DPT)/ Hollow Stem Auger (HSA)/Air Rotary/ Interface Probe (MIP) Survey[(a)]
Excavation, Transportation, and Disposal[(a)]
In-Situ Enhanced Bioremediation (ISEB) injection
Disc and Raking Contaminated Soil[(a)]
Equipment Decontamination, Demobilization and Site Restoration[(a)]

Notes:
(a) Activity Hazard Analyses is included as **Appendix A**.

The APP was prepared to address the complete range of activities to be conducted per the Performance Work Statement (PWS). Hazards associated with the work that will be addressed in the AHAs, some of which have been completed and are included in **Appendix A**. Other AHAs will be developed during the course of the project prior to the preparatory meeting associated with each DFOW as the work develops.

Work conducted under this contract will be performed in accordance with USACE Health and Safety Requirements Manual, EM 385-1-1 (30 November 2014), National Fire Protection Association (NFPA) 101 Life Safety Code (2006) and ECC Standard Operating Procedures (SOPs) addressing safety work practices.

2.4 Contractor Accident Experience

As shown in **Table 2-2**, ECC has an excellent safety record. ECC's Experience Modification Rate (EMR) is less than 1.0, indicative of fewer injuries and claims compared to other construction companies. The OSHA Recordable Injury Rate (RIR) is also less than the industry averages 2014 Bureau of Labor Statistics (BLS) data in North American Industrial Classification System (NAICS) Code 236, Building Construction.

Table 2-2: ECC OSHA Recordable Injuries and Illnesses through Quarter 2 2020

	2015	2016	2017	2018	2019	2020	National Avg Remediation 56291 (2018)	Nat Av Non-Res Bldg 2362 (2018)
Work Hours	783,714	650,615	533,274	523,449	772,677	399,171		
Total Recordable Cases	5	2	2	0	1	1		
Total Recordable Rate	1.27	0.61	0.75	0.0	0.28	0.5	2.9	2.5
DART Cases	2	2	2	0	0	0		
DART Rate	0.51	0.61	0.75	0.00	0.0	0.5	1.7	1.4

	2015	2016	2017	2018	2019	2020	National Avg Remediation 56291 (2018)	Nat Av Non-Res Bldg 2362 (2018)
Days Away Cases	2	2	2	0	0	0		
Days Away Rate	0.51	0.61	0.75	0.00	0.0	0.0	0.9	0.8
Interstate EMR	0.63	0.65	0.70	0.74	0.7	0.73		

Notes:
DART = Days Away, Restricted, or Transferred
EMR – Experience Modification Rate

Copies of ECC's OSHA Form 300 for the above-referenced years are available on request.

2.5 Key Field Personnel

Table 2-3 lists key field personnel for this project. Resumes of the Site Safety and Health Officer (SSHO) and SHM are included in **Appendix B**.

Table 2-3: Key Personnel

Name	Organization	Role	Contact (phone)
Jennifer Graham	USAEC	COR	Office: (210) 466-1406
Clint Howard	U.S. Army – RSA	Branch Chief – Environmental Restoration	Office: (256) 842-3702
Pam Foti, CHMM, PMP	ECC	PM	Mobile (508) 274-3084
Carol Canada, PG	ECC	Assistant PM	Mobile: (615) 693-9915
Kym Edelman, CIH, CSP	ECC	SHM	Mobile: (757) 496-5622
Brian Kateley	ECC	SSHO	Mobile: (410) 671-2970
Aaron Glad	ECC	Site Superintendent	Mobile: (508) 229-2270

Notes:
CHMM – Certified Hazardous Materials Manager
CIH – Certified Industrial Hygienist
COR – Contracting Officer's Representative
CSP – Certified Safety Professional
ECC – Environmental Chemical Corporation
PG – Professional Geologist
PM – Project Manager
PMP – Project Management Professional
SHM – Safety and Health Manager
SSHO – Site Safety and Health Officer
USAEC – United States Army Environmental Command

3.0 STATEMENT OF SAFETY AND HEALTH POLICY

The ECC Corporate Environment, Safety and Quality (ESQ) statement is presented in **Figure 3-1**. The statement will be posted at the job site on the safety and health bulletin board and in other applicable locations.

The safety goal for this project is zero loss incidents, and zero incidents with a high potential for loss. ECC will strive to complete the project without any injuries, significant property damage incidents, reportable environmental releases, or quality defects requiring re-work.

Objectives to meet this goal include:

- Conduct client kickoff meeting before the start of the project
- Hold subcontractor pre-construction meetings before work begins
- Implement the three-phase quality control (QC) system
- Conduct site orientation, including review of this APP with all project participants
- Use only trained and qualified workers
- Generate AHAs for all major DFOWs and train workers in AHA content
- Perform daily work-site inspections
- Conduct daily Plan-of-the-Day and Safety Tailgate Meetings
- Hold workers accountable for following hazard controls listed in the AHA
- Hold monthly project ECC and Subcontractor management safety meetings
- Conduct inspections by qualified Safety and Health personnel
- Employee participation activities such as milestone recognition and establishing a safety committee by the on-site team.

Figure 3-1: ECC Corporate Environment, Safety, and Quality Statement

4.0 ORGANIZATION, RESPONSIBILITIES, AND LINES OF AUTHORITY

ECC and its subcontractors are responsible for implementing this APP. Personnel responsibilities for project safety and the lines of authority of these safety personnel are described below. Refer to **Figure 4-1** for the project safety organization. Resumes of the SHM and SSHO are provided in **Appendix B.**

ECC, as the prime contractor, is the "controlling authority" for all work site safety and health of the subcontractors. ECC is responsible for informing their subcontractors of the safety provisions under the terms of the contract and the penalties for noncompliance, coordinating the work to prevent one craft from interfering with or creating hazardous working conditions for other crafts, and inspecting subcontractor operations to ensure that accident prevention responsibilities are being carried out.

Figure 4-1: Safety Organization

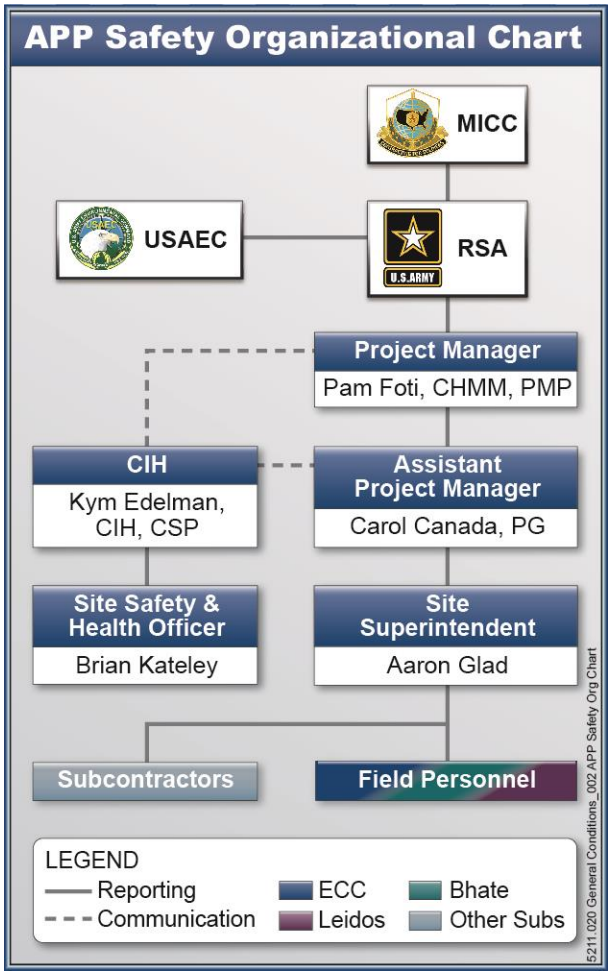

4.1 Health and Safety Responsibilities

The following sections describe the key personnel involved in this project and their responsibilities. To achieve the goals of the APP, each individual must fulfill their responsibilities and comply with the health and safety requirements. Failure to do so could result in removal from the site.

No work will be conducted on the site without the presence of the Site Safety and Health Officer (SSHO) or designated CP. Pre-task analysis (AHA, daily tailgate, Job Safety Analysis) will be conducted prior to doing work.

4.1.1 ECC Project Manager

Reports through Program Director to the Chief Operating Officer.

The PM, Ms. Pam Foti, CHMM, PMP, represents ECC in all aspects of work under the contract and is responsible for the following:

- Providing leadership by setting an example for all site personnel through actions and words regarding the importance of proper health and safety practices and holding project staff accountable for safety performance.
- Ensuring adequate resources are available to implement the APP.
- Ensuring that subcontractor Statements of Work include appropriate safety provisions and expectations.
- Ensuring that mishaps are properly reported to the Army and ECC's ESQ reporting network.
- Notifying the SHM of any changes in the SOW or site conditions.
- Ensuring that the APP is updated to address new hazards.

4.1.2 ECC Safety and Health manager

Reports to the Vice President of ESQ.

The SHM, Ms. Kym Edelman, CIH, CSP will oversee the overall project health and safety structure and implementation.

The SHM is responsible for the following:

- Reviewing and signing the APP prior to submittal and approving any modifications.
- Developing and/or reviewing AHAs prepared for the project.
- Approving the appointment of the SSHO and ensuring that the SSHO has the appropriate training and competencies to perform all expected duties.
- Being available on a 24-hour basis for consultation with the SSHO during on-site emergencies or as needed.
- Providing on-site consultation as needed to ensure the APP is fully implemented.
- Conducting general safety inspections during site visits and at least once per quarter.
- Participating in the investigation of mishaps.
- Evaluating air monitoring data and recommending changes to engineering controls, work practices, and personal protective equipment (PPE).
- Assisting in development of on-site training, which will be provided by the SSHO.

4.1.3 Site Safety and Health Officer

Reports to the PM and SHM.

The SSHO, Mr. Brian Kateley, implements the task-specific APP. In accordance with USACE EM 385-1-1, the SSHO must have completed the 30-hour OSHA Construction Safety course, the 30-hour General Industry Safety course, or an equivalent course meeting the 30-hour training objectives; eight hours of safety and health coursework every year; and at least five years' experience in construction or general industry safety or four years' experience plus a third party, nationally accredited SOH certification.

The SSHO will be responsible for:

- Serving as the general site CP for safety and health (EM 385-1-1 01.A.17 and 29 CFR 1926.20(b)(2)). No work will be done unless the SSHO or a suitable CP is on site.
- Overseeing compliance with the APP procedures and OSHA regulations through informal daily inspections.
- Developing (or assisting subcontractors with the development of) project-specific AHAs before work begins.
- Reporting to the site on a full-time basis for the duration of field activities.
- Serving as a member of the QC staff on matters relating to safety and health.
- Stopping work if unacceptable safety and health conditions exist and taking necessary action to re-establish and maintain safe working conditions.
- Consulting and coordinating modifications to the APP with the SHM, ECC PM, and designated U.S. Army representative.
- Ensuring all site personnel and visitors are properly trained in site hazards.
- Ensuring all employees and subcontractors are properly trained on the APP/AHAs and implement the APP.
- Conducting air monitoring and preparing air monitoring reports.
- Conducting site safety surveys and maintaining deficiency logs.
- Ensuring accidents are reported, investigated, and corrective actions are implemented.
- Monitoring decontamination methods to determine effectiveness.
- Ensuring proper training on PPE usage and monitoring the effectiveness of the PPE program.
- Maintaining all required safety and health records (e.g., OSHA 300 Logs, incident/accident reports, training certificates and qualifications, equipment checklists, safety plans, air monitoring data and reports) throughout the life of the project.

4.1.4 Site Superintendent

Reports to the PM.

The Site Superintendent, Mr. Aaron Glad**,** is responsible for:

- Setting an example for all site personnel through actions and words regarding the importance of proper health and safety practices on the job.
- Assisting in the development of AHAs before beginning work.
- Communicating daily work plans and schedules with the SSHO.
- Monitoring overall safety performance of field personnel.
- Conducting a weekly general safety inspection of the site, when needed.
- Enforcing safety rules and correcting work practices or conditions that may result in injury or hazard exposure.

- Immediately stopping site operations in emergencies or serious hazard exposure.
- Participating in mishap investigations.
- Ensuring proper equipment is provided, utilized, and maintained in accordance with manufacturer recommendations.

4.1.5 Field Personnel

Report to the SSHO, Site Superintendent, or CP.

Field personnel are responsible for understanding and abiding by the APP and performing work in a safe and responsible manner. Specific responsibilities include the following:

- Acting in a responsible manner at all times in order to prevent incidents, injury, and exposure to themselves and co-workers.
- Reporting all incidents, including near misses, and hazards to the SSHO.
- Attending and participating in all health and safety tailgate meetings.
- Following the instructions and directions of the SSHO, Site Superintendent, and/or CP.
- Utilizing the PPE provided.
- Following all field safety procedures for safe work practices.
- Performing tasks as instructed (unless the individual feels unqualified to perform the tasks safely).
- Conducting work in a manner compliant with the APP and AHAs.
- Reporting any personal condition that could affect their safety and/or the safety of coworkers (e.g., fatigue, drowsiness, illness, impairment by medications, influence by drugs or alcohol, emotional stress).

4.1.6 Subcontractors

Report to the SSHO or CP.

Subcontractors who perform work for ECC under this APP are responsible for the health and safety of their employees. The presence of an SSHO and the implementation of the APP do not relieve subcontractors of their responsibilities as employers. Specific responsibilities of subcontractors include:

- Complying with the requirements of their SOW.
- Development of AHAs for their work activities.
- Maintaining a safe and healthy work environment.
- Complying with contract requirements, laws, regulations, and EM 385-1-1.
- Reviewing the APP to ensure that the health and safety requirements of their specific tasks are satisfied.
- Performing all work in accordance with the APP requirements.
- Providing trained and experienced workers for the specific work activities.
- Participating in the Safety Tailgate Meetings.
- Identifying additional training needs for unique tasks.
- Reporting all incidents and participating in the investigations.
- Participating in routine site inspection activities.

- Ensuring all equipment brought to the site is in a "new or like new" condition, routinely inspected, and maintained in safe working order.
- Setting a positive safety example for all project staff.

4.1.7 Site Visitors

Site visitors will be responsible for the following:

- Participating in a site briefing before leaving the administrative office or site entry point.
- Following all site rules and instructions.
- Being escorted at all times unless otherwise approved by the SSHO.
- Wearing appropriate PPE.

4.2 Lines of Authority

ECC as the prime contractor is responsible for the implementation of the SOH Program as described in this APP and attachments. ECC will enforce compliance with the program requirements among our own employees, subcontractors and all others on the worksite.

The SSHO has a technical and administrative reporting relationship to the SHM who reports directly to ECC's President and Chief and Executive Officer. The reporting relationship provides for access to safety and health expertise as well as an independent reporting and line of communication. The SSHO has a functional reporting relationship to the PM, providing the PM and team with a resource for safety and health support for the project.

During field event, an SSHO or CP will perform daily and weekly health and safety inspections and provide general support to the PM for health and safety issues.

4.3 Competent Persons

The SSHO serves as the general CP, per EM 385-1-1 01.A.17 and 29 CFR 1926.20(b)(2). The qualifications of the SSHOs are included in **Appendix B**.

CPs for specific activities will be designated in the AHAs for those activities, and their qualifications will be submitted and accepted with the AHA at the Preparatory Meeting.

No work will be performed unless a designated CP/SSHO is present at the job site.

4.4 Disciplinary Procedures

All employees are required to comply with APP policies and procedures. Discipline will be in accordance with the Disciplinary Procedure described in the ECC Employee Handbook, which allows for immediate termination for serious infractions. ECC expects that all subcontractors will exercise proper discipline or terminate its employees at its sole discretion when justified. ECC retains the right to deny access to the site to any individual not compliant with safety requirements, in accordance with our subcontract agreement.

4.5 Manager and Supervisor Accountability

ECC managers and supervisors are accountable for providing a safe work environment through proper staffing, training, equipment availability, and by setting a leadership example for safety. Annual

performance reviews for managers and supervisors include assessments of project safety performance as well as the individual's demonstrated attitude toward safety.

5.0 SUBCONTRACTORS AND SUPPLIERS

ECC will use the subcontractors listed in **Table 5-1** for the execution of this Task Order. As stated in **Section 4.1.6**, subcontractors that perform work for ECC under this APP are responsible for the health and safety of their employees. The presence of an SSHO and the implementation of the APP do not relieve subcontractors of their responsibilities as employers. However, ECC is ultimately responsible for the safety performance during project execution including any work being performed by ECC subcontractors.

5.1 Identification of Subcontractors and Suppliers

Subcontractors expected to participate in this project are described in **Table 5-1**.

Table 5-1: Subcontractors

Subcontractor	Scope of Services
TBD	MIP Survey
TBD	Geophysical survey
TBD	ISEB injections - sub
TBD	Soil discing
TBD	Analytical Chemistry Support
TBD	Excavation and Drilling
TBD	Monitoring well installation/abandonment

Notes:
ISEB – In-situ enhanced bioremediation
MIP – Membrane-Interface Probe
TBD – to be determined

5.2 Managing Subcontractors

Subcontractor safety is critical to successful project performance. Subcontractors are expected to comply with the provisions of this APP and the AHAs. Subcontractor safety performance on the job will be monitored and substandard practices and conditions will be addressed immediately. Furthermore, subcontractor safety performance will be evaluated in the ECC procurement system where the information can be used for future subcontracting decisions.

Subcontractors will provide lists of hazardous materials and copies of Safety Data Sheets (SDS) to the SSHO prior to bringing the materials on-site. The SSHO will submit the SDS to the Contracting Officer's Representative (COR), if requested, and will maintain an active file in the project office.

5.3 Supplier Control

All suppliers of safety-related items are required to provide approved and appropriate safety and health materials for the project. The material supplied must meet the specifications, testing criteria or third-party certifications. These criteria are identified in the SOW, Quality Control Plan (QCP), or APP or as recommended by the SSHO. For safety-critical items, specifications will be identified, and receipt inspections will be conducted and documented. Health and safety related supplies will be obtained from recognized safety supply vendors and will meet specified OSHA, European Union (EU) or consensus standards. These items will be inspected upon receipt by the SSHO or the project Quality Control Manager (QCM).

All SDSs for materials brought on-site will be maintained by the SSHO. The QCM may request SDSs as part of the product information submittal process. Each subcontractor is responsible for maintaining their

own SDSs. Refer to **Attachment 9** of the APP for further detail on the project Hazard Communication Program.

6.0 MEETINGS AND TRAINING REQUIREMENTS

All ECC and subcontractor project personnel will have the training and certifications required to complete environmental remediation at RSA.

6.1 Project Meetings and Training Requirements

The training listed in **Table 6-1** will be provided to project personnel as noted. In addition to the topics listed below, the SSHO (in cooperation with the assistant SSHO), may identify additional topics and work tasks to be included in the training requirements. These special requirements may be noted on Project AHAs requiring additional training. All required training will be documented, and this documentation will be maintained on site.

Table 6-1: Project Meetings and Training Requirements

Topic	Description	Trainer	When Conducted	Personnel
General Training				
New Employee Indoctrination	Responsibilities for accident prevention; general SOH policies and procedures; reporting of mishaps; medical facilities and emergency response procedures; reporting of unsafe conditions and practices; job hazards and controls; other specific training as required.	SHM, SSHO, or other authorized by SHM	Before beginning field work	All new hires, and employees new to the project site.
APP	Review of APP requirements during site orientation.	SSHO	Before beginning field work	All project personnel
AHAs	Activity-specific hazards, controls, and training requirements for a specific phase or activity.	SSHO or designated CP	Before beginning specific tasks	Workers, supervisors, and oversight personnel engaged in the activity
HAZWOPER – General Training	40-Hour OSHA HAZWOPER initial training for general site employees, and three days of supervised on-the-job training for site workers.	HAZWOPER sites	Before beginning field work	Workers, supervisors, and oversight personnel working on-site who must enter the exclusion zone or whose work exposes them to health or safety hazards related to hazardous waste or contaminated media.
HAZWOPER Supervisor Training	8-Hours of training for supervising activities on hazardous waste sites.	HAZWOPER sites	Before beginning field work	Supervisors at HAZWOPER sites
Respiratory Protection	In accordance with 29 CFR 1910.134	SHM, SSHO, or other authorized by SHM; by Subcontractor CP	Before use of respiratory protection	Employees engaged in operations requiring use of respirators

Topic	Description	Trainer	When Conducted	Personnel
HAZWOPER Refresher	Eight-Hours of annual refresher training for workers on hazardous waste sites.	HAZWOPER sites or SHM	Before beginning field work	Workers, supervisors, and oversight personnel working on-site who must enter the exclusion zone or whose work exposes them to health or safety hazards related to hazardous waste or contaminated media.
Emergency Action Plan	Roles, responsibilities, recognition of emergency conditions, reporting and notification, evacuation, and other procedures.	SSHO	Before beginning field work	All project personnel, with detailed information on procedures for workers with special responsibilities
Hazard Communication	Requirements for SDSs and labels; hazards of site materials and controls; signs and symptoms of exposure; location of and access to Hazardous Materials and their SDSs.	SSHO	Before beginning field work	All project personnel potentially exposed to hazardous materials
Fire Protection and Prevention	Requirements of the Fire Protection and Prevention Plan, general education on selection, distribution, and proper use of fire extinguishers.	SSHO	Before beginning field work; as necessary to document extinguisher training	All project personnel. Fire extinguisher use for personnel designated as Fire Watch (other personnel as deemed necessary)
OSHA 30-hour construction or equivalent	Common hazards, controls, and OSHA requirements for construction activities.	Authorized OSHA Trainer	Prior to beginning field work	SSHO
Daily Safety Briefing	Review of Plan-of-the-Day and daily hazards; presentation of a specific topic; refresher training on various issues; and changes in hazards, controls, or procedures.	SSHO, Site Superintendent, CP	Daily, prior to work	All field workers, and field oversight personnel
Weekly safety Meeting	Incidents, modification to APP, upcoming work, new hazards, etc.	SSHO, CP	Weekly	All field personnel and field oversight personnel
Special Training				
Topic	**Description**	**Trainer**	**When Conducted**	**Personnel**
First Aid/CPR	Principles and techniques for First Aid and CPR.	Red Cross, American Heart Association, or other authorized provider	Prior to beginning field work	At least two project personnel (SSHO, and other field personnel)
Fall protection	Fall (from elevation) hazards, fall protection techniques, proper use of personal fall arrest systems and rescue procedures.	SSHO, other qualified instructors	Prior to work at elevation	Task-specific, workers exposed to fall hazards

Topic	Description	Trainer	When Conducted	Personnel
Lockout/tagout	Site-specific energy control and verification procedures.	SSHO, other qualified instructors	Prior to utilization of Lockout/tag out procedures	Authorized personnel engaged in lockout/ tagout, and affected employees whose work may be impacted by a lockout/tagout situation
Forklifts	Hazards and operation procedures, including machine-specific safe operating procedures.	SSHO	Prior to operation of forklift; every three years	Forklift/powered industrial truck operators
Other heavy equipment operations	Qualified by SSHO, Site Superintendent or Equipment Supervisor as documented on ECC Equipment Operator Qualifications Form.	SSHO, Equipment Supervisor	Prior to heavy equipment operations on site	Equipment operators
Power tools (e.g., chain saws, chippers, powder-actuated tools, compressed air systems)	Hazards; proper use and maintenance of tools as described in operations manual. Powder-operated tool users certified by manufacturer.	SSHO, or a trainer authorized by the manufacturer (explosive-actuated tools)	As part of general site orientation; prior to use of specific tools	Project personnel using power tools
UXO Awareness Training	Recognition of munitions and explosives of concern that may be encountered during site activities	UXO Qualified Personnel	Prior to beginning site operations	All site personnel

Notes:
AHA – Activity Hazard Analysis
APP – Accident Prevention Plan
CFR – Code of Federal Regulations
CP – Competent Person
CPR – Cardiopulmonary Resuscitation
HAZWOPER – Hazardous Waste Operations and Emergency Response
OSHA – Occupational Safety and Health Administration
SDS – Safety Data Sheet
SHM – Safety and Health Manager
SOH – Safety and Occupational Health
SSHO – Site Safety and Health Officer
UXO- Unexploded Ordnance

6.2 Safety Indoctrination Training for New Employees

New employees to ECC receive indoctrination training before they are allowed to participate in field work. The indoctrination training consists of the following:

- ECC COVID-19 Prevention Program (**Appendix C**)
- Review requirements and responsibilities for accident prevention and maintaining a safe and healthy workplace.
- Review ECC's general safety and health policies and procedures.
- Review ECC's incident reporting system and procedures.
- Identify employees' responsibilities for reporting incidents (safety, health and quality).
- Review medical treatment facilities of the employee's assigned office.
- Review safety, emergency, and evacuation procedures for the employee's assigned office.

6.3 Periodic Safety and Health Training for Supervisors and Employees

All project personnel will participate in training/refresher topics throughout the project. These topics may be presented as part of the daily tailgate meetings, or as separate classes established for specific project work activities and procedures. All supervisors, managers, and employees are encouraged to participate in other seminars or courses provided by outside vendors as necessary to increase knowledge and to maintain currency with construction topics, hazards, and controls.

6.4 Visitor Indoctrination Policy

All site visitors will be required to review the daily tailgate safety issues and sign the visitor's log. At a minimum, all visitors must be informed of the anticipated hazards, PPE requirements, designated work zones, escort procedures, and emergency procedures.

6.5 Site Orientation

All site personnel will be required to attend an initial site orientation prior to the start of field work. This training will be specific to the project and will include a detailed review of this APP, any AHAs applicable to mobilization and site setup, and key general safety requirements as outlined in **Table 6-1** above.

6.6 Emergency Response Training

As part of the initial orientation and ongoing refresher meetings, all employees shall be trained in the project-specific emergency response procedures detailed in **Attachments 1** through **3** of this APP. Retraining will occur whenever a drill or actual event identifies deficiencies in performance or when emergency plans change.

6.7 Personal Protective Equipment and Safety Equipment Training

Workers will be trained in the proper use of and be able to demonstrate their understanding of proper PPE regarding the selection, donning, doffing and adjustment, limitations and useful life, inspection and testing, proper care including maintenance, storage and disposal.

Retraining of workers shall be conducted whenever it is believed that the worker does not have the understanding or skill required for the use of the PPE.

7.0 SAFETY AND HEALTH INSPECTIONS

ECC and its subcontractors will perform periodic health and safety inspections in accordance with **Table 7-1** throughout the duration of the environmental remediation field activities at RSA. Results of all health and safety compliance review audits or inspections will become part of the project file.

7.1 General Inspection Procedures

Table 7-1 lists the general inspection requirements for this project.

Daily site-wide inspections will be conducted by the SSHO. Other CPs identified in specific AHAs will also conduct daily inspections of the work activities within their responsibility, as deemed necessary. Findings that represent deficiencies in the implementation of the APP or EM 385-1-1 will be added to the Tracking Log. Actions, timetable, and responsibility for correcting the deficiencies shall be recorded in the Deficiency Tracking Log. Follow-up inspections to ensure correction of any identified deficiencies will also be conducted and documented in the Deficiency Tracking Log. The Deficiency Tracking Log will be posted in the administrative area and updated on a daily basis. A monthly evaluation of the data should be discussed in the QC or SOH meeting with everyone on the project.

Table 7-1: General Inspection Requirements

What	Who	When	Documentation
General site conditions	SSHO	Daily	Logbook
	SSHO	Weekly or as needed	Site Health and Safety Inspection Checklist and Action Item Report, cc: SSHO, PM, Program/SHM
	PM	As needed	
	Program SHM	As needed	
Mobile construction equipment	Operators	Initial and Daily	Inspection checklist, cc: Construction/Equipment Supervisor (Note: Notify Army before initial to coordinate joint inspection)
Construction tools and equipment	Users	Daily	None. Tag defective items "out of service"
Lock out/Tag Out	SSHO	Prior to working on machinery, equipment, or process units where employees may be exposed to hazardous energy sources.	Lockout/Tagout Permit
Rigging	CP	Daily	None. Rigging items must be tagged with load capacities.
Ladders	SSHO	Weekly	Logbook, tag or inspection log form
Emergency supplies and equipment (fire extinguishers, spill response, PPE, First Aid, etc.)	SSHO	Weekly	Logbook, tag or inspection log form
PPE	SSHO	Initial, Periodic	None
	Users	Daily	None

What	Who	When	Documentation
Hazardous energy sources and processes (electrical systems, pneumatic equipment, etc.)	CP or QP	Initial	Per operating instructions, QCP, O&M procedures
	User/Operator	Daily	TBD

Notes:
CP – Competent Person
O&M – Operations and Maintenance
PPE – Personal Protective Equipment
PM –Project Manager
QCP – Quality Control Plan
QP – Qualified Person
SHM – Safety and Health Manager
SSHO – Site Safety and Health Officer
TBD – To be Determined

7.2 External Inspections and Certifications

If regulatory agency personnel arrive on site to conduct an inspection, the ECC PM and the following individuals will be contacted immediately:

- COR
- Subcontractor's site representative
- ECC SHM
- ECC General Counsel

If a citation is issued to ECC or its subcontractors, a copy of the citation will be submitted to the COR along with a Corrective Action Plan.

7.3 Follow-up Procedures for Inspection Deficiencies

All deficiencies identified during project or equipment inspections are noted and tracked through closure. Deficiencies identified by operators during equipment inspections are noted on the equipment inspection form. Any deficiency noted must be reviewed by the SSHO or site supervisor/foreman prior to the equipment being allowed to operate. Any deficiency that affects safe work performance must be corrected before the equipment is put back into operation. Minor deficiencies that do not affect safe performance will be corrected as soon as practical. Following correction of the deficiency, the noted item is initialed by the SSHO on the inspection form as corrected.

Deficiencies identified during the weekly formal site inspections are noted on the inspection form (with a due date and responsible individual) as well as on the SOH Deficiency Tracking Log posted on the project Safety and Health Bulletin Board. These deficiencies are also tracked to closure and verified upon completion. Deficiencies corrected immediately will be noted on the weekly inspection form.

8.0 MISHAP REPORTING AND INVESTIGATION

This section describes the project mishap reporting and investigation procedures. Other Army procedures may be utilized if there is a significant safety issue that occurs during this project.

8.1 Mishap Investigation, Reports, Logs

A mishap is any unplanned, undesired event that occurs during the course of work being performed. The term "mishap" includes accidents, incidents and near misses.

Project personnel are required to report all mishaps to their immediate supervisor. The SSHO will immediately arrange appropriate medical care as required. Once immediate medical care for the injured personnel or other critical emergency procedures has been accomplished, the SSHO will follow the Incident Notification, Reporting, and Management Procedure. In the event that an accident results in an employee being sent to a doctor, the Return-to-Work Examination Form will be completed by the attending physician on the date of treatment and will state one of the following conditions:

- Employee may return to full duty.
- Employee may return to limited duty (with type of limitations).
- Employee is unable to return to work.

A copy of this release will accompany the accident report.

For injuries and vehicle accidents, the scene will be secured to prevent additional injury/incident and to administer on-site First Aid Emergency assistance will be arranged prior to making any other notifications. After immediate emergency attention has been given, all incidents will be reported to the PM and SHM.

All recordable mishaps will be reported to the COR by the PM or SSHO as soon as possible, but no later than 24 hours after the incident. These include:

- OSHA Recordable injuries
- Property damage (exceeding $5,000)
- Days Away Injuries
- Days Away Illnesses
- Restricted/Transfer Injuries

Corrective actions will be determined and implemented to prevent the recurrence of the accident; responsibility for implementation of corrective actions will be assigned. Investigation findings and corrective actions will be reported within five days following an accident. A log of OSHA-recordable injuries/illnesses will be maintained.

A project-specific OSHA 300 Log (Log of Work-Related Injuries and Illnesses) will be kept at the job site or maintained by the SSHO. Minor injuries requiring only First Aid will be recorded on a project-specific First Aid log. A copy of the First Aid log will be submitted upon request to the COR. From 1 February through 30 April of each year, OSHA Form 300A (Summary of Work-Related Injuries and Illnesses) will be posted on the project safety and health bulletin board, if available; if not, the SSHO will have a copy available.

8.2 Immediate Notification of Major Mishaps

The COR will be verbally notified immediately by the PM or SSHO of any incidents that involve, or appear to involve:

- A fatal injury/illness (Report to OSHA within eight hours)
- Amputation, Loss of an Eye (report to OSHA within 24 hours)
- A permanent total disabling injury/illness
- A permanent partial disabling injury/illness
- In-patient hospitalization (Report to OSHA within 24 hours)
- Property damage of $500,000 or more
- Three or more illnesses suspected of being related to a site condition, or a hazardous or toxic agent on the site
- USACE aircraft destroyed or missing
- An electrical incident including arc-flash, shock, etc.
- Uncontrolled Release of Hazardous Energy (includes electrical and non-electrical)
- A load-handling equipment or rigging mishap
- Fall-from-Height (any level other than same surface)
- Underwater diving mishap

The PM will contact Ms. Kym Edelman immediately if a major incident occurs, as it may require immediate reporting to OSHA or State agencies.

At the time of any major incident, project site conditions will be preserved until released by the Government Investigation Team.

The written report will be submitted to the COR on the appropriate form no later than five working days after the accident. Corrective actions will be implemented as soon as possible. The COR will be notified when the corrective actions are completed.

9.0 PLANS, PROGRAMS, AND PROCEDURES

Table 9-1 lists the plans, programs, and procedures required by EM 385-1-1.

Table 9-1: Plans, Programs, and Procedures

Plans (Programs, Procedures) required by the Safety and Health Manual)	EM 385 Reference	Applicable to this Project? Y	N	If Required, Location or Reference
Fatigue Management Plan	01.A.20		X	Work hour criteria will not be exceeded.
Emergency Plans:	01.E			
Procedures and Test	01.E.01	X		**Attachment 1**
Spill Plans	01.E.01, 06.A.02	X		**Attachment 1**
Fire Fighting Plan	01.E.01, 19.A	X		**Attachment 2**
Posting Emergency Telephone Numbers	01.E.05	X		**Attachment 1**
Man overboard/abandon ship	19.A.04		X	No boating.
Medical Support	03.A, 03.D	X		**Attachment 3**
Alcohol and Drug Abuse Prevention Plan	01.C.02	X		**Attachment 4**
Site Sanitation/Housekeeping Plan	02.B	X		**Attachment 5**
Medical Support Agreement	03.A.01, 03.A.03	X		**Attachment 3**
Bloodborne Pathogen Plan	03.A.05	X		**Attachment 6**
Exposure Control Plan	03.A.05	X		**Attachment 6**
Automatic External Defibrillator (AED) Program	03.B.04		X	No AEDs on this project
Site Layout Plans	04.A		X	Will be included in the future in in applicable Work Plans **Attachment 7**
Access and Haul Road Plan	4.B	X	X	If/when subsurface activities are required, this plan will be provided. **Attachment 8**
Hearing Conservation Program	05.C	X		**Attachment 9**
Respiratory Protection Plan	05.G		X	Respiratory protection is not anticipated.
Health Hazard Control Plan	06.A	X		**Attachment 10**
Hazard Communication Program	06.B.01	X		**Attachment 11**
Process Safety Management Plan	06.B.04		X	No process meeting criteria
Lead Compliance Plan	06.C and specs		X	No lead abatement
Asbestos Abatement Plan	06.C and specs		X	No asbestos abatement
Radiation Safety Program	06.F		X	No radiological hazards
Abrasive Blasting Plan	06.I		X	No abrasive blasting
Heat Stress Monitoring Plan	06.J.02	X		**Attachment 12A**
Cold Stress Monitoring Plan	06.J.04	X		**Attachment 12B**
Indoor Air Quality Management Plan	06.L		X	No Indoor Air Quality issues expected
Mold Remediation Plan	06.L.04		X	No mold remediation
Chromium VI Exposure Evaluation	06.M		X	No exposures to Chromium VI
Crystalline Silica Assessment	06.N.02	X		**Attachment 13**
Lighting Plan for Night Operations	07.A.06		X	Daylight hour work
Traffic Control Plan	08.C.05		X	No work on or near roadways
Fire Prevention Plan	09.A.01	X		**Attachment 3**
Wild Land Fire Management Plan	09.L		X	No wildland work

Plans (Programs, Procedures) required by the Safety and Health Manual)	EM 385 Reference	Applicable to this Project? Y	N	If Required, Location or Reference
Arc Flash Hazard Analysis	11.B		X	No live electrical work
Assured Equipment Grounding Control Program	11.D.05, App E		X	Ground fault circuit interrupters used.
Hazardous Energy Control Program and Procedures	12.A.01	X		**Attachment 14**
Standard Pre-Lift Plan - LHE	16.A.03		X	No crane activity
Critical Lift Plan - LHE	16.H		X	No crane activity
Naval Architectural Analysis	16.L		X	No marine activities
Floating Plant Inspection and Certification	19.A.01		X	No marine activities
Severe Weather Plan for Marine Activities	19.A.03		X	No marine activities
Emergency Plan for Marine Activities	19.A.04		X	No marine activities
Man Overboard/Abandon Ship Procedures	19.A.04		X	No marine activities
Float Plan for Launches, Motorboats, Skiffs	19.F.04		X	No marine activities
Fall Protection and Prevention Plan	21.D		X	No activities that require fall protection
Demolition/Renovation Plan (to include engineering survey)	23.A		X	No demolition
Rope Access Plan	24.H		X	No rope access
Excavation/Trenching Plan	25.A.01	X		**Attachment 15**
Underground construction fire prevention and protection Plan	26.D.01		X	No underground work
Compressed Air Work Plan for Underground Construction	26.I.01		X	No underground work
Formwork and Shoring Erection and Removal Plan	27.C		X	No formwork and shoring erection
Precast Concrete Plan	27.D		X	No precast operations
Lift Slab Plans	27.E		X	No lift slab operations
Masonry Bracing Plan	27.F.01		X	No masonry wall construction
Steel Erection Plan	28.B		X	No Steel Erection
Explosives Safety Site Plan	29.A		X	No explosives work
Blasting Plan	29.A, 26.J		X	No blasting operations
Underwater Dive Operations Plan	30.A.14, 16		X	Do dive operations
Safe Practices Manual for Diving Activities	30.A.15		X	Do dive operations
Emergency Management Plan for Diving	30.A.18		X	Do dive operations
Tree Felling/Maintenance Program	31.A.01		X	No tree felling
Aircraft/Airfield Construction Safety & Phasing Plan	32.A.02		X	No airfield construction
Aircraft/Airfield Safety Plan Compliance Document	32.A.02		X	No airfield construction
Site Safety and Health Plan (Hazardous, Toxic, and Radioactive Waste [HTRW])	33.B	X		**Attachment 16**
Confined Space Entry Procedures	34.A.05		X	No confined space activities
Confined Space Entry Program	34.A.06		X	No confined space activities

10.0 RISK MANAGEMENT PROCESSES

ECC's Corporate ESQ SOPs will be utilized to assist in the identification and implementation of appropriate hazard control measures. The Table of Contents for these SOPs is presented in **Appendix D**. SOPs may be referenced throughout the APP and its attachments, appendices and supplemental plans.

10.1 Activity Hazard Analyses – Policy and Procedure

Activities, tasks and each DFOW to be performed will be covered in an AHA. Craft labor involvement in AHA development will be encouraged. All personnel involved in a task will review the AHA before performing the task. This review will be appropriately documented. Upon commencement and throughout the activity, the AHA will be used to verify compliance with the prescribed hazard controls and to note any potential changes in process and, therefore, potential hazards. An initial list of AHAs anticipated for this project includes:

- Mobilization, Site Inspection and Site Preparation
- Environmental Sampling
- Well Installation, Maintenance, and Abandonment
- Landfill Repair and Maintenance
- LUC Inspections and Geophysical Survey
- Direct Push Technology (DPT)/ Hollow Stem Auger (HSA)/Air Rotary/ Interface Probe (MIP) Survey
- Excavation, Transportation, and Disposal
- ISEB injection
- Disc and Raking Contaminated Soil
- Equipment Decontamination, Demobilization and Site Restoration

Some initial AHAs are included in **Appendix A**. Additional AHAs will be submitted for review and acceptance by the COR prior to the preparatory phase meeting for the subject activity.

Work shall not begin until the AHA with Risk Assessment Code (RAC) for the work activity has been accepted by the COR and discussed with all engaged in the activity, including the ECC personnel, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.

The AHA shall be reviewed and modified as necessary to address changing site conditions, operations, or change of CP(s)/Qualified Persons (QP[s]).

If a new CP/QP (not on the original list) is added, the list shall be updated (an administrative action not requiring an updated AHA). The new CP/QP shall acknowledge in writing that they have reviewed the AHA and is familiar with current site safety issues.

If the initial RAC increases due to a change made to the AHA by the workers, the AHA shall be resubmitted to Government Designated Authority (GDA) for acceptance prior to work proceeding.

Changes to or updates to an AHA that do not increase the RAC are not required to be resubmitted for acceptance by the GDA.

Workers/crews shall have in their possession the current AHA that reflects current site conditions, personnel, equipment, control measures, etc. while the work is being performed.

The AHA shall be used to assure work is being performed consistent with the AHA. In the event that the work is not being conducted in a safe manner, ECC and/or the client representative shall immediately stop the unsafe work being conducted until it is in compliance with this manual, APP and the AHA or the APP/ AHA is revised and accepted by the GDA, if necessary.

AHAs for completed work for the same contract or project work shall be readily available and maintained by the SSHO and accessible on-site by all workers, for a period of 12 months or, for contract work, the length of the contract.

Unless otherwise noted on the AHA, the minimum work clothing and PPE for this project includes:

- Shirts with sleeves
- Long pants
- American National Standards Institute (ANSI)-approved hard hat
- ANSI Z87+ safety glasses with side protection
- ANSI approved safety toe footwear, meeting American Society for Testing Materials (ASTM) Impact/Compression (I/C) 75 standards
- ANSI/Industrial Safety Equipment Association (ISEA) Class 2 High visibility garment while working around vehicles or mobile construction equipment
- Work gloves suitable to the task and hazards

Other PPE specific to the hazards of the tasks or DFOW are listed in the appropriate AHA. Workers will be trained in the proper selection, use, care and maintenance of all PPE and will be responsible for proper use, fit, cleaning and daily inspections. Damaged or worn PPE shall not be used. Employees noting problems with PPE will report immediately to their supervisor for replacement or refitting.

FIGURES

Redstone Arsenal
Madison
Huntsville
Alabama A&M University
Oakwood University
Links at Redstone Golf Course
Brahan Spring Park
Monte Sano State Park
1584 ft
1644 ft
MONTE SANO MOUNTAIN
Valley Hill Country Club
Huntsville Int'l Airport
Redstone Arsenal
Triana
Wheeler National Wildlife Refuge
Laceys Spring
Valhermoso Springs
1321 ft
Somerville
Coppercum Branch
Knox Creek
Indian Creek
Mill Creek
Bradford Creek
Chase Creek
Aldridge Creek
Big Cove Creek
Barren Fork Creek
Cotaco Creek
Woodland Mills Creek
Dry Creek
Town Creek
Guyer Branch
MORGAN
HUNTSVILLE MOUNTAIN
GREEN MOUNTAIN
WALLACE MOUNTAIN
BIG
72
53
231
565
431
255

LEGEND

- Redstone Arsenal
- Roads

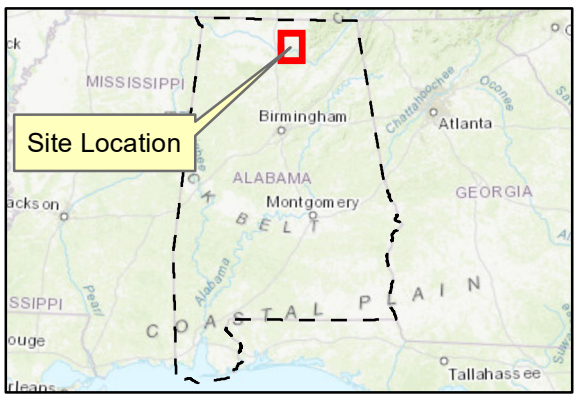

NOTES
1. Coordinate System: NAD83 State Plane Alabama East, US Feet (FIPS 0101)
2. Basemap data from IGI&S Office at Redstone Arsenal
3. Map Size: B-size (17" x11")
4. Revision Date: 2/8/2021

Figure 2-1

Installation Location Map
Redstone Arsenal
Madison County, Alabama

0 4,800 9,600 Feet
1 inch = 10,000 feet

Mission & Installation Contracting Command (MICC)
U.S. Army Garrison-Redstone

DISCLAIMER- The data represent the results of data collection/processing for a specific Redstone Arsenal activity and indicates the general existing conditions. As such, it is only valid for its intended use, content, time, and accuracy specifications. The user is responsible for the results of any application of the data for other than its intended purpose.

ECC GIS Server: E:\Projects\Redstone\MapDocument\APP\Fig2-1_RSA_APP_BaseMap.mxd

APPENDICES

APPENDIX A
Activity Hazard Analyses

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Mobilization, Site Inspection, and Site Preparation Activities**	Overall Risk Assessment Code (RAC) (Use highest code)	**L**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**		
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**		
Date Prepared / Revised: **4 February 2021**		
Prepared by (Name/Title): **Lauren Sparkman, Environmental Engineer**		
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**		
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**		
Notes: (Field Notes, Review Comments, etc.)		

Risk Assessment Code (RAC) Matrix

Severity	Probability				
	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	E	E	H	H	M
Critical	E	H	H	M	L
Marginal	H	M	M	L	L
Negligible	M	L	L	L	L

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS Consider People, Equipment, Materials and Environment *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHO in accordance with WE SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Underground utility survey Identify all overhead utilities	Contact with Overhead Utility Lines – Electrocution, Fires/underground utilities	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures, operational aspects & heavy equipment use, and change(s) in site work conditions. Daily housekeeping will be implemented during and at the ends of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines. • If work must be conducted closer to utilities than guidelines allow, the utility company must be contacted. • An observer/spotter shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means. This shall be the ONLY job the observer is performing when an observer is required.	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Underground utility survey Identify all overhead utilities (Continued)	Contact with Overhead Utility Lines – Electrocution, Fires/underground utilities (Continued)	• Keep all personnel well away from the equipment whenever it is close to power lines. • If intrusive activities, Louisiana 811 shall be notified prior to with sufficient time allowed for white-lining and utility marking. — Excavation Permit Procedure: Mark the area for the requested clearance and then submit an excavation permit with RSA. Alabama 811 is contacted 48 hours prior to activity start. • ECC personnel will "white-line" or otherwise mark the area where the wells are to be installed, prior to utility marking. • Intrusive soil activities conducted within a five foot "Buffer Zone" (horizontal or vertical, as measured from the outside edge of the utility) of any utility (electric, gas, high pressure, chemical storage tanks, pipelines, sewers, etc.) may require the use of non-aggressive excavation methods such as hand excavation using non-conductive hand tools, use of an air spade, hydro-excavation, or similar means (some jurisdictions require more stringent buffer zones). Spotter will assist the operator/workers to identify unknown conditions during drilling. • If a previously unknown utility line is identified, uncovered, or disturbed during intrusive activities, stop immediately and project management notified. Intrusive operations shall not recommence until the line has been evaluated, identified, and the appropriate utility notified. • Most utilities and marking services utilize the American Public Works Association Uniform Color Code for marking out utilities. All personnel involved in excavation projects will be familiar with this code.	**L**
	Back Strain or Sprain	• Use proper lifting techniques, move heavy objects with wheelbarrow/carts, seek assistance if items weigh over 50 pounds.	**L**
Receipt and placement of equipment vehicle: Spotting of equipment vehicle	Struck-by moving truck	• Always ensure a spotter for delivery truck stays in line-of-sight of driver at all times.	**L**
	Caught in or under equipment vehicle	• Use a spotter to coordinate activities of driver and person setting cribbing, tie-downs, chains. • Keep hands out of pinch points. • Wear leather work gloves.	**L**
	Contact with Overhead Utility Lines – Electrocution, Fires	• Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines. An observer/spotter shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means. This shall be the ONLY job the observer is performing when an observer is required. • Keep all personnel well away from the equipment whenever it is close to power lines.	**L**
Installation of temporary work zones construction fencing	Struck-by hand tools	• Wear leather gloves, safety-glasses, hard hats, safety-toe footwear. Keep hands out of pinch points. • Use post driver, not sledgehammer, for placing fence posts. Tape top of fence post or install mushroom caps to reduce potential for scrapes.	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Installation of erosion controls	Sprains/strains Struck-By (hand tools)	• Use two people to carry heavy loads of fencing/posts. Do not lift and carry more than comfortable weight for individual; 50 lbs. maximum.	**L**
Establishment of work zones, decontamination stations for personnel and equipment	Slips/trips/falls	• Wear high traction safety-toe footwear. • Keep loads manageable to not obstruct vision.	**L**
	Scrapes and cuts	• Wear safety glasses, gloves and long sleeves.	**L**
	Contact with poisonous plants (e.g. poison ivy)	• Inspect area before starting. • Wear long sleeve shirts, tuck sleeves and pant legs. If there is heavy growth, wear disposable coveralls and use barrier cream (e.g. Ivy Block). • Have Tecnu or other poison ivy cleanser on-hand, and wash immediately after contact.	**L**
	Stung by bees/hornets, bit by ticks or snakes	• Inspect areas for hives. • Ensure allergic individuals have emergency medical kit and are committed to using it. • Use insect repellant containing DEET on exposed skin and Permethrin on clothing. • Do not approach snakes. If bitten, seek medical attention.	**L**
	Struck by moving equipment	• Personnel will stay out of equipment swing areas and pinch-points.	**L**
	Fire/explosion of gasoline	• Allow equipment to cool before refueling and eliminate other sources of ignition. • Use only approved NFPA safety cans for gasoline. • Cleanup spills immediately.	**L**
	Heat Stress/Cold Stress (applies to all job steps)	• Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur and when instructed by SSHO. • Report all signs and symptoms of heat strain immediately to SSHO.	**L**
	Severe Weather (applies to all job steps)	• Shut down operations during severe electrical storms, heavy rain, high wind and evacuate site/take cover. • Train personnel on Emergencies Response. • Monitor weather systems.	**L**
	Eye injuries	• Safety glasses with side shields (impact resistant).	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***
Equipment to be Used	**Training Requirements**	**Inspection Requirements**
1. Support Vehicles 2. Skid steer/forklift <u>Support Zone</u> • Cell phone or Radio communication • Eyewash station • Fire extinguishers • First aid kit • Drinking water • 911 Air horn • Spill containment supplies • Air Monitoring equipment, if needed • Emergency decontamination supplies **PPE: Level D (hardhat, steel toe boots, work gloves, orange safety vest, safety glasses, and hearing protection, as needed)**	• Only qualified operators permitted to operate mobile equipment • Operators of forklifts will have recent certification / training in safe forklift operation (20 CFR 1910, Subpart N – Powered Industrial Trucks) • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan/Procedures • Fire extinguishers. **Competent Person: Site Superintendent and/or SSHO**	• SSHO daily site inspection • Equipment - Receipt and inspected by SSHO • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Complete ECC daily equipment inspection form • Weekly inspection of first aid kits • Monthly inspection of fire extinguishers • GFCIs (at least monthly).

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Environmental Sampling**	Overall Risk Assessment Code (RAC) (Use highest code) **L**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**	
Date Prepared / Revised: **4 February 2021**	
Prepared by (Name/Title): **Lauren Sparkman, Environmental Engineer**	
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**	
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**	
Notes: (Field Notes, Review Comments, etc.)	

Risk Assessment Code (RAC) Matrix

Severity	Probability				
	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	E	E	H	H	M
Critical	E	H	H	M	L
Marginal	H	M	M	L	L
Negligible	M	L	L	L	L

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS Consider People, Equipment, Materials and Environment *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHS in accordance with ECC SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Labeling sample containers Handling sample containers w/ preservation / adding preservation to containers Purging monitoring wells Filling sample containers from soil borings or well sample pump Cleaning outer surface of sample containers	• Personal injury • Slips & Trips • Lifting Strains & Sprains • Heat Stress/Cold Stress • Splash hazard • Handling Materials Containing Hazardous Materials • Proper Material Handling • Biohazard and Controls	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Tailgate meeting. Review JSA to familiarize themselves to hazards, emergency procedures and equipment, operational aspects & heavy equipment use, and change(s) in site/work conditions. Daily housekeeping will be implemented at the end of each workday. Equipment/vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit w/ eye wash. Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". **Stay on established pathways and ensure tools, cords, other objects are removed from walk areas to prevent trips and falls.** **Be cautious of muddy, wet, icy, or other slippery surfaces. Ensure surfaces are cleared and proper footwear is utilized to prevent slips/falls.**	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Labeling sample containers Handling sample containers w/ preservation / adding preservation to containers Purging monitoring wells Filling sample containers from soil borings or well sample pump Cleaning outer surface of sample containers (CONTINUED)	• Personal injury • Slips & Trips • Lifting Strains & Sprains • Heat Stress/Cold Stress • Splash hazard • Handling Materials Containing Hazardous Materials • Proper Material Handling • Biohazard and Controls (CONTINUED)	**Hand & Power Tool Use:** Prior to use all tools must be inspected. Any damaged or defective tools will be tagged and removed from service for repair and/or discarded. Ensure all guards are in place on tools. Wear protective gloves based on hazard associated with tool. Cutting devices must have blade protection. Fixed blade utility knives that cannot be retracted are prohibited. Ensure electrical tools are double insulated or properly grounded. Extension cords shall be connected to a GFCI. **Working with Hazardous Materials:** Employees will be provided with an overview of the hazards associated with the chemicals that will be used. A copy of the SDS will be available for review and proper PPE will be provided.	**L**
		Heat Stress/Cold Stress: • Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur and when instructed by SSHO. • Report all signs and symptoms of heat strain immediately to SSHO. **PPE:** Modified Level-D PPE will be worn inside posted areas. Any PPE upgrade will be in accordance with the SSHP action level guidelines. A face shield or goggles shall be used during activities where a splash hazard exists. Use of chemical resistant gloves shall be worn when there is potential skin contact with contaminated fluids. Hearing protection shall be worn if noise survey results above TWA of 85dBA. Wear Permethrin treated gaiters. **Material Handling & Storage:** No individual employee is permitted to lift any object that weights over 50-pounds. Proper lifting techniques shall be used. Multiple employees or the use of mechanical lifting are for lifting objects over the 50-pounds limit. Know the weight of the load and ensure loads are stable and secure before transporting. Ensure stages materials are properly stacked and secured to prevent sliding/falling. **Biohazard Controls:** • Inspect area before starting. • Wear long sleeve shirts, tuck sleeves and pant legs. If there is heavy growth, wear disposable coveralls and use barrier cream (e.g. Ivy Block). Wear Permethrin treated gaiters. • Have Tecnu or other poison ivy cleanser on-hand and wash immediately after contact. • Do not approach any wild animals. If bitten seek medical attention.	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Use of Generator	• Lift and carrying generator • Fire hazard while refueling	**Back Injury:** • Do not lift awkward sized items use proper lifting techniques • Do not use equipment to lift and move drums, equipment and supplies. Lift with your legs not with your back. • Additional personnel will be used to lift items weighing over 60 pounds. If possible, use mechanical movement aids (i.e., hand truck or wheelbarrow). • A fire extinguisher and spill containment supplies should be readily available. Ensure generator is on the ground while refueling. • Fuel generator only after engine has been shut down and cooled	**L**

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***
Equipment to be Used	**Training Requirements**	**Inspection Requirements**
• Hand Sampling Tools • Generator <u>Support Zone</u> • Cell phone or Radio communication • Eyewash station • Fire extinguishers • First aid kit • Drinking water • 911 Air horn • Spill containment supplies • Air Monitoring equipment, if needed • Emergency decontamination supplies **PPE: Modified Level D (hardhat, steel toe boots, nitrile gloves when sampling/leather gloves when cutting plastic tubes, gaiters, orange safety vest, safety glasses, and hearing protection, as needed). A face shield or goggles shall be used during activities where a splash hazard exists. Wear Permethrin treated gaiters.**	• Only qualified operators permitted to operate First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan/Procedures • Fire extinguishers **Competent Person: Site Superintendent and/or SSHO**	• Daily inspection of hand and power tools with replacement of damaged items. • Annual and monthly inspection of fire extinguishers • Weekly inspection of first aid kits/eyewash

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Well Installation, Maintenance and Abandonment**	Overall Risk Assessment Code (RAC) (Use highest code) **L**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**	
Date Prepared / Revised: **4 February 2021**	
Prepared by (Name/Title): **Lauren Sparkman/ Environmental Engineer**	
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**	
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**	
Notes: (Field Notes, Review Comments, etc.)	

Risk Assessment Code (RAC) Matrix

Severity	Probability				
	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	E	E	H	H	M
Critical	E	H	H	M	L
Marginal	H	M	M	L	L
Negligible	M	L	L	L	L

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS **Consider People, Equipment, Materials and Environment** *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHS in accordance with ECC SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Mobilization		General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures, operational aspects & heavy equipment use, and change(s) in site work conditions. Daily housekeeping will be implemented during and at the ends of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Level D PPE will be worn inside the designated EZ. Any PPE upgrade will be in accordance with APP guidelines. Hearing protection shall be worn if noise survey results above TWA of 85 dBA	L

Direct Push Technology (DPT), Hollow Stem Auger (HSA), Air Rotary Activities	Contact with Underground and Overhead Utility Lines – Electrocutions, Fires/underground utilities	• Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines. • If work must be conducted closer to utilities than guidelines allow, the utility company must be contacted. • An observer/spotter shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means. This shall be the ONLY job the observer is performing when an observer is required. • Keep all personnel well away from the equipment whenever it is close to power lines. • If intrusive activities, Alabama 811 shall be notified prior to with sufficient time allowed for white-lining and utility marking. — Excavation Permit Procedure: Mark the area for the requested clearance and then submit an excavation permit with RSA DPW. Alabama 811 is contacted 48 hours prior to activity start. • ECC personnel will “white-line” or otherwise mark the area where the wells are to be installed, prior to utility marking. • Intrusive soil activities conducted within a five foot “Buffer Zone” (horizontal or vertical, as measured from the outside edge of the utility) of any utility (electric, gas, high pressure, chemical storage tanks, pipelines, sewers, etc.) may require the use of non-aggressive excavation methods such as hand excavation using non-conductive hand tools, use of an air spade, hydro-excavation, or similar means (some jurisdictions require more stringent buffer zones). Spotter will assist the operator/workers to identify unknown conditions during drilling. • If a previously unknown utility line is identified, uncovered, or disturbed during intrusive activities, stop immediately and project management notified. Intrusive operations shall not recommence until the line has been evaluated, identified, and the appropriate utility notified. Most utilities and marking services utilize the American Public Works Association Uniform Color Code for marking out utilities. All personnel involved in excavation projects will be familiar with this code. Before derrick is raised a thorough walkthrough of surrounding area is required to ensure there are no overhead utilities within 100 feet horizontally. If overhead utilities are within 100 ft horizontally of the derrick, consult local utility company and refer to EM 385-1-1 Table 11-1 before commencing operations.	**L**
	Equipment Malfunction	• Rig operators must be qualified and designated. • All operations must be conducted in accordance with manufacturer’s operations manual. Ensure equipment manual is on site at all times and contents of the manual, specifically related to safe operations, have been reviewed will all employees engaged in activities. Ensure this review is documented. • Complete inspections and maintenance of the rig in accordance with the manufacturer’s operations manual.	**L**

DPT, HSA, Air Rotary Activities (CONTINUED)	Cuts/Lacerations	• A cutting device designed for cutting acetate liners (procured through Geoprobe) shall be used. If a safety utility knife is used, snubbed nose blades are required and the user must wear Kevlar gloves under leather gloves. Non-retractable utility knives are prohibited. Blades must be secured when not in use. • Utilize proper cutting technique and ensure cuts are made away from the body, keep hands clear. • Utilize leather work gloves or other cut resistant work gloves at all times when handling equipment. Ensure gloves are appropriate for potential laceration hazard if sharp edges are encountered.	**L**
	Lifting Strains/Sprains	• No individual employee is permitted to lift any object that weighs over 50 pounds. Proper lifting techniques shall be used. Multiple employees or the use of mechanical lifting are for lifting objects over the 50-pound limit. Materials shall be inspected for sharp edges prior to being handled and avoid pinch point hazards. • While handling direct push rods and filled acetate liners, make sure proper lifting techniques are used.	**L**

	Struck by or caught in drill rig equipment	• Only qualified personnel shall be permitted to operate equipment. The equipment shall be inspected daily using an ECC inspection form specific for the equipment in use. Equipment must have functioning safety devices as installed by the manufacturer. Deficiencies in equipment shall be corrected prior to operating. Equipment found to be unsafe shall not be used. Fire extinguishers of the appropriate size will be available on the equipment. All equipment shall have back up enunciators.
		• Only personnel essential to drill rig operation will be permitted in area directly surrounding drill rig. All personnel not directly contributing to drill rig operations will be required to stay a minimum of 25' away.
		• Check all safety devices, emergency shut-down switches daily or at the start of drilling shift. Drilling will not be permitted until all emergency shut-down switches and warning systems are working properly.
		• Drill rig operator is required to do a daily equipment checklist to ensure equipment is in safe working condition.
		  ○ Personnel need to be cognizant of surroundings and keep clear of cuttings discharge point. Eye protection will be worn at all times.
		  ○ Personnel need to remain away from air compressor and air hose unless a specific task requires work in close proximity.
		  ○ Do not operate compressed air system with broken or inoperable safety controls.
		  ○ Inspect airline safety cables to verify they are in good working condition.
		• If augers are used during drilling operations, auger guards will be required.
		• All work areas on and around the drill rig operation will be required to be kept clear of unnecessary equipment and materials. Ongoing housekeeping throughout the day will keep work areas free of slip, trip and fall hazards.
			L

	Struck by Traffic	When working adjacent to or on active roadways adequate traffic control devices must be installed to establish a safe work zone. Adequate signage must be established to identify the work zone. All personnel entering and working in an established work zone must wear the classification of reflective vests (appropriate based on speed of vehicles).	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

DPT, HSA, Air Rotary Activities (CONTINUED)	Struck-By / Pinch Points	• All personnel will wear ANSI Type 2 high-visibility traffic safety vests. Operators shall maintain a constant awareness of personnel and equipment in the work areas. • Moving heavy equipment must have properly functioning back-up alarms. • Spotters on the ground will assist operators in manipulating vehicles and equipment into tight or confined spaces. • Getting off or on any equipment while it is in motion is prohibited. • Three points of contact shall be maintained when getting on or off equipment. • Seats will be provided for each occupant of the equipment. • The operator shall use safety belts while equipment is in use. • All original manufacturer-installed safety equipment such as lights, guards, brakes, horn, etc. must be functional at all times. • Whenever equipment is parked, the parking brake shall be set, and wheels chocked when on an incline • Heavy equipment operators shall inform their Supervisor(s) of any prescribed medication that they are taking that would impair their judgment and/or vision • Never walk or work directly in back of or to the side of heavy equipment without the operator's knowledge and approval.	**L**
		• Personnel will stay out of equipment swing areas and pinch-points. When dumping a load from a bed equipped with a tailgate, a spotter must be positioned a safe distance from the vehicle, such that they can observe the bed to notify the operator if an obstruction occurs	**L**
	Excessive Noise Exposure	• Wear hearing protective devices (Ear muffs/plugs) when working, when using or near high noise producing equipment, or when directed by ECC SSHO in response to noise monitoring. • Ensure adequate maintenance on equipment. • Conduct periodic sound level surveys.	**L**
	Inhalation of materials containing crystalline silica	• Review SDS for grout/concrete and other materials utilized to install wells to determine silica content. If silica is present, adhere to controls in APP. Work upwind, avoid dust clouds, keep materials wet, avoid dry sweeping	**L**
	Heat/Cold Stress (applies to all steps in this AHA)	• Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur and when instructed by SSHO. — Report all signs and symptoms of heat strain immediately to SSHO.	**L**
	Severe weather (applies to all steps in this AHA)	• Shut down operations during severe storms, heavy rain, high wind, and lightning episodes. Evacuate the project site and take shelter at the designated shelter location. • All personnel shall be trained on the project Emergencies Response procedures.	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Welding/Cutting	Fire	• Personnel that weld or cut will be required to wear proper PPE including flame resistant gloves, aprons, safety shoes, welding helmets, goggles, and shaded glasses. • Fire extinguisher must be present. • Hot work permit must be obtained before any welding or cutting begins. • Verify that no combustible materials are within work area. • Fire watch must continue for 30 minutes after any welding or cutting concludes. • Protective caps must be used when moving cylinders. • Cylinders must be stored properly.	**L**
Equipment Decontamination	Chemical Contamination Exposure	• All personnel assigned to drilling operations will operate inside a designated EZ. • All PPE will be removed properly prior to exiting the CRZ. • Air monitoring will be performed. All equipment and hand tools will be decontaminated in accordance with the established procedure. • Air monitoring will be conducted for combustible gas, oxygen levels, and toxic gas exposure during drilling and well abandonment.	**L**

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***
Equipment to be Used	**Training Requirements**	**Inspection Requirements**
1. Support Vehicles 2. Drill Rig 3. Hand Tools 4. Air Monitoring Equipment (Multi-RAE Plus or equivalent) <u>Support Zone</u> • Cell phone or radio communication • Eyewash station • Fire extinguishers • First aid kit • Drinking water • 911 air horn • Spill containment supplies • Air monitoring equipment, if needed • Emergency decontamination supplies • GFCI • Hand and power tools. **PPE: Level D (hardhat, steel toe boots, work gloves, Class 2 hi-viz safety garment, safety glasses, and hearing protection as needed), unless noted otherwise in this AHA**	• Only qualified operators permitted to operate mobile equipment • Operators of DPT and HSA rig will be a licensed driller. • Operators of forklifts will have recent certification / training in safe forklift operation (20 CFR 1910, Subpart N – Powered Industrial Trucks) • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan/Procedures • Fire extinguishers. **Competent Person: Site Superintendent and/or SSHO** **Designated Drill Rig Operator:**	• SSHO daily site inspection • Equipment – Receipt and inspected by SSHO • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Complete daily equipment inspection form will be completed by the operator • Weekly inspection of first aid kits • Monthly inspection of fire extinguishers • GFCIs (at least monthly) • Air monitoring equipment will be calibrated at least monthly and bump tested daily before each shift and as often as necessary. Equipment that cannot pass bump test criteria will be recalibrated or replaced. • Drill rig and associated equipment in accordance with manufacturer's requirements.

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Landfill Repair & Maintenance**	Overall Risk Assessment Code (RAC) (Use highest code)	**M**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	**Risk Assessment Code (RAC) Matrix**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**	**Severity** / **Probability**	
Date Prepared / Revised: **4 February 2021**		
Prepared by (Name/Title): **Lauren Sparkman/ Environmental Engineer**		
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**		
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**		
Notes: (Field Notes, Review Comments, etc.)		

Severity	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	E	E	H	H	M
Critical	E	H	H	M	L
Marginal	H	M	M	L	L
Negligible	M	L	L	L	L

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS Consider People, Equipment, Materials and Environment *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHS in accordance with ECC SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Landfill Repair and Maintenance	Contact with Overhead Utility Lines – Electrocution, Fires / Underground utilities	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures and equipment, operational aspects & heavy equipment use, and change(s) in site/work conditions. Daily housekeeping will be implemented at the end of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines. • If work must be conducted closer to utilities than guidelines allow, the utility company must be contacted. • An observer/spotter shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means. This shall be the ONLY job the observer is performing when an observer is required. • Keep all personnel well away from the equipment whenever it is close to power lines.	L

Landfill Repair and Maintenance (CONTINUED)	Contact with Overhead Utility Lines – Electrocution, Fires / Underground utilities (CONTINUED)	• If intrusive activities, Louisiana 811 shall be notified prior to with sufficient time allowed for white-lining and utility marking. — Excavation Permit Procedure: Mark the area for the requested clearance and then submit an excavation permit with RSA. Alabama 811 is contacted 48 hours prior to activity start. • ECC personnel will "white-line" or otherwise mark the area where the wells are to be installed, prior to utility marking. • Intrusive soil activities conducted within a five foot "Buffer Zone" (horizontal or vertical, as measured from the outside edge of the utility) of any utility (electric, gas, high pressure, chemical storage tanks, pipelines, sewers, etc.) may require the use of non-aggressive excavation methods such as hand excavation using non-conductive hand tools, use of an air spade, hydro-excavation, or similar means (some jurisdictions require more stringent buffer zones). Spotter will assist the operator/workers to identify unknown conditions during drilling. • If a previously unknown utility line is identified, uncovered, or disturbed during intrusive activities, stop immediately and project management notified. Intrusive operations shall not recommence until the line has been evaluated, identified, and the appropriate utility notified. • Most utilities and marking services utilize the American Public Works Association Uniform Color Code for marking out utilities. All personnel involved in excavation projects will be familiar with this code.	**L**
	Struck-By (heavy equipment)	• All personnel will wear ANSI Type 2 high-visibility traffic safety vests. Operators shall maintain a constant awareness of personnel and equipment in the work areas. • Equipment operators must be qualified and designated • Moving heavy equipment must have properly functioning back-up alarms. • Spotters on the ground will assist operators in manipulating vehicles and equipment into tight or confined spaces. • Moving heavy equipment must have properly functioning back-up alarms. • Getting off or on any equipment while it is in motion is prohibited. • Three points of contact shall be maintained when getting on or off equipment. • Seats will be provided for each occupant of the equipment. • The operator shall use safety belts while equipment is in use. • All original manufacturer-installed safety equipment such as lights, guards, brakes, horn, etc. must be functional at all times. • Whenever equipment is parked, the parking brake shall be set, and wheels chocked when on an incline. • Heavy equipment operators shall inform their Supervisor(s) of any prescribed medication that they are taking that would impair their judgment and/or vision. • Never walk or work directly behind or to the side of heavy equipment without the operator's knowledge and approval. • Personnel will stay out of equipment swing areas and pinch-points. • When dumping a load from a bed equipped with a tailgate, a spotter must be positioned a safe distance from the vehicle, such that they can observe the bed to notify the operator if an obstruction occurs.	**M**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Landfill Repair and Maintenance (CONTINUED)	Heat/Cold Stress (applies to all steps in this AHA)	• Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur and when instructed by SSHO. • Report all signs and symptoms of heat strain immediately to SSHO.	**L**
	Severe weather (applies to all steps in this AHA)	• Shut down operations during severe storms, heavy rain, high wind, and lightning episodes. Evacuate the project site and take shelter at the designated shelter location. • All personnel shall be trained on the project Emergencies Response procedures.	**L**

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***
Equipment to be Used	**Training Requirements/Competent or Qualified Personnel name(s)**	**Inspection Requirements**
Earth moving equipment (i.e., excavators, articulated dump trucks, bulldozer) <u>Support Zone</u> • Cell phone or Radio communication • Eyewash station • Fire extinguishers • First aid kit • drinking water • 911 Air horn • Spill containment supplies • PDR and PID air monitors • Emergency decontamination supplies • Hand tools **PPE: Level D (hardhat, steel toe boots, work gloves, orange safety vest, safety glasses and hearing protection, as needed)**	• HEAVY EXCAVATING, EARTHMOVING, AND TRANSPORT EQUIPMENT OPERATIONS: Equipment to be operated and inspected only by qualified, trained operators who have had a practical competency evaluation performed by a qualified supervisor. • UNDERGROUND UTILITIES: Utility color coding; excavation procedures within buffer zones; emergency procedures in the event of utility contact. • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) **Competent Person: Site Superintendent and/or SSHO** **Designated Equipment Operators:**	• Documented daily equipment inspections by operator are to be conducted and recorded on ECC inspection checklist form. • Daily inspections of excavation to be documented by Competent Person. • Equipment - Receipt and inspected by SSHO • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Weekly inspection of first aid kits • Annual and Monthly inspection of fire extinguishers

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Land Use Control (LUC) Inspection and Geophysical Survey**	Overall Risk Assessment Code (RAC) (Use highest code)	**L**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	**Risk Assessment Code (RAC) Matrix**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**	**Severity** / **Probability**	
Date Prepared: **4 February 2021**		
Prepared by (Name/Title): **Lauren Sparkman/ Environmental Engineer**		
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**		
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**		
Notes: (Field Notes, Review Comments, etc.)		

Severity	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	**E**	**E**	**H**	**H**	**M**
Critical	**E**	**H**	**H**	**M**	**L**
Marginal	**H**	**M**	**M**	**L**	**L**
Negligible	**M**	**L**	**L**	**L**	**L**

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS **Consider People, Equipment, Materials and Environment** *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHS in accordance with ECC SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
LUC Inspection	Slips & Trips	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures and equipment, operational aspects & heavy equipment use, and change(s) in site/work conditions. Daily housekeeping will be implemented at the end of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Wear high traction safety-toe footwear. • Keep loads manageable to not obstruct vision.	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

LUC Inspection (CONTINUED)	Lifting Strains & Sprains	• No individual employee is permitted to lift any object that weighs over 50 pounds. Proper lifting techniques shall be used. Multiple employees or the use of mechanical lifting are for lifting objects over the 50-pound limit. Materials shall be inspected for sharp edges prior to being handled, and avoid pinch point hazards.	**L**
	Exposure to excessive Noise levels	• Hearing protection shall be worn around heavy equipment of other noise generating equipment or when noise levels exceed TWA of 85 dBA.	**L**
	Using damaged / malfunctioning power tools	• Prior to use all tools must be inspected. Any damaged or defective tools will tagged and removed from service for repair and/or discarded. • Proper PPE shall be worn when operating power tools. At a minimum, Level "D" will be required.	**L**
	Caught in or between equipment	• Only qualified personnel shall be permitted to operate equipment. Operators will have constant communication with ground support crews and will be aware of activities around their piece of equipment during operation. • Mobile equipment shall be inspected daily. Deficiencies in equipment shall be noted on the inspection form. Equipment found to be unsafe shall not be used. • Fire extinguishers of the appropriate size will be available in the operators of all heavy equipment. • All equipment shall have backing alarms. • All equipment will be properly secured / rigged prior to transportation off site. All rigging equipment shall be inspected prior to use.	**L**
	Contact with stinging or biting insects	• Personnel shall wear light colored clothing and apply insect repellent (i.e., DEET) to outer pants legs; Body checks should be performed at the end of the workday. • Any individual who has a known or has a potential for allergic reaction to insect stings shall notify the SSHS and an Epi-Pen shall be readily available.	**L**
	Contact with poisonous plants (e.g. poison ivy)	• Inspect area for known plants before starting field activities • Wear long sleeve shirts, tuck sleeves and pant legs. If there is heavy growth, wear disposable coveralls and use barrier cream, e.g. Ivy Block. • Have TecNu or other poison ivy cleanser on hand and wash immediately after contact.	**L**
	Scrapes and cuts	• Wear safety glasses, gloves and long sleeves.	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

LUC Inspection (CONTINUED)	Heat/Cold Stress (applies to all steps in this AHA)	• Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur and when instructed by SSHO. • Report all signs and symptoms of heat strain immediately to SSHO.	**L**
	Severe weather (applies to all steps in this AHA)	• Shut down operations during severe storms, heavy rain, high wind, and lightning episodes. Evacuate the project site and take shelter at the designated shelter location. • All personnel shall be trained on the project Emergencies Response procedures.	**L**
Stop work and notify your supervisor if you are not sure how to perform your task safely!	***Stop work and notify your supervisor if you are not sure how to perform your task safely!***	***Stop work and notify your supervisor if you are not sure how to perform your task safely!***	

Equipment to be Used	Training Requirements/Competent or Qualified Personnel name(s)	Inspection Requirements
• Hand and Portable power tools <u>Support Zone</u> • Cell phone or Radio communication • Eyewash station • Fire extinguishers • First aid kit • drinking water • 911 Air horn • Spill containment supplies • PDR and PID air monitors • Emergency decontamination supplies • Hand tools **PPE: Level D (hardhat, steel toe boots, work gloves, orange safety vest, safety glasses, and hearing protection as needed)**	• Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) **Competent Person: Site Superintendent and/or SSHO**	• Documented daily equipment inspections by operator are to be conducted and recorded on ECC inspection checklist form. • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Weekly inspection of first aid kits • Monthly inspection of fire extinguishers

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Drilling: Direct Push Technology (DPT)/ Hollow Stem Auger (HAS)/ Air Rotary/ Membrane Interface Probe (MIP)**	Overall Risk Assessment Code (RAC) (Use highest code) **M**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**	
Date Prepared / Revised: **4 February 2021**	
Prepared by (Name/Title): **Lauren Sparkman/ Environmental Engineer**	
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**	
Competent Person (Name/Title): **Master Driller**	
Notes: (Field Notes, Review Comments, etc.)	

Risk Assessment Code (RAC) Matrix

Severity	Probability				
	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	E	E	H	H	M
Critical	E	H	H	M	L
Marginal	H	M	M	L	L
Negligible	M	L	L	L	L

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS Consider People, Equipment, Materials and Environment *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHS in accordance with ECC SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Location of Underground and Above ground Utilities	Hitting Utilities	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures, operational aspects & heavy equipment use, and change(s) in site work conditions. Daily housekeeping will be implemented during and at the ends of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines. • If work must be conducted closer to utilities than guidelines allow, the utility company must be contacted.	L

Location of Underground Utilities (CONTINUED)	Hitting Utilities (CONTINUED)	• An observer/spotter shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means. This shall be the ONLY job the observer is performing when an observer is required. • Keep all personnel well away from the equipment whenever it is close to power lines. • If intrusive activities, Alabama 811 shall be notified prior to with sufficient time allowed for white-lining and utility marking. Additionally, private locating services will be contacted for locations on base. — Excavation Permit Procedure: Mark the area for the requested clearance and then submit an excavation permit with RSA. Alabama 811 is contacted 48 hours prior to activity start. • ECC personnel will "white-line" or otherwise mark the area where the wells are to be installed, prior to utility marking. • Intrusive soil activities conducted within a five foot "Buffer Zone" (horizontal or vertical, as measured from the outside edge of the utility) of any utility (electric, gas, high pressure, chemical storage tanks, pipelines, sewers, etc.) may require the use of non-aggressive excavation methods such as hand excavation using non-conductive hand tools, use of an air spade, hydro-excavation, or similar means (some jurisdictions require more stringent buffer zones). Spotter will assist the operator/workers to identify unknown conditions during drilling. • If a previously unknown utility line is identified, uncovered, or disturbed during intrusive activities, stop immediately and project management notified. Intrusive operations shall not recommence until the line has been evaluated, identified, and the appropriate utility notified. • Most utilities and marking services utilize the American Public Works Association Uniform Color Code for marking out utilities. All personnel involved in excavation projects will be familiar with this code	**L**
Drill Rig Operations	Cuts/Lacerations	• A cutting device designed for cutting acetate liners (procured through Geoprobe) shall be used. If a safety utility knife is used, snubbed nose blades are required, and the user must wear Kevlar gloves under leather gloves.	**L**
	Lifting Strains/Sprains	• No individual employee is permitted to lift any object that weighs over 50 pounds. Proper lifting techniques shall be used. Multiple employees or the use of mechanical lifting are for lifting objects over the 50-pound limit. Materials shall be inspected for sharp edges prior to being handled, and avoid pinch point hazards. • While handling direct push rods and filled acetate liners, make sure proper lifting techniques are used.	**L**
	Struck by or caught in drill rig equipment	Only qualified and designated personnel shall be permitted to operate equipment. The equipment shall be inspected daily using an ECC inspection form specific for the equipment in use. Equipment must have functioning safety devices as installed by the manufacturer. Deficiencies in equipment shall be corrected prior to operating. Equipment found to be unsafe shall not be used. Fire extinguishers of the appropriate size will be available on the equipment. All equipment shall have back up enunciators. • Only personnel essential to drill rig operation will be permitted in area directly surrounding drill rig. All personnel not directly contributing to drill rig operations will be required to stay a minimum of 25' away.	**L**

Drill Rig Operations (CONTINUED)	Struck by or caught in drill rig equipment (CONTINUED)	• Check all safety devices, emergency shut-down switches daily or at the start of drilling shift. Drilling will not be permitted until all emergency shut-down switches and warning systems are working properly. • Drill rig operator is required to do a daily equipment checklist to ensure equipment is in safe working condition. • If augers are used during drilling operations, auger guards will be required. • All work areas on and around the drill rig operation will be required to be kept clear of unnecessary equipment and materials. Ongoing housekeeping throughout the day will keep work areas free of slip, trip and fall hazards.	**L**
	Struck by Traffic	• When working adjacent to or on active roadways adequate traffic control devices must be installed to establish a safe work zone. Adequate signage must be established to identify the work zone. All personnel entering and working in an established work zone must wear the classification of reflective vests (appropriate based on speed of vehicles).	**L**
	Struck-By / Pinch Points	• All personnel will wear ANSI Type 2 high-visibility traffic safety vests. Operators shall maintain a constant awareness of personnel and equipment in the work areas. • Moving heavy equipment must have properly functioning back-up alarms. • Spotters on the ground will assist operators in manipulating vehicles and equipment into tight or confined spaces. • Getting off or on any equipment while it is in motion is prohibited. • Three points of contact shall be maintained when getting on or off equipment. • Seats will be provided for each occupant of the equipment. • The operator shall use safety belts while equipment is in use. • All original manufacturer-installed safety equipment such as lights, guards, brakes, horn, etc. must be functional at all times. • Whenever equipment is parked, the parking brake shall be set, and wheels chocked when on an incline • Heavy equipment operators shall inform their Supervisor(s) of any prescribed medication that they are taking that would impair their judgment and/or vision • Never walk or work directly in back of or to the side of heavy equipment without the operator's knowledge and approval.	**L**
	Severe weather (applies to all job steps)	• Shut down operations during severe storms, heavy rain, high wind, and lightning episodes. Evacuate the project site and take shelter at the designated shelter location. • All personnel shall be trained on the project Emergencies Response procedures.	**L**
	Excessive Noise Exposure	• Wear hearing protective devices (Ear muffs/plugs) when working, when using or near high noise producing equipment, or when directed by ECC SSHO in response to noise monitoring. • Ensure adequate maintenance on equipment. • Conduct periodic sound level surveys	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Drill Rig Operations (CONTINUED)	Exposure to dust	• Dust control measures will be implemented, as needed, and include some or all of the following: — Visual monitoring for fugitive dust. — Covering soil stockpiles with plastic sheeting or tarps. — Covering loaded dump truck beds with tarps. — Applying magnesium chloride, or similar dust-suppressing agent, for stockpiles and roads to reduce dust emissions. — Spraying potable water on dirt roadways outside the work zone and along dirt access roads. — Spraying the surface of the area to be excavated with water or a dust-suppressing agent, if required. — Work stoppage during wind speed in excess of 25 miles per hour. • Proper PPE	**L**

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***
Equipment to be Used	**Training Requirements**	**Inspection Requirements**
1. Heavy equipment 2. Dust suppressant <u>Support Zone</u> • Cell phone or radio communication • Eyewash station • Fire extinguishers • First aid kit • Drinking water • 911 air horn • Spill containment supplies • Air monitoring equipment • Emergency decontamination supplies • GFCI • Hand and power tools **PPE: Modified Level D (hardhat, steel toe boots, work gloves, Class 2 high-visibility garment, hearing protection, and safety glasses). If direct contact with soils, boot covers/over boots and Tyvek may be required (SSHO will determine when boot covers and Tyvek are needed).**	• Only qualified operators permitted to operate mobile equipment • Review of Excavation Plan • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan/Procedures • Fire extinguishers **Competent Person: Site Superintendent and/or SSHO** Designated Equipment Operators:	• SSHO daily site inspection • Equipment – Receipt and inspected by SSHO • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Complete ECC daily equipment inspection form • Weekly inspection of first aid kits • Monthly and annual inspection of fire extinguishers • GFCIs (at least monthly).

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Excavation, Transportation, and Disposal**	Overall Risk Assessment Code (RAC) (Use highest code)	**M**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	**Risk Assessment Code (RAC) Matrix**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**		
Date Prepared / Revised: **4 February 2021**		
Prepared by (Name/Title): **Lauren Sparkman/ Environmental Engineer**		
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**		
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**		
Notes: (Field Notes, Review Comments, etc.)		

Severity	Probability				
	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	**E**	**E**	**H**	**H**	**M**
Critical	**E**	**H**	**H**	**M**	**L**
Marginal	**H**	**M**	**M**	**L**	**L**
Negligible	**M**	**L**	**L**	**L**	**L**

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS Consider People, Equipment, Materials and Environment *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHS in accordance with ECC SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Location of Underground and Above ground Utilities	Hitting Utilities	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures, operational aspects & heavy equipment use, and change(s) in site work conditions. Daily housekeeping will be implemented during and at the ends of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines. • If work must be conducted closer to utilities than guidelines allow, the utility company must be contacted.	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Location of Underground Utilities (CONTINUED)	Hitting Utilities (CONTINUED)	• An observer/spotter shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means. This shall be the ONLY job the observer is performing when an observer is required. • Keep all personnel well away from the equipment whenever it is close to power lines. • If intrusive activities, Alabama 811 shall be notified prior to with sufficient time allowed for white-lining and utility marking. Additionally, private locating services will be contacted for locations on base. — Excavation Permit Procedure: Mark the area for the requested clearance and then submit an excavation permit with RSA. Alabama 811 is contacted 48 hours prior to activity start. • ECC personnel will "white-line" or otherwise mark the area where the wells are to be installed, prior to utility marking. • Intrusive soil activities conducted within a five foot "Buffer Zone" (horizontal or vertical, as measured from the outside edge of the utility) of any utility (electric, gas, high pressure, chemical storage tanks, pipelines, sewers, etc.) may require the use of non-aggressive excavation methods such as hand excavation using non-conductive hand tools, use of an air spade, hydro-excavation, or similar means (some jurisdictions require more stringent buffer zones). Spotter will assist the operator/workers to identify unknown conditions during drilling. • If a previously unknown utility line is identified, uncovered, or disturbed during intrusive activities, stop immediately and project management notified. Intrusive operations shall not recommence until the line has been evaluated, identified, and the appropriate utility notified. • Most utilities and marking services utilize the American Public Works Association Uniform Color Code for marking out utilities. All personnel involved in excavation projects will be familiar with this code	**L**
Heavy Equipment Activities (trenching, moving earthwork, T&D)	Struck by equipment and loads	• Only qualified and designated operators will be authorized to operate mobile construction equipment. • Inspect equipment daily before use. • All mobile equipment will have working back up alarms, tested each day. • Stay outside the working radius of the machine. If you need to speak to operator, make eye contact first, use hand signal, and wait until operator stops the machine, grounds the bucket, and takes hands off controls before approaching cab. • Operators will not lift buckets, booms or loads over people. • Operator will immediately stop whenever ground personnel encroach on the working radius.	**L**
	Roll over into excavation	• There will be no vehicles in the vicinity of the excavations. The only equipment in the area will the equipment directly involved in excavation activities including an excavator and either a front end loader or a dump truck to move the excavated materials from the excavation to the staging area. Areas where the transfer equipment enters or approaches the excavation will be sloped to avoid sharp edges/drops. • Excavators will be positioned at one end of the trench with tracks parallel to the trench and the operator will not undermine the machine.	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Heavy Equipment Activities (trenching, moving earthwork, T&D) (CONTINUED)	Exposure to Noise	• Operators and workers in the vicinity shall wear hearing protection or when instructed by the SSHO. • Reference USACE EM 385-1-1 Section 5.	**L**
	Fire and hydraulic fuel spill from heavy equipment	• Daily inspection of all heavy equipment. A fire extinguisher will be located in each piece of equipment. • Spill containment supplies will be readily available at the fueling area. NO SMOKING allowed in the operating equipment or fueling area. • See Fire Protection Plan and Emergency Response Plan in APP.	**L**
	Heat/Cold Stress (applies to all job steps)	• Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur and when instructed by SSHO. • Report all signs and symptoms of heat strain immediately to SSHO	**L**
	Severe weather (applies to all job steps)	• Shut down operations during severe storms, heavy rain, high wind, and lightning episodes. Evacuate the project site and take shelter at the designated shelter location. • All personnel shall be trained on the project Emergencies Response procedures.	**L**
Entering/ exiting excavation	Excavation collapse Unauthorized personnel Excavated soils near the excavation	• Entry into excavations only after inspection by a competent person determines there are no cave-in hazards to employees. • Excavation faces will be sloped as determined by competent person. A restricted access zone will established. • Appropriate fencing and warning signs will be implemented on site. • Excavated soil shall be a minimum of 2 ft from the excavation. • Reference Excavation Plan in the APP and SOP ESQ 7.7	**M**
General Earthwork	Exposure to dust	• Dust control measures will be implemented, as needed, and include some or all of the following: — Visual monitoring for fugitive dust. — Covering soil stockpiles with plastic sheeting or tarps. — Covering loaded dump truck beds with tarps. — Applying magnesium chloride, or similar dust-suppressing agent, for stockpiles and roads to reduce dust emissions. — Spraying potable water on dirt roadways outside the work zone and along dirt access roads. — Spraying the surface of the area to be excavated with water or a dust-suppressing agent, if required. — Work stoppage during wind speed in excess of 25 miles per hour. — Proper PPE	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	*Stop work and notify the Team Leader if you are not sure how to perform your task safely!*	*Stop work and notify the Team Leader if you are not sure how to perform your task safely!*
Equipment to be Used	**Training Requirements**	**Inspection Requirements**
1. Heavy equipment 2. Dust suppressant <u>Support Zone</u> • Cell phone or radio communication • Eyewash station • Fire extinguishers • First aid kit • Drinking water • 911 air horn • Spill containment supplies • Air monitoring equipment • Emergency decontamination supplies • GFCI • Hand and power tools **PPE: Modified Level D (hardhat, steel toe boots, work gloves, Class 2 high-visibility garment, hearing protection, and safety glasses). If direct contact with soils, boot covers/over boots and Tyvek may be required (SSHO will determine when boot covers and Tyvek are needed).**	• Only qualified operators permitted to operate mobile equipment • Review of Excavation Plan • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan/Procedures • Fire extinguishers **Competent Person: Site Superintendent and/or SSHO** Designated Equipment Operators:	• SSHO daily site inspection • Equipment – Receipt and inspected by SSHO • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Complete ECC daily equipment inspection form • Weekly inspection of first aid kits • Monthly and annual inspection of fire extinguishers • GFCIs (at least monthly).

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Equipment Decontamination, Demobilization, and Site Restoration**	Overall Risk Assessment Code (RAC) (Use highest code)	**L**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	**Risk Assessment Code (RAC) Matrix**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**		
Date Prepared / Revised: **4 February 2021**		
Prepared by (Name/Title): **Brian Kateley, SSHO**		
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**		
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**		
Notes: (Field Notes, Review Comments, etc.)		

Severity	Probability				
	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	**E**	**E**	**H**	**H**	**M**
Critical	**E**	**H**	**H**	**M**	**L**
Marginal	**H**	**M**	**M**	**L**	**L**
Negligible	**M**	**L**	**L**	**L**	**L**

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS Consider People, Equipment, Materials and Environment *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHO in accordance with WE SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Decontamination of equipment Dry Decontamination with hand tools • Use hand tools to remove excess soil or debris from equipment Site Restoration/Demob	Slip and Trip Hazards	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures and equipment, operational aspects & equipment use, and change(s) in site/work conditions. Daily housekeeping will be implemented at the end of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit w/ eye wash). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Practice good housekeeping. • Use care when walking on surface tarp, especially when wet. • Clean all spills immediately. • Proper PPE to include shoes which allow for good footing. • Be aware of physical hazards – watch for uneven ground, rocks, dirt clods, etc.	**L**
	Overhead Hazards	• Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines.	**L**

Decontamination of equipment Dry Decontamination with hand tools • Use hand tools to remove excess soil or debris from equipment Site Restoration/Demob (CONTINUED)	Manual Lifting/Backs/Ergonomic	• Train/Utilize correct lift techniques. • Personnel will not lift more than 50 lb. • Use Buddy System. • Position equipment as to eliminate over stretching/ergonomic concerns.	**L**
	Splash hazards (skin/eyes / face)	• Avoid direct exposure to potential eye hazards. • Wear ANSI approved safety glasses at all times. • Utilize face shield/goggles if potential for flying debris/splash hazards. • Wear rain suit or poly coated Tyvek, waterproof boots or boot covers	**L**
	Severe Weather	• Shut down operations during severe electrical storms, heavy rain, high wind and evacuate site/take cover. • Train employees on Emergencies Response. • Monitor weather systems.	**L**
	Noise	• Wear hearing protective devices (earmuffs/plugs) inside the exclusion zone, when using or near high noise producing equipment, or when directed by ECC's SSHS in response to noise monitoring. • Ensure adequate maintenance on thermal/heavy equipment.	**L**
	Struck By/Against Heavy Equipment	• Maintain radio/verbal communication. • Eye contact with operators will be made before approaching trucks. • Equipment will not be approached on blind sides. • Personnel will understand and review hand signals. • All machines will be equipped with backup alarms and lighting. • Always set emergency brake on equipment. • Equipment will properly Locked Out prior to decontamination (i.e., key removed from ignition) • Engage all equipment-supplied safety equipment (i.e., locking arms, chocks) on equipment parts that are suspended. DO NOT place yourself between unprotected/unsecured parts of the equipment.	**L**
	Chemical Exposure	• Protective clothing/PPE (steel toe boots, ANSI approved safety glasses, chemical gloves). • Decontaminate equipment away from intrusive activities and upwind.	**L**
	Scrapes and cuts	• Wear safety glasses, gloves and long sleeves.	**L**
	Heat/Cold Stress	• Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur, when instructed by SSHO. • Report all signs and symptoms of heat strain immediately to SSHO.	**L**
Wet Decontamination with use of water • Use hose or pressure washer to remove soil or debris from equipment	High pressure washer operation	• The lance must always be pointed at the work area and away from other site personnel. Non-operators must remain a safe distance from the operator. The distance must be a minimum of 25 feet in every direction • Only trained authorized personnel will be allowed to use the equipment. • The operating pressure should never exceed what is necessary to complete the job. • **The trigger should never be tied down.**	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Wet Decontamination with use of water • Use hose or pressure washer to remove soil or debris from equipment (CONTINUED)	Equipment malfunction	• No unauthorized attachment may be connected to the unit. • Equipment should be cleaned after every use to avoid oil or dirt build-up especially around the trigger and guard area. • **Do not modify the lance.** The lance barrel, from trigger block to the tip, should not be less than 48 inches as recommended by manufacturers of hydroblasting equipment. • All users and assistants must be trained in emergency shut down procedures and general equipment maintenance.	**L**
	Slips, trips, and falls	• Proper PPE to include shoes which allow for good footing.	**L**

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***
Equipment to be Used	**Training Requirements/Competent or Qualified Personnel name(s)**	**Inspection Requirements**
1. Hand Tools 2. Skid Steer 3. Pressure washer unit and hoses 4. Support Vehicles <u>Support Zone</u> • Cell phone or Radio communication • Eyewash station • Fire extinguishers • First aid kit • Drinking water • 911 Air horn • Spill containment supplies • Air Monitoring equipment, if needed • Emergency decontamination supplies • GFCI • Hand and Power Tools **PPE: Modified Level D (Face shield, hardhat, steel toe boots, chemical gloves, orange safety vest, safety glasses (face shield if needed) and hearing protection, as needed)**	• Only qualified operators permitted to operate mobile equipment • Operators of forklifts will have recent certification / training in safe forklift operation (20 CFR 1910, Subpart N – Powered Industrial Trucks) • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan/Procedures • Fire extinguishers. **Competent Person: Site Superintendent and/or SSHO**	• SSHO daily site inspection • Equipment – Receipt and inspected by SSHO • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Complete daily equipment inspection form will be completed by the operator • Weekly inspection of first aid kits • Monthly and annual inspection of fire extinguishers • GFCIs (at least monthly).

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Disc and Raking Contaminated Soil**	Overall Risk Assessment Code (RAC) (Use highest code)	**L**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**		
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**		
Date Prepared / Revised: **4 February 2021**		
Prepared by (Name/Title): **Lauren Sparkman/ Environmental Engineer**		
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**		
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**		
Notes: (Field Notes, Review Comments, etc.)		

Risk Assessment Code (RAC) Matrix

Severity	Probability				
	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	E	E	H	H	M
Critical	E	H	H	M	L
Marginal	H	M	M	L	L
Negligible	M	L	L	L	L

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS Consider People, Equipment, Materials and Environment *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHS in accordance with ECC SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Location of Underground Utilities	Hitting Utilities	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures, operational aspects & heavy equipment use, and change(s) in site work conditions. Daily housekeeping will be implemented during and at the ends of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines. • If work must be conducted closer to utilities than guidelines allow, the utility company must be contacted.	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Location of Underground Utilities (CONTINUED)	Hitting Utilities (CONTINUED)	• An observer/spotter shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means. This shall be the ONLY job the observer is performing when an observer is required. • Keep all personnel well away from the equipment whenever it is close to power lines. • If intrusive activities, Louisiana 811 shall be notified prior to with sufficient time allowed for white-lining and utility marking. — Excavation Permit Procedure: Mark the area for the requested clearance and then submit an excavation permit with RSA. Alabama 811 is contacted 48 hours prior to activity start. • ECC personnel will "white-line" or otherwise mark the area where the wells are to be installed, prior to utility marking. • Intrusive soil activities conducted within a five foot "Buffer Zone" (horizontal or vertical, as measured from the outside edge of the utility) of any utility (electric, gas, high pressure, chemical storage tanks, pipelines, sewers, etc.) may require the use of non-aggressive excavation methods such as hand excavation using non-conductive hand tools, use of an air spade, hydro-excavation, or similar means (some jurisdictions require more stringent buffer zones). Spotter will assist the operator/workers to identify unknown conditions during drilling. • If a previously unknown utility line is identified, uncovered, or disturbed during intrusive activities, stop immediately and project management notified. Intrusive operations shall not recommence until the line has been evaluated, identified, and the appropriate utility notified. • Most utilities and marking services utilize the American Public Works Association Uniform Color Code for marking out utilities. All personnel involved in excavation projects will be familiar with this code	**L**
Disc and Raking soil	Struck by equipment	• Operators will be qualified and designated. • All personnel will wear ANSI Type 2 high-visibility traffic safety vests. Operators shall maintain a constant awareness of personnel and equipment in the work areas. • Spotters on the ground will assist operators in manipulating vehicles and equipment into tight or confined spaces. • Getting off or on any equipment while it is in motion is prohibited. • Three points of contact shall be maintained when getting on or off equipment. • Seats will be provided for each occupant of the equipment. • The operator shall use safety belts while equipment is in use. • All original manufacturer-installed safety equipment such as lights, guards, brakes, horn, etc. must be functional at all times. • Whenever equipment is parked, the parking brake shall be set, and wheels chocked when on an incline • Mobile equipment operators shall inform their Supervisor(s) of any prescribed medication that they are taking that would impair their judgment and/or vision • Never walk or work directly in back of or to the side of mobile equipment without the operator's knowledge and approval.	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Disc and Raking soil (CONTINUED)	Excessive Noise Exposure	• Wear hearing protective devices (Ear muffs/plugs) when working, when using or near high noise producing equipment, or when directed by ECC SSHO in response to noise monitoring. • Ensure adequate maintenance on equipment. • Conduct periodic sound level surveys.	L
	Fire and hydraulic fuel spill from tractor	• Daily inspection of all heavy equipment. A fire extinguisher will be located in each piece of equipment. • Spill containment supplies will be readily available at the fueling area. NO SMOKING allowed in the operating equipment or fueling area. • See Fire Protection Plan and Emergency Response Plan in APP.	L
	Heat/Cold Stress (applies to all job steps)	• Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur and when instructed by SSHO. • Report all signs and symptoms of heat strain immediately to SSHO	L
	Severe weather (applies to all job steps)	• Shut down operations during severe storms, heavy rain, high wind, and lightning episodes. Evacuate the project site and take shelter at the designated shelter location. • All personnel shall be trained on the project Emergencies Response procedures.	L
General Earthwork	Exposure to dust	• Dust control measures will be implemented, as needed, and include some or all of the following: — Visual monitoring for fugitive dust. — Covering soil stockpiles with plastic sheeting or tarps. — Covering loaded dump truck beds with tarps. — Applying magnesium chloride, or similar dust-suppressing agent, for stockpiles and roads to reduce dust emissions. — Spraying potable water on dirt roadways outside the work zone and along dirt access roads. — Spraying the surface of the area to be excavated with water or a dust-suppressing agent, if required. — Work stoppage during wind speed in excess of 25 miles per hour. — Proper PPE	L

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	*Stop work and notify the Team Leader if you are not sure how to perform your task safely!*	*Stop work and notify the Team Leader if you are not sure how to perform your task safely!*
Equipment to be Used	**Training Requirements**	**Inspection Requirements**
1. Tractor with disc 2. Dust suppressant <u>Support Zone</u> • Cell phone or radio communication • Eyewash station • Fire extinguishers • First aid kit • Drinking water • 911 air horn • Spill containment supplies • Air monitoring equipment • Emergency decontamination supplies • GFCI • Hand and power tools **PPE: Modified Level D (hardhat, steel toe boots, work gloves, Class 2 high-visibility garment, hearing protection, and safety glasses). If direct contact with soils, boot covers/over boots and Tyvek may be required (SSHO will determine when boot covers and Tyvek are needed).**	• Only qualified operators permitted to operate mobile equipment • Review of Excavation Plan • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan/Procedures • Fire extinguishers **Competent Person: Site Superintendent and/or SSHO** Designated Operator:	• SSHO daily site inspection • Equipment – Receipt and inspected by SSHO • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Complete ECC daily equipment inspection form • Weekly inspection of first aid kits • Monthly inspection of fire extinguishers • GFCIs (at least monthly).

APPENDIX B
Resumes of Key Safety and Health Personnel and Competent Persons

Kym Edelman, CIH, CSP *757-435-5384*
EHS Manager

Experience Summary

Highly accomplished Certified Industrial Hygienist and Certified Safety Professional with over 27 years of on-site and project management expertise to provide oversight, review, reporting, training, and control of employee H&S processes on multiple construction/environmental sites.
Comprehensive knowledge of regulatory compliance requirements under OSHA, DOE, CERCLA, RCRA, USACE, EPA, and other federal/state regulatory programs.
Hands-on experience in compliance monitoring, development and implementation of policies and procedures, accident investigation, and worker's compensation issues.
Proven record of retaining minute detail with excellent recall regarding safety regulations and contractual language to make on-the-spot independent decisions.
Well respected with reputation for using excellent interpersonal communication skills to collaborate with staff, all levels of management, and clients.
Consistently commended for outstanding leadership skills, producing quality work product, developing proactive initiatives, and commitment to achieving optimum project safety expectations to ensure client satisfaction while adhering to corporate policy and procedures.

Education

BS (Bachelor of Science), Environmental Health, Industrial Hygiene Concentration, Old Dominion University, Norfolk, VA

Registrations/Certifications

Certified Industrial Hygienist
Certified Safety Professional

Training

40-Hour OSHA Hazardous Waste Health and Safety Training – 1989
40-Hour EM 385 1-1 Awareness Course- 2018
30-Hour OSHA Construction Safety Course- 2004
Shipyard Competent Person- 2019

Experience

Program Health and Safety Manager, April 2020-Present
ECC, Jacksonville, NC

Responsible for assisting in overall management of the safety programs for ECC.

- Monitor overall safety compliance, assistance, and oversight of multiple task orders for Federal as well as commercial client project sites:
- Assist in preparation and review of project work plans in relation to site specific safety program documents.
- Assist in implementation of safety processes on active project sites.
- Provided technical guidance to project and program employees as well as clients.
- Revise and develop programs and procedures

Kym Edelman, CIH, CSP *757-435-5384*
EHS Manager

EHS Manager, September 2018-April 2020
APTIM, Norfolk, VA
Responsible for assisting the EHS Lead in overall management of safety programs for APTIM's Government operations.

- Monitor overall safety compliance, assistance, and oversight of multiple task orders for Federal as well as commercial client project sites:
- Assist in preparation and review of project work plans in relation to site specific safety program documents.
- Assist in implementation of safety processes and manage safety staffing on active project sites.
- Provided technical guidance to project and program employees as well as clients.
- Manage injuries and illnesses, and related worker's compensation claims.
- Assist in safety council, award programs, and employee involvement initiatives.
- Conduct periodic reviews and audits of project sites to determine compliance with applicable regulations, standards, and internal procedures.

Director, EHS June 2018-September 2018
Tetra Tech EC, Inc., Virginia Beach, VA
Responsible for overall management of environmental health and safety programs and employees for Tt EC operations.

- Serves as program Certified Industrial Hygienist for the Atlantic Division Remedial Activities Contract, Naval Facilities Engineering Command.
- Provides technical support for programs and projects, including proposal review and support.
- Manages site safety and health professionals on projects and ensures safety staff assignments to meet project and client needs.
- Injury case management and worker's compensation claim management.
- Writes or reviews and approves site-specific health and safety plans.
- Conduct program reviews and audits for compliance and continual improvement.

EHS Manager of Eastern Operations, September 2015-June 2018
Tetra Tech EC, Inc., Virginia Beach, Virginia
Responsible for assisting the Tetra Tech EC Director in overall management of safety programs for Tt EC's operations.

- Monitor overall safety compliance, assistance, and oversight of multiple task orders for Federal as well as commercial client project sites:
- Assist in preparation and review of project work plans in relation to site specific safety program documents.
- Assist in implementation of safety processes and manage safety staffing on active project sites.
- Provided technical guidance to project and program employees as well as clients.
- Manage injuries and illnesses, and related worker's compensation claims.
- Facilitated implementation of LANT RAC program safety council, award programs, and employee involvement initiatives.
- Conduct periodic reviews and audits of project sites to determine compliance with applicable regulations, standards, and internal procedures.

- Program CIH for LANT RAC VI Navy contract.

ES&H Manager, August 2012 – September 2015
CB&I AREVA MOX Project, DOE, CB&I (formerly Shaw) Project Services Group, Aiken, SC
Manage all safety aspects of the project, including sub-contractors. The project has exceeded 21 million man-hours without a lost work day case.
Responsible for management of the on-site medical clinic, fitness center, production facility safety staff, and all field safety engineers.
Interface between high level construction management, client, and filed construction employees, to ensure clear communication of expectations to continue to promote a positive safety environment that has yielded exemplary employee safety performance.
Technical resource for all project staff, as well as client.

August 2002 – August 2012, SHAW E&I, Norfolk, VA
Ten years of progressive experience and achievement as safety project management/ site safety coordinator

Program Safety Manger, May 2008 – August 2011
IHNC, USACE, New Orleans,
Accountable for establishment and initial/continued implementation of project safety programs for this high profile $1.1B project involving design and construction of the New Orleans Hurricane and Storm Damage Risk Reduction System.
Successfully managed the safety program for the largest civil works design-build project ever undertaken by the USACE. The project, during this timeframe, concluded with "no lost work days" for Shaw.
Staffed project, developed project safety initiatives, organized the Accident Prevention and Hurricane Preparedness Plans, coordinated training, conducted subcontractor reviews, and acted as overall technical consultant regarding project safety issues, and compliance monitoring of the safety process.

Program Safety Manager, November 2007 – August 2012
Global Contingency and Construction Contract (GCCC), NAVFAC (Naval Facilities) Worldwide
Serves as Health and Safety Manager for this $335M US Navy contract. Directed safety programs for all construction projects under the GCCC contract. Implemented safety processes, managed staffing, developed H&S and Accident Prevention Plans, managed worker's compensation claims, and provided technical oversight to staff and management on all projects.Developed documents and programs to ensure training, programs, and procedures were translated into local languages and worked with third country nationals to establish safety cultures where previously non-existent.Monitored and ensured the implementation of corporate policies and procedures, conducted incident investigations, and maintained proactive safety programs.Ensured compliance with applicable laws/regulations, and provided safety support/consultation to Shaw management, as well as client companies and governmental entities.

Program Safety Manager, May 2008 – 2012
LANTDIV RAC V Program, NAVFAC Atlantic Division, Norfolk, VA
Directed overall program safety on this $150M Navy contract, including safety program implementation and oversight of multiple task orders under the contract.

- Instrumental in team accomplishing 4,000 days with a record of "no lost work days."
- Implemented safety processes, managed staffing, developed health and safety, and accident prevention plans.
- Provided technical guidance to project and program employees as well as clients.
- Managed injuries and illnesses, and related worker's compensation claims.
- Facilitated program safety council, award programs, and employee involvement initiatives.

Program Safety Manager, December 2002 – August 2012
Served as Program Safety Manager leading a staff of field safety professionals in the development and implementation of safe work practices on multiple individual task orders. Also, functioned as Site Safety Coordinator for several individual projects at multiple locations conducted under the LANTDIV RAC IV program.

These projects included UXO demilling activities, active range clearance activities, "Clean" site closures, installation of treatment systems, storage tank removals, bio-remediation, landfill excavation/repairs/capping, soils excavation and removal of hazardous materials.

- 2000 Day President's Award for no lost work days on one project.
- Target Zero achieved for 2 Project Sites.
- RAC Program achieved Zero Lost Work Days, Recordable Incidents or Chargeable Vehicle Incidents within Fiscal Year 2008.
- Successfully adapted to EHS organizational changes, and positioned to advance within group.

Environmental Health and Safety Manager, October 2000 – April 2002
Flextronics Enclosures, Kingston, PA
Responsible for the development, implementation, and monitoring of Flextronics Enclosures, Inc. Environmental Health and Safety program.

- Conducted initial audits, assessments, and industrial hygiene sampling, to determine environmental, safety, and industrial hygiene compliance issues.
- Developed plans and procedures necessary to attain compliance with water permitting, waste disposal, safety and industrial hygiene issues.
- Developed programs to decrease employee injuries as well as reduce incident rates and worker's compensation costs.
- Worked with local occupational health clinic to better manage accidents and injuries, to keep employees at work, and ensure best care possible.
- Responsible for maintaining OSHA 200 logs.
- Conducted and facilitated training sessions for managers and technicians to ensure understand and compliance with new company safety programs.
- Monitored effectiveness of new EHS Program and continually improved upon programs implemented.
- Developed and implemented an Environmental Management System to be compliant with ISO-14001.

Environmental Scientist, January 1996 – April 1997
Maxim Technologies (formerly Huntingdon Chen-Northern), Denver, CO
Assigned to USEPA Superfund Technical Assistance and Response Team, sub-contracted to the primary USEPA contractor.

- Conducted hazardous waste and emergency response operations, including delineation of contamination, site control, and contamination monitoring and reporting.
- Provided on-site technical support to EPA and oversight of contractors for EPA.
- Provided assistance to EPA regarding sampling, management, and disposal of hazardous and mixed wastes.
- Conducted preliminary site investigations to determine presence and extent of contamination on sites.

- Assisted in development of work plans and provided assistance to EPA for subsequent remediation of contaminated sites and abandoned industrial facilities.
- Conducted hazardous materials training as required by OSHA for hazardous waste site work and emergency response, as well as the hazard communication standard.
- Assisted EPA in conducting public information meetings pertaining to remedial sites.

Health and Safety Manager, August 1994 – January 1996
Maxim Technologies (formerly Huntingdon Chen-Northern), Denver, CO
Responsible for the overall management of Maxim's regional health and safety program.

- Developed and implemented corporate health and safety procedures throughout the Northwest Region.
- Managed accidents and injuries as well as required documentation on OSHA 200 logs.
- Responsible for compliance, documentation, and disposal of hazardous materials generated by the regional offices.
- Assisted environmental groups in conducting Phase I site assessments.
- Conducted training for Hazardous Waste Site Work, Hazard Communication, Asbestos Awareness, Instrumentation, and Air Monitoring.
- Conducted accident investigations and management of workers' compensation claims.
- Developed site specific health and safety plans for hazardous waste site work.
- Provided technical support in the areas of industrial hygiene and health and safety.

Site Safety Supervisor, October 1992 – June 1994
OHM Corporation, Findlay, OH
Responsible for the implementation, and management of site specific environmental, industrial hygiene, health, and safety programs, in accordance with site specific health and safety plans.

- Conducted initial site hazard assessments.
- Assisted in completing and maintaining documentation related to hazardous waste storage and disposal.
- Monitored compliance of site operations with respect to OSHA, EPA, and state regulations, such as, RCRA, TSCA, AHERA, HAZWOPER, and HAZCOM.
- Implemented appropriate means to control hazardous materials exposure.
- Monitored the effectiveness of on-site industrial hygiene and safety programs.
- Initiated safety awareness programs.
- Conducted training as required by 29 CFR 1910.120 and the Hazard Communication Standard.
- Liaison between client representatives and OHM in regard to environmental, industrial hygiene, and health and safety issues.

Division Safety Coordinator, October 1989 – October 1992
MAECORP Inc., Columbus, OH
Responsible for the implementation and compliance monitoring of company safety policies in addition to Federal and State OSHA and EPA regulations, on hazardous waste project sites in USEPA Region V.

- Conducted site safety audits and prepared appropriate reports.
- Conducted air monitoring for personal exposures in addition to environmental air sampling.
- Conducted annual refresher training for hazardous waste site operation.
- Developed site specific health and safety plans in accordance with the requirements 29 CFR 1910.120.

- Conducted building inspections for asbestos.
- Maintained appropriate documentation in regard to medical monitoring requirements, training certificates, and hazard communication.
- Conducted accident investigations.
- Managed work related injuries.

References available upon request

HST

CERTIFICATE OF TRAINING

THIS CERTIFIES THAT

Kym Mohrman

has successfully completed 40 hours of instruction in

WASTE SITE WORKER PROTECTION

Prepared and conducted by
Hygiene, Safety and Training Inc.
to comply with OSHA 1910.120(e)(2)

Jack M. Peterson
CSP, CIH

November 10, 1989
Date of Completion

© GOES 462-1/2

LITHO IN U.S.A.

Scanned with CamScanner

OSHA 000266501

U.S. Department of Labor
Occupational Safety and Health Administration

Kym Edelman

has successfully completed a 10-hour Occupational Safety and Health Training Course in

Construction Safety & Health

John H. DeBruyn 11/30/04
(Trainer) (Date)

OSHA 600047764

U.S. Department of Labor
Occupational Safety and Health Administration

Kym Edelman

has successfully completed a 30-hour Occupational Safety and Health Training Course in

Construction Safety & Health

John H. DeBruyn 11/15/04
(Trainer) (Date)

OSHA Occupational Safety and Health Administration WK 0007986

This acknowledges that

KYM EDELMAN

has successfully completed

Course # 7600 - Disaster Site Worker (16- Hour)

This course emphasizes awareness of the safety and health hazards that may be encountered at natural or man-made disaster sites, as well as the importance of personal protective equipment, decontamination, and incident command organization.

Dominick A. Cinquegrana June 29, 2006
Trainer Completion Date

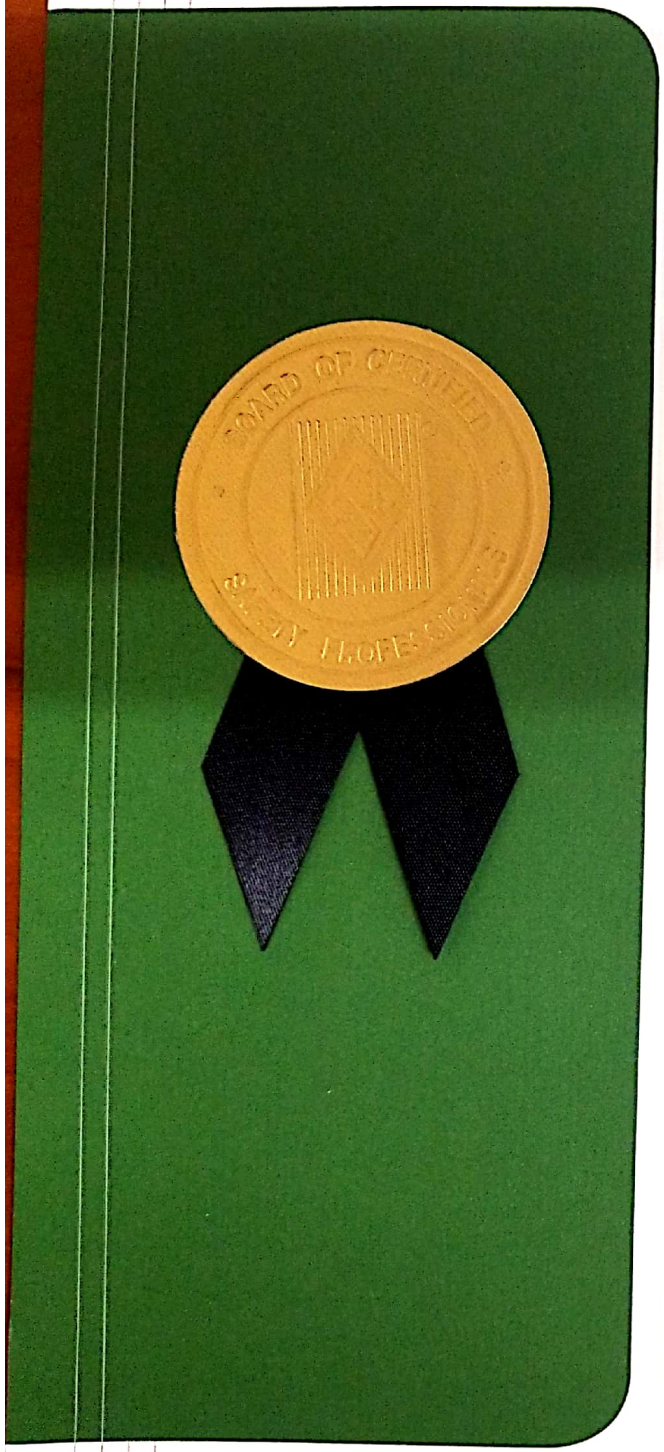

BOARD OF CERTIFIED SAFETY PROFESSIONALS

affirms that

Kym Y Edelman

Has applied for, met qualifications, and passed required examination(s) and is hereby authorized to use the designation

Certified Safety Professional®

in Comprehensive Practice

So long as this certificate is not suspended or revoked and the certificant renews this authorization annually and meets Continuance of Certification requirements.

Board of Examiners in witness whereof we have here unto set our hands and affixed the Seal of the Board this 21st Day of December, 2006

President

Secretary

19423 CSP No.

Scanned with CamScanner

ABIH
american board of industrial hygiene®

6015 West St. Joseph, Suite 102 Lansing, Michigan 48917 **P:** (517) 321-2638 **F:** (517) 321-4624 **E:** abih@abih.org

November 02, 2016

Kym Y. Edelman, CIH
4900 Fennell Lane
Suffolk VA 23435

Dear Ms. Edelman,

It is my pleasure to congratulate you. With the combination of education, experience and your performance on the CIH® examination, the American Board of Industrial Hygiene® finds you qualified for professional certification in the Comprehensive Practice of Industrial Hygiene. You may now use the designation "Certified Industrial Hygienist®" and the corresponding "CIH®".

This is a significant career milestone. Many industrial hygienists strive for the CIH® certification but it's attained by only a few. Your certification says a lot about you as a professional. It is a mark of distinction that indicates not only your knowledge and skills but also your personal motivation to successfully undertake the challenge. This is recognized by peers, employers and clients.

We will be publishing your name on the ABIH® website so that everyone may see this great accomplishment.

Now that you've attained the CIH®, you'll want to make every effort to retain it. The best place to start is with the CM Primer which is available in the Documents Library section of the ABIH website. It provides an easy-to-read summary of the basic program along with some useful tips. As you review the CM Primer, note that you are on a 60 month CM Cycle that runs from January 1, 2017 to December 31, 2021.

Please use the ID Number listed below to access the My Account section of the ABIH website where you can update your contact information, pay fees and locate other CIHs in the private roster.

ID Number: **11689**

On behalf of ABIH®, I personally congratulate you on your achievement. Welcome to an elite group of professionals!

Ron Drafta

Ron Drafta, CIH
Certification Program Manager, ABIH
rdrafta@abih.org

Enclosure

Certificate Of Completion

American Safety Council

KYM EDELMAN

Has diligently and with merit completed the

40-Hour EM 385-1-1 on 7/6/2018

Director: **Jeff Pairan**

ABIH®

american board of industrial hygiene®

organized to improve the practice of industrial hygiene
proclaims that

Kym Y. Edelman

having met all requirements of
education, experience and examination,
is hereby certified in the

COMPREHENSIVE PRACTICE
of
INDUSTRIAL HYGIENE

and has the right to use the designations

CERTIFIED INDUSTRIAL HYGIENIST

CIH

Certificate Number	**11090 CP**
Awarded:	**October 26, 2016**
Expiration Date:	**June 1, 2022**

Chair, ABIH

Chief Executive Officer, ABIH

The Compliance Edge Online Institute

Certificate of Completion

Kym Edelman

has met the online course completion requirements for

HAZWOPER 8-Hour Refresher

in accordance with 29 CFR 1910.120 and 1926.65

Certificate ID 1724619-328
Continuing Education Units 0.8
AdvanceOnline Solutions, Inc. offers 0.8 CEUs for this program.

AdvanceOnline, Inc. is authorized to issue the ICSR CEU.

ICSR CEU

Date 7/28/2020 8:09:00 AM
Time Online 08:38:52
AdvanceOnline Solutions, Inc.
1811 Bering Drive, Suite 430
Houston, Texas 77057
www.advanceonline.com
(713) 621-1100

AdvanceOnline SOLUTIONS

BRIAN KATELEY

Years' Experience: 17

With Current Firm: 9.5

Current Professional Registration:

Security Clearance:

Aberdeen Proving Ground

Education:

- BS, Environmental Science & Policy Program, University of Maryland, 2003
- Environmental Technology Certificate, Harford Community College, 1999

Other Professional Qualifications/Training:

- OSHA 40-hour HAZWOPER, 1999 and 2006; 8-hr HAZWOPER Refresher, 2021
- OSHA 8-hour Excavation Safety; 2006
- OSHA 8-hr Supervisor, 2008
- OSHA 30-hour Construction Safety and Health, 2011 – renewal in progress
- First Aid/CPR/AED/BBP, 2017 – renewal in progress

Summary of Experience:

Mr. Kateley is experienced in environmental characterization techniques such as groundwater sampling, soil sampling, lithologic characterization, surface media sampling, direct-push technology, investigations, and monitoring well installation. He is also skilled in groundwater remediation system implementation and operation and maintenance, including monitored natural attenuation, pump and treat systems, in situ bioremediation, and product recovery systems.

Mr. Kateley has been in a Site Supervisor and SSHO role since March of 2014. His responsibilities have included assisting with managing project safety and health programs. Providing safety consultation to the project management team in the planning and execution of project tasks. Providing site orientation for new employees, subcontractors, vendors, and visitors. Performing multi-media sampling to determine appropriate levels of PPE and assigning PPE to team members. Conducting daily safety and workplan tailgate meetings. Conducting daily, weekly, monthly, and annual site inspections. Ensured all employees, including subcontractors, performed daily activities safely and assured compliance with APP/SSHP, AHAs, and workplans while enforcing all site safety and health procedures.

Roles & Responsibilities: Environmental Scientist, Site Supervisor and SSHO since 03/14.

ECC Project Experience

Project Title and Location: Aberdeen Proving Ground Remedial Action (Optimization), Maryland

Dates on Project Start/End: 11/11 to present

Project Start/End Dates: 06/11 to present

Roles & Responsibilities: Environmental Scientist, Site Supervisor and SSHO

Mr. Kateley currently serves as the Site Supervisor and SSHO for the operations, maintenance, and performance monitoring of enhanced in-situ bioremediation systems for the remediation of chlorinated solvents in groundwater at six sites within the Aberdeen Area of APG, Buildings 3327, 525, M600, 361, 507 and Defense Reutilization and Marketing Office Metal Scrap Yard. Systems include active groundwater recirculation systems for the addition of groundwater amendments and passive biobarriers for the treatment of downgradient areas. He is responsible for operations and technical support, including:

tracking weekly groundwater elevation data to determine the status of hydraulic containment; scheduling and overseeing long-term monitoring (LTM) groundwater sampling on a semi-annual schedule; maintaining the project groundwater analytical database; managing and interpreting all of the groundwater elevation and chemical sampling data; and, preparation of quarterly performance and annual operations and performance monitoring technical reports. Mr. Kateley also assists the Project Manager in the oversight of field lab pack technicians and the inventory, tracking, and disposal of solid and liquids wastes generated from the project activities.

Mr. Kateley also supports operations at the Canal Creek and O-Field Groundwater Treatment Facilities under this project and has held an Operator in Training Industrial Wastewater License with the Maryland Department of the Environment (MDE).

Project Title and Location: Site Delineation and Characterization of Phillips Landfill, Western Boundary OU2, Ecological Soil Removal at Fire Training Area, and Achieve Site Closure at CCAPG04031, Aberdeen Proving Ground, Maryland

Dates on Project Start/End: 09/14 to 09/19

Project Start/End Dates: 09/14 to 09/19

Roles & Responsibilities: Environmental Scientist, Site Supervisor and SSHO

Mr. Kateley directed environmental sampling in support of a data-gap investigation at six landfill areas identified within the Phillips Army Airfield Landfill (PAALF) to evaluate potential Feasibility Study response actions for the areas under CERCLA. Specific tasks included the delineation of the presence/absence and horizontal extent of fill material within each landfill area through the use of 171 test pits; existing soil cover thickness assessments of each area, soil and solid waste sampling to characterization of contaminates and waste streams; groundwater sampling of the entire PAALF monitoring well network. Mr. Kateley assisted the Project Manager in the implementation of a non-time-critical removal action (NTCRA) at the Aberdeen Fire Training Area (AFTA), located in the Western Boundary Study Area (WBSA) of the Aberdeen Area of APG involving shallow soil excavation/removal of polycyclic aromatic hydrocarbons (PAHs) and metals-contaminated soil; achieving negotiated cleanup levels. He also supported the implementation of the Closure Plan for the former Aberdeen Area Building 4031 Underground Storage Tank (UST) Site regulated under the State of Marylandôs Oil Control Program. Mr. Kateley was responsible for the oversight of well abandonments, decommissioning of the in-active SVE system, construction and operation of an on-site treatment cell for DRO/GRO contaminated soils, excavation and treatment of DRO/GRO contaminated soil from the footprint of the former 4031 Building, liquid phase hydrocarbons (LPH) recovery and groundwater treatment, confirmation sampling and analysis, excavation backfilling, and site restoration. He also supervised lab pack technicians in the performance of post-closure monthly gauging of water levels and removal of free-product from two wells, as well as quarterly groundwater sampling of the well field at the former Building 4031 UST site. Supported preparation of the site project workplans, health safety plans, and closure documentation and coordinated with the DPW Environmental Division Hazardous Waste Branch to provide all documentation necessary to remove waste and IDW from APG. Responsibilities for all project work included oversight of the field sampling teams; inventory and tracking of chemical data and waste generated from investigation and remediation activities; data reporting; and maintaining strict adherence to the health and safety plans and compliance with associated federal, state, local, and APG regulations and guidance governing all CERCLA and RCRA work at APG.

Project Title and Location: Canal Creek Study Area Sites RI/FS PBA, Aberdeen Proving Ground, Maryland

Dates on Project Start/End: 03/14 to 09/17

Project Start/End Dates: 03/14 to 09/19

Role & Responsibilities: Environmental Scientist, Site Supervisor and SSHO

Mr. Kateley supported the environmental sampling tasks associated with the RI work at the Canal Creek Study Area (CCSA) at APG as part of the Installation Restoration Program under CERCLA. This contract covered the completion of the remedial investigations (RIs) (including risk assessments and final RI Reports) for 10 East and 12 West CCSA sites, plus an investigation of the Buried Legacy Chemical Sewer Lines throughout the CCSA. The remedial investigations include site inspections, test digs, and media sampling (i.e., soil, sediment, sludge, and groundwater). Responsibilities included development and production of RI Work Plans, field activity reports, and final RI Reports, overseeing team subcontractors, field sampling events, evaluation of analytical data, inventory and tracking of waste generated from RI activities, and maintaining strict adherence to the health and safety plans and standard operating procedures (SOPs) governing all CERCLA work at APG.

Project Title and Location: Other Miscellaneous DoD and Former DoD Sites in the United States Mid-Atlantic area.

Dates on Project Start/End: 01/12 to present

Role & Responsibilities: Environmental Scientist, Site Supervisor and SSHO

Mr. Kateley has supported other similar projects in the Mid-Atlantic on shorter terms including:

- Joint Base McGuire-Dix-Lakehurst ï Burlington County, NJ
- Atlantic City Air National Guard Site ï Atlantic County, NJ
- Fort Meade ï Anne Arundel County, MD
- Picatinny Arsenal ï Morris County, NJ
- Former Griffiss Air Force Base ï Oneida County, NY

Work Prior to ECC

Scientist II, EA Engineering, Science, and Technology, Inc. (01/06-10/11).
Project Manager, Aberdeen Proving Ground Edgewood Area Munitions Response Site Remedial Investigation, Aberdeen Proving Ground; Army Environmental Command (2011). Fixed price remedial investigation assessment for munitions and explosives of concern and munitions constituents for 12 Munitions Response Sites at Aberdeen Proving Ground, which total 3,500 acres. Responsible for Technical Project Planning and Restoration Advisory Board support, munitions constituents assessments, providing Unexploded Ordnance Quality Control Officer and Unexploded Ordnance Safety Officer support, Geographic Information System database management, DGM support to include brush clearing, ERIS uploads, and document support. Project includes the re-acquirement and evaluation of over 20 years of Installation Restoration Program data (including geophysics and Installation Restoration Program chemical sampling) to support the Military Munitions Response Site remedial investigation efforts.

Environmental Scientist, Suburban Propane, Reisterstown, Maryland (2010). Responsible for field activities during DPT chemical-oxidation injections including assurance of proper injection depths, volumes, and geochemical sampling from surrounding monitoring wells.

Environmental Scientist, Department of Public Works Parcel B, C, D Remedial Action Plan, National Aquarium of Baltimore, Baltimore, Maryland (2010). Responsible for construction quality assurance and air monitoring of perimeter and work zone at site utilizing dust and mercury vapor meters. Also responsible for the creation of an environmental monitoring plan for environmental hazards during the voluntary cleanup program remedial action plan implementation.

Environmental Scientist, New O-Field Groundwater Remediation; Aberdeen Proving Ground (2009-2010). Performed field activities required to determine contaminant distribution and hydraulic properties for the remedial system design. Responsible for design, installation, and implementation of a bio-barrier injection and monitoring well network to treat chlorinated solvents and metals in groundwater at the site.

Environmental Scientist, Constellation Power Generation Oil Control Program Compliance Support, Perryman and C. P. Crane Generating Stations (2008). Responsible for coordination and performance of field activities including site wide groundwater gauging and sampling events and light non-aqueous phase liquid recovery.

Environmental Scientist, Site 2 Old Dump at Swan Creek Soil, Aberdeen Proving Ground, Aberdeen, Maryland (2009). Conducted site clearing activities and the installation of geotextile for the reestablishment of landfill cap.

Environmental Scientist, Compliance Cleanup of 13 Sites, Aberdeen, Maryland; Aberdeen Proving Ground; Environmental Scientist (2008). Tasks include operation and maintenance of product recovery systems, groundwater monitoring, and reporting.

Environmental Scientist, Enhanced In Situ Bioremediation Systems, Buildings 3327, 525, M600, 361, 507 and Defense Reutilization and Marketing Office Metal Scrap Yard, Aberdeen Proving Ground, Maryland, Aberdeen Proving Ground (2006). Involved in the installation and responsible for the operation, maintenance, and performance monitoring for enhanced bioremediation systems for the remediation of chlorinated solvents in groundwater at six sites in the Aberdeen Area. Systems include active groundwater recirculation systems for the addition of groundwater amendments and passive biobarriers for the treatment of down gradient areas.

Environmental Scientist, Operations and Maintenance Soil Vapor Extraction/Free Product Recovery System, Building 4025, Aberdeen Proving Ground, Maryland (2006-2007). Responsible for operations and maintenance of the Building 4025 soil vapor extraction remediation system, which consists of a soil vapor extraction system that is designed to enhance the recovery of light non-aqueous phase liquids and biodegrade residual hydrocarbons. Also responsible for collection of monthly air sample for submission to laboratory for benzene, toluene, ethylbenzene, and xylene analysis, to ensure that air emissions for the system are in compliance with the Maryland Department of the Environment regulations. Additional responsibilities include preparation of comprehensive monthly progress reports for the system.

Environmental Scientist, Operation and Maintenance Soil Vapor Extraction System, Building 4031, Aberdeen Proving Ground, Maryland (2006-2007). Responsible for operations and maintenance of the Building 4031 soil vapor extraction/free product recovery system. Also responsible for collection of monthly air sample, for submission to laboratory for benzene, toluene, ethylbenzene, and xylene analysis, to ensure that air emissions for the system are in compliance with the Maryland Department of the

Environment regulations. Additional responsibilities include preparation of comprehensive monthly progress reports for the system.

Inspector/Technician, Monitoring and Maintenance 5 Installation Restoration Program Sites; Edgewood Area, Aberdeen Proving Ground, Maryland (2006). Responsible for quarterly inspections and subsequent maintenance of 5 Installation Restoration Program sites; Nike SW landfill, Cluster 5 test area, Old Bush River Road Dump, Graces Quarters, and Carroll Island. Monitoring tasks include sampling of monitoring wells and surface media (soil and sediment), maintenance inspection of landfill sites to ensure site stability and inspection of shoreline stabilization measures with unexploded ordnance sweeps at Graceôs Quarters and Carroll Island. Maintenance tasks involve removal of unwanted vegetation, fence repair, and carbon filter replacements.

Environmental Scientist, Millsboro Groundwater Investigation (Trichloroethene); Millsboro, Delaware; Department of Natural Resources and Environmental Control (2006). Collected groundwater samples using direct-push technology in order to delineate the plume size of known trichloroethene contamination. Also collected soil, soil gas vapor, and air samples to define possible volatile organic compound occurrences outside of the groundwater.

Environmental Scientist, Uncle Ted's Trading Post, Millsboro, Delaware, Department of Natural Resources and Environmental Control (2006). Performed operations and maintenance on soil vapor extraction system. Installed upgraded aquifer air sparge and soil vapor extraction system. Sampled monitoring wells and potable wells surrounding the site.

Scientist, Absecon Island Shore Protection Project, Atlantic City, New Jersey; US Army Corps of Engineers (01/04-11/04). Employed on the dune restoration phase of the US Army Corp of Engineers Absecon Island Shore Protection Project. Project focus included sand fence and dune grass installation from Atlantic City to Ventnor City, New Jersey. Responsibilities included fence and planting layout, material storage, equipment maintenance, and communication with contractors. Gained experience in coastal ecology, winter field conditions and operating light machinery. Other projects with this firm included native species reforestation jobs for the Maryland State Highway Administration.

Carpenter's Assistant, Potts & Callahan Inc., Baltimore, Maryland (06/99-09/00). Assisted carpenters in the layout, building, and setting of concrete forms for stormwater management structures. Gained experience in reading blueprints and using instrument levels for grading and excavation. Learned heavy equipment safety procedures and the use of industrial power tools.

Intern/Scientist, Radford Army Ammunition Plant, Radford, Virginia (07/98-04/99). Worked on the environmental remedial investigation. Responsibilities included air, soil, surface water, and sediment sampling along with sampling documentation and transportation. Assisted in the compilation of the collective measures study by processing sampling results, preparing data spreadsheets and producing sampling maps from Global Positioning System data. Team involvement included site management during remediation phases.

ALL AMERICAN ENVIRONMENTAL SERVICES, INC.

This is to certify that

BRIAN D. KATELEY

has successfully completed

"HAZARDOUS WASTE SITE WORKER" 40-HOUR COURSE
SATISFYING OSHA 29 CFR 1910.120 (e) (3) (i)

at

ALL AMERICAN SCHOOL OF OCCUPATIONAL SAFETY AND HEALTH
COLUMBIA, MARYLAND

January 9-13, 2006
40S-0601A

School Director

EA Engineering, Science,
And Technology, Inc.

Certificate of Training

PRESENTED TO

Brian Kateley

FOR COMPLETION OF

8-Hour HAZWOPER
Supervisor Training
Per 29 CFR 1910.120

25 April 2008

Peter Garger, CIH

OSHA Occupational Safety and Health Administration

14-600541403

This card acknowledges that the recipient has successfully completed a 30-hour Occupational Safety and Health Training Course in

Construction Safety and Health

Brian Kateley

Peter Garger CIH, CSP (Trainer name – print or type)

5/24/2011 (Course end date)

OSHA recommends Outreach Training Courses as an orientation to occupational safety and health for workers. Participation is voluntary. Workers must receive additional training on specific hazards of their job. This course completion card does not expire.

Use or distribution of this card for fraudulent purposes, including false claims of having received training, may result in prosecution under 18 U.S.C. 1001. Potential penalties include substantial criminal fines, imprisonment up to five years, or both.

For OSHA Outreach Training Program go to "Training" at www.osha.gov

Rev. 12/2009

CLICKSAFETY®

certifies that

BRIAN KATELEY

has successfully completed ClickSafety's web-based training course:

HAZWOPER 2021 Refresher (8-Hour)

In accordance with the requirements of 29 CFR 1910.120(e)

This course was developed and presented by ClickSafety.com, Inc.

I confirm that I personally took the course listed above.

31533408	1/27/2021	8 HOURS	
SERIAL NUMBER	COMPLETION DATE	COURSE DURATION	STUDENT SIGNATURE

APPENDIX C
ECC COVID-19 PREVENTION PROGRAM

ECC COVID-19 Prevention Program (CPP)

December 21, 2020

1.0 INTRODUCTION

ECCôs work is considered ñessentialò in support of the Critical Infrastructure. Prevention of all cases of COVID-19 infections among essential workers during a pandemic, as in general society, may not be possible. The following procedures are intended to minimize the spread and impacts of COVID-19 pandemic to protect workers and support the mission. The procedures are based on various state regulations and guidance provided by the US Centers for Disease Control and Prevention (CDC); USDOL Occupational Safety and Health Administration (OSHA), and NAVADMIN Memorandum 173/20: U.S. NAVY COVID-19 STANDARDIZED OPERATIONAL GUIDANCE VERSION 3.1.

This program applies to all ECC employees and invitees, guests, or visitors to our facility as applicable. Subcontractors are expected to have and follow their own protection program that is compliant with Federal, State and Local workplace regulations and public health guidance.

Each Office and Worksite must enter the following information. Site-specific changes to this program should be made in consultation with Health and Safety and Human Resources.

Office/Project Site Name/Location:

Redstone Arsenal, Alabama

Local Health Department Contact Information:

Alabama Public Health (alabamapublichealth.gov/covid19/). General COVID-19 questions (800) 270-7268 or email covid19info@adph.state.al.us

2.0 AUTHORITY AND RESPONSIBILITY

The Corporate Health and Safety Manager has overall authority and responsibility for implementing the provisions of this CPP. In addition, all managers and supervisors are responsible for implementing and maintaining the CPP in their assigned work areas and for ensuring employees receive answers to questions about the program, in a language they understand.

All employees are responsible for using safe work practices, following all directives, policies and procedures, and assisting in maintaining a safe work environment.

3.0 IDENTIFICATION AND EVALUATION OF COVID-19 HAZARDS

ECC has identified and evaluated the hazards of COVID-19 in our workplace, using **Attachment B: Identification of COVID-19 Hazards** form, attached.

People with COVID-19 have had a wide range of symptoms reported ï ranging from mild symptoms to severe illness. Symptoms may appear 2-14 days after exposure to the virus. People with these symptoms may have COVID-19:

1) Fever or chills
2) Cough
3) Shortness of breath or difficulty breathing
4) Fatigue

5) Muscle or body aches
6) Headache
7) New loss of taste or smell
8) Sore throat
9) Congestion or runny nose
10) Nausea or vomiting
11) Diarrhea

In offices and job sites, exposure to the virus may occur due to close contact with others that are currently infected, and through contact with surfaces contaminated with respiratory droplets from infected people.

Because ECC offices and job site operations do not involve contact with the general public, providing health care or work in active health care facilities and/or institutional residential facilities, USDOL OSHA considers the workplace to be in the Lower to Medium Risk Categories.

Workplace protection procedures contained in this SOP will minimize the risk of transmission within the workplace.

4.0 EMPLOYEE PARTICIPATION

Employees are encouraged to participate in the identification and evaluation of COVID-19 hazards by:

1) Identifying specific situations where person-to-person contact cannot be avoided and reporting situations to their Supervisor or Health and Safety representative
2) Conducting or participating in frequent inspections of the workplace
3) Ensuring adequate disinfection and sanitizing materials are available at all times and reporting reordering needs
4) Contacting the Supervisor or Health and Safety representative with questions and suggestions for improvement
5) Coaching and encouraging co-workers regarding safe work practices for COVID-19 prevention

5.0 CORRECTION OF COVID-19 HAZARDS

All supervisors and Health and Safety Representatives are responsible for frequent inspections and observations of the working conditions and practices in the workplace. Unsafe or unhealthy work conditions, practices or procedures may be documented on **Attachment C: COVID-19 Inspections** form, and corrected in a timely manner based on the severity of the hazards, as follows:

1) Failure to maintain proper distancing or face covering use will be addressed with the individuals immediately
2) Cleaning and disinfection procedures will be updated as soon as practical where found to be deficient
3) Failure to follow screening protocols will result in disciplinary action as described in the ECC employee handbook
4) Workplace configuration and ventilation deficiencies will be corrected as soon as practical.

6.0 CONTROL OF COVID-19 HAZARDS

Personnel screening

Self screening:

Employees are encouraged to have a thermometer and to self-monitor their temperature daily before coming to work and determine if they have developed one or more other symptoms of COVID-19. Employees should use the **Self-Checker on the CDC website**. They can also use the Apple CDC Screening app if they have an iPhone or iPad **https://apps.apple.com/us/app/apple-covid-19/id1504132184.**

Employees experiencing a fever or other symptoms of COVID-19 should not come to work, and immediately contact their Supervisor.

Offices:

Office doors remain closed, with signs for visitors to ring bell or call a number for access. Signs will also announce a need for screening. Employees and visitors will be screened daily when they first arrive at an ECC office. An iPad, thermometer and disinfecting wipes are stationed at the Reception area or immediately adjacent to the entry door. Signs are posted with instructions to activate the app on the ipad, complete the symptom and travel questionnaire and take their temperature. Each person should disinfect the thermometer and iPad screen when finished. The screening will indicate whether entry is permitted or denied. A limited number of personnel will receive an email notification for follow up if entry is denied. Screening applies to all personnel requiring entry to an office including employees, clients, subcontractors, building maintenance and custodial services workers.

Job sites:

At the daily tailgate meeting, each person is to certify the that they have no significant risk factors including symptoms, recent close contact with sick individuals, etc. The Screening Questionnaire in Attachment A will be used to question each worker.

Responses can be documented in a variety of methods best suited to the project that help maintain social distancing and infection control. The method implemented will prevent physical sign-offs by individual crew members on a common sheet of paper. Options that may be implemented include:

a) One person checks off a list of workers questioned

b) Tailgate is photographed or video recorded indicating who was present

c) Electronic database input, such as the ECC Screening Mobile App. (Contact Ivan Leung or Olivia Su to set up an account.)

Project sites should have a no-touch medical thermometer. Thermometers designed for industrial use are not acceptable for this application. Temperatures can be taken in either of these situations:

a) For an individual having close contact with sick individual who has not been diagnosed with COVID-19, or

b) As part of the daily general screening of all employees entering the worksite. In this case, check-in station(s) will be established to complete the temperature and questionnaire screening.

Individuals with temperatures that are found to be above 99.5^{o}F will require additional screening or isolation.

Individuals taking temperatures of other employees must be properly protected. Wear the following:

a) Double nitrile gloves, and change the outer glove often, or sanitize hands between readings

b) Face coverings. Face coverings must also be worn by personnel being screened to help protect the screener.

Cloth face covering, surgical mask or N95 are acceptable face coverings. Note: Respirators with exhalation valves are not permitted for this purpose. Also, bandannas should be discouraged, but where allowed should drape down to the chest.

Disinfect thermometer after use.

See Sections 10 through 12 when employees do not pass the temperature and symptoms screening criteria.

6.1 Physical Distancing

Where possible, ECC will ensure at least six feet of physical distancing at all times in our workplace by implementing these procedures:

1) Permit and facilitate employees working remotely where possible
2) Eliminate person-to-person meetings when possible, with site workers and clients. Meet virtually on Microsoft Teams, use social media apps to distribute safety messages, photograph and distribute AHAs on cell phone text, etc. Physical group meetings will be limited to 10 persons and held outdoors in spaces that can accommodate 6 ft. separation of attendees.
3) Do not allow people to congregate in enclosed spaces including job site trailers, tool rooms, shipping containers, buildings under construction/renovation, etc.
4) Hold tailgate meetings outside if e-meetings are not possible. Make sure personnel respect the recommended 6 ft. social distancing rule at a minimum. Use a battery powered megaphone if necessary. Have one person record attendance, or use photographs as your attendance record, so people donôt need to sign a common sheet (often with a passed around pen). At large sites, split the meetings up into crew meetings.
5) Trades and technical workers will be assigned in a manner that facilitates social distancing whenever possible. Staggered shifts, multiple shifts and phased construction approaches will be used to avoid congestion.
6) Have vendors drop supplies at the entrance gate or an established outside drop point in the Support Zone.
7) Have fuel vendors wear gloves and avoid close contact with operators.
8) Have fuel and other vendors submit invoices electronically. Avoid signing delivery slips.
9) Stagger breaks and do not permit congregating indoors for breaks.
10) Carpooling should be discouraged. Where it occurs employees should be educated and encouraged to follow the procedures below.
11) If ECC employees must share rides in site vehicles, the following rules will apply:

a) Maintain at least 3 ft. distance in all directions from other passengers and the driver, e.g. only 2 people per seating level (front and back)
b) All drivers and riders must wear face coverings
c) Keep windows open to extant feasible (whenever outdoor temperatures are between 60- and 90-degrees F)
d) Clean and disinfect the vehicle high touch surfaces at least twice per day

6.2 Face Coverings

ECC will provide clean, undamaged face coverings to ECC employees and visitors, when needed, and ensure they are properly worn over the nose and mouth. Subcontractors are responsible for ensuring their

own employees have suitable face coverings.

Face coverings must be worn:

1) when indoors, and
2) when outdoors and less than six feet away from another person, including non-employees, and where required by orders from the California Department of Public Health (CDPH) or other state and local health departments. **(Note: some localities have rules or orders that require mask wearing outdoors at all times regardless of distancing.)**

The following are exceptions to the use of face coverings in our workplace:

1) When an employee is alone in a room.
2) While eating and drinking at the workplace, provided employees are at least six feet apart and outside air supply to the area, if indoors, has been maximized to the extent possible.
3) Employees wearing respiratory protection in accordance with CCR Title 8 section 5144 or other safety orders.
4) Employees who cannot wear face coverings due to a medical or mental health condition or disability, or who are hearing-impaired or communicating with a hearing-impaired person. Alternatives will be considered on a case-by-case basis.
5) Specific tasks that cannot feasibly be performed with a face covering, where employees will be kept at least six feet apart.

Any employee not wearing a face covering, face shield with a drape or other effective alternative, or respiratory protection, for any reason, shall be at least six feet apart from all other persons.

6.3 Engineering controls

Each office is responsible for contacting their building owner, facility manager, HVAC vendor or HVAC service contractor to determine the maximum level of filtration and the maximum level of fresh outside supply air are possible with their current HVAC system. Typically, HEPA filtration is not feasible with systems that have not been designed for special occupancies, such as biomedical laboratories or infectious control health care facilities. MERV 10 have been found to reduce the amount of virus in the supply air by 70% in one study, but further filtration up to MERV 15 did not appear to further reduce the amount of virus passing the through. However an evaluation of system performance will have to be made to see if filters of that efficiency are compatible, especially with older systems.

Outside supply air may be maximized where it does not present other hazards, such as poor air quality due to wildfire smoke or local pollution levels, and where heating/cooling efficiency is not compromised to an unacceptable level.

6.4 Cleaning and disinfecting

At ECC offices adequate cleaning and disinfection supplies will be available and employees will regularly clean and disinfect high touch surfaces such as doorknobs and handles, desks and tabletops, and keyboards. Disinfection supplies will include disinfecting wipes, and solutions containing bleach, hydrogen peroxide or quaternary ammonium will be used. Items with these constituents will usually have an EPA Reg Number as an approved biocide. Solutions can be made by mixing one-third cup of household bleach with 1 gallon of water.

Custodial services will include regular disinfection of high touch services as part of their cleaning contracts.

If an employee becomes a confirmed COVID-19 case in our workplace, cleaning and disinfection will be

done of areas, materials, and equipment used by a COVID-19 case during the high-risk exposure period, using the materials described above, by employees wearing proper PPE including disposable gloves, eye protection and face coverings. If necessary, a specialized disinfection service will be engaged to perform this service.

6.5 Shared tools, equipment and personal protective equipment (PPE)

PPE will not be shared, e.g., gloves, goggles and face shields.

Items that employees regularly physically contact, such as phones, headsets, desks, keyboards, writing materials, instruments and tools will also not be shared, to the extent feasible. Where there must be sharing, the items will be disinfected between uses by the users.

Sharing of vehicles and mobile construction equipment will be minimized to the extent feasible, and high-touch points (for example, steering wheel, control knobs, door handles, seatbelt buckles, armrests, shifter, etc.) will be disinfected between users.

Disinfect shared resources like radios, power tools, etc. daily.

6.6 Hand sanitizing

Supplies of hand soap and water, hand sanitizer, disinfecting wipes and disinfecting solution will be available on site. Encourage all site personnel to use these often and to wash hands for at least 20 seconds each time. Hand sanitizer must be:

1) kept in travel vehicles used for passenger transport,

2) used before entering office or project site or having temperature checked,

3) used after exiting office or project site or having temperature checked.

6.7 Personal protective equipment (PPE) used to control employees' exposure to COVID-19

ECC provides disposable gloves and eye protection for employees to perform cleaning and disinfection activities, and while taking screening temperatures of other employees using non-contact thermometers. Face coverings are provided for general work where 6 ft. distance cannot be maintained. Subcontractors are expected to provide their employeesô PPE.

ECC has no operations where aerosolized respiratory droplets and particles are a risk requiring respiratory protection.

Employees providing first aid to others on the job site will follow the precautions in the Bloodborne Pathogens Standard Operating Procedure HS SOP 8.3.

7.0 INVESTIGATING AND RESPONDING TO COVID-19 CASES

Appendix C: Investigating COVID-19 Cases form will be used as a guide in investigating COVID-19 cases in the workplace. Where workplace transmission is a concern, testing may be required and will be provided by ECC for their employees and subcontractors for their employees.

Contact the Health and Safety Manager and Human Resources for assistance in investigating such incidents.

8.0 SYSTEM FOR COMMUNICATING

ECCôs goal is to ensure effective two-way communication with our employees, in a form they can readily understand, while minimizing contact and potential spread of COVID-19 by implementing the following or similar methods:

1) ECC all-hands messages will be forwarded to all ECC personnel, ECC subcontractor managers and client contacts using cell phone group texts, email distribution lists and/or social media apps.
2) A central area will be established to display posters and messages related to COVID-19 prevention. Informational posters will also be distributed throughout the workspaces as feasible. Contact the Health and Safety Manager for posters or visit the CDC and state Health Department websites for information and to download postings.
3) OSHA 3990, Guidance on Preparing Workplaces for COVID-19 may be shared with all ECC personnel, ECC subcontractor managers and client contacts.
4) Site orientations and tailgate meetings will be used to provide training on signs, symptoms and protective measures incorporated in this plan
5) Employees should report COVID-19 symptoms and possible hazards to their direct Supervisor and/or Health and Safety representative:
    a) By phone before coming to work when symptoms first develop
    b) Directly if symptom onset occurs during the workday
6) Employees can report symptoms and hazards without fear of reprisal.
7) Employees with medical or other conditions that put them at increased risk of severe COVID-19 illness must make this situation known to their supervisor or HR. ECC will provide accommodation, to the extent possible. by allowing remote work, modifying workstations, providing extra PPE, or other measures as appropriate.
8) Where testing is not required, ECC employees may access testing through our health insurance plan or through public testing stations established by local health departments or health care facilities.
9) In the event we are required to provide testing because of a workplace exposure or outbreak, we will communicate the plan for providing testing and inform affected employees of the reason for the testing and the possible consequences of a positive test. ECC will cooperate with testing orders by state and local health departments. In California, ECC is required to provide testing if a local health department identifies the workplace as the location of a COVID-19 outbreak, or when there are 3 or more cases in an exposed workplace within a 14-day period. In these cases, employees in the workplace will be given one test immediately and a second test a week later. After the first two tests, weekly tests will be provided for as long as the outbreak persists.
10) Information about COVID-19 hazards employees (including other employers and individuals in contact with our workplace) may be exposed to, what is being done to control those hazards, and our COVID-19 policies and procedures, will be provided to employees.

9.0 TRAINING AND INSTRUCTION

Training and instruction will include:

1) Our COVID-19 policies and procedures to protect employees from COVID-19 hazards.
2) Information regarding COVID-19-related benefits to which the employee may be entitled under applicable federal, state, or local laws.
3) The fact that:
    a) COVID-19 is an infectious disease that can be spread through the air.
    b) COVID-19 may be transmitted when a person touches a contaminated object and then touches their eyes, nose, or mouth.

c) An infectious person may have no symptoms.

4) Methods of physical distancing of at least six feet and the importance of combining physical distancing with the wearing of face coverings.

5) The fact that particles containing the virus can travel more than six feet, especially indoors, so physical distancing must be combined with other controls, including face coverings and hand hygiene, to be effective.

6) The importance of frequent hand washing with soap and water for at least 20 seconds and using hand sanitizer when employees do not have immediate access to a sink or hand washing facility, and that hand sanitizer does not work if the hands are soiled.

7) Proper use of face coverings and the fact that face coverings are not respiratory protective equipment - face coverings are intended to primarily protect other individuals from the wearer of the face covering.

8) COVID-19 symptoms, and the importance of obtaining a COVID-19 test and not coming to work if the employee has COVID-19 symptoms.

9) This training will be provided by a combination of project site orientations, daily tailgates, and all-hands messages for employees.

10.0 EXCLUSION OF COVID-19 CASES

Where we have a COVID-19 case in our workplace, we will limit transmission by:

1) Ensuring that COVID-19 cases are excluded from the workplace until our return-to-work requirements are met.

2) Excluding employees with COVID-19 exposure from the workplace for the time recommended by the CDC for quarantine or required by state or local authorities if more restrictive.

3) California requires continuing and maintaining an employeeôs earnings, seniority, and all other employee rights and benefits whenever weôve demonstrated that the COVID-19 exposure is work related. Human Resources will determine how this will be accomplished.

4) Providing employees at the time of exclusion with information on available benefits.

10.1 COVID-19 Cases

For the purposes of this procedure, a COVID-19 Case is an individual who 1) tests positive or 2) has symptoms consistent with COVID-19 until a physician or public health authority determines that their symptoms were not caused by COVID-19 and documentation of this determination is presented to the Supervisor or Health and Safety Representative. Personnel who meet the Return to Work criteria in Section 12 will no longer be considered a COVID-19 Case.

If an employee reports symptoms of COVID-19 during the daily screening, ECC will ask them to leave the site and to self-isolate at home or their temporary living quarters. ECC will request that they contact their personal medical provider or the state or local public health agency.

If an employee does not self-report symptoms, but symptoms are observed, ECC will ask them to leave the work site until released by a physician or the state or local public health agency.

Immediately notify ECC Human Resources (Tiffany Giglio tgiglio@ecc.net 508-340-9317), ECC local Health and Safety representative, and your Contracting Officer if any of your jobsite personnel test positive or are presumed positive for COVID-19. In accordance with medical privacy requirements, do not

provide the name of the individual to the Contracting Officer; **only disclose the name of a confirmed or presumptively infected employee to ECC Human Resources.** In your notification, please include the following details:

1) Worksite where the employee was working prior to the positive test result;
2) Names of people in the workplace the individual had contact with in the two days preceding the positive test result and/or symptom onset (if known); and,
3) Any known facilities (include description, name of building, building number, or any additional details that may assist us in identifying the facility) the individual visited up to 3-days before the positive test result and/or symptom onset (if known).
    a. Human Resources will contact the local health department regarding non-workplace facilities visited. Jobsite personnel are to notify other personnel contacted by the infected employee as well as all site personnel regarding the infected individual.

If the individual has symptoms or tests positive, they are to follow their physicianôs and the CDCôs guidance on home isolation until they meet the Return to Work criteria in Section 12.0.

10.2 COVID-19 Exposed Personnel

COVID-19 exposure includes close contact with infected individuals, i.e. being within 6 ft. for a total of 15 minutes during a 24-hour period, whether wearing masks or not, or being coughed on, sneezed on, or kissed by a COVID-19 case. Employees who share a household with a COVID-19 case are presumed to be in close contact, and therefore an exposed person.

COVID-19 Exposed Personnel will be excluded from the workplace and advised to quarantine at home.

11.0 REPORTING, RECORDKEEPING, AND ACCESS

It is ECCôs policy to:

1) Report information about COVID-19 cases at our workplace to the local health department whenever required by law, and provide any related information requested by the local health department.
2) Report immediately to OSHA any COVID-19-related serious illnesses resulting in hospitalization or death of an employee occurring in a place of employment or in connection with any employment.
3) Maintain records of the steps taken to implement our written COVID-19 Prevention Program.
4) Make our written COVID-19 Prevention Program available at the workplace to employees, authorized employee representatives, and to representatives of OSHA immediately upon request.
5) The manager investigating COVID-19 cases may use the **Attachment D: Investigating COVID-19 Cases** form to keep a record of the investigation. The information will be made available to employees, authorized employee representatives, or as otherwise required by law, with personal identifying information removed.

12.0 RETURN-TO-WORK CRITERIA

COVID-19 cases with COVID-19 symptoms will not return to work until all the following have occurred:

1) At least 24 hours have passed since a fever of 100.4 or higher has resolved without the use of fever-reducing medications, and
2) COVID-19 symptoms have improved, and.
3) At least 10 days have passed since COVID-19 symptoms first appeared.

COVID-19 cases who tested positive but never developed COVID-19 symptoms will not return to work until a minimum of 10 days have passed since the date of specimen collection of their first positive COVID-19 test.

A negative COVID-19 test will not be required for an employee to return to work.

COVID-19 exposed personnel (close contact) may return to work 14 days after the last close contact in California locations. All other locations may follow the latest CDC Guidelines for release from quarantine ï

1) 10 days since the last close contact, or

2) 7 days after the last close contact and a negative test no earlier than 5 days after the last close contact

If an order to isolate or quarantine an employee is issued by a local or state health official, the employee will not return to work until the period of isolation or quarantine is completed or the order is lifted. If no period was specified, then the period will be 10 days from the time the order to isolate was effective, or 14 days from the time the order to quarantine was effective.

Program Approved by (Signature): Date

ATTACHMENT A
DAILY TAILGATE QUESTIONNAIRE

Each Site worker must answer the following questions at the tailgate meeting or upon arriving at the site. Responses must be documented by the ECC SSHO or other management representative.

A. Is this your first day on the project?

B. Did you just return from international travel? If yes, leave site, you must quarantine for 14 days.

C. Did you travel here from within the US by airplane, train or bus? Indicate locations traveled from and through.

D. Are you experiencing any of the following symptoms? If yes, leave the site immediately. Isolate and contact your medical provider.

- Fever[1] or chills
- Cough
- Shortness of breath or difficulty breathing
- Fatigue
- Muscle or body aches
- Headache
- New loss of taste or smell
- Sore throat
- Congestion or runny nose
- Nausea or vomiting
- Diarrhea

E. Have you had close personal contact[2] with anyone who has been diagnosed with COVID-19? Tested positive? Or is presumed to have COVID-19? If yes, leave the site immediately. You must quarantine for 14 days.

F. Have you had close personal contact with anyone who has experienced those symptoms (identified in Question D) in the past 14 days?ò ï If yes, daily temperature monitoring is required along with questionnaire.

If any of the responses are YES, report the case to the ECC Site Safety and Health Officer and Project Manager immediately for follow up. If any of the responses are YES, or thermometer readings exceed the threshold, please conduct any further additional screenings or discussions outside the presence or earshot of other persons not involved in the screening for the privacy of the employee.

[1] Fever for the purposes of this procedure is defined as a temperature greater than 99.5°F confirmed with a second reading at least 30 minutes apart.

[2] Close personal contact means living with, caring for, or had contact with respiratory secretions, being within 6 ft in an enclosed space for more than 10 minutes, or being coughed on or sneezed on by a confirmed COVID-19 patient.

Attachment B: Identification of COVID-19 Hazards

All persons, regardless of symptoms or negative COVID-19 test results, will be considered potentially infectious. Particular attention will be paid to areas where people may congregate or come in contact with one another, regardless of whether employees are performing an assigned work task or not. For example: meetings, entrances, bathrooms, hallways, aisles, walkways, elevators, break or eating areas, cool-down areas, and waiting areas.

Evaluation of potential workplace exposure will be to all persons at the workplace or who may enter the workplace, including coworkers, employees of other entities, members of the public, customers or clients, and independent contractors. We will consider how employees and other persons enter, leave, and travel through the workplace, in addition to addressing fixed work locations.

Person conducting the evaluation: **[enter name(s)]**

Date: **[enter date]**

Name(s) of employee and authorized employee representative that participated: **[enter name(s)]**

Interaction, area, activity, work task, process, equipment and material that potentially exposes employees to COVID-19 hazards	**Places and times**	**Potential for COVID-19 exposures and employees affected, including members of the public and employees of other employers**	**Existing and/or additional COVID-19 prevention controls, including barriers, partitions and ventilation**
General office areas during general office work and cleaning. This applies to fixed facilities and temporary job site offices, including trailers and modular units.	Common areas including: • Reception area/lobby • Hallways – both in-suite and common hallways • Rest rooms • Kitchens • Conference rooms • Open office areas, e.g. bull pens • Copy and production rooms • Storage rooms and storage pods	Potential exposures include working within 6 ft. of others and touching contaminated surfaces. Client and subcontractor interactions Rendering first aid to co-workers	• Work from home policies • Many employees have individual enclosed offices • Entry screening including temperature screening and symptom and travel questionnaire • Video conferencing and IM communications • Travel limitations – must be approved by CEO • Face coverings in common areas and when 6 ft. cannot be maintained • Distancing, e.g. spacing in conference rooms and bull pens • No public access • Limitations on visitors • Traffic flow signs to prevent crossing paths where feasible

Interaction, area, activity, work task, process, equipment and material that potentially exposes employees to COVID-19 hazards	**Places and times**	**Potential for COVID-19 exposures and employees affected, including members of the public and employees of other employers**	**Existing and/or additional COVID-19 prevention controls, including barriers, partitions and ventilation**
			• Limits on # persons to one at a time in rest rooms, kitchen, copy/production rooms and storage rooms and pods • Sanitizer stations • Regular cleaning and disinfection of high touch surfaces (Need to check on ventilation systems with building managers)
Job sites - Various types of construction and environmental work including but not limited to: • Site inspections and assessments • Excavation, grading and utility work • Drilling and environmental sampling • Concrete forming, pouring and finishing • Structural steel and concrete construction • Plumbing, electrical and mechanical system installations • Roofing • Exterior architectural work and finishing • Fencing • Paving • Waste loading • Debris removal • Landscaping and forestry work • Interior finishing, Remodeling and repairs • Water treatment	• Access control points at start and end of shift • Pre-shift tailgate meetings • Working in building interiors • Performing construction work that requires more than one person is required to perform a task	• Screening employee IDs, temperatures and questionnaires • Working indoors with others • Working outdoors with others where 6 ft. cannot be maintained • Sharing tools • Sharing mobile construction equipment • Signing common paperwork and sharing writing tools • Rendering First aid to co-workers	• PPE is individually assigned • Education and information on maintaining distance • Face coverings indoors and when tasks require close contact with others • Minimizing signing of documents • Outdoor meetings – with social distancing • Cleaning and disinfection protocols • Sanitizing solution availability • Bloodborne Pathogens program

Interaction, area, activity, work task, process, equipment and material that potentially exposes employees to COVID-19 hazards	**Places and times**	**Potential for COVID-19 exposures and employees affected, including members of the public and employees of other employers**	**Existing and/or additional COVID-19 prevention controls, including barriers, partitions and ventilation**
Transportation • Air Travel • Job-site vehicles • Van/shuttle and car pools	• Airports • Air planes • Driving or riding in shared vehicles and vehicles with passengers	• Close contact with others within small enclosed spaces • Exposure to contaminated surfaces	• Limit travel to business essential with approval of CEO • Follow rules of terminal and carriers while using public transportation • Minimize ride-sharing • Rules for job-site ride sharing and car pools • Disinfection of shared equipment and vehicles • Ventilation in vehicle • Face coverings in vehicles

Attachment C: COVID-19 Inspections

Date:

Name of person conducting the inspection:

Work location evaluated:

Exposure Controls	Status	Person Assigned to Correct	Date Corrected
Engineering			
Barriers/partitions			
Ventilation (amount of fresh air and filtration maximized)			
Additional room air filtration			
[add any additional controls]			
[add any additional controls]			
Administrative			
Physical distancing			
Surface cleaning and disinfection (frequently enough and adequate supplies)			
Hand washing facilities (adequate numbers and supplies)			
Disinfecting and hand sanitizing solutions being used according to manufacturer instructions			
[add any additional controls your workplace is using]			
[add any additional controls your workplace is using]			
PPE (not shared, available and being worn)			
Face coverings (cleaned sufficiently often)			
Gloves			
Face shields/goggles			
Respiratory protection			
[add any additional controls]			

Attachment D: Investigating COVID-19 Cases

All personal identifying information of COVID-19 cases or symptoms will be kept confidential. All COVID-19 testing or related medical services provided by us will be provided in a manner that ensures the confidentiality of employees, with the exception of unredacted information on COVID-19 cases that will be provided immediately upon request to the state or local health department, OSHA, the National Institute for Occupational Safety and Health (NIOSH), or as otherwise required by law.

All employeesô medical records will also be kept confidential and not disclosed or reported without the employeeôs express written consent to any person within or outside the workplace, with the following exceptions: (1) Unredacted medical records provided to the state or local health department, OSHA, NIOSH, or as otherwise required by law immediately upon request; and (2) Records that do not contain individually identifiable medical information or from which individually identifiable medical information has been removed.

Date: [enter date]

Name of person conducting the investigation: **[enter name(s)]**

Employee (or non-employee*) name:		**Occupation (if non-employee, why they were in the workplace):**	
Location where employee worked (or non-employee was present in the workplace):		**Date investigation was initiated:**	
Was COVID-19 test offered?		**Name(s) of staff involved in the investigation:**	
Date and time the COVID-19 case was last present in the workplace:		**Date of the positive or negative test and/or diagnosis:**	
Date the case first had one or more COVID-19 symptoms:		**Information received regarding COVID-19 test results and onset of symptoms (attach documentation):**	
Results of the evaluation of the COVID-19 case and all locations at the workplace that may have been visited by the COVID-19 case during the high-risk exposure period, and who may have been exposed (attach additional information):			

<table>
<tr><td colspan="4">Notice given (within one business day, in a way that does not reveal any personal identifying information of the COVID-19 case) of the potential COVID-19 exposure to:</td></tr>
<tr><td rowspan="2">All employees who may have had COVID-19 exposure and their authorized representatives.</td><td>Date:</td><td colspan="2"></td></tr>
<tr><td>Names of employees that were notified:</td><td colspan="2"></td></tr>
<tr><td rowspan="2">Independent contractors and other employers present at the workplace during the high-risk exposure period.</td><td>Date:</td><td colspan="2"></td></tr>
<tr><td>Names of individuals that were notified:</td><td colspan="2"></td></tr>
<tr><td>What were the workplace conditions that could have contributed to the risk of COVID-19 exposure?</td><td></td><td>What could be done to reduce exposure to COVID-19?</td><td></td></tr>
<tr><td>Was local health department notified?</td><td></td><td>Date:</td><td></td></tr>
</table>

*Should an employer be made aware of a non-employee infection source COVID-19 status.

APPENDIX D
ECC Corporate Environment, Safety, and Quality Standard Operating Procedures (Table of Contents)

ECC CORPORATE ENVIRONMENT, SAFETY, AND QUALITY PROGRAM STANDARD OPERATING PROCEDURES TABLE OF CONTENTS

1.0 General Administration

- 1.2 ESQ Organization and Responsibilities
- 1.4 Subcontractor Management
- 1.5 Office Injury and Illness Prevention Plans
- 1.8 Drug Free Workplace
- 1.11 Logbooks

2.0 Continuous Improvement

- 2.1 ESQ Audits and Surveillances
- 2.2 Incident Reporting and Investigation
- 2.3 Lessons Learned
- 2.4 Corrective and Preventive Actions

5.0 General Safety

- 5.1 Site Control
- 5.3 Mobile Construction Equipment
- 5.5 Fall Prevention and Protection
- 5.6 Stairways and Ladders
- 5.7 Electrical Safety
- 5.8 Hand and Power Tools
- 5.9 Fire Protection
- 5.10 Hazard Communication
- 5.13 Back Injury Prevention
- 5.14 Scaffolds

6.0 Personal Protective Equipment

- 6.1 Personal Protective Equipment
- 6.2 Respiratory Protection

7.0 Permit-Required High Loss Potential Activities

- 7.1 Confined Space Entry
- 7.2 Hot Work

7.3 Control of Hazardous Energy (Lockout/Tagout)
7.4 Line Breaking
7.5 Hoisting and Crane Operation
7.6 Underground Utilities
7.7 Excavation
7.10 Diving Management Plan

8.0 Occupational Health

8.2 Medical Surveillance
8.3 Bloodborne Pathogens
8.4 Cold Stress Prevention
8.5 Heat Stress Prevention
8.6 Hearing Conservation
8.7 Air Monitoring
8.8 Biological Hazards
8.9 Asbestos Abatement
8.10 Lead Remediation

9.0 Environmental Protection

9.4 Spill and Discharge Control

ATTACHMENTS

ATTACHMENT 1

EMERGENCY ACTION PLAN

1.0 PROJECT

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

2.0 PRE-EMERGENCY PLANNING

This section includes information needed for pre-planning for emergencies.

2.1 Emergency Contact List

Table A1-1 EMERGENCY CALL LIST AND PROJECT ORGANIZATION

Name or Organization	Title	Phone number(s)
Fire/Ambulance/Police/ Emergency Redstone Arsenal (RSA)		For all emergencies: 911 For non-emergency RSA police/fire: (256) 876-2222
Hospital	Huntsville Hospital	(256) 265-1000
Clinic	Huntsville Hospital Urgent Care	(256) 539-0781
Occupational Medicine	Peter Greaney, MD / WorkCare, or US HealthWorks	(800) 455-6155 (714) 288-8303
Poison Control	Poison Control	(800) 256-9822
Jennifer Graham	Contracting Officerôs Representative (COR)	Office: (210) 466-1406
Clint Howard	Army ï RSA Branch Chief-Environmental Restoration	Office (256) 8423702
Pam Foti, Certified Hazardous Materials Manager (CHMM) Project Management Professional (PMP)	Project Manager (PM)	Mobile: (508) 274-3084
Carol Canada, Professional Geologist (PG)	Assistant PM	Mobile: (615) 693-9915
Kym Edelman, Certified Safety Professional (CSP), Certified Industrial Hygienist (CIH)	Safety and Health Manager (SHM)	Mobile: (757) 496-5622
Brian Kateley	Site Safety and Health Officer (SSHO) (Primary) (first aid/ Cardiopulmonary Resuscitation [CPR] provider)	Mobile: (410) 671-2970
Aaron Glad	Site Superintendent ï alternate (first aid/ CPR provider)	Mobile: (508) 229-2270
First Aid/CPR providers	SSHOs	See above
ECC HOTLINE	ECC	650-347-7512 Ext 111

KEY PROJECT PERSONNEL ARE TO HAVE A COPY OF THIS LIST READILY AVAILABLE AT ALL TIMES

2.2 Coordination with local Emergency Agencies

Local authorities and emergency services will be contacted prior to initiation of work. The work objectives and on-site capabilities will be explained, as well as the most likely emergencies. Preferred contact procedures will be established and the response capabilities of local responders will be determined. Environmental Chemical Corporation (ECC) will ensure there is good coordination between our emergency plan and local requirements. The Site Safety and Health Officer (SSHO) will document this meeting in the project files.

3.0 PERSONNEL ROLES AND LINES OF AUTHORITY

During all emergencies, the SSHO will serve as the SSHO. He will work to abate and/or contain the emergency.

4.0 EMERGENCY RECOGNITION AND PREVENTION

Conditions that may lead to an emergency situation during field activities will be addressed in specific Activity Hazard Analyses (AHAs) as tasks are identified or the Accident Protection Plan (APP) attachments. These conditions include:

- Incident involving a serious injury
- Fire
- Environmental release
- Severe weather

Before daily work assignments, regular ñtailgate/toolboxò safety meetings should be held. Discussions should include, but not limited to:

- Specific task to be performed (Plan of the Day)
- Weather conditions (if severe weather is anticipated, evacuation routes/rally points will be discussed)
- Time Constraints (e.g. rest breaks, tide restrictions, 24-hour operations)
- Hazards that may be encountered, including their effects, how to recognize symptoms or monitor them, concentration limits, or other danger signals
- Near misses from the previous dayôs work
- Emergency Procedures

5.0 SAFE DISTANCES AND SAFE ZONES

If severe weather is anticipated, places of refuge and rally points will be discussed at the daily tailgate meeting.

For releases of hazardous material, the SSHO will monitor the rally point to ensure exposure to hazardous materials is not likely to occur. The evacuation routes and rally points during a fire or environmental release may be modified during the response due to wind direction and potential exposure situations. Personnel must remain alert for changes to alternate routes and rally locations.

6.0 SITE SECURITY AND CONTROL

Site control procedures for this project will include the establishment of Work Zones in order to provide site security by avoiding unauthorized access and to secure work locations between shifts. On this project, work zones may be established by using appropriate work area signage in combination with warning or danger tape, barricades, or other measures selected for the sites, if deemed necessary.

The SSHO, as well as employees, will stay alert for any unauthorized entry and take necessary actions to control the work area.

Authorized site visitors may visit the site upon meeting the following conditions:

- Receiving site hazard and safety instructions from the SSHO; to include Emergency Response procedures briefing

- Reviewing and complying with the essential elements of the APP
- Using their own, or provided Personal Protective Equipment (PPE), to enter regulated work areas per the APP
- Reporting any observed unsafe act and/or condition at, or affecting, the work site

Visitors will be evacuated from the incident location, or from the site, during emergency activities.

7.0 EVACUATION ROUTES AND PROCEDURES

Evacuation routes and procedures will be reviewed and discussed regularly during tailgate meetings.

8.0 EMERGENCY MEDICAL TREATMENT (FIRST AID/CPR/AED)

At least two employees certified in both First Aid, Cardiopulmonary Resuscitation (CPR), and Automated External Defibrillator (AED) use be on the project at all times. A First Aid kit must be maintained on site and checked weekly (EM 385-1-1 section 03.B.02). First aid kit will be maintained by the SSHO. A log of First Aid treatment and materials used will also be maintained by SSHO.

If an injury or illness requires more than First Aid, but is not an emergency, the employee will be taken to Huntsville Hospital Urgent Care for examination or observation, after contacting the ECC Corporate Medical Provider, Dr. Greaney, or his alternate at WorkCare (1-800-455-6155). The Huntsville Hospital Urgent Care route can be found in **Figure A3-1**.

If the injury or illness is considered an emergency, call 911 and an installation ambulance service will be contacted to transport the victim to the Huntsville Hospital. The route can be found in **Figure A3-2**.

9.0 RESCUE OPERATIONS

Where employees are engaged in one of the following activities or environments, a rescue plan will be incorporated into the AHA or appropriate site-specific plan:

- Working at elevations ï not anticipated
- Using personal fall arrest systems ï not anticipated
- Working alone ï not anticipated
- Confined spaces, or potentially immediately dangerous to life and health atmospheres ï not anticipated

10.0 EMERGENCY ALERTING AND RESPONSE NOTIFICATION

An employee alarm system will consist of the use of verbal instructions, either directly or via radio.

Cellphone of telephones will be used to contact emergency responders. **Table A1-1** of this Plan will be kept in site vehicles. The following information will be communicated:

- Name of the person reporting the emergency
- Telephone number at the location of the person making the call
- Name of the injured person, if known
- Description of the emergency
- Exact location of the emergency
- Actions already taken
- What assistance is needed

Although not anticipated, if an employee is working alone in remote area, he/she will have either two-way radios or cell phones. The employee will be required to check in/check out with the SSHO with an agreed upon frequency before employee leaves for the remote work.

11.0 PERSONAL PROTECTIVE EQUIPMENT AND EMERGENCY EQUIPMENT

Each field team will have quick access to a First Aid kit, cell phone, bloodborne pathogen prevention PPE, and fire extinguisher.

12.0 SITE LAYOUT AND PREVAILING WEATHER CONDITIONS

See **Attachment 3** for hospital and clinic routes; due to the numerous sites for this project, the rally points and procedures will be discussed regularly during the daily tailgate meetings.

13.0 REPORTING PROCEDURES

All emergencies will be immediately communicated to the SSHO who will initiate emergency response procedures and notify the Contracting Officerôs Representative (COR) and appropriate response personnel.

After the response, ECC will prepare an Incident Report. It will include such things as a chronological history of the emergency facts, actions taken, personnel present, sample results (if taken), summary of injuries, and possible exposures. For spills and releases it will also include:

- Description of material spilled, including identity, quantity, and a copy of the Safety Data Sheet (SDS) or waste disposal manifest
- Exact time and location of the spill, and the description of the area involved
- Containment procedures utilized
- Description of the cleanup procedure employed at the site, including disposal of spill residue
- Summary of the communications ECC had with other agencies.

This report will be given to the Army within 24 hours of the incident along with immediate verbal notification.

The report will also contain a critique of the response and modifications to this plan will be made if necessary, to adequately address subsequent emergencies.

14.0 TRAINING

The Emergency Response Plan will be discussed during initial site training and discussed regularly during the Daily Tailgate Safety Meetings. Due to the short timeframes of field events drill test will not be necessary.

15.0 PROCEDURES

Emergency Action Procedures - Injury and Medical Emergency

Prevention:

Wear proper PPE at all times. Implement precautions in AHA. Follow standard operating procedures. Avoid pinch points, struck by hazards and exposures to falls from elevation. Report all hazards, injuries and illnesses to your supervisor SSHO immediately. Follow instructions on all prescription medications. Stay hydrated.

Recognition and Reporting:

If an injury, illness or medical condition arises, notify your nearest co-worker immediately. Have them call the SSHO or your supervisor.

All First Aid Providers will be contacted immediately and will report to location of the injured person. See **Table A1-1** contact list.

Actions:

1. First Aid Providers will do an immediate area and victim assessment in accordance with their training.
2. Call 911 or local emergency notification number immediately if any of the following situations exist:
    a. Unconscious
    b. Severe bleeding
    c. Head or spine injury is suspected
    d. Seizures
    e. No pulse
    f. No breathing
    g. Overdose situation possible
    h. Situation requires rescue/medical evacuation (fire, airborne release, workplace violence, trapped)
    i. Any other situation where the condition of the patient is in question. If in doubt contact 911.
3. Establish clear area or have ambulatory patient move to a safe location.
4. Apply Universal Precautions per Bloodborne Pathogens Exposure Control Plan (**Attachment 6** of APP) and training, and don PPE (disposable gloves, CPR mask, etc.).
5. Provide appropriate First Aid/CPR/AED consistent with training and certification.
6. Provide complete information to emergency medical technicians, if necessary.
7. Clean area and contain potentially contaminated materials and articles in labeled bag per Bloodborne Pathogens Exposure Control Plan (**Attachment 6** of APP).
8. Participate in incident investigation, provide for and monitor medical follow up if necessary.

Emergency Action Procedures - Fire

Prevention:

See Fire Prevention and Protection Plan, **Attachment 2** to APP.

Recognition and Reporting:

Call designated base emergency services number upon observation of any uncontrolled fire or smoke.

Actions:

1. Always alert the emergency management system first, regardless of the size of the fire
2. Use fire extinguisher if:
    a. You have been trained
    b. You have an escape route behind you
    c. The fire is small (incipient stage) and can likely be put out with one extinguisher in about 10 seconds.

3. If the fire cannot be controlled with a fire extinguisher:
    a. Notify Site Superintendent or SSHO and initiate evacuation procedure immediately.
    b. The SSHO will notify site personnel and client representatives of evacuation order.
    c. The SSHO will ensure evacuation alarms are sounded, and evacuation proceeds in accordance with Evacuation Plan.
4. If the fire is controlled by a fire extinguisher:
    a. Call for another fire extinguisher for stand by
    b. Remove potential sources of fuel and ignition
    c. Stay at the location until relieved by the SSHO or Fire Department to watch for re-ignition.
5. Participate in incident investigation.

Emergency Action Procedures - Evacuation

Prevention:

Most emergency evacuations can be prevented by following the APP and by practicing safe behaviors. Report all hazards and suspicious activities immediately.

Recognition and Reporting:

Emergency evacuation of the site may be prompted by various situations, including but not limited to the following:

- Fires
- Hazardous material releases
- Sudden severe weather events
- Workplace violence or terrorism
- Utility damage
- Off-site emergency that may impact site operations.

Report potential emergency conditions immediately to your Supervisor or the SSHO. Call 911. See **Table A1-1** contact list.

Actions:

1. In the event of an emergency, the SSHO may initiate evacuation of the site by sounding the evacuation alert - one long blast on the air horn or make verbal contact
2. Call local 911 or emergency notification number
3. The SSHO will notify and coordinate with client representatives, RSA personnel, and emergency responders
4. Upon arrival of emergency response personnel, the SSHO will report to and assist the Incident Commander (lead from local emergency response team)
5. The SSHO will retrieve the daily sign in logs and proceed to the rally point
6. All personnel, upon hearing the evacuation alert, or receiving verbal instructions to evacuate will immediately proceed along the designated route to the rally point which will be discussed at each daily tailgate meeting
7. In the event of a fire or release of airborne toxic chemical, check local wind indicators. Evacuate in a direction perpendicular to the wind direction if possible
8. Be attentive for instructions on changes in rally location based on site conditions

9. In some cases, a shelter-in-place order may be given. In that case, close doors and windows and shut off ventilation system
10. Report to your Supervisor at the rally point
11. Supervisors will report on the presence of crew members to SSHO for accountability purposes.
12. Look around for friends and co-workers. Report anyone missing to the SSHO
13. Critical plant operations ï there are no critical plant operations on this project. Upon hearing the evacuation alert, all personnel will shut off power tools and equipment and proceed immediately to the rally point
14. Rescue procedures are included in the Fall Prevention and Protection Plan or Confined Space Entry Plan, if applicable. Once an evacuation order is given, rescue activities will be turned over to off-site emergency responders
15. Site First Aid Providers will render First Aid and support to injured personnel at the rally point. In an evacuation, the local Emergency Medical Service will be notified and will take charge of medical support
16. The SSHO will report the status of evacuated personnel to the Incident Commander, including the name, description and last known location of any unaccounted for individuals
17. Site(s) may be re-entered when the SSHO gives the ñall clearò order. An incident investigation will begin immediately, led by the SSHO.

Emergency Action Procedures - Severe Weather

Prevention:

The SSHO will monitor the weather at least twice daily. Weather monitoring will become continuous when the National Weather Service issues a severe weather Watch or Warning.

Recognition and Reporting:

A Watch means that a weather emergency is possible. It means Be Prepared. On issuance of a Watch, the SSHO will determine what site preparations will be made to secure the site, shut down, evacuate or call off a scheduled work shift.

A Warning means that a weather emergency is in the area. It means Take Action. Upon issuance of a Warning, the SSHO will implement emergency shut down procedures.

Actions:

1. Thunderstorm, Lightning, Tornado
    a. Remove loose or stacked materials from roofs, or open floor decks
    b. Remove from site or secure stacks of materials at ground level
    c. Lightning - Stop outdoor activities involving load handling equipment, roofing, working on elevating platforms and scaffolds, tree trimming, or work in open areas upon hearing thunder or seeing lightning. Seek indoor shelter. Stay indoors for 30 minutes after the last audible thunder or visible flash of light
    d. Proceed to pre-determined tornado shelter upon issuance of a Warning. The SSHO will work with RSA personnel or local emergency agencies to identify shelters during mobilization.

Emergency Action Procedures - Spills and Releases of Hazardous Materials

Prevention:

Supervisors will review the hazards of chemicals with their work crews, and SDS and labels will be maintained in accordance with the Hazard Communication Program.

- **Avoid mixing chemicals**, even common household products. Some combinations, such as ammonia and bleach, can create toxic gases. When in doubt, consult the SDS or the SSHO.
- **Always read and follow the directions** when using a new product. Some products should not be used in small, confined spaces to avoid inhaling dangerous vapors. Other products should not be used without gloves and eye protection to help prevent the chemical from touching your body.
- **Store chemical products properly.** Non-food products should be stored tightly closed in their original containers so you can always identify the contents of each container and how to properly use the product. Containers of flammable and combustible liquids will be stored in flammable liquid storage cabinets or removed from the site at the end of the day. Bulk storage of fuels or other hazardous materials will have secondary containment, and containment around transfer valves, spigots and hoses.
- **Report and Clean up any spills immediately** with some rags, being careful to protect your eyes and skin.
- **Follow operating procedures**. Implement procedures designed to limit open containers, excess pressure, surface area of contaminated environmental media, drum and container handling, etc.
- **Implement the Storm Water Pollution Prevention Plan** if one is required on the site, or general good chemical handling practices to keep materials from flowing off-site with stormwater.

Recognition and Reporting:

Notify your Supervisor or the SSHO of any spill or airborne release of hazardous materials. The SSHO will investigate and determine if an emergency should be declared and will issue an alert to evacuate or shelter-in-place if necessary. The SSHO will call the RSA emergency services if an emergency is declared.

The SSHO will notify the client representative immediately of any spill or release. Where reporting to installation and regulatory agencies is required, the reporting will be done in accordance with the communications plan approved by the Contracting Officer. See Contact List **Table A1-1**.

Actions:

The actions to be taken will depend on the nature and extent of the release. Only personnel trained in the procedures and PPE required to handle the spill or release should be involved in containing, stabilizing, and cleaning up the material.

1. If a release from an on-site or off-site source results in a shelter-in-place order:
    a. Proceed to the nearest designated shelter
    b. Shut doors and windows
    c. Turn off ventilation system.
    d. If possible, seal gaps around doors and window with tape, wet towels or other items
2. Take immediate measures to control and contain the release (e.g. shut off pumps, close valves).
3. Contact local emergency service providers.
4. Don protective equipment as specified by the SSHO.

5. If exposure to individuals causes injury/health effects, make sure the area is safe before attempting rescue or First Aid. If safe to do so, move them to fresh air and apply appropriate First Aid. Notify the Emergency Medical Service of the nature of injury.
6. Isolate and contain hazardous release areas.
7. Deny entry to the spill area to unauthorized personnel.
8. Do not allow anyone to touch spilled material.
9. Stay upwind, keep out of low areas.
10. Keep combustible materials away from the spilled material.
11. Use water spray or foam to reduce dust or vapors as needed.
12. Collect samples for analysis to determine that cleanup is adequate.
13. If the release is from tanks, prevent the discharge from traveling beyond site boundaries.
14. Containerize materials and arrange for proper disposal.
15. Take caution when handling drums and containers (opening, sampling, and over packing).

ATTACHMENT 2

FIRE PREVENTION AND PROTECTION PLAN

Attachment 2
FIRE PREVENTION AND PROTECTION PLAN

1.0 PROJECT

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

2.0 SCOPE

This Plan applies to all activities, including subcontractor activities for the project identified above.

3.0 LIST OF MAJOR WORKPLACE FIRE HAZARDS

On this project, the major workplace fire hazards will include:

- Normal combustibles including transmitter building, trash, construction materials, vegetation and waste piles. Good housekeeping will be maintained. Trash will be collected daily and placed in a designated receptacle.
- Combustible and flammable liquids used as fuels in site vehicles, mobile construction equipment and power tools.
    - Gasoline will be kept in labeled five-gallon metal safety cans with flame arrestor and spring-loaded lid, or in Underwriters Laboratories (UL) approved one to two-gallon plastic cans.
    - Diesel fuel will be kept in labeled UL approved containers.
    - A temporary Diesel fuel tank will be protected with barriers and secondary containment.
    - The refueling area is shown on the Site Layout.

4.0 CONTROL OF IGNITION SOURCES

- Smoking is prohibited inside vehicles and buildings. A designated smoking area will be established during mobilization and supplied with a self-extinguishing ash tray stand.
- Temporary fuel storage tanks will be protected from accidental impact by vehicles and equipment.
- Storage tanks will be double-walled or have other secondary containment measures which will have a capacity of at least the tank volume +10 percent (%). Secondary containment will be inspected regularly and kept free of accumulation of liquids, including rainwater to ensure sufficient free board at all times.
- Tanks, pumps and hoses will be rated/approved and listed for the service and will include appropriate bonding to control static sparks.
- Hose nozzles used to fill equipment from the temporary tank will be automatic closing and will not be equipped with a latch-open device. All filling and transfer operations will be attended.
- Normal combustibles, including high vegetation will be kept at least 25 feet from the refueling area.
- Sources of ignition will be prohibited within 25 feet of the refueling area.
- Equipment with small engines will not be fueled while hot.
- The refueling area will be posted with signs, including ñNo Smokingò, ñNo Hot Workò, and ñDo not fuel hot equipment.ò
- A Fire Extinguisher rated at least 40 B:C will be placed in a fixed and visibly labeled location within 100 feet of the refueling area.
- Tanks will have appropriate hazard warning labels.
- A spill kit suitable for minor spills and leaks of petroleum products will be stationed at the refueling area.

- The refueling area, equipment, and emergency supplies will be inspected as needed.
- Small portable containers of flammable liquids will be stored out of direct sunlight and in a designated location. A Flammable liquid storage cabinet will be used if more than two containers of flammable liquids are stored on site. The cabinet will include a ñNo Smokingò label.
- See **Section 9** for Hot Work requirements.

5.0 TYPES OF FIRE SUPPRESSION EQUIPMENT

Portable fire extinguishers will be selected and distributed as follows:

- Fire extinguishers rated to 1-A:10-B:C or higher, will be in all work vehicles, mobile construction equipment, and in the immediate vicinity of stored flammable materials.
- 40-B:C extinguisher in the refueling area.
- 4-A: 60-B:C (10-pound agent minimum) at each hot work location.
- Not anticipated, but if in buildings under construction, alteration or demolition, at least one 4-A:6-0B:C extinguisher will be located per every 6,000 square feet of floor space, on each floor. Extinguishers shall not require a travel distance of more than 75 feet, and one extinguisher on each floor should be placed close to the stairways. Note: If unusual fire hazards exist, consult National Fire Protection Association (NFPA) 10 for additional selection and distribution information.
- The equipment will not be removed except for inspection and/or use in an emergency.
- The Site Safety and Health Officer (SSHO) will provide training on the use of the fire extinguisher during the pre-entry briefing.
- Fire extinguishers will be visually inspected monthly.

6.0 RESPONSIBILITIES FOR MAINTAINING EQUIPMENT AND SYSTEMS

The SSHO will be responsible for inspection of work areas on a daily basis, and inspection of fire extinguishers on a monthly basis.

Fixed systems in buildings under construction, alteration or demolition will be inspected by, or under the direction of the Authority Having Jurisdiction.

7.0 PERSONNEL RESPONSIBLE FOR CONTROLLING FUEL SOURCE HAZARDS

The SSHO is responsible for controlling fuel source hazards, in accordance with this Plan. This includes regular inspections of areas and equipment, maintaining adequate freeboard in secondary containment, limiting combustibles around fuel storage and dispensing operations, and ensuring control of ignition sources in these areas.

8.0 HOUSEKEEPING PROCEDURES

Trash will not be permitted to accumulate. Receptacles with lids or roll off boxes will be used to contain trash. Work areas will be cleaned up each day, as often as necessary to maintain a safe job site.

Waste piles will be limited in size, segregated and removed from site as soon as possible.

Spills of flammable and combustible materials will be contained and cleaned up as soon as possible. See Emergency Action Plan, **Attachment 1** to the APP.

9.0 HOT WORK PERMITS

Hot work is defined as any process that produces open flames, heat or sparks, including, but not limited to: burning, cutting, welding, soldering, brazing, torch applied roofing, and the use of temporary heating devices involving an open flame or exposed heating elements.

Before any hot work is performed, ECC personnel shall obtain a Hot Work Permit from the U.S. Army local authority. A hot work site will have a designated fire watch. This personôs sole responsibility shall be to monitor the hot work and have immediate access to the fire extinguisher located at each hot work site (a portable fire extinguisher (A:B:C) will be readily available). The fire watch shall remain at his/her designated watch for 30 minutes from the conclusion of hot work activities.

It is the responsibility of the SSHO to work with the Army or local authority/permit issuing group to establish the requirements, definitions, and regulations. In general, a hot work permit is required from the local hosting facility when the hot work is being performed on a pre-existing building/structure or new attachment to an existing structure. If the hot work is solely on a new building/structure not connected to a preexisting structure and has not been handed over to client or end user, then an ECC Hot Work permit can be used. This should be communicated prior to the start of any hot work activities.

ATTACHMENT 3

MEDICAL SUPPORT PLAN

1.0 PROJECT

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

2.0 SCOPE

This plan provides information for medical support for all operations at the project identified above.

3.0 COMMUNICATION

The site will have ready communications to medical support facilities via cell phone. Phone numbers are listed on the Emergency Contact List (Emergency Action Plan, **Attachment 1** to the APP, **Table A1-1**) and the list will be kept in all site vehicles.

4.0 FIRST AID AND MEDICAL FACILITIES

Minor injuries will be treated on-site by certified First Aid Providers (see Emergency Contact List). If additional care is needed, the local facility, Huntsville Hospital Urgent Care**,** will be used. **Figure A3-1** shows the route map to the facility.

If an incident results in a major injury, call 911 for ambulance. Environmental Chemical Corporation (ECC) will not transport non-ambulatory, unconscious or shock risk patients. **Figure A3-2** is the route map to Huntsville Hospital. Copies of the route maps will be kept in all site vehicles.

Medical consultation can be obtained from ECCôs occupational medical consultant, Dr. Greaney or his associates at WorkCare, Inc. WorkCare should be called before transporting any minor injury to the local clinic or emergency room.

At least one First Aid kit for every 25 employees will be kept on-site. The First Aid kits will comply with American National Standards Institute (ANSI) Z308.1. All kits will contain bloodborne pathogen prevention personal protective equipment (PPE) including surgical gloves and resuscitator mask or shield.

At least two individuals with current certification in First Aid and Cardiopulmonary Resuscitation (CPR) will available on each shift.

Each will have current certification in First Aid and CPR from the American Red Cross, the American Heart Association, or from an organization whose training adheres to the standards of the International Liaison Committee on Resuscitation (as stated in writing), or from a Licensed Physician. Certification courses will have hands-on component that cannot be taken on-line. Retraining will occur every two years.

First Aid Providers on this project include the Site Safety and Health Officers (SSHOs) Mr. Brian Kateley and Mr. Aaron Glad. They are First Aid and CPR trained; are qualified to administer First Aid and CPR; and have completed Bloodborne Pathogen training in accordance with 29 Code of Federal Regulations (CFR) 1910.1030. Their duties are to provide First Aid/CPR in accordance with their training.

DIRECTIONS (6.9 mi, 10 min)

1. Turn right onto Market St SW (200 ft)
2. Turn right onto Redstone Gatway SW (0.1 mi)
3. Use the right lane to turn left onto Rideout Rd (0.3 mi)
4. Use the right lane to take the ramp onto I-565 E (0.7 mi)
5. Merge onto I-565 E (3.8 mi)
6. Take exit 19A to merge onto US-231 S/US-431 S/ Memorial Pkwy SW toward Memorial Pkwy (1.2 mi)
7. Take the exit toward Bob Wallace Ave (300 ft)
8. Merge onto AL-53 S (0.3 mi)
9. Keep right to continue on US-231 Frontage Rd (0.2 mi)
10. Turn left onto Bob Wallace Ave SW (0.2 mi)
11. Turn left onto Commerce Ct (200 ft)
12. Destination will be on the right.

Huntsville Hospital Urgent Care
900 Bob Wallace Ave SW #104
Huntsville, AL 35801
(256) 539-0781
Mon-Fri: 8:00 am - 8:00 pm
Sat: 9:00 am - 5:00 pm
Sun: 1:00 pm - 5:00 pm

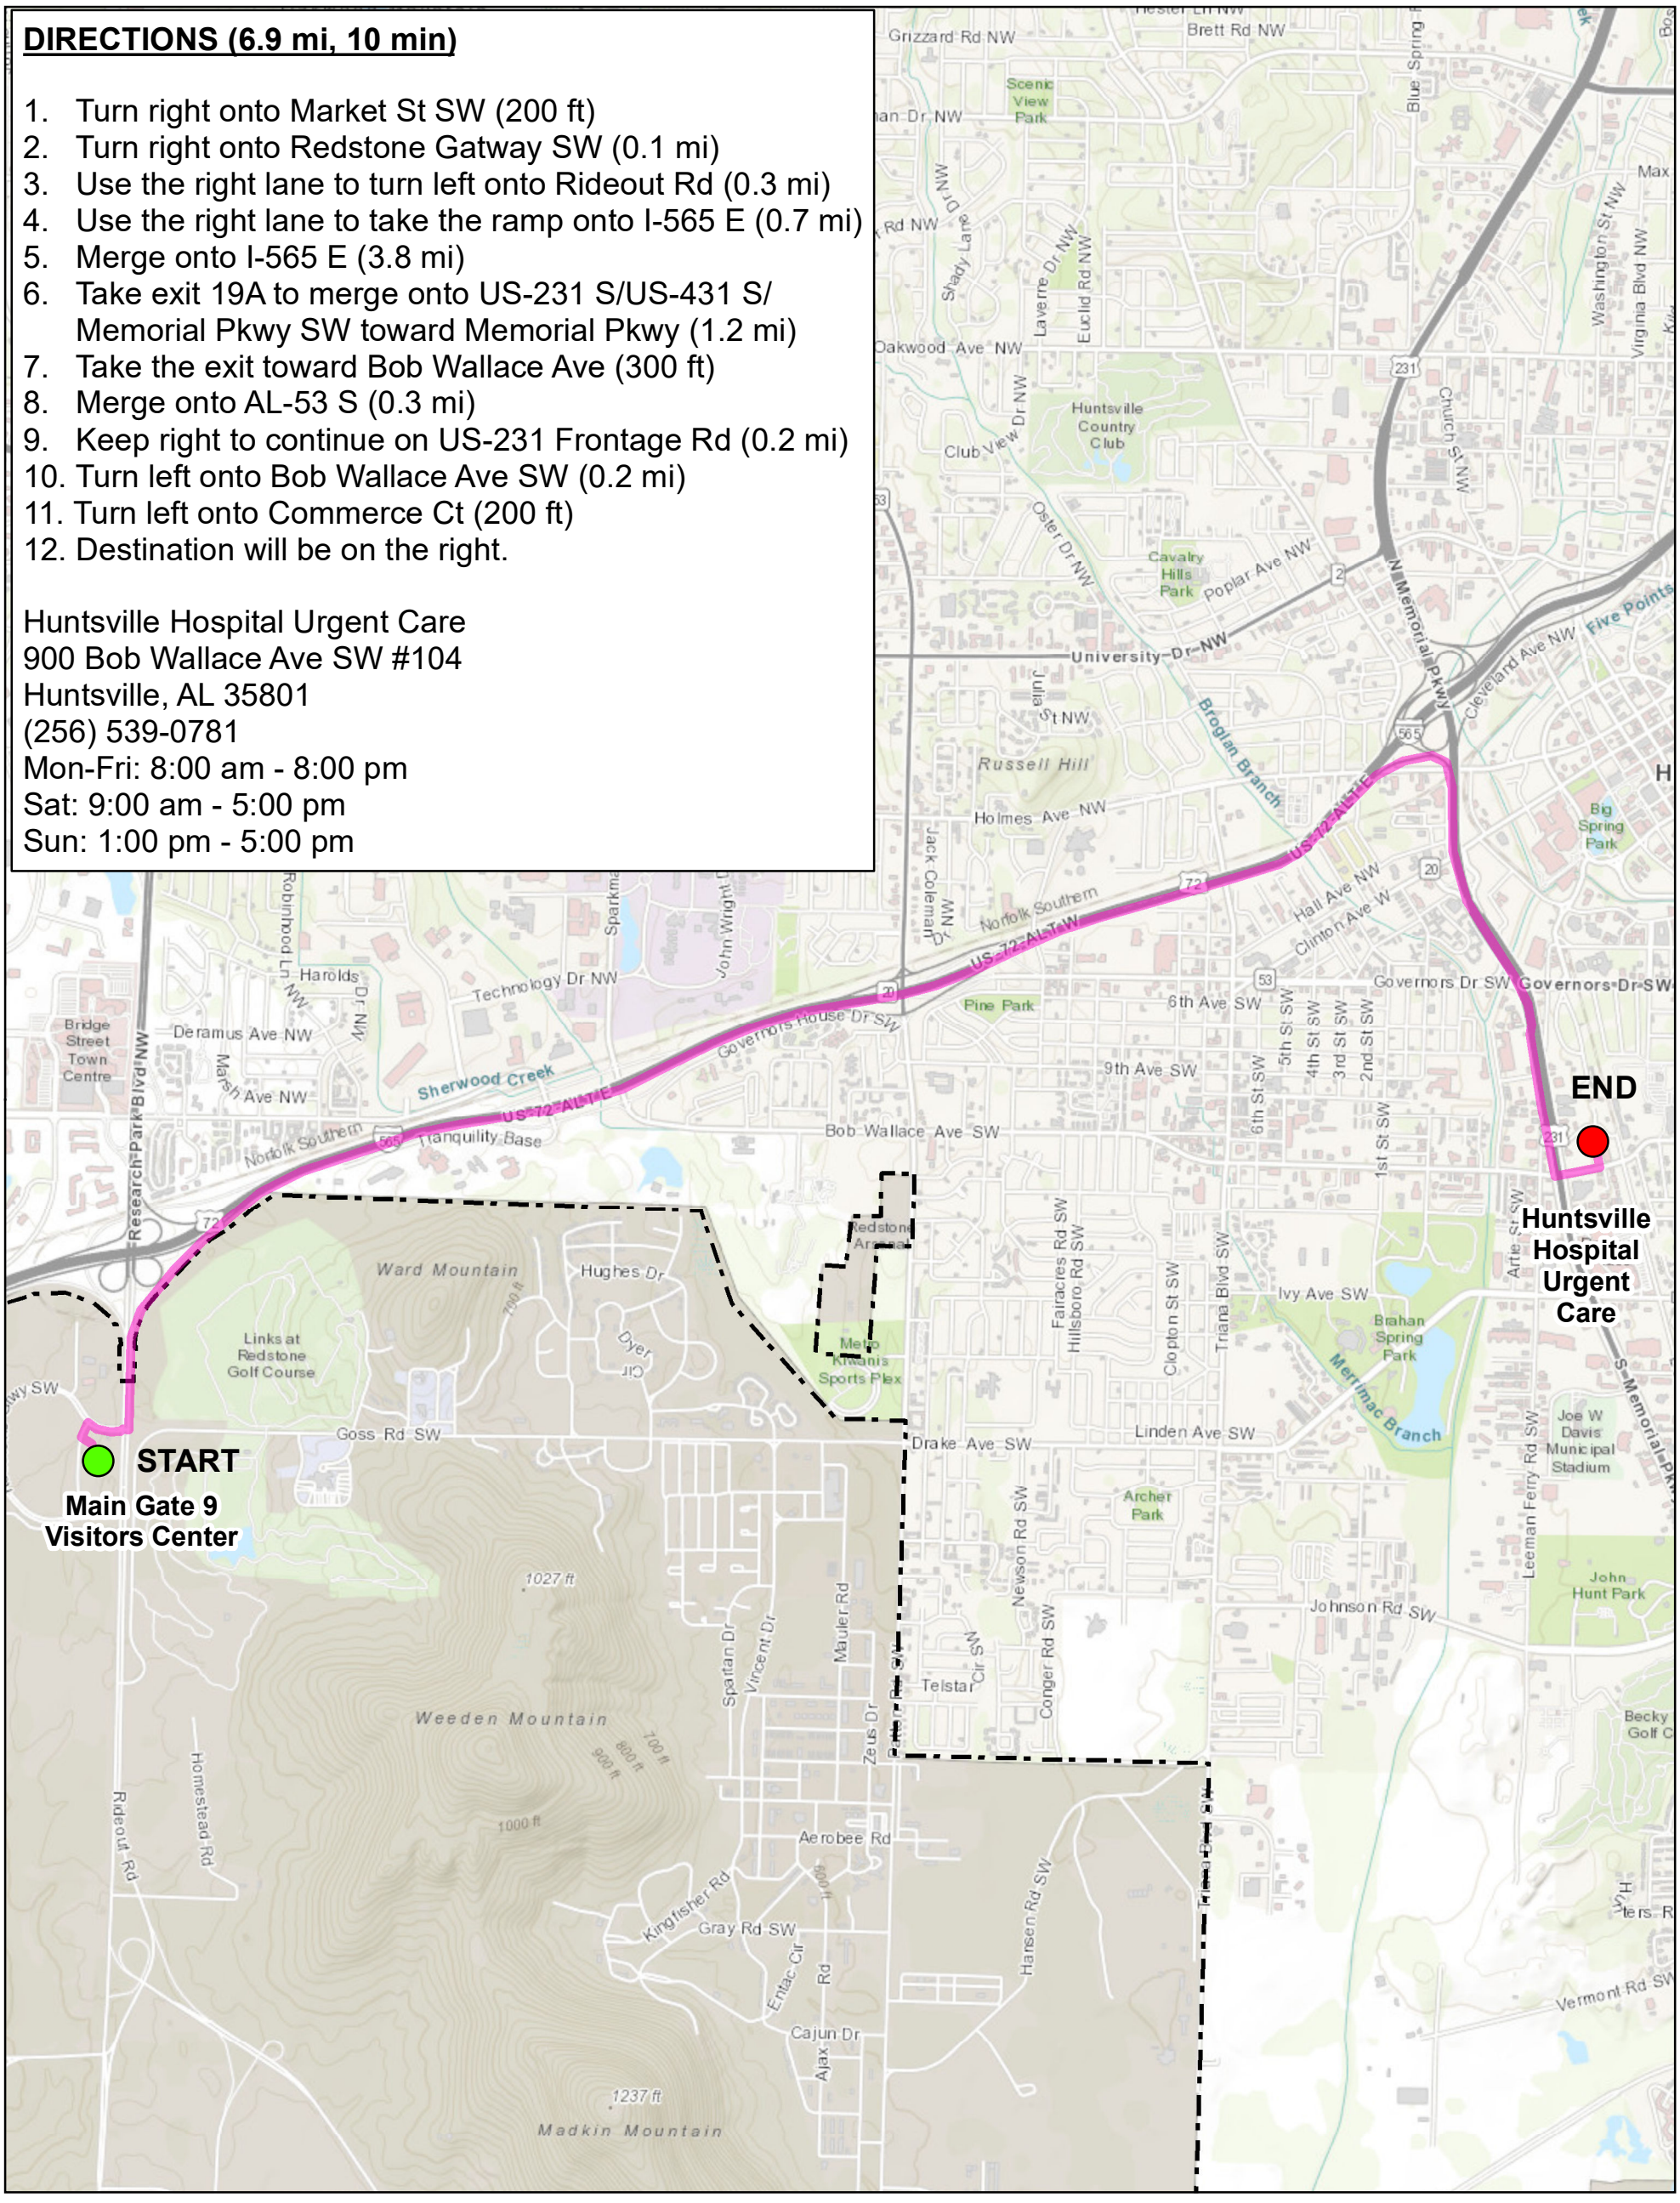

LEGEND

- Clinic Route
- Redstone Arsenal

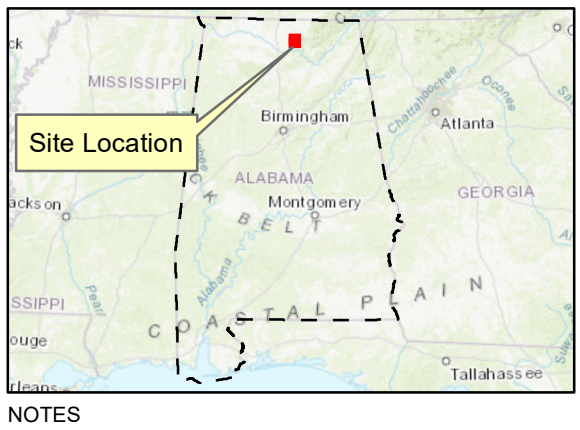

NOTES
1. Coordinate System: NAD83 State Plane Alabama East, US Feet (FIPS 0101)
2. Basemap data from IGI&S Office at Redstone Arsenal
3. Map Size: B-size (17" x11")
4. Revision Date: 2/8/2021

Figure A3-1

Clinic Route Map
Redstone Arsenal
Madison County, Alabama

0 3,500 7,000 Feet

1 inch = 2,778 feet

Mission & Installation Contracting Command (MICC)
U.S. Army Garrison-Redstone

DISCLAIMER- The data represent the results of data collection/processing for a specific Redstone Arsenal activity and indicates the general existing conditions. As such, it is only valid for its intended use, content, time, and accuracy specifications. The user is responsible for the results of any application of the data for other than its intended purpose.

ECC GIS Server: E:\Projects\Redstone\MapDocument\APP\FigA3-1_RSA_APP_ClinicMap.mxd

DIRECTIONS (7.4 mi, 12 min)

1. Turn right onto Market St SW (200 ft)
2. Turn right onto Redstone Gateway SW (0.1 mi)
3. Use the right lane to turn left onto Rideout Rd (0.3 mi)
4. Use the right lane to take the ramp onto I-565 E (0.7 mi)
5. Merge onto I-565 E (4.4 mi)
6. Use the right lane to take exit 19C for Jefferson St toward Downtown (0.3 mi)
7. Continue onto Jefferson St N (0.2 mi)
8. Turn right onto Monroe St NW (0.5 mi)
9. Turn left onto Church St NW (0.5 mi)
10. Turn left onto Williams Ave SW (0.2 mi)
11. Turn right onto Madison St SE (0.5 mi)
12. Turn right (70 ft)
13. Destination will be on the right

Huntsville Hospital
101 Sivley Rd SW
Huntsville, AL 35801
(256) 265-1000

START
Main Gate 9
Visitors Center

END
Huntsville
Hospital

LEGEND

Hospital Route

Redstone Arsenal

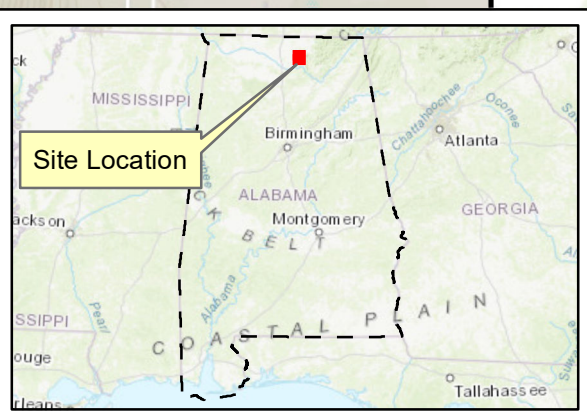

NOTES
1. Coordinate System: NAD83 State Plane Alabama East, US Feet (FIPS 0101)
2. Basemap data from IGI&S Office at Redstone Arsenal
3. Map Size: B-size (17" x11")
4. Revision Date: 2/8/2021

Figure A3-2

Hospital Route Map
Redstone Arsenal
Madison County, Alabama

0 4,000 8,000 Feet

1 inch = 3,045 feet

Mission & Installation Contracting Command (MICC)
U.S. Army Garrison-Redstone

DISCLAIMER- The data represent the results of data collection/processing for a specific Redstone Arsenal activity and indicates the general existing conditions. As such, it is only valid for its intended use, content, time, and accuracy specifications. The user is responsible for the results of any application of the data for other than its intended purpose.

ECC GIS Server: E:\Projects\Redstone\MapDocument\APP\FigA3-2_RSA_APP_HospitalMap.mxd

ATTACHMENT 4

DRUG AND ALCOHOL ABUSE PREVENTION

1.0 PROJECT

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

2.0 PURPOSE

The purpose of this Standard Operating Procedure (SOP) is to a) meet the requirements of applicable laws and regulations to ensure that the workplace is free of illegal drugs; b) establish restrictions on the workplace-related use of legal substances, such as alcohol and prescription drugs; c) address other behaviors and practices that can be related to the abuse of drugs and other substances; and d) enable Environmental Chemical Corporation (ECC) to comply with client Drug Free Workplace policies.

3.0 SCOPE AND APPLICATION

This SOP includes requirements for the control of the use of alcohol, illegal drugs and legally prescribed drugs that may impact an employeeôs ability to work safely. This SOP applies to all ECC employees, as well as to all subcontractors who work on ECC project sites. For the purposes of this procedure, the term ñemployeeò includes subcontractor employees.

4.0 PROCEDURES

This section includes the Drug Free Workplace Policy and implementation procedures.

4.1 Drug Free Workplace Policy

ECC prohibits the use, sale, dispersal, possession, or manufacture of illegal drugs, narcotics or alcoholic beverages on its premises. This prohibition also covers all legal or prescription drugs that impair an employeeôs ability to perform his/her job safely or properly. Employees will be subjected to disciplinary action, up to and including dismissal, for bringing illegal, non-prescribed drugs and narcotics or alcoholic beverages to work; being under the influence of such substances while working; using such substances while working; or dispensing, distributing, or illegally manufacturing or selling such substances on ECC premises or work sites.

Employees, their possessions, and ECC issued equipment and containers under their control are subject to search and surveillance at all times while on ECC premises or while conducting ECC business.

Employees may be required to take a test at any time to determine the presence of drugs, narcotics, or alcohol, unless such tests are prohibited by law. Employees convicted of any criminal drug violation occurring in the workplace must report such conviction to Human Resources within five days, who will then take appropriate actions as required by law.

Employees judged to be under the influence of drugs, narcotics, or alcohol will be required to leave the premises. Employees who must use prescribed drugs or narcotics during work should report this fact to their supervisor and provide acceptable medical documentation. A determination will then be made as to whether the employee should be able to perform his/her job safely and properly.

Employees experiencing problems resulting from drug, narcotic, or alcohol abuse or dependency are encouraged to seek rehabilitation, counseling, and/or other help.

4.2 Drug and Alcohol Testing

For the purposes of this SOP, the terms "drug screening" or "drug testing" includes testing for alcohol, in either blood, urine, or breath.

4.2.1 Pre-employment Drug Screening

Pre-employment drug screening shall be required for all ECC full-time and project employees. ECC shall test for the following drugs: ethanol (alcohol), amphetamines, barbiturates, benzodiazepines, cocaine metabolites, methadone, opiates, phencyclidine, and marijuana metabolites. The list and cutoffs may be modified by the Corporate Medical Consultant, who also serves as the Medical Review Officer, in accordance with rules and guidelines established by the Substance Abuse and Mental Health Services Administration (SAMHSA). This testing may also be required before a new assignment, such as a promotion or assignment to a particular job site. All positive tests results are kept confidential at all times by the Human Resource Department.

Subcontractors must provide a statement or certification that their employees have had pre-employment screening with negative results.

4.2.2 Periodic Drug Screening

Annual or biennial drug screening shall be required for all operational department personnel conducting work activities at ECC project sites. Periodic drug tests will measure the same substances as the pre-employment tests. All positive results are kept confidential at all times by the Human Resource Department.

4.2.3 Post Accident Testing

Employees who are involved in an incident that results in an employee injury requiring medical treatment beyond First Aid, equipment or property damage above $500, a serious environmental release, or who have been observed committing a substandard practice that could result in the above, will be required to submit to drug and alcohol testing as soon as possible. Operators of vehicles or construction equipment involved in a collision with a person or another object or contact with overhead power lines are included in this testing requirement.

4.2.4 Test Sample Validity

Employees will be retested if the test results are deemed invalid or too dilute to detect levels at or below the cutoff values. Evidence of sample tampering will be grounds for immediate discharge or revocation of offer of employment.

4.2.5 Refusal of Testing

Refusals to submit valid samples for testing in accordance with this SOP will be treated as positive results.

5.0 MONITORING

Monitoring conformance with this SOP will be the responsibility of the Human Resources Department, with the assistance of Environment, Safety and Quality and the Medical Review Officer.

6.0 TRAINING

Employees will be trained on this SOP during their new-hire orientation. Subcontractor employees will be trained on the SOP during site-orientation.

7.0 DOCUMENTATION

ECC employees will be required to pass a quiz after reviewing a power point presentation on their Training Matrix.

Project employees including site subcontractors will sign an Orientation sign-in sheet which will be maintained in the site files.

8.0 REFERENCES

SAMHSA Drug Free Workplace Kit http://store.samhsa.gov/product/Making-Your-Workplace-Drug-Free/SMA07-4230

Title 48-Federal Acquisition Regulations System; Chapter 1-Federal Acquisition Regulation; Part 52_Solicitation Provisions and Contract Clauses- Subpart 52.2_Text of Provisions and Clauses; Sec. 52.223-6 Drug-Free-Workplace http://www.gpo.gov/fdsys/pkg/CFR-2011-title48-vol2/pdf/CFR-2011-title48-vol2-sec52-223-6.pdf

ATTACHMENT 5

SITE SANITATION PLAN

1.0 PROJECT

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

2.0 SCOPE

This Plan is applicable to work being performed by Environmental Chemical Corporation (ECC), their subcontractors and their employees on the project identified above.

3.0 HOUSEKEEPING

The sites will be kept as clean as possible, taking into consideration the nature of the work. Regular cleaning shall be conducted to ensure safe and sanitary conditions in the workplace.

Waste materials will be properly disposed of, and routinely removed from the site.

Vegetation will not be allowed to grow around storage and dispensing containers containing flammable liquids and gases.

4.0 DRINKING WATER

An adequate supply of potable water (cool drinking water when weather is hot) shall be provided for both drinking and personal cleansing. Bottled water is acceptable. Empty bottles will be deposited into a designated recycling (or trash if recycling is not available) receptacle immediately to maintain good housekeeping.

5.0 NON-POTABLE WATER

Non-potable water will be used on this project

6.0 TOILETS

The project site will have sufficient toilet facilities for each sex in accordance with the **Table A5-1** below:

Table A5-1

Number of Employees	Minimum Number of Toilets[1]
20 or fewer	One
20 or greater	One toilet seat and One urinal per 40 workers
200 or greater	One toilet seat and One urinal per 50 workers

NOTE: [1]Where toilet facilities will not be used by women, urinals may be provided instead of commodes, except that the number of commodes in such cases shall not be reduced to fewer than 2/3 of the minimum number specified.

All shall be provided with adequate light and ventilation. Toilet paper shall be provided and when water is not present, hand sanitizer. Facilities shall be constructed so that occupants are protected against the weather and falling objects; all cracks shall be sealed and the door self-closing, tight fitting and capable of being latched.

The toilet facilities will be kept clean and orderly in between servicing. Graffiti on toilet facilities is forbidden.

7.0 WASHING FACILITIES

Washing facilities shall be provided at toilet facilities and as needed to maintain healthful and sanitary conditions. If it is not practical to provide running water and soap, hand sanitizers may be used as a substitute.

8.0 WASTE DISPOSAL

Field team will be responsible for waste, refuse, and garbage. All waste, refuse, and garbage shall be removed in a manner which avoids creating a menace to health and should be properly disposed of on a daily basis.

ATTACHMENT 6

BLOODBORNE PATHOGENS PROGRAM AND EXPOSURE CONTROL PLAN

1.0 PROJECT

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

2.0 SCOPE AND APPLICATION

This Plan applies to Environmental Chemical Corporation (ECC) and subcontractor employees who may be exposed to another individualôs blood or other bodily fluids during the course of the project identified above. Specifically, this includes individuals who have current First Aid training and may provide First Aid on the job (e.g., Site Safety and Health Officers [SSHOs]), as these are the only project members who may have exposure to bloodborne pathogens (BBP) and providing First Aid is the only activity where such exposure is anticipated. It includes the site-specific Exposure Control Plan for the project. For the purposes of this Plan, First Aid refers to administration of cardiopulmonary resuscitation (CPR) as well as other common First Aid procedures.

3.0 EXPOSURE CONTROL PLAN

3.1 Definitions

Bloodborne Pathogens means pathogenic microorganisms that are present in human blood and can cause disease in humans. These pathogens include, but are not limited to, Hepatitis B virus (HBV) and Human Immunodeficiency Virus (HIV).

Occupational Exposure means reasonably anticipated skin, eye, mucous membrane, or other non-oral contact with blood or other potentially infectious materials that may result from the performance of an employee's duties.

Personal Protective Equipment (PPE) is specialized clothing or equipment worn by an employee for protection against a hazard. General work clothes (e.g., uniforms, pants, shirts, or blouses) not intended to function as protection against a hazard are not considered to be personal protective equipment.

Universal Precautions is an approach to infection control. According to the concept of Universal Precautions, all human blood and certain human body fluids are treated as if known to be infectious for HBV, HIV, and other BBP.

3.2 EXPOSURE DETERMINATION

3.2.1 Job Classifications in which All Employees have Occupational Exposure

ECC has no job classifications in which all employees have occupational exposure.

3.2.2 Job Classifications in which Some Employees have Occupational Exposure

The potential for occupational exposure exists for individuals who have current First Aid training and may provide First Aid on the job, including project SSHOs, and designated First Aid Providers for this project.

3.3 HEPATITIS B VACCINATION

A Hepatitis B vaccination will be made available at no charge to First Aid Providers immediately following an occupational exposure, unless the employee has previously received the complete Hepatitis B vaccination series, antibody testing has revealed that the employee is immune, or the vaccine is

contraindicated for medical reasons. If an employee desires a Hepatitis B vaccination after the initial BBP training, but prior to an occupational exposure, they should contact the Safety and Health Manager (SHM).

3.4 EXPOSURE PREVENTION

Engineering Controls - The only foreseeable exposure potential on this project is through application of First Aid, which requires direct contact with the injured party. Engineering controls are not feasible for this activity.

Administrative Controls ï Only personnel trained in First Aid/CPR and Universal Precautions will attend to individuals injured or ill on the project. First Aid Providers will keep other personnel out of the immediate First Aid area where contact with bodily fluids may occur by the use of caution tape barricades or posting a spotter to keep other employees away. Spilled bodily fluids will be demarcated and barricaded with caution tape until the First Aid Providers clean the area as described below.

PPE and Clean up Materials - This project will have available on site a bloodborne pathogen kit, with appropriate PPE. The kit includes but is not limited to:

- Gloves
- Eyewear (goggles or glasses)
- Face shields
- Resuscitation barrier
- Bleach and water (or 10 percent [%] bleach solution in labeled container)
- Paper towels
- Disposal bag for contaminated materials

These materials will be maintained with the First Aid kit in the SSHOôs site vehicle.

Universal Precautions - Universal precautions include wearing gloves when contact with blood or other bodily fluids is possible and wearing eye protection. Face shields must be worn when there is danger of blood splashing on mucous membranes.

In providing First Aid, where exposure to bodily fluids is possible, the First Aid Provider shall:

- Try to isolate the area, and limit approach by other people
- Don protective gear including surgical gloves and eye protection, and a face shield if splashing is possible
- Collect all wastes such as gauze pads, gloves and resuscitation barriers and place in a red bag (or other properly labeled container)
- Clean any spillage and disinfect potentially contaminated surfaces in accordance with **Section 3.6** below, disposing of the cleaning materials also in red bag
- Carefully remove gloves inside-out, placing them in the disposal bag
- Call the SHM to report a potential exposure event

3.5 POST-EXPOSURE ACTIONS

Following an occupational exposure incident, the affected party shall **IMMEDIATELY** inform the SSHO or other management personnel, who in turn must **IMMEDIATELY NOTIFY THE SHM (Ms. Kym Edelman)** by telephone. In no case shall the report be made later than the end of the work shift during

which the incident occurred. Immediate notification is essential to allow proper consultation with the WorkCare Occupational Physician in order to ensure that the proper post-exposure evaluation, prophylaxis (initiation of Hepatitis B vaccination), and follow-up procedures are made available immediately.

This notification must include:

- A description of the First Aid incident including time and date
- The potential routes of exposure
- The names of all First Aid Providers who rendered assistance
- Type of personal protective equipment used, or if none used
- The identity of the source individual where feasible

A confidential post-exposure medical evaluation and follow-up must be immediately made available to the employee after the report of an occupational exposure, along with the opportunity for Hepatitis B vaccination. The medical evaluation is offered at no cost to the employee.

If the Hepatitis B vaccination is provided, a copy of the employee's Hepatitis B vaccination status including the dates of all the Hepatitis B vaccinations and any other relevant medical record required by 29 Code of Federal Regulations (CFR) 1910.1030(f)(2) shall be forwarded to WorkCare for retention and maintenance in the employeeôs medical file.

If the employee declines to accept a recommended Hepatitis B vaccination following an occupational exposure, the employee shall complete and sign the Declination Form and return it to the SHM. The form can be obtained from the SHM. The SHM shall forward the form to Corporate Records Administrator for retention as an employee Medical Surveillance document.

Although the BBP standard excludes employees who perform unanticipated Good Samaritan acts from coverage (as this is does not constitute "occupational exposure"), ECC shall offer follow-up medical evaluations and Hepatitis B vaccinations to ECC employees who experience a work-related exposure incident as the result of performing a Good Samaritan act at work.

3.6 DECONTAMINATION, STERILIZATION, AND DISPOSAL

All surfaces that come in contact with blood or potentially infectious materials must be decontaminated as soon as possible. Decontamination should be accomplished by using a solution of household bleach (5.25% sodium hypochlorite) diluted about 1:10 with water.

> *When diluting bleach, always carefully add bleach to water to avoid a hazardous exothermic reaction. NEVER pour water directly into bleach.*

When cleaning up a spill of blood, carefully cover the spill with paper towels or rags, and then gently pour the 10% solution of bleach over the towels or rags. This will decrease the chances of causing a splash when you pour the bleach on it. ***Leave it in place for at least 10 minutes.*** This will help ensure that the bloodborne pathogens are killed before beginning to clean or wipe up the material.

When decontaminating equipment or other objects (knives, tweezers, mechanical equipment upon which someone has been cut, First Aid boxes, etc.), leave the disinfectant in place for *at least 10 minutes* before continuing the cleaning process. Any materials used to clean up a spill must also be decontaminated or disposed immediately, including mops, sponges, buckets, towels, and rags.

Materials for disposal shall be placed in a strong, plastic garbage bag, sealed, and labeled. Contact your local health agency/hospital and waste company for additional information on appropriate or required disposal methods.

4.0 TRAINING

Three elements are part of the required training: 1) First Aid/CPR, 2) BBP, and 3) this Plan.

4.1 First Aid/CPR

SSHOs, as well as individuals designated as First Aid Providers, shall (at time of assignment) hold current certification in First Aid and CPR from the American Red Cross, National Safety Council, American Heart Association, or another qualified provider.

4.2 Bloodborne Pathogens

SSHOs, as well as individuals designated as First Aid Providers, shall (at time of assignment) hold current BBP training. When BBP training has not been received as part of a First Aid/CPR class, individuals must complete the on-line training. Contact the Environment, Safety and Quality (ESQ) Administrative Assistant in the ECC Lakewood, Colorado office.

BBP training is required at least annually thereafter.

4.3 ECC Bloodborne Pathogen Plan

The contents of this Plan will be reviewed with designated First Aid Providers by the SSHO at the initial assignment to the project. This training will be documented by having the First Aid Providers sign the plan review, below.

5.0 DOCUMENTATION

Copies of all records and certificates related to completion of First Aid, CPR, and/or BBP training shall be submitted to the Contracting OfficersôRepresentative and maintained on site for the duration of the project.

Bloodborne Pathogen Plan Review

I certify that I have been informed of the potential for exposure to bloodborne pathogens on this project, and this BBP Plan, including the Exposure Control Plan. I agree to use Universal Precautions in applying First Aid procedures. I also understand my rights to prophylactic or post-exposure Hepatitis B vaccination, and the availability of Medical consultation. I agree to immediately report any potential exposure to bloodborne pathogens that occur on this project site.

First Aid Provider (PRINT)	Signature	Date

ATTACHMENT 7

SITE LAYOUT PLANS

(Will be included in the future or in applicable Work Plans)

ATTACHMENT 8

ACCESS AND HAUL ROAD PLAN

(If/when an Access and Haul Road Plan is required, this plan will be provided)

ATTACHMENT 9

HEARING CONSERVATION PROGRAM

1.0 PROJECT

Contract Number:	W9124J-18-D-0004
Delivery Order	W9124J21F0020
Project Name:	Environmental Remediation Services
Location:	Redstone Arsenal (RSA), Alabama

2.0 PURPOSE

Environmental Chemical Corporationôs (ECCôs) Hearing Protection Program is prepared in accordance with 29 Code of Federal Regulations (CFR) 1910.95 and 29 CFR 1926.

3.0 OBJECTIVE

The objective of this Standard Operating Procedure (SOP) is to protect the hearing of employees who may be exposed to noise levels exceeding the permissible exposure levels set by the Occupational Safety and Health Administration (OSHA).

4.0 HEARING CONSERVATION PROGRAM REQUIREMENTS

ECC shall administer a continuing, effective Hearing Conservation Program whenever employee noise exposures equal or exceed an eight-hour time-weighted average sound level (TWA) of 85 decibels (dB) measured on the A scale (slow response) or equivalently, a dose of 50 percent (%).

4.1 Action Level

An 8-hour TWA of 85 dB or a dose of 50% shall also be referred to as the action level.

5.0 MONITORING

When information indicates that any employee's exposure may equal or exceed an eight-hour TWA of 85 dB, ECC shall develop and implement a monitoring program.

Where circumstances such as high worker mobility, significant variations in sound level, or a significant component of impulse noise make area monitoring generally inappropriate, ECC shall use representative personal sampling to comply with the monitoring requirements of this paragraph, unless ECC can show that area sampling produces equivalent results.

All continuous, intermittent, and impulsive sound levels from 80 dB to 130 dB shall be integrated into the noise measurements. Instruments used to measure employee noise exposure shall be calibrated to ensure measurement accuracy. Monitoring shall be repeated whenever a change in production, process, equipment, or controls increases noise exposures to the extent that:

- Additional employees may be exposed at or above the action level or
- The attenuation provided by hearing protectors being used by employees might be rendered inadequate to meet the requirements of paragraph (j) of 29 CFR 1910.95 (Occupational Noise Exposure).

The protection against the effects of noise exposure shall be provided when the sound levels exceed those shown in **Table A9-1** when measured on the A scale of a standard sound level meter at slow response. When employees are subjected to sound exceeding those listed in **Table A9-1**, feasible administrative and/or engineering controls shall be utilized. If such controls fail to reduce sound levels within the levels

of **Table A9-1**, personal protective equipment shall be provided and used to reduce sound levels within the levels of the table. If the variations in noise level involve maxim at intervals of one second or less, it is to be considered continuous.

Table A9-1 Permissible Noise Exposures

Duration Per Day, Hours	Sound Level (Decibels adjusted [dBA] Slow Response
8	90
6	92
4	95
3	97
2	100
1 İ	102
1	105
2	110
ı or less	115

Notes:
Footnote (1) when the daily noise exposure is composed of two or more periods of noise exposure of different levels, their combined effect should be considered, rather than the individual effect of each. If the sum of the following fractions: C(1)/T(1) + C(2)/T(2) C(n)/T(n) exceeds unity, then, the mixed exposure should be considered to exceed the limit value. Cn indicates the total time of exposure at a specified noise level, and Tn indicates the total time of exposure permitted at that level. Exposure to impulsive or impact noise should not exceed **140 dB** peak sound pressure level.

6.0 EMPLOYEE NOTIFICATION

ECC shall notify each employee exposed at or above an eight-hour TWA of 85 dB of the results of the monitoring.

7.0 AUDIOMETRIC TESTING PROGRAM

ECC shall establish and maintain an audiometric testing program as provided in this paragraph by making audiometric testing available to all employees whose exposures equal or exceed an eight-hour TWA of 85 dBA. The program shall be provided at no cost to employees.

Hearing measurements (audiograms) made periodically are the best way to determine whether a Hearing Conservation Program is preventing noise-induced hearing loss. Hearing measurements are made at least annually. For very high noise exposures, measurements shall be made more often, until the noise exposure is reduced to safe levels.

Hearing measurements also help to accomplish the following:

- Document hearing-threshold changes that may occur during employment
- Determine the ability to hear (communicate) effectively at work, (i.e., direction, warning signals)
- Assist in proper job placement
- Diagnose pre-existing hearing loss prior to employment and establish a baseline hearing ability

Audiometric tests shall be performed by a licensed or certified audiologist, otolaryngologist, or other physician, or by a technician who is certified by the Council of Accreditation in Occupational Hearing Conservation, or who has satisfactorily demonstrated competence in administering audiometric examinations, obtaining valid audiograms, and properly using, maintaining, and checking calibration and

proper functioning of the audiometers being used. A technician who operates microprocessor audiometers does not need to be certified. A technician who performs audiometric tests must be responsible to an audiologist, otolaryngologist, or physician.

7.1 Baseline Audiogram

Within six months of an employee's first exposure at or above the action level, ECC shall establish a valid baseline audiogram against which subsequent audiograms can be compared.

7.2 Annual Audiogram

At least annually after obtaining the baseline audiogram, ECC shall obtain a new audiogram for each employee exposed at or above an eight-hour TWA of 85 dB.

7.3 Evaluation of Audiogram

Each employee's annual audiogram shall be compared to that employee's baseline audiogram to determine whether the audiogram is valid and if a standard threshold shift has occurred. A technician may do this comparison. If the annual audiogram shows that an employee has suffered a standard threshold shift, ECC may obtain a retest within 30 days and consider the results of the retest as the annual audiogram.

The audiologist, otolaryngologist, or physician shall review problem audiograms and determine whether there is a need for further evaluation. ECC shall provide the following information to the person performing this evaluation:

- A copy of the requirements for hearing conservation
- The baseline audiogram and most recent audiogram of the employee to be evaluated
- Measurements of background sound pressure levels in the audiometric test room
- Records of audiometer calibrations required by paragraph (h)(5) of this section

7.4 Follow-up Procedures

If a comparison of the annual audiogram to the baseline audiogram indicates a standard threshold shift, the employee shall be informed of this fact in writing, within 21 days of the determination.

Unless a physician determines that the standard threshold shift is not work related or aggravated by occupational noise exposure, ECC shall ensure that the following steps are taken when a standard threshold shift occurs:

- Employees not using hearing protectors shall be fitted with hearing protectors, trained in their use and care, and required to use them.
- Employees already using hearing protectors shall be refitted and retrained in the use of hearing protectors and provided with hearing protectors offering greater attenuation if necessary.
- The employee shall be referred for a clinical audiological evaluation or an otological examination, as appropriate, if additional testing is necessary or if ECC suspects that a medical pathology of the ear is caused or aggravated by the wearing of hearing protectors.
- The employee shall be informed of the need for an otological examination if a medical pathology of the ear that is unrelated to the use of hearing protectors is suspected.

If subsequent audiometric testing of an employee whose exposure to noise is less than an eight-hour TWA of 90 dB indicates that a standard threshold shift is not persistent, ECC:

- Shall inform the employee of the new audiometric interpretation
- May discontinue the required use of hearing protectors for that employee

7.5 Standard Threshold Shift

As used in this section, a standard threshold shift is a change in hearing threshold relative to the baseline audiogram of an average of 10 dB or more at 2,000, 3,000, and 4,000 Hertz (Hz) in either ear.

In determining whether a standard threshold shift has occurred, allowance may be made for the contribution of aging (presbycusis) to the change in hearing level by correcting the annual audiogram.

7.6 Audiometric Test Requirements

Audiometric tests shall be pure tone, air conduction, hearing threshold examinations, with test frequencies including as a minimum 500, 1,000, 2,000, 3,000, 4,000, and 6,000 Hz. Tests at each frequency shall be taken separately for each ear.

Audiometric tests shall be conducted with audiometers (including microprocessor audiometers) that meet the specifications of, and are maintained and used in accordance with, American National Standard Specification for Audiometers, S3.6-1969, which is incorporated by reference as specified in Sec. 1910.6.

7.7 Audiometer Calibration

The functional operation of the audiometer shall be checked before each day's use by testing a person with known, stable hearing thresholds, and by listening to the audiometer's output to ensure that the output is free from distorted or unwanted sounds. Deviations of 10 dB or greater require an acoustic calibration. Audiometer calibration shall be checked acoustically at least annually. Test frequencies below 500 Hz and above 6,000 Hz may be omitted from this check. Deviations of 15 dB or greater require an exhaustive calibration.

8.0 HEARING PROTECTORS

ECC shall make hearing protectors available to all employees exposed to an eight-hour TWA of 85 dB or greater at no cost to the employees. Hearing protectors shall be replaced as necessary. ECC shall ensure that hearing protectors are worn:

- For all explosive blasts. Due to the potential of blasts exceeding 115 decibels adjusted (dBA), personal ear protection equivalent to the combination of earplugs and earmuffs shall be required.
- By an employee who is required to wear personal protective equipment.
- By any employee who is exposed to an 8hr TWA of 85 dB or greater.
- Has not yet had a baseline audiogram established pursuant to 29 CFR 1910.95 paragraph (g)(5)ii.
- Has experienced a standard threshold shift.

Employees shall be given the opportunity to select their hearing protectors from a variety of suitable hearing protectors provided by ECC.

ECC shall provide training in the use and care of all hearing protectors provided to employees. ECC shall ensure proper initial fitting and supervise the correct use of all hearing protectors.

9.0 HEARING PROTECTOR ATTENUATION

ECC shall evaluate hearing protector attenuation for the specific noise environments in which the protector will be used.

Hearing protectors must attenuate employee exposure at least to an eight-hour TWA of 90 dB.

For employees who have experienced a standard threshold shift, hearing protectors must attenuate employee exposure to an eight-hour TWA of 85 dB or below.

The adequacy of hearing protector attenuation shall be re-evaluated whenever employee noise exposures increase to the extent that the hearing protectors provided may no longer provide adequate attenuation. ECC shall provide more effective hearing protectors where necessary.

10.0 TRAINING PROGRAMS

ECC shall institute a Training Program for all employees who are exposed to noise at or above an eight-hour TWA of 85 dB and shall ensure employee participation in such program.

The Training Program shall be repeated annually for each employee included in the Hearing Conservation Program. Information provided in the Training Program shall be updated to be consistent with changes in protective equipment and work processes.

ECC shall ensure that each employee is informed of the following:

- The effects of noise on hearing
- The purpose of hearing protectors, the advantages, disadvantages, and attenuation of various types, and instructions on selection, fitting, use, and care
- The purpose of audiometric testing, and an explanation of the test procedures

11.0 ACCESS TO INFORMATION AND TRAINING MATERIALS

ECC shall make copies of this standard available to affected employees or their representatives and shall also post a copy in the workplace.

ECC shall provide any informational materials pertaining to the standard that are supplied to ECC by the Assistant Secretary of Labor ï OSHA to affected employees.

ECC shall provide, upon request, all materials related to ECC's training and education program pertaining to this standard to the Assistant Secretary of Labor ï OSHA and the Director ï National Institute for Occupational Safety and Health (NIOSH).

12.0 RECORDKEEPING

ECC shall maintain an accurate record of all employee exposure measurements required by 29 CFR 1910.95.

11.1 Audiometric Tests

ECC shall retain all employee audiometric test records. These records shall include:

- Name and job classification of the employee

- Date of the audiogram
- The examiner's name
- Date of the last acoustic or exhaustive calibration of the audiometer
- Employee's most recent noise exposure assessment
- Accurate records of the measurements of the background sound pressure levels in audiometric test rooms

11.2 Record Retention

ECC shall retain records required by the Hearing Conservation Standard for at least the following periods:

- Noise exposure measurement records shall be retained for two years.
- Audiometric test records shall be retained for the duration of the affected employee's employment at ECC.

11.3 Access to Records

All records required by this section shall be provided upon request to employees, former employees, representatives designated by the individual employee, and the Assistant Secretary of Labor - OSHA. The provisions of 29 CFR 1910.20.

11.4 Transfer of Records

If ECC ceases to do business, ECC shall transfer to the successor employer all records required to be maintained by this section, and the successor employer shall retain them for the remainder of the period as required by this Program.

ATTACHMENT 10

HEALTH HAZARD CONTROL PLAN

1.0 PROJECT

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

2.0 INTRODUCTION

This Plan addresses the requirements of EM 385-1-1 06.A. It describes the general approach to Health Hazard Control and references other portions of the Accident Prevention Plan (APP) where more site-specific information is found.

3.0 EXPOSURE STANDARDS

Exposures to harmful chemicals or biological agent will be controlled to levels as low as reasonably achievable through the use of combinations of control methods. Uncontrolled inhalation exposures above the Occupational Exposure Limits (OELs) are not permitted.

The OELs for chemical substances for this project will be the most stringent from among those specified in the current American Conference of Governmental Industrial Hygienists (ACGIH) guideline, "Threshold Limit Values and Biological Exposure Indicesò, published by Department of the Army (DA) or Department of Defense (DoD) Exposure Limits, or by Occupational Safety and Health Administration (OSHA) in 29 Code of Federal Regulations [CFR] 1910.1000 (Permissible Exposure Limits [PELs]) or appropriate construction standards in 29 CFR 1926. Activities where occupational exposure to explosive constituents or chemical or biological warfare agents will comply with current DA safety and occupational health (SOH) requirements.

OELs for substances that may create an inhalation hazard due to construction materials and processes are listed in the Activity Hazard Analysis (AHA) for the activities for which the hazard is present.

4.0 HAZARD EVALUATION

Where hazardous or toxic agents may be used or produced in an activity, a qualified industrial hygienist will evaluate the hazards, considering the following information:

- Toxicity of the material, likely routes of exposure
- Physical and chemical properties (e.g. physical state, vapor pressure, particle size distribution, pH, flammability, reactivity, solubility, concentration in the material or product)
- Conditions of use, including approximate amount, surface area, usage rates, etc.
- Work operations that may impact exposures, such as drilling, grinding, application methods, proximity, duration, etc.
- Likely environmental conditions, such as location (outdoor, indoor, enclosed or confined space), natural ventilation, temperature, etc.

The results of this evaluation will be incorporated into the AHA for the activity, in the form of listing exposure in the Hazards section of appropriate steps and the exposure controls to be used in the Controls column.

5.0 TESTING AND MONITORING

The need for other Real Time or Personal exposure monitoring will be determined by the Safety and Health Manager (SHM) (or a Certified Industrial Hygienist [CIH]) during the hazard evaluation for specific features of work. This determination will be based on the substances used or generated; the likelihood of significant exposure considering frequency, duration and proximity; OSHA requirements in expanded health standards; employee concerns or complaints; and other factors as necessary. If such testing or monitoring is determined to be necessary, it will be listed in the Controls section of the AHA at the appropriate job step. Monitoring requirements will include the instrumentation, selection of personnel or area for monitoring, frequency and duration of monitoring, action levels and required actions.

Based information available regarding levels of contaminants in soils, air monitoring is not anticipated to be necessary. Controlling visible dust will maintain levels of contaminants in air, in the breathing zone of employees, well below PELs. As work progresses, evaluations will continue to be made, to determine if air monitoring is necessary. In the event it becomes necessary, all air monitoring instrumentation will be maintained and calibrated by trained personnel according to the applicable National Institute for Occupational Safety and Health (NIOSH)/OSHA analytical methods and the manufacturerôs recommendations. Where samples are collected for laboratory analysis, ECC will utilize the services of a laboratory accredited by the American Industrial Hygiene Association to analyze the samples in accordance with standard NIOSH or OSHA methods.

Records will include the date, time, substances or hazards monitored, person conducting monitoring, calibration date and method, operations and location of monitoring, and results. An air monitoring data sheet will be completed for each day of operations at the site when monitoring is conducted. Results will be provided to employees. Records are available to employees, their representatives and to the Government Designated Authority.

6.0 HEALTH HAZARD CONTROLS

ECC will prioritize the following control hierarchy for health hazards on this project:

- ***Elimination of the hazard*** ï substitute the process or materials
- ***Engineering controls*** ï wet methods for concrete cutting, concrete surface grinding, dusty earth moving operations; general or local exhaust ventilation for welding; mechanical ventilation for confined spaces
- ***Work Practice controls*** ï limiting or modifying the time of exposure to maintain cumulative exposures below health hazard concerns. Limiting the duration of exposure to noisy operations or radiation sources are examples. Performing work in high levels of personal protection during night shift or early morning hours is another example
- ***Personal Protective Equipment (PPE)*** ï generally a last resort, to be used in combination with other controls.
- ***Housecleaning and contaminant control*** ï decontamination areas and measures used to control the spread of contamination, regular cleaning of support facilities and if required by SHM, testing of contact surfaces to ensure proper cleaning/contamination control.

The specific control measures to be used for an anticipated exposure will be identified in the Controls column of the AHA for the activity where exposure may occur.

ATTACHMENT 11

HAZARD COMMUNICATION PROGRAM

1.0 PROJECT

Contract Number: W9124J-18-D-0004
Delivery Order W9124J20F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

2.0 SCOPE

The Environmental Chemical Corporation (ECC) Hazard Communication Program applies to all known hazardous substances in the workplace that ECC employees and their subcontractors may be exposed to under normal conditions of use or in a foreseeable emergency, such as equipment failure or rupture of containers, resulting from workplace operations.

Each hazardous material will be documented before being brought onto the job site. The Safety Data Sheets (SDSs) and proposed use and storage locations will be reviewed by the ECC Site Safety and Health Officer (SSHO) for approval. Site personnel will have access to the hazardous material inventory and SDS file upon request.

ECC will communicate this hazard communication program to project employees and subcontractors and provide information about chemical hazards and controls through SDSs, chemical inventory, chemical labeling, and chemical storage. ECC will communicate employee information and training programs as detailed in this written hazard communication program.

3.0 SAFETY DATA SHEETS

A SDS will be available for each chemical in the Chemical Inventory List. A copy of the SDS supplied by the manufacturer or distributor of the chemical(s) will be kept with the SSHO in a folder or binder. The SSHO will be responsible for obtaining SDSs for all hazardous chemicals or materials present at the project site.

The SSHO will review incoming SDSs for new and important health and safety information. The SSHO is responsible for disseminating the SDS information to the appropriate workers at the appropriate preliminary, initial and follow-up inspections of the Definable Features of Work (DFOW) where the hazardous chemical or material is to be utilized for which the SDS was written. Supervisors and employees will be informed of all new SDSs as soon as possible. If an SDS is missing, a new SDS will be requested from the manufacturer within seven days.

SDSs will be kept conspicuous location (i.e., office trailer, SSHO vehicle, etc.) at all times.

Employees and/or subcontractors are responsible for reading the SDSs for substances they use.

4.0 CHEMICAL INVENTORY

The project site must have a Chemical Inventory List. The inventory will be placed with the SDS binder in a conspicuous location at all times. The SSHO is responsible for updating the Chemical Inventory List and adding the appropriate SDS whenever a new chemical is brought on-site.

5.0 CHEMICAL LABELING

ECC will not accept or release hazardous chemicals or materials for use unless the original container is clearly labeled with at least the following information: product identifier; hazard statement(s); pictogram(s);

precautionary statement(s); the name, address and telephone number of the manufacturer, importer or other responsible party. If the hazardous chemical(s) or material(s) is transferred to a secondary container, the secondary container must be clearly labeled with at least the following information: product identifier and words, pictures, symbols, or combination thereof.

All labels must be legible, in English, and prominently displayed on the container. Labels will not be defaced or removed unless the container is immediately marked with the required information. Unlabeled containers should be immediately reported to the SSHO. The name of the material that appears on the manufacturer's label will be the same as the name that appears in the chemical area or Chemical Inventory List as well as the SDS.

6.0 CHEMICAL STORAGE

Hazardous chemicals or materials will be properly stored in approved flammable storage lockers, corrosive storage lockers, shelves or cabinets.

All incompatible chemicals or materials will be properly separated and stored by hazard classes.

No open flames, heat sources or smoking will be allowed in the vicinity of flammable liquids or materials.

7.0 EMPLOYEE INFORMATION AND TRAINING

Project employees and subcontractors will be trained on the hazards and proper uses of all hazardous chemical(s) or materials in their work area:

- At the time of their initial assignment;
- Whenever a new hazardous chemical(s) or material(s) is introduced into their area; and
- Whenever ECC or the subcontractor receives updated SDSs containing new information indicating significant increased risk or changes in the use of personal protective equipment.

Project employees and subcontractors will be trained in the following:

- Overview of the Hazard Communication Regulation (29 Code of Federal Regulations [CFR] 1910.1200) and the elements of ECC's Hazard Communication Program;
- Operations involving hazardous chemicals or materials in their work area and methods of detecting and identifying them;
- Location and availability of the SDSs and a written hazard communication program;
- How to read an SDS and container labels;
- Physical properties and health effects of hazardous chemicals and materials and measures to be taken by the employee to protect themselves;
- Use of engineering controls, personal protective equipment (PPE) and work practices to prevent or lessen exposure to hazardous chemicals or materials;
- Emergency and first aid procedures to follow in case of exposure to hazardous chemicals or materials.

Activity Hazard Analyses (AHA) will be developed for each DFOW with hazardous activities, and employees and/or subcontractor will be trained in the hazardous chemicals or materials to be used or encountered in that activity when the AHA is discussed.

ATTACHMENT 12A AND 12B

HEAT AND COLD STRESS MONITORING PLAN

1.0 PROJECT

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

2.0 SCOPE

This Plan applies to the project identified above and will be incorporated into the Accident Prevention Plan (APP). Subcontractors are required to comply with this program by virtual of their coverage under the APP.

3.0 PROCEDURES

3.1 HEAT STRESS AND HEAT STRAIN

Heat stress is the net heat load to which a worker may be exposed from the combined contributions of metabolic cost of work, environmental factors and clothing requirements. Heat stress is a hazard during warm weather or when personnel are wearing personal protective equipment (PPE) that aggravates the heat stress hazard. Heat stress can occur even when temperatures are moderate if the bodyôs physiological processes fail to maintain a normal body temperature.

Heat strain is the overall physiological response resulting from heat stress. The resulting physical reactions that occur are fatigue, irritability, anxiety, and a decrease in concentration, dexterity, and/or movement. Onset of signs and symptoms of exposure can occur rapidly, and may progress to a medical emergency (i.e., heat stroke) without intervention. In extreme cases, death can result if the patient is not given immediate treatment.

3.1.1 Symptoms of Heat Exhaustion

Heat exhaustion occurs when your body cannot sweat enough to cool you off. It generally happens when you are working or exercising in hot weather. Symptoms include:

- Fatigue, weakness, dizziness, or nausea
- Cool, clammy, pale, red, or flushed skin
- Heavy sweating

First Aid for Heat Exhaustion

- Get the person out of the sun and into a shady or air-conditioned location
- Lay the person down and elevate the legs and feet slightly
- Loosen or remove the person's clothing
- Have the person drink cool water, not iced, or a sports drink containing electrolytes
- Cool the person by spraying or sponging him or her with cool water and fanning
- Monitor the person carefully. Heat exhaustion can quickly become heatstroke. If fever greater than 102 degrees Fahrenheit (ÜF), fainting, confusion or seizures occur, call for emergency medical assistance.

3.1.2 Symptoms of Heat Stoke

Heat exhaustion can sometimes lead to a heat stroke. Heat stoke requires emergency treatment. It happens when your body stops sweating but the body temperature continues to rise, often to 105ÁF or higher. Symptoms include the following:

- Cessation of sweating
- Confusion, delirium, or unconsciousness
- Hot, dry, red or flushed skin, even under the arm pits
- Rapid and shallow breathing
- Chills
- Irritability
- Malaise
- Disorientation or confusion

First Aid for Heat Stroke

- It is vital to lower a heat stroke victimôs body temperature. Seconds count.
- Call emergency medical assistance and get an ambulance on the way as soon as possible.
- Move the person out of the sun and into a shady or air-conditioned space.
- Pour water on them, fan them, apply cold packs.

3.2 CONTROL MEASURES

Where monitoring indicates a possible heat stress hazard the following safety procedures shall be implemented:

General Controls

- Review signs and symptoms of heat strain, as well as controls and First Aid measures with site personnel.
- Encourage employees to eat a normal diet and get proper rest.
- Encourage employees to refrain from consuming diuretics, including caffeine from coffee and tea beverages, or any form of alcohol. (Note: Consumption of alcohol is prohibited during working hours). Counsel and monitor workers on medications that may affect blood pressure, sweating, body temperature regulation, or kidney function.
- Adjust expectations of those returning to work after absence from heat exposure situations and encourage them to eat salty foods (with approval of physician for those on salt-restricted diets).
- Provide potable drinking water and encourage workers to about one cup every 20 minutes.
- Permit self-limitation of exposures and plan frequent rest breaks.
- Encourage workers to report signs and symptoms of heat strain and not to try to work through it.
- Encourage the buddy system to detect signs and symptoms in co-workers.
- Provide shade (i.e., fixed or portable canopy) and/or cool rest areas.

Job-Specific Controls

Where the screening or physiological monitoring discussed below exceed the criteria, the job-specific controls for this project will include the following:

- Engineering controls to reduce workload, (e.g., mechanical vs. manual material handling where possible).
- Mobile construction equipment will have functioning air conditions and be operated with the doors/windows closed.
- Office trailer and vehicles will have functional air conditioning to provide cool rest locations during breaks.
- Wear breathable polypropylene disposable coveralls over modesty clothing for activities requiring Modified Level C.
- Use heat reducing PPE, such as cool vests, head bands, wrist bands, etc.
- Modify work schedule to take advantage of the cooler parts of the day.
- Establish work/rest regimens to reduce exposure times, when physiological monitoring indicates heat strain conditions.

3.3 Heat Stress and Heat Strain Monitoring

Heat stress and heat strain monitoring shall begin when ambient conditions exceed 85ÁF when working in Level D and 70ÁF when working in Modified Level C and above. For clear weather conditions (i.e., 100 percent [%] sunshine) ambient temperatures shall be decreased by 5ÁF (i.e., 65ÁF and 80ÁF, respectively) to determine when to begin monitoring. Ambient conditions shall be determined by maintaining a properly calibrated outdoor thermometer in the shade at each workstation, or by monitoring local weather reports throughout each work shift.

3.3.1 Environmental Monitoring

Use a Wet Bulb ï Globe Temperature (WBGT) monitor to perform heat stress screening in accordance with the **Tables A12-1** (Acclimatized Workers) and **Table A12-2** (Unacclimatized Workers) below. Clothing adjustment factors are included in **Table A12-3**.

If the WBGT levels (corrected for clothing ensemble) for the particular workload and work/rest cycle are exceeded, then implement the General Controls and either perform physiological monitoring as described below or implement Job Specific Controls such as those listed in **Section 3.2**.

Table A12-1 - WBGT Screening Criteria for Acclimatized Workers

Allocation of Work in a Cycle of Work and Recovery	Light	Moderate	Heavy	Very Heavy
75% - 100%	88ÁF 31ÁC	82.5ÁF 28ÁC	-	-
50% - 75%	88ÁF 31ÁC	84ÁF 29ÁC	81.5ÁF 27.5ÁC	-
25% - 50%	89.5ÁF 32ÁC	86ÁF 30ÁC	84ÁF 29ÁC	82.5ÁF 28ÁC
0%-25%	90.5ÁF 32.5ÁC	88.5ÁF 31.5ÁC	87ÁF 30.5ÁC	86ÁF 30ÁC

From ACGIH Threshold Limit Values (TLVs)È and BEIsÈ 2014.
Note: Light moderate work includes operating heavy equipment. Heavy work includes hand shoveling or other manual labor activities.
ÁC ï degrees Celsius ÁF ï degrees Fahrenheit

Table A12-2 - WBGT Screening Criteria for Unacclimatized Workers

Allocation of Work in a Cycle of Work and Recovery	Light	Moderate	Heavy	Very Heavy
75% - 100%	86ÁF 28ÁC	77ÁF 25ÁC	-	-
50% - 75%	83.5ÁF 28.5ÁC	79ÁF 26ÁC	75ÁF 24ÁC	-
25% - 50%	85ÁF 29.5ÁC	80.5ÁF 27ÁC	78ÁF 25.5ÁC	76.1ÁF 24.5ÁC
0%-25%	86ÁF 30ÁC	84ÁF 29ÁC	82ÁF 28ÁC	80.5ÁF 27ÁC

From ACGIH TLVsÈ and BEIsÈ 2015.
ÁC ï degrees Celsius ÁF ï degrees Fahrenheit

Table A12-3 – Clothing-Adjustment Factors for Some Clothing Ensembles*

Clothing Type	Addition to WBGT (°C)
Work clothes (long sleeve shirt and pants)	0
Cloth (woven material) coveralls	0
Double-layer woven clothing	3
SMS polypropylene coveralls	0.5
Polyolefin coveralls	1
Limited-use vapor barrier coveralls	11

*These values must not be used for completely encapsulating suits, often called Level A. Clothing Adjustment Factors cannot be added for multiple layers. The coveralls assume that only modesty clothing is worn underneath, not a second layer of clothing.
From ACGIH TLVsÈ and BEIsÈ 2014.
ÁC ï degrees Celsius

3.3.2 Alternate Environmental Monitoring Procedures

Where permitted by the client, ECC may use the Occupational Safety and Health Administration (OSHA) Heat Tool mobile app for monitoring environmental conditions based on the HEAT INDEX. Precautions recommended for the different Heat Index levels should be followed and are consistent with the General Controls and Job Specific Controls listed above. Where the HEAT INDEX level falls in the High or Very High to Extreme categories, implement physiological monitoring in addition to Job Specific Controls. The Heat Tool app can be accessed in OSHAôs Heat Stress prevention topic section at https://www.osha.gov/SLTC/heatillness/heat_index/heat_app.html

3.3.3 Physiological Monitoring

For site personnel wearing vapor barrier clothing and for site personnel where Job-Specific Controls may not be sufficient to control heat strain, physiological monitoring will be performed. Physiological monitoring will also be performed when workers report signs and symptoms of heat strain.

Select workers whose exposure is most extreme or who are probably the least heat tolerant. Heat tolerance may be affected by acclimatization, body size, general health and physical fitness, medications, and age.

Heat strain should be evaluated by monitoring the heart rate and temperature.

Where an individualôs pulse rate or temperature exceeds the criteria below, action should be taken to limit the individualôs heat exposure. However, where a pattern develops among workers of exceeding the criteria, then additional Job-Specific Controls shall be implemented for the work group.

Pulse Rate

The radial pulse should be taken for 30 seconds one minute after beginning to rest (i.e., at the beginning of a rest break). This rate is multiplied by two to determine the heart rate at initial rest. This rest should not exceed 110 beats per minute (bpm). If the resting heart rate exceeds 110 bpm, then modify the work rest schedule for the individual by decreasing the work period and increasing the rest period.

Heart rate monitoring should be recorded on an Exposure Monitoring Log. Monitoring should begin at the first break. The first rest break should be taken within the first hour of work when ambient conditions exceed the screening criteria of **Table A10-1** if working in Level D, and within the first 30 minutes if ambient conditions exceed 70ÁF if working in Modified Level C.

Oral Temperature

Use a digital oral thermometer with disposal plastic sleeves or similar device (e.g. aural thermometer) to measure the oral temperature at the end of the work period (before drinking).

If an individualôs temperature exceeds 99.6ÁF (or 37.6 degrees Celsius [ÁC]), adjust the work rest cycle.

Do not permit a worker to wear semipermeable or impermeable clothing when his/her oral temperature exceeds 100.6 ÁF (or 38.1 ÁC).

- Never ignore signs and symptoms of heat-related disorders -

4.0 TRAINING

Workers on project sites will be trained by the SSHO at site orientation, or during special tailgate meetings. The training will include the elements of this program, and in particular:

- Heat related disorders and First Aid measures
- Environmental factors and workload impacts on heat strain
- Personal factors impacting heat strain including health status, caffeine, alcohol and drugs
- Reporting Signs and Symptoms of exposure
- Monitoring measures to be employed on the project
- General and Job-Specific Controls to reduce exposure
- Emergency Response

5.0 DOCUMENTATION

The SSHO will record periodic environmental monitoring results in the Logbook, if needed. Physiological monitoring will be recorded on the Physiological Monitoring Form, if needed. Records will be maintained on the job site and will be archived with the project files at the end of the job.

Attachment 12B
COLD STRESS MONITORING PLAN

1.0 PROJECT

Contract Number:	W9124J-18-D-0004
Delivery Order	W9124J21F0020
Project Name:	Environmental Remediation Services
Location:	Redstone Arsenal (RSA), Alabama

2.0 COLD STRESS

Cold stress hazards are most likely to occur at low temperatures or low wind chill factors, with wet, windy conditions contributing to risk. Where cold stress is a potential hazard (temperatures less than 40 degrees Fahrenheit [ÜF]) workers will be trained on the information in the attached Cold Weather Fact Sheet.

As a precautionary measure, employees will wear layers of loose-fitting clothing including insulated coveralls, head cover (perhaps a liner beneath a hard hat), and boots when temperatures fall below 40°F, including wind chill. Protection of the hands, feet, and head is particularly important because these are likely to be injured first by cold. However, actual injury to hands, feet, and head is not likely to occur without prior development of early signs of hypothermia, such as numbing and shivering. Bare skin contact with cold surfaces (below 32°F) will be avoided.

The wind chill factor is the cooling effect of any combination of temperature and wind velocity or air movement. An anemometer can be used to measure wind velocity. The wind chill index (below) should be consulted when planning for exposure to low temperatures and wind. The Site Safety and Health Officer (SSHO) will monitor weather forecasts and determine wind chills at least every four hours when the temperature drops below 20ÜF. The wind chill index does not take into account the specific part of the body exposed to cold, the level of activity that affects body heat production, or the amount of clothing being worn.

Like with heat strain, employees are permitted and encouraged to self-limit outdoor work activities when symptoms of cold stress are experienced. The buddy system is also encouraged to ensure that employees frequently check on co-workers in temperature extremes. A temperature-dependent work regimen limiting lengthy periods of outdoor activity may be necessary. If required, this will be developed by the SSHO in coordination with the Project Safety and Health Manager (SHM).

Wind Chill Index

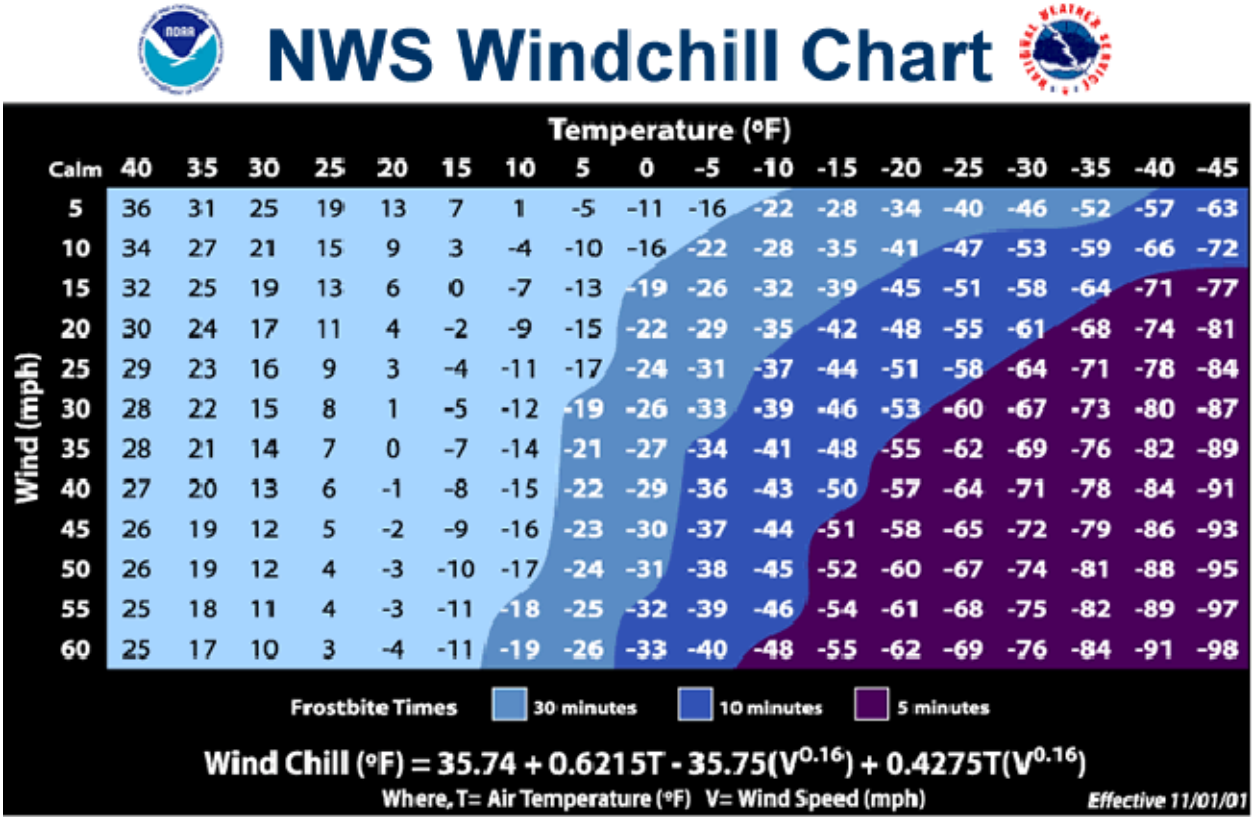

3.0 REFERENCES

National Weather Service http://www.nws.noaa.gov/om/winter/windchill.shtml

OSHAâs Campaign to Prevent Heat Illness in Outdoor Workers.
https://www.osha.gov/SLTC/heatillness/index.html

Injury Prevention: Fact vs Fiction

Cold Weather Injuries

FACT SHEET 12-004-0415

What causes Cold Weather Injuries?

Cold weather injuries (CWIs) can occur due to an imbalance of body temperature regulation, where heat loss is greater in an area of the body (or the body core) than heat production. There are 4 primary types of cold injuries: hypothermia, frostbite, non-freezing cold injuries, and injuries related to cold exposure. **Tables 1-4** provide details on these injuries.[1]

Why are CWIs a concern to the Army?

CWIs are preventable, yet if early signs and symptoms go unrecognized or preventive measures are not taken, these injuries may result in permanent injury and even death. A typical CWI casualty is a 20 year-old male at the rank of E-4 and below and often from a warm climate. However, anyone can become a CWI casualty.[2]

How can Soldiers protect themselves from a CWI?

Soldiers should be aware of risk factors and increase resilience by consuming a healthy diet with plenty of fluids, maintaining fitness levels according to Army standards, and getting quality sleep each night. Dressing properly for the weather conditions in a way to easily adjust (layers), and balancing the time and amount of activity spent in cold weather conditions will reduce risks.[1,3,4,5]

Prevention of Cold Weather Injuries

Clothing
- ❖ Wear uniform properly (layers worn loosely).
- ❖ Keep socks & clothes dry (use sock liners and foot powder).
- ❖ Remember the acronym **C-O-L-D**
  - Keep it **CLEAN**
  - Avoid **OVERHEATING**
  - Wear clothing **LOOSE** and in **LAYERS**
  - Keep clothing **DRY**

Eyes
- ❖ Wear dark UV protective glasses
- ❖ If no sun glasses – improvise with cut slits in cardboard/cloth; or use tape over regular eyeglasses

Skin
- ❖ Keep your skin clean, covered, & dry
- ❖ Use sunscreen and lip balm
- ❖ Use gloves to handle all equipment and fuel products

Hydration
- ❖ Drink warm liquids
- ❖ Monitor urine color for dehydration

Environment
- ❖ Use warming tents when needed
- ❖ Monitor conditions, especially the wind chill index
- ❖ Use anti-slip shoe gear if outside extensively

Other
- Conduct NCO checks and look after your battle buddy

What factors increase the risk of having a CWI?

All Soldiers regardless of rank are susceptible to a CWI in the right conditions. However, surveillance data from the Army and other Services indicate that rates of cold injuries appear higher among African Americans, women, Service members under 20 years old, and enlisted personnel.[2] Additional risk factors are discussed below[1-7]:

✚ *Prior cold injury or medical conditions*

Soldiers who have had a cold injury in the past are much more likely to develop a new cold injury sooner or one of more severe nature in the future. Existing medical conditions may predispose an individual to a CWI. For example, Raynaud's Disease is a disorder that causes blood vessel constriction in cold temperatures or during emotional distress, resulting in reduced blood flow to the extremities (e.g., fingers & toes).[6] Other conditions, such as anemia, diabetes, sickle cell disease, hypotension, and atherosclerosis, may also increase susceptibility to frostbite and injuries related to cold exposure.[1]

✚ *Dehydration*

Inadequate fluid intake affects the body's ability to sustain physical activity, which in turn affects thermoregulation (i.e., the balance between heat production and loss). In cold environments sensitivity to thirst declines, which can increase the risk of dehydration during strenuous activity, where fluid loss often exceeds intake.[1, 4, 5]

✚ *Over- and Under- Activity*

Vigorous exercise/activity induces sweating, which leads to wet clothing and subsequent increased heat loss. Conversely, under-activity results in low heat production, which may lower the body's core temperature.[1, 4, 5]

✚ *Tight clothing*

Close-fitting clothing reduces insulation and may restrict movement, resulting in heat loss. Clothing should be worn loosely and layered to allow adjustments as physical activity levels and environmental conditions change.[1, 4, 5]

✚ *Inadequate nutrition*

Underfeeding can cause low blood sugar (hypoglycemia) which impairs shivering, thereby making it difficult to generate body heat. Low carbohydrates stores also limit the ability to maintain physical activity.

✚ *Alcohol & nicotine*

Alcohol imparts a sense of warmth and causes dilation of skin blood vessels which increases heat loss to the environment. It may also impair the senses and judgment, making it difficult for a Soldier to detect signs and symptoms of a CWI. Tobacco use (smoking or chewing) causes increased constriction of skin blood vessels, which increases the risk for frostbite.[1, 4, 5]

✚ *Medications*

Some medications may affect thermoregulation by impairing vasoconstriction. These include benzodiazepines, tricyclic antidepressants, barbiturates, and general anesthetics.[1, 4, 5]

U.S. Army Public Health Command - Injury Prevention Program
usarmy.apg.medcom-phc.mbx.injuryprevention@mail.mil ***410-436-4655/DSN 584-4655***
5158 Blackhawk Road, APG, MD 21010-5403
Approved for Public Release, Distribution Unlimited

ATTACHMENT 13

CRYSTALLINE SILICA ASSESSMENT

1.0 PROJECT/ TASK ORDER DESCRIPTION

Contract Number:	W9124J-18-D-0004
Delivery Order	W9124J21F0020
Project Name:	Environmental Remediation Services
Location:	Redstone Arsenal (RSA), Alabama

2.0 SCOPE AND APPLICATION

There are operations that could present occupational exposures of personnel to respirable crystalline silica above the American Conference of Governmental Industrial Hygienists (ACGIH) Threshold Limit Value (TLV) of 25 micrograms per cubic meter (Õg/m^3)^3 These operations include, but are not limited to the following:

- Mixing grouts and concrete for well installation

3.0 EXPOSURE CONTROL PLAN

Sub-contractors will be required to comply with Environmental Chemical Corporationôs (ECCôs) plan, or provide their own internal plan, for approval, prior to beginning activities that may generate crystalline silica.

Both the exposure control methods and alternative exposure control methods identified in 29 Code of Federal Regulations (CFR) 1926.1153 Table 1, will be used at the project, to control employee exposures to respirable crystalline silica.

4.0 ENGINEERING AND WORK PRACTICE CONTROL METHODS

Due to the limited nature of these tasks, employees will implement, at a minimum, the following controls to prevent exposure to crystalline silica found in grouts and concrete utilized for installing monitoring wells.

The engineering and work practice control methods identified for these tasks include:

- Use water spray/mist when feasible.
- Work from upwind direction.
- Preferentially use materials that contain lower percentages of silica and are formulated for reduced dusting.

5.0 HOUSEKEEPING

The housekeeping procedures to be used for reducing employee exposure to respirable crystalline silica include:

- Dry sweeping or dry brushing is not allowed when respirable crystalline silica is present. Use wet sweeping and high-efficiency particulate air (HEPA)-filtered vacuuming when feasible.
- Do not use compressed air to clean clothing or surfaces when respirable crystalline silica is present.

6.0 WORK AREA ACCESS CONTROL

Work will be isolated to control access.

7.0 COMPETENT PERSON

The Site Safety and Health Officer (SSHO) is the designated competent person. The competent person is responsible for making frequent and regular inspections of job sites, materials, and equipment to implement the written exposure control plan.

8.0 COMMUNICATION OF RESPIRABLE CRYSTALLINE SILICA HAZARDS TO EMPLOYEES

ECC addresses respirable crystalline silica in the Hazard Communication Program. Each employee must have access to labels on containers of crystalline silica and the safety data sheets. At a minimum, the following respirable crystalline silica hazards are to be communicated to employees:

- Cancer
- Lung effects
- Immune system effects
- Kidney effects

9.0 EMPLOYEE INFORMATION AND TRAINING

All workers potentially exposed to silica will be trained. The training shall include the following information:

- The health hazards associated with exposure to respirable crystalline silica.
- Specific work tasks that could result in exposure to respirable crystalline silica.
- Specific measures ECC has implemented to protect employees from exposure to respirable crystalline silica, including engineering controls, work practices, and respirators to be used.
- The contents of the Occupational Safety and Health Administration (OSHA) respirable crystalline silica standard (29 CFR 1926.1153).
- Methods for limiting silica exposure.
- The identity of the competent person.

All workers who will be wearing respirators will be trained in accordance with ECC Standard Operating Procedure (SOP) Environment, Safety, and Quality (ESQ) 6.2 ôRespiratory Protectionõ.

10.0 RECORDKEEPING

An accurate record of all exposure measurements taken to assess employee exposure to respirable crystalline silica will be made and maintained as required by OSHA.

11.0 MEDICAL SURVEILLANCE

Personnel using a respirator for 30 or more days per year shall participate in a medical surveillance program as required by 29 CFR 1926.1153.

ATTACHMENT 14

HAZARDOUS ENERGY CONTROL PLAN

1.0 PROJECT/ TASK ORDER DESCRIPTION

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

2.0 SCOPE AND APPLICATION

The requirements in this procedure applies to the activities associated with this Plan applies to all activities, including subcontractor activities, for the project identified above involving cleaning, maintenance, adjustment and repairs of tools, machinery and equipment where hazardous energy may be present.

3.0 PROCEDURES

3.1 General Procedures

Before working on machinery, equipment, or process units where employees may be exposed to hazardous energy sources, a lockout/tagout procedure will be implemented.

1. Notify affected employees of the shut down and lockout.
2. Issue a lockout permit. See *Form ESQ-7.3.01 Lockout Permit*.
   Note: For fixed plant equipment, an equipment-specific procedure may be developed and used in lieu of a permit.
3. Shut down the system by shutting off the generator.
4. Isolate the energy sources, vent the vapor lines, drain the liquid lines.
5. Lock out the generator start switch and place a tag on it. The system will be locked out by each employee working on the equipment (authorized employees). If it is not feasible to place a lock on the system, tags alone may be used.
   Note: All employees working on the equipment and potentially exposed to the hazardous energy must have control over the system. Each one must place a lock on the isolation device, or on a lockbox under a group lockout procedure. See TI ESQ-7.3.03 Group Lockout Procedures.
6. Block or release any stored energy. (Examples: vent vapor line, drain liquid lines)
7. Verify the de-energization. In mechanical system cases, this is accomplished by trying to start the equipment. However, the specific verification procedure should be documented on the permit.
   Note: If the work is to be done on or near current carrying electrical equipment, verification must be done by a qualified electrical worker using test equipment.
8. Perform work.
9. Clear work area of personnel, tools and material. Replace all parts and guards.
10. Notify affected employees.
11. Remove locks.
    Note: If an employee leaves the site with his lock on equipment to be returned to operation, the Supervisor must contact the employee and verify their whereabouts. If still on site, the employee must return to remove their lock. If they have left the site, and it is verified, the lock may be cut.
12. Re-energize the system or equipment.
13. Follow normal start-up procedure.

3.2 Exceptions

Lockout permits and lockout devices are not required by this Plan for the following equipment:

1. Equipment that is provided with a cord and plug need not comply with the permit and lockout procedures in this Plan, provided the equipment is unplugged and the plug is under the direct control of the person performing the servicing.
2. Mobile Equipment using an ignition key is considered locked out if the service mechanic removes the key from the ignition and keeps it in his/her pocket and places a ñDo Not Operateò tag on the steering wheel or operating levers. Mobile equipment tools (blades, buckets, booms etc.) must be lowered or blocked and the equipment must be properly blocked or chocked to prevent unintentional movement.
3. Other small equipment that is operated on hydrocarbon fuel that does not have a keyed ignition switch can be de-energized by disconnecting the starter battery or the fuel line. The disconnected items must be under the direct control of the person performing the servicing.

4.0 MONITORING

The Site Safety and Health Officer (SSHO) will monitor the implementation of the energy control procedures.

5.0 TRAINING

Each employee engaged in lockout/tagout must be trained in this procedure, appropriate Task Instructions, and any site-specific or equipment-specific procedures. See *TI ESQ-7.3.05 Energy Control Procedure Training Outline.*

6.0 DOCUMENTATION

Training in this procedure shall be documented using a training sign-in sheet, a Daily Tailgate sign-in sheet, or a copy of the *TI ESQ-7.3.05 Energy Control Procedure Training Outline.*

Lockout/tagout activities are documented using the permit, *Form ESQ-7.3.01 Lockout Permit.* Where a specific written procedure is applicable, it should be documented using *Form ESQ-7.3.02 Equipment-Specific Written Lockout Procedure.*

7.0 REFERENCES

29 Code of Federal Regulations (CFR) 1910.147 The Control of Hazardous Energy The control of hazardous energy (lockout/tagout). - 1910.147

United States Army Corps of Engineers (USACE) EM 385-1-1. Section 12. Control of Hazardous Energy (Lockout/Tagout) http://www.hq.usace.army.mil/soh/em385/current/SECTION12-V2-final.pdf

LOCKOUT/TAGOUT PERMIT

Fill out Completely

Project Name: _____ Location: _____

DATE:_____ SHIFT:_____PERMIT #:

EQUIPMENT/SYSTEM IDENTIFICATION:_____

REASON FOR LOCKOUT/TAGOUT:_____

ISOLATION INFORMATION

Device Description	Location	Isolation Position	Lockout Device

SPECIAL INSTRUCTIONS FOR REMOVAL OR RELEASING STORED ENERGY

SIGNATURES

Supervisor:		
Authorized Employee		**Lock #:**
Authorized Employee		**Lock #:**
Authorized Employee		**Lock #:**

TI ESQ-7.3.03
GROUP LOCKOUT PROCEDURES

1.0 GENERAL

The purpose of this Task Instruction is to provide guidance on the implementation of a Group Lockout Procedure. It is ECCôs policy that each employee who may be involved in servicing equipment while it is de-energized and locked out (authorized employee), have control over the hazardous energy source(s) through the use of personally assigned padlock(s). This policy is summarized by the phrase ñOne employee ï One lock ï One Keyò.

However, there are occasions when multiple energy sources must be locked by a group of employees. It may not be feasible or practical for each employee to physically place a lock on each source. An example is during an outage on a thermal desorption unit. In such instances, the Group Lockout Procedure described below maintains the control of each authorized person over each energy isolation device and may be implemented.

2.0 PROCEDURE

1. The Supervisor (or Lead Operator) Completes the Lock Out / Tag Out Permit listing items to be locked out.
2. Notify personnel (authorized and affected employees) of what is being locked out and why.
3. Shut down the system using normal shutdown procedures
4. Isolate the energy source (e.g. open circuit breaker, valve, etc.)
5. Release stored energy (drain, vent, block/crib, ground, etc.)
6. The Supervisor (or Lead Operator) applies a set of **keyed-alike** locks on each energy isolation device. These locks should be a different color than those **keyed-differently** locks issued to the authorized employees.
7. In the case of electrical sources, the Supervisor (or Lead Operator) opens the appropriate circuit breakers in the main circuit panels. Prior to shutting and locking the cabinet door, authorized employees assigned to work on the isolated systems visually observe that the correct breakers are open. They also observe the correct position and Supervisor (or Lead Operator) locks on other energy isolation devices. Each of these authorized employees then initials the Lock Out / Tag Out Permit.
8. After the authorized employees initial the Lock Out / Tag Out Form, the Supervisor (or Lead Operator) puts his/her key for the **keyed-alike** set of locks into the group lockbox. This should be the only key for this set of locks. Each authorized employee then applies his/her individually assigned lock, which is uniquely keyed to the lockbox. The Supervisor (or Lead Operator) cannot retrieve the key for the set of keyed-alike locks, until each authorized employee removes his/her lock from the lockbox.
9. The authorized employees then perform or witness the ñtryò or isolation verification step. (Note: For work on or near current carrying parts of electrical equipment, this step is done by a Qualified Electrical Worker using electrical test equipment. See *SOP ESQ-5.7 Electrical Safety*.)
10. If a different employee needs to work on the system, that employee must review the Lock Out / Tag Out Form, noting the authorized employees initials verifying that the correct isolation devices

have been locked out, and then places his/her lock on the lockbox. If the new authorized employee has any doubt as to the whether the appropriate devices are isolated and locked out, he/she may request a first-hand observation.

11. After the work is performed, follow normal procedures for removal of locks and restarting the system.

TI ESQ-7.3.05
CONTROL OF HAZARDOUS ENERGY – TRAINING OUTLINE

1.0 GENERAL

The purpose of this Task Instruction is to provide guidance on training of employees in ECC SOP ESQ-7.3 Control of Hazardous Energy and associated Task Instructions and equipment specific equipment.

Each employee involved in servicing equipment that must be shut down and locked out is considered an authorized employee. Affected employees are those not directly involved in the servicing or maintenance equipment but may use the equipment or be exposed to a hazard from inadvertent starting of the shutdown equipment. This training must be provided to authorized employees. Affected employees must be trained in items 1 through 4 below. Training is to be documented with sign-in sheets, and the records must be maintained in the project files.

TRAINING OUTLINE

1. Energy Source Hazards ï General
   a. Electrocution
   b. Struck-by falling/flying objects, pressure release, compressed gas
   c. Caught in or between mechanical parts
   d. Contact with chemicals, steam, hot surfaces
   e. Spills, fires and explosions
2. Energy Source Hazards ï Site Specific
3. Hazardous energy sources on this site (or with this system or equipment). (List)

   _____

   _____

   _____

   _____
4. ECC Policies:
   a. One employee ï one lock ï one key
   b. Locks used whenever feasible. When infeasible to use locks, standard, durable tags used.
5. Assignment and description of Locks and Tags (show samples)
6. Lockout Permit (go over permit requirements)
7. General Procedures:

   Before working on machinery, equipment or process units where employees may be exposed to hazardous energy sources a lockout/tagout procedure will be implemented.
   Notify Affected employees of the shut down and lockout.
   a. Issue a lockout permit. See *Form ESQ-7.3.01 Lockout Permit*.
      Note: For fixed plant equipment, an equipment-specific procedure may be developed and used in lieu of a permit.
   b. Shut down the equipment following normal shutdown procedures.
   c. Isolate the energy sources.

d. Lock out the energy source isolation device and place a tag on it. The system will be locked out by each employee working on the equipment (authorized employees). If it is not feasible to place a lock on the system, tags alone may be used.
Note: All employees working on the equipment and potentially exposed to the hazardous energy must have control over the system. Each one must place a lock on the isolation device, or on a lockbox under a group lockout procedure. See TI ESQ-7.3.03 Group Lockout Procedures.

e. Block or release any stored energy. (Examples: detach springs; discharge capacitors; use cribbing or secured blocking under raised items; vent pressure and check gauge; drain fluids; check temperatures)

f. Verify the de-energization. In mechanical system cases, this is accomplished by trying to start the equipment. However, the specific verification procedure should be documented on the permit.
Note: If the work is to be done on or near current carrying electrical equipment, verification must be done by a qualified electrical worker using test equipment.

g. Perform work.

h. Clear work area of personnel, tools and material. Replace all parts and guards.

i. Notify affected employees.

j. Remove locks.
Note: If an employee leaves the site with his lock on equipment to be returned to operation, the Supervisor will contact employee, verify they left the site, then authorize cutting the lock.

k. Re-energize the system or equipment.

l. Follow normal start-up procedure.

8. Job or Equipment-specific procedures (List procedures discussed)

_____

_____

_____

9. Group Lockout Procedures (if used). See *TI ESQ-7.3.03*

INSTRUCTOR	COMPANY	DATE
ATTENDEE (Print)	**COMPANY**	**SIGNATURE**

ATTACHMENT 15

EXCAVATION AND TRENCHING PLAN

1.0 PROJECT/ TASK ORDER DESCRIPTION

Contract Number:	W9124J-18-D-0004
Delivery Order	W9124J21F0020
Project Name:	Environmental Remediation Services
Location:	Redstone Arsenal (RSA), Alabama

2.0 SCOPE AND APPLICATION

The Activity Hazard Analysis (AHA) for excavation related activities is included in Appendix A of the Accident Prevention Plan (APP).

(a) Excavations that may exceed 4 feet in depth, and therefore, Environmental Chemical Corporation (ECC) and sub-contractor personnel will adhere to the requirements of EM 385 1-1 and 29 Code of Federal Regulations (CFR) 1926. Additionally, prior to conducting any excavation activities, utility locates must be conducted.

(b) Ramps or ladders will be placed to allow access/egress of employees if working in excavations is necessary. Egress points must be within 25 feet of personnel, so at least every 50 feet. Ladders must extend from bottom of excavation to three feet above surface. Ramps for personnel access must be a minimum of four feet wide and have standard guardrails ï see Section 21.F.01 of EM 385-1-1. Ramps for equipment must be at least 12 feet wide and curbs of not less than eight by eight-inch timbers. Equipment ramps must be designed and constructed in accordance with accepted engineering practice. In addition to the access/egress the AHA must provide the proper Perimeter Protection Class per definitions in Appendix Q of EM 385-1-1 and provide the acceptable controls according to Section 25.B of EM 385-1-1]

(c) Competent Person (CP) must be able to demonstrate:
   (1) Training, experience, and knowledge of soil analysis, use of protective systems, and requirements of this Section and 29 CFR 1926 Subpart P;
   (2) Ability to detect conditions that could result in cave-ins, failures in protective systems, hazardous atmospheres, and other hazards including those associated with confined spaces; and
   (3) The authority to take prompt corrective measures to eliminate existing and predictable hazards and stop work when required.

(d) The CP will conduct inspections daily, and as conditions change, and provide documentation that examination of the ground by the CP provides no indication of a potential cave-in. Daily inspections by CP will be recorded on ECC Form Environment, Safety and Quality (ESQ)-7.7.01.

3.0 RESCUE PLAN

A rescue plan will be provided, as applicable, for each separate location.

3.1 Diagram of Excavation Area

As applicable diagrams will be provided (at later date or in an applicable work plan), for each location, and will provide the following:

- Location and extent of excavation
- Structures or trees within excavation to be removed
- Structures, trees or other features adjacent to excavation to be protected and preserved
- Expected Underground utility locations and locations of shut offs
- Nearby Overhead power lines

- Access to excavation area, and protective systems around perimeter of excavation
- Access/egress points to excavation
- Expected depths of excavation

3.2 Projected Maximum Depth(s)

If depths exceed that 4 feet, additional measures will be implemented in accordance with EM 385 1-1.

4.0 PROJECTED SOIL TYPE AND METHOD OF TESTING TO DETERMINE SOIL TYPE

Soil shall be evaluated and classified by the CP. The classifications will in accordance with Occupational Safety and Health Administration (OSHA) 1926 Subpart P, App. A as stable rock, type A, B, or C soil. Classifications shall be made using at least one visual and one manual analysis identified in 1926 Subpart P, App. A.

It is anticipated all soil will be classified as Type C.

In layered soil systems, the system shall be classified according to its weakest layer. However, each layer may be classified individually where a more stable layer exists under a weaker layer.

In the event the properties, factors, or conditions affecting classification change, the system shall be reevaluated by the CP. Reclassify as necessary to reflect the changed circumstances.

Soil Classification will be documented using the Soil Classification Form.

5.0 PROTECTIVE SYSTEMS

It is anticipated excavations will be sloped. In the event sloping is not possible, alternate methods including shoring or trench boxes, will be utilized.

6.0 PLANNED METHOD FOR CONFINED SPACE ENTRY, TRENCH ACCESS AND EGRESS AND ATMOSPHERIC MONITORING PROCESSES

6.1 Entry into Excavations

Each excavation will be evaluated by the Safety and Health Manager (SHM) to determine the anticipated potential hazards and if confined space regulations apply. In the event it is necessary to treat an excavation as a confined space, this plan will be updated accordingly.

6.2 Trench Access and Egress

Trenches in excess of four feet deep require a minimum of two means of egress. The AHA and drawing for each location, where applicable, will address locations.

6.3 Atmospheric Monitoring

In the event there is potential for sources of toxic gases, such as exhaust from nearby combustion engines, to the enter the excavation, monitoring will be conducted. Monitoring in general would consist of a multi-gas detector, to check for oxygen, Carbon monoxide (CO), and explosive gases. Action levels are as follows:

- Oxygen: less than (<) 20.8 or greater than (>) 21.0 percent (%) = stop work, contact SHM for evaluation
- Lower explosive limit (LEL): > 10% = stop work, ventilate, and contact SHM

- CO: > 25 ppm, stop work, ventilate, and contact SHM

7.0 LOCATION OF UTILITY SHUT OFFS

Utilities connected to drainage lines will be blocked and locked out. Other utilities that may affect work will be evaluated at each location and measures will be taken to control associated hazardous energy.

8.0 DAMAGE PREVENTION

For all adjacent structures that pose a hazard to workers or potential damage incidents, precautions shall be established per OSHA 29 CFR 1926.651(i). Sidewalks, pavements and appurtenant structure shall not be undermined unless a support system or another method of protection is provided to protect employees from the possible collapse of such structures.

9.0 MANAGEMENT OF EXCAVATED SOIL

Excavated materials will be kept a minimum of two feet from the edge of all excavations to avoid falling into excavation or creating a hazardous surcharge on excavation faces.

10.0 TRAFFIC CONTROL PLAN

In areas where activities are adjacent to roadways, traffic controls will be implemented accordingly, based on the requirements of EM 385 1-1. Additionally, traffic control is addressed in the work plan.

11.0 DIGGING PERMITS

Prior to excavation work being performed, utilities must be located in accordance with Standard Operating Procedure ESQ-7.6 ï Underground Utilities. All utility locates shall be performed a minimum of two days in advance of any excavation work being performed. Private locating services will be utilized as well.

A ñDigging Permitò processed through the Contracting Officerôs Representative must be obtained from the base authority having jurisdiction.

ATTACHMENT 16

SITE SAFETY AND HEALTH PLAN (HAZARDOUS, TOXIC, AND RADIOACTIVE WASTE [HTRW])

1.0 PROJECT

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

This SSHP supplements the Accident Prevention Plan (APP) and contains project-specific information for environmental remediation services at RSA. Additional safety and health requirements are found in the Activity Hazard Analyses (AHAs), supplemental plans, and Environmental Chemical Corporation (ECC) Safety and Health Standard Operating Procedures (SOPs).

If hazards or conditions are identified that are not covered by this Site Safety and Health Plan (SSHP), ECC staff must contact the project manager or the Site Safety and Health Officer (SSHO).

1.1 Redstone Arsenal History and Description

See Section 2.1 of the APP.

1.2 Scope of Work

See Section 2.2 of the APP.

2.0 ACTIVITY HAZARD ANALYSIS

Section 2.3 of the APP lists the definable features of work for this project. The AHAs will be reviewed with the field team prior to commencing a new activity.

Tables A16-1 and **A16-2** list maximum concentrations, exposure limits, and health hazards for the chemicals of concern. The contaminant concentrations in groundwater and soil, together with the nature of operations, are such that the potential of hazardous exposures to site workers is low.

Table A16-1: Site Contaminants

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
RSA-156/157						
Cobalt	0.1 mg/m^3 0.02 mg/m^3 0.05 mg/m^3	NA	PEL TLV REL	20 mg/m^3 (as Co)	Inh, Ing, Con	Cough, dyspnea, wheezing, weight loss; dermatitis; diffuse nodular fibrosis; asthma
Iron	10 mg/m^3 5 mg/m^3 5 mg/m^3	NA	PEL TLV REL	2500 mg/m^3 (as Fe)	Inh	Benign pneumoconiosis with X-ray shadows indistinguishable from fibrotic pneumoconiosis (siderosis)
Manganese	0.02 mg/m^3 1 mg/m^3	C 5 mg/m^3 3 mg/m^3	PEL TLV REL	500 mg/m^3 (as Mn)	Inh, Ing	Manganism; mental confusion; metal fume fever: dry throat, cough, chest tightness, dyspnea, flu-like fever; low-back pain; vomiting; malaise; lassitude; kidney damage

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
TCE	100 ppm 50 ppm 25 ppm	100 ppm	PEL TLV REL	Ca (1,000 ppm)	Inh, Abs, Ing, Con	Irritation of eyes, skin; headache, vertigo; visual disturbances, fatigue, tremor, nausea, vomiting; dermatitis.
2-hexanone	5 ppm 5 ppm 1 ppm	NA	PEL TLV REL	1600 ppm	Inh, Abs, Ing	irritation eyes, nose; peripheral neuropathy: lassitude, paresthesia; dermatitis; headache, drowsiness
Vinyl chloride	1 ppm	NA	PEL TLV REL	Ca ND	Inh, Con	Lassitude; abdominal pain, gastrointestinal bleeding; liquid: frostbite; [potential occupational carcinogen]..
1,1- dimethyl-hydrazine	0.5 ppm 0.01 ppm NA	(Ca C) 0.06 ppm	PEL TLV REL	Ca (15 ppm)	Inh, Abs Ing	irritation eyes, skin; choking, chest pain, dyspnea; drowsiness; nausea; anoxia; convulsions; [potential occupational carcinogen].
2-nitrotoluene	5 ppm 2 pm 2 ppm	NA	PEL TLV REL	200 ppm	Inh, Abs, Ing, Con	Anoxia, cyanosis; headache, lassitude, dizziness; ataxia; dyspnea; tachycardia; nausea, vomiting.
Nitrobenzene	1 ppm 1 ppm 1 ppm	NA	PEL TLV REL	200 ppm	Inh, Abs, Ing, Con	irritation eyes, skin; anoxia; dermatitis; anemia; methemoglobinemia.
2,6- DNT	1.5 mg/m^3 1.5 mg/m^3 1.5 mg/m^3	NA	PEL TLV REL	200 mg/m^3	Con	headache, irritability, dizziness, weakness, nausea, vomiting, dyspnea, drowsiness, unconsciousness, and possibly death. Repeated or prolonged exposure may cause anemia [potential occupational carcinogen].
Nitroglycerin	0.05 ppm	(C) 0.2 ppm 0.1	PEL TLV REL	200 mg/m^3 [e]	Inh, Abs, Ing, Con	throbbing headache; dizziness; nausea, vomiting, abdominal pain; flush; palpitations; delirium; angina; skin irritation.
1,3-dinitrobenzene	1 mg/m^3 1 mg/m^3 1 mg/m^3	NA	PEL TLV REL	50 mg/m^3 [f]	Inh, Abs, Ing, Con	Anoxia, cyanosis; visual disturbance, central scotomas; bad taste, burning mouth, dry throat, thirst; yellowing hair, eyes, skin; anemia; liver damage.

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
2,4-DNT	1.5 mg/m^3 1.5 mg/m^3 1.5 mg/m^3	NA	PEL TLV REL	200 mg/m^3	Con	headache, irritability, dizziness, weakness, nausea, vomiting, dyspnea, drowsiness, unconsciousness, and possibly death. Repeated or prolonged exposure may cause anemia [potential occupational carcinogen].
Perchlorate	10 mg/m^3 Inhalable particles 3.0 mg/m^3 Respirable Particles	NA	PEL TLV REL	NA	Inh, Ing, Con, Abs	Local irritation or stinging effect. Chronic ingestion of sufficient quantities may interfere with uptake of iodine by the thyroid which may cause hypothyroidism. Irritation of the eyes will cause stinging effect.
RSA-262						
Benzo[a] anthracene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Benzo[a] pyrene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Benzo[b] fluoranthene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Dibenz[a,h] anthracene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
2-nitrotoluene	5 ppm 2 ppm 2 ppm	NA	PEL TLV REL	200 ppm	Inh, Abs, Ing, Con	Anoxia, cyanosis; headache, lassitude, dizziness; ataxia; dyspnea; tachycardia; nausea, vomiting.
1,1,2-trichloroethane	10 ppm 10 ppm 10 ppm	NA	PEL TLV REL	Ca (100 ppm)	Inh, Abs, Ing, Con	Irritation eyes, nose; liver, kidney damage; dermatitis; [potential occupational carcinogen].
CT	10 ppm 5 ppm-skin	(C) 25 ppm 10 ppm-skin 2 ppm (60-min)	PEL TLV REL	Ca (200 ppm)	Inh, Abs, Ing, Con	Irritation eyes, skin; nausea, vomiting; drowsiness, dizziness, incoordination; (potential occupational carcinogen).
PCE	100 ppm 25 ppm (minimize workplace exposure concentrations)	(C)200 ppm 100 ppm	PEL TLV REL	Ca (150 ppm)	Inh, Abs, Ing, Con	irritation eyes, skin, nose, throat, respiratory system; nausea; flush face, neck; dizziness, headache, drowsiness; [potential occupational carcinogen].

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
TCE	100 ppm 50 ppm 25 ppm	100 ppm	PEL TLV REL	Ca (1,000 ppm)	Inh, Abs, Ing, Con	Irritation of eyes, skin; headache, vertigo; visual disturbances, fatigue, tremor, nausea, vomiting; dermatitis.
1,1,2,2-tetrachloro-ethane	5 ppm 1 ppm 1 ppm	NA	PEL TLV REL	Ca (100 ppm)	Inh, Abs, Ing, Con	Nausea, vomiting, abdominal pain; tremor fingers; jaundice, hepatitis, dermatitis; kidney damage; [potential occupational carcinogen].
CCSWMU-306						
Benzene	1 ppm 0.5 ppm 0.1 ppm	4 ppm 2.5 ppm 1 ppm	PEL TLV REL	Ca (500 ppm)	Inh, Abs, Ing, Con	Irritated eyes, skin, nose, respiratory system, giddiness, headache, nausea, dermatitis, bone marrow depression.
1-methyl-naphthalene	0.5 ppm	NA	PEL TLV REL	NA	Inh, Abs, Ing, Con	Lower Respiratory Tract irritation Lung damage Danger of cutaneous absorption.
Iron	10 mg/m^3 5 mg/m^3 5 mg/m^3	NA	PEL TLV REL	2500 mg/m^3 (as Fe)	Inh	Benign pneumoconiosis with X-ray shadows indistinguishable from fibrotic pneumoconiosis (siderosis).
RSA-308						
Perchlorate	10 mg/m^3 Inhalable particles 3.0 mg/m^3 Respirable Particles	NA	PEL TLV REL	NA	Inh, Abs, Ing, Con	Local irritation or stinging effect. Chronic ingestion of sufficient quantities may interfere with uptake of iodine by the thyroid which may cause hypothyroidism. Irritation of the eyes will cause stinging effect.
RDX	0.5 mg/m^3	NA	PEL TLV REL	NA	Inh, Abs, Ing, Con	Irritation eyes, skin; headache, irritability, lassitude, tremor, nausea, dizziness, vomiting, insomnia, convulsions.
RSA-056/RSA-139						
Arsenic	0.01 mg/m^3 0.01 mg/m^3	Ca 0.002 mg/m^3	PEL TLV REL	5 mg/m^3	Inh, Ing, Con	Cough, diarrhea, shortness of breath, vomiting, grey skin. Redness.

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
RSA-009						
Arsenic	0.01 mg/m^3 0.01 mg/m^3	Ca 0.002 mg/m^3	PEL TLV REL	5 mg/m^3	Inh, Ing, Con	Cough, diarrhea, shortness of breath, vomiting, grey skin. Redness.
Mercury	0.05 mg/m^3 (vapor)(skin)	C 0.1 mg/m^3	PEL TLV REL	10 mg/m^3 (as Hg)	Inh, Ing, Con, Abs	Irritation of eyes, skin; cough, chest pain, dyspnea, bronchitis, pneumonitis, tremor, insomnia, irritability, headache, weakness, stomatitis, salivation, GI disturbance, low-weight, proteinuria.
Aroclor-1248	0.5 mg/m^3 0.5 mg/m^3 0.001 mg/m^3	NA	PEL TLV REL	Ca (5 mg/m^3)	Inh, Ing, Con, Abs	irritation eyes, chloracne; liver damage; reproductive effects; [potential occupational carcinogen].
Aroclor-1254	0.5 mg/m^3 0.5 mg/m^3 0.001 mg/m^3	NA	PEL TLV REL	Ca (5 mg/m^3)	Inh, Ing, Con, Abs	irritation eyes, chloracne; liver damage; reproductive effects; [potential occupational carcinogen].
Aroclor-1260	0.5 mg/m^3 0.5 mg/m^3 0.001 mg/m^3	NA	PEL TLV REL	Ca (5 mg/m^3)	Inh, Ing, Con, Abs	irritation eyes, chloracne; liver damage; reproductive effects; [potential occupational carcinogen].
RSA-140						
Cadmium	0.005 mg/m^3 0.01mg/m^3 0.002 mg/m^3	NA	PEL TLV REL	Ca (9 mg/m^3) (as Cd)	Inh, Ing	Pulmonary edema, dyspnea, cough, chest tightness, substernal pain; headache; chills, muscle aches; nausea, vomiting, diarrhea; anosmia, emphysema, proteinuria, mild anemia; [potential occupational carcinogen].
Lead	0.05 mg/m^3 0.05 mg/m^3 0.05 mg/m^3	NA	PEL TLV REL	100 mg/m^3 (as Pb)	Ihh Ing, Con	lassitude, insomnia; facial pallor; anorexia, weight loss, malnutrition; constipation, abdominal pain, colic; anemia; tremor; paralysis wrist, ankles; kidney disease; irritation eyesô hypertension.
Dieldrin	0.25 mg/m^3 0.1 mg/m^3 Ca 0.25 mg/m^3	NA	PEL TLV REL	Ca (50 mg/m^3)	Inh, Ing, Con, Abs	headache, dizziness; nausea, vomiting, malaise, sweating; In Animals: liver, kidney damage [potential occupational carcinogen].
Aroclor-1254	0.5 mg/m^3 0.5 mg/m^3 0.001 mg/m^3	NA	PEL TLV REL	Ca (5 mg/m^3)	Inh, Ing, Con, Abs	irritation eyes, chloracne; liver damage; reproductive effects; [potential occupational carcinogen].

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
RSA-058						
Arsenic	0.01 mg/m^3 0.01 mg/m^3	Ca 0.002 mg/m^3	PEL TLV REL	5 mg/m^3	Inh, Ing Con	Cough, diarrhea, shortness of breath, vomiting, grey skin. Redness.
DDT	1 mg/m^3 1 mg/m^3 0.5 mg/m^3	NA	PEL TLV REL	500 mg/m3	Inh, Ing, Con, Abs	Irritation eyes, skin; anxiety, dizziness, confusion, malaise headache, lassitude; convulsions; vomiting; (potential occupational carcinogen).
Benzo[a] pyrene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL		Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Dibenz(a,h) anthracene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Benzo[a] anthracene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Benzo[b] fluoranthene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Endrin	0.1 mg/m^3 0.1 mg/m^3 0.1 mg/m^3	NA	PEL TLV REL	2 mg/m^3	Inh, Ing, Con, Abs	Stupor, headache, dizziness; abdominal discomfort, nausea, vomiting; insomnia; aggressiveness, confusion; drowsiness, lassitude; anorexia.
Chlorobenzene	75 ppm 10 ppm	NA	PEL TLV REL	1,00 ppm	Ing, Inh, Con	Irritation eyes, skin, nose; drowsiness, incoordination.
Nitroglycerine	0.05 ppm	(C) 0.2 ppm 0.1	PEL TLV REL	200 mg/m^3 [e]	Inh, Abs, Ing, Con	throbbing headache; dizziness; nausea, vomiting, abdominal pain; flush; palpitations; delirium; angina; skin irritation.
Beta-BHC	0.5 mg/m^3 0.5 mg/m^3 0.5 mg/m^3	NA	PEL TLV REL	50 mg/m^3	Inh, Abs, Ing, Con	Irritation eyes, skin, nose, throat; headache; nausea; resp difficulty; cyanosis; muscle spasm.
RSA-083						
TCE	100 ppm 50 ppm 25 ppm	100 ppm	PEL TLV REL	Ca (1,000 ppm)	Inh, Abs, Ing, Con	Irritation of eyes, skin; headache, vertigo; visual disturbances, fatigue, tremor, nausea, vomiting; dermatitis.
Cis-1,2-DCE	200 ppm 200 ppm 200 ppm	NA	PEL TLV RE	1,000 ppm	Inh, Ing, Con	Irritation eyes, respiratory system; central nervous system depression.
Vinyl chloride	1 ppm	NA	PEL TLV REL	Ca ND	Inh, Con	Lassitude; abdominal pain, gastrointestinal bleeding; liquid: frostbite; [potential occupational carcinogen].

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
1,1-DCE (vinylidene chloride)	NA	NA	NA	NA	Inh, Abs, Ing, Con	Irritation of eyes, skin; throat, dizziness, headache, nausea, dyspnea, liver injury, kidney disturbance.
Chlorobenzene	75 ppm 10 ppm	NA	PEL TLV REL	1,00 ppm	Ing, Inh, Con	Irritation eyes, skin, nose; drowsiness, incoordination.
2,4-DNT	1.5 mg/m^3	NA	PEL TLV REL	NA	NA	Headaches; fatigue, nausea, vomiting, chest pain, and weight loss.
CCSWMU-003						
TCE	100 ppm 50 ppm 25 ppm	100 ppm	PEL TLV REL	Ca (1,000 ppm)	Inh, Abs, Ing, Con	Irritation of eyes, skin; headache, vertigo; visual disturbances, fatigue, tremor, nausea, vomiting; dermatitis.
Cis-1,2-DCE	200 ppm 200 ppm 200 ppm	NA	PEL TLV RE	1,000 ppm	Inh, Ing, Con	Irritation eyes, respiratory system; central nervous system depression.
Vinyl chloride	1 ppm	NA	PEL TLV REL	Ca ND	Inh, Con	Lassitude; abdominal pain, gastrointestinal bleeding; liquid: frostbite; [potential occupational carcinogen].
1,1-DCE	NA	NA	PEL TLV REL	NA	Inh, Abs, Ing, Con	Irritation of eyes, skin; throat, dizziness, headache, nausea, dyspnea, liver injury, kidney disturbance, pneumonitis.
1,2-dichloroethane	50 ppm 10 ppm Ca 1 pp	C 100 ppm 2ppm	PEL TLV REL	Ca (50 ppm)	Inh, Abs, Ing, Con	Irritation eyes, corneal opacity; nausea, vomiting; dermatitis; liver, kidney, cardiovascular system damage; [potential occupational carcinogen].
2-nitrotoluene	5 ppm 2 pm 2 ppm	NA	PEL TLV REL	200 ppm	Inh, Abs, Ing, Con	Anoxia, cyanosis; headache, lassitude, dizziness; ataxia; dyspnea; tachycardia; nausea, vomiting.
RSA-048						
TCE	100 ppm 50 ppm 25 ppm	100 ppm	PEL TLV REL	Ca (1,000 ppm)	Inh, Abs, Ing, Con	Irritation of eyes, skin; headache, vertigo; visual disturbances, fatigue, tremor, nausea, vomiting; dermatitis.
1,1,2-trichloroethane	10 ppm 10 ppm 10 ppm	NA	PEL TLV REL	Ca (100 ppm)	Inh, Abs, Ing, Con	Irritation eyes, nose; liver, kidney damage; dermatitis; [potential occupational carcinogen].
1,1,2,2-tetrachloro-ethane	5 ppm 1 ppm 1 ppm	NA	PEL TLV REL	Ca (100 ppm)	Inh, Abs, Ing, Con	Nausea, vomiting, abdominal pain; tremor fingers; jaundice, hepatitis, dermatitis; kidney damage; [potential occupational carcinogen].

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
Dibromo-chloroethane	NA	NA	PEL TLV REL	NA	Inh, Abs, Ing, Con	Sleepiness or sedation liver and kidney injury; central nervous system depression and respiratory failure.
Benzo[a] anthracene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Benzo[b] fluoranthene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Manganese	0.02 mg/m^3 1 mg/m^3	C 5 mg/m^3 3 mg/m^3	PEL TLV REL	500 mg/m^3 (as Mn)	Inh, Ing	Manganism; mental confusion; metal fume fever: dry throat, cough, chest tightness, dyspnea, flu-like fever; low-back pain; vomiting; malaise; lassitude; kidney damage.
RSA-059						
Arsenic	0.01 mg/m^3 0.01 mg/m^3	Ca 0.002 mg/m^3	PEL TLV REL	5 mg/m^3	Inh, Ing Con	Cough, diarrhea, shortness of breath, vomiting, grey skin. Redness.
Cadmium	0.005 mg/m^3 0.01mg/m^3 0.002 mg/m^3	NA	PEL TLV REL	Ca (9 mg/m^3) (as Cd)	Inh, Ing	Pulmonary edema, dyspnea, cough, chest tightness, substernal pain; headache; chills, muscle aches; nausea, vomiting, diarrhea; anosmia, emphysema, proteinuria, mild anemia; [potential occupational carcinogen].
Chromium	1 mg/m^3 0.5 mg/m^3 0.5 mg/m^3	NA	PEL TLV REL	250 mg/m^3 (as Cr)	Inh Ing, Con	Irritation eyes, skin; lung fibrosis (histologic).
Silver	0.01 mg/m^3 0.1 mg/m^3 0.01 mg/m^3	NA	PEL TLV REL	10 mg/m^3 (as Ag)	Inh Ing, Con	Blue-gray eyes, nasal septum, throat, skin; irritation, ulceration skin; gastrointestinal disturbance.
Lead	0.05 mg/m^3 0.05 mg/m^3 0.05 mg/m^3	NA	PEL TLV REL	100 mg/m^3 (as Pb)	Inh Ing, Con	lassitude, insomnia; facial pallor; anorexia, weight loss, malnutrition; constipation, abdominal pain, colic; anemia; tremor; paralysis wrist, ankles; kidney disease; irritation eyesõ hypertension.
Chlorobenzene	75 ppm 10 ppm	NA	PEL TLV REL	1,00 ppm	Ing, Inh, Con	Irritation eyes, skin, nose; drowsiness, incoordination.
TCE	100 ppm 50 ppm 25 ppm	100 ppm	PEL TLV REL	Ca (1,000 ppm)	Inh, Abs, Ing, Con	Irritation of eyes, skin; headache, vertigo; visual disturbances, fatigue, tremor, nausea, vomiting; dermatitis.

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
1,2-DCE	200 ppm 200 ppm 200 ppm	NA	PEL TLV RE	1,000 ppm	Inh, Ing, Con	Irritation eyes, respiratory system; central nervous system depression.
Pentachloro phenol	0.5 mg/m^3 0.5 mg/m^3 0.5 mg/m^3	NA	PEL TLV RE	2.5 mg/m^3	Inh, Abs, Ing, Con	Irritation eyes, nose, throat; sneezing, cough; lassitude, anorexia, weight loss; sweating; headache, dizziness; nausea, dyspnea, chest pain; high fever; dermatitis.
Benzo(a) anthracene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80 mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Benzo[b] fluoranthene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80 mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Dibenz(a,h) anthracene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80 mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Indeno(1,2,3-cd)pyrene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80 mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Bis(2-chloroethyl) ether	5 ppm 5 ppm	C 15 ppm 10 ppm 10 ppm	PEL TLV REL	Ca (100 ppm)	Inh, Abs, Ing, Con	Irritation nose, throat, respiratory system; cough; nausea, vomiting; [potential occupational carcinogen].
Alpha-BHC	0.5 mg/m^3 0.5 mg/m^3 0.5 mg/m^3	NA	PEL TLV REL	50 mg/)m^3	Inh, Abs, Ing, Con	Irritation eyes, skin, nose, throat; headache; nausea; resp difficulty; cyanosis; muscle spasm.
Beta-BHC	0.5 mg/m^3 0.5 mg/m^3 0.5 mg/m^3	NA	PEL TLV REL	50 mg/m^3	Inh, Abs, Ing, Con	Irritation eyes, skin, nose, throat; headache; nausea; resp difficulty; cyanosis; muscle spasm.
Aldrin	0.25 mg/ m^3 0.05 mg/ m^3 0.25 mg/ m^3	NA	PEL TLV REL	Ca (25 mg/m^3)	Inh, Abs, Ing, Con	Headache, dizziness; nausea, vomiting, malaise tonic convulsions; coma; hematuria; [potential occupational carcinogen].
Dieldrin	0.25 mg/m^3 0.1 mg/m^3 Ca 0.25 mg/m^3	NA	PEL TLV REL	Ca (50 mg/m^3)	Inh, Ing, Con, Abs	headache, dizziness; nausea, vomiting, malaise, sweating; [potential occupational carcinogen].
Aroclor 1254	0.5 mg/m^3 0.5 mg/m^3 0.001 mg/m^3	NA	PEL TLV REL	Ca (5 mg/m^3)	Inh, Ing, Con, Abs	irritation eyes, chloracne; liver damage; reproductive effects; [potential occupational carcinogen].
Aroclor 1016	0.5 mg/m^3 0.5 mg/m^3 0.001 mg/m^3	NA	PEL TLV REL	Ca (5 mg/m^3)	Inh, Ing, Con, Abs	irritation eyes, chloracne; liver damage; reproductive effects; [potential occupational carcinogen].

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
RSA-255						
Manganese	0.02 mg/m^3 1 mg/m^3	C 5 mg/m^3 3 mg/m^3	PEL TLV REL	500 mg/m^3 (as Mn)	Inh, Ing	Manganism; mental confusion; metal fume fever: dry throat, cough, chest tightness, dyspnea, flu-like fever; low-back pain; vomiting; malaise; lassitude; kidney damage.

Notes:

(a) The time-weighted average (TWA) concentration for a normal workday (usually 8 or 10 hours) and a 40-hour work week, to which nearly all workers may be repeatedly exposed, day after day without adverse effect.

(b) Short-term exposure limit (STEL). A 15-minute TWA exposure that should not be exceeded at any time during a workday, even if the TWA is not exceeded.

(c) PEL - Occupational Safety and Health Administration (OSHA) permissible exposure limit (29 Code of Federal Regulations [CFR] 1910.1000, Table Z). AEL - Airborne Exposure Limit. TLV - American Conference of Governmental Industrial Hygiene (ACGIH) threshold limit valueð TWA. REL - National Institute for Occupational Safety and Health (NIOSH) recommended exposure limit.

(d) IDLH (NIOSH)ð Immediately dangerous to life or health (NIOSH). Represents the maximum concentration from which, in the event of respirator failure, one could escape within 30 minutes without a respirator and without experiencing any escape-impairing or irreversible health effects.

(e) No data on acute inhalation toxicity are available on which to base the IDLH for ethylene glycol dinitrate (EGDN) and/or nitroglycerin. The chosen Immediately Dangerous to Life and Health (IDLH), therefore is based on chronic toxicity data concerning the physiological response to animals to EGDN (NIOSH for Nitroglycerine, May 1994)

(f) No inhalation toxicity data are available on which to base an IDLH for dinitrobenzene. Therefore, the revised IDLH for dinitrobenzene is 50 mg/m3 based on acute oral toxicity data in humans [Deichmann and Gerarde 1969] (NIOSH for dinitrobenzene

(g) Exposure limits are based on coal tar pitch.

Õg/L ï micrograms per liter
Abs ï skin absorption
Ag ï Silver
Beta-BHC ï Beta-hexachlorocyclohexane
C = Ceiling limit value which should not be exceeded at any time.
Ca ï Carcinogen
Cd ï Cadmium
Co ï Cobalt
Con ï skin and/or eye contact
Cr - Chromium
CT ï carbon tetrachloride
DCE - dichloroethene
DDT ï Dichlorodiphenyltrichloroethane
DNT ï dinitrotoluene
Hg - mercury
Inh ï inhalation
Ing ï ingestion
mg/m^3 ï milligrams per cubic meter
Mn ï Manganese
NA ï Not applicable
ND ï Not determined
Pb - Lead
PCE - Tetrachloroethene
ppm ï parts per million
RDX ï 1,3,5-trinitro-1,3,5-triazine
TCE ï trichloroethene

Table A16-2: Chemical Contaminants

Chemical	Max (mg/kg)	PEL	TLV	Exposure Routes and Symptoms	Fire/ Reactivity Hazards
Gasoline	NA	300 ppm STEL 500 ppm	900 mg/m^3	Routes of exposure: inhalation, ingestion, and skin contact Symptoms: Irritation eyes, skin, mucous membrane; dermatitis; headache, lassitude (weakness, exhaustion), blurred vision, dizziness, slurred speech, confusion, convulsions; chemical pneumonitis (aspiration liquid); possible liver, kidney damage; [potential occupational carcinogen]	Flammable; Flash Point = -45 ŒF
Diesel Fuel	NA	none	100 mg/m^3	Routes of exposure: inhalation, ingestion, and skin contact Skin and upper respiratory irritation. May cause central nervous system effects, dizziness, nausea, etc.	Combustible ; Flash Point >100 ŒF

Notes:

ŒF ï degrees Fahrenheit
> ï greater than
NA ï Not Applicable
PEL ï Permissible Exposure Limit
ppm ï parts per million
mg/kg ï milligrams per kilogram
mg/m^3 ï milligrams per cubic meter
STEL ï Short term exposure limit
TLV ï Threshold Limit Value

3.0 TRAINING

See Section 4 of the APP.

4.0 TRAINING

See Section 6 of the APP.

5.0 PERSONAL PROTECTIVE EQUIPMENT

5.1 Selection

Unless otherwise approved by the SSHO, all activities will include at least American National Standards Institute (ANSI)-approved hard hats, safety-toe footwear, safety glasses with side impact protection and high visibility garments. Other Personal Protective Equipment (PPE) requirements are listed below, and included in the AHAs for specific activities/tasks.

Table A16-3. PPE Selection

Activity	Respiratory Protection	Body Protection*	Hand Protection	Eye/Face/Other Protection	Hearing Protection	Fall Protection
Mobilization, Site Inspection and Site Preparation	NA	Level D	Leather palm work gloves; cut resistant gloves if sharp objects, cutting devices, or sharp edges are present	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA
Environmental Sampling	NA	Modified Level D[(a)]	Leather or cut resistant gloves when cutting plastic tubes/ nitrile gloves when sampling	Safety glasses; for splash hazards, face shield with safety glasses or goggles	Plugs or muffs if necessary, based on equipment use	NA
Well Installation, Maintenance, and Abandonment	NA	Level D	Nitrile or Leather palm work gloves	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA
Landfill Repair and Maintenance	NA	Level D	Nitrile or Leather palm work gloves	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA
LUC inspections and Geophysical Survey	NA	Level D	Nitrile or Leather palm work gloves	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA

Activity	Respiratory Protection	Body Protection*	Hand Protection	Eye/Face/Other Protection	Hearing Protection	Fall Protection
MIP Survey	NA	Level D	Nitrile or Leather palm work gloves	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA
Excavation, Transportation, and Disposal	NA	Modified Level D(b)	Nitrile or Leather palm work gloves	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA
ISEB injection	NA	Level D	Nitrile or Leather palm work gloves	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA
Disc and Raking Contaminated Soil	NA	Modified Level D(b)	Nitrile or Leather palm work gloves	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA
Equipment Decontamination, Demobilization and Site Restoration(a)	NA	Level D	Nitrile or Leather palm work gloves	Safety glasses and face shield and apron (if necessary, for equipment decon)	Plugs or muffs if necessary, based on equipment use	NA

Notes:
(a) ï A face shield with safety glasses or goggles shall be used during activities where a splash hazard exists. Wear permethrin treated gaiters when in grassy areas.
(b) ï If direct contact with soils, boot covers/ over boots and Tyvek È may be required. SSHO will determine when boot covers and Tyvek È are needed.
* - Level D body protection includes high visibility Class II garment.
ISEB ï In-Situ Enhanced Bioremediation
LUC ï Land Use Control
MIP ï Membrane Interface Probe
NA ï Not applicable

5.2 Use and Limitations

Read and follow all manufacturer instructions regarding product use and limitations!!!

Body protection ï Wear normal work clothing including high visibility Class II garment. During soil disc and raking and excavation activities, boot covers /over boots and Tyvek ® may be required. The SSHO will determine when these over garments are required.

Hand protection ï Use gloves described in **Table A16-3**. Chemical protective gloves are meant for incidental contact. Change gloves in the event of immersion unless specifically selected for that purpose. Inspect frequently and change gloves on signs of contamination, and when protection is compromised by wear and tear.

Eye/face protection ï Wear protection prescribed in **Table A16-3**. Discard when protection is scratched or worn impacting visibility. If face shields are worn for chemical splash, also wear splash goggles underneath. Safety glasses will be worn under face shields for impact protection and under welding helmets. Lens shade will be selected based on hazard, following SOP Environment, Safety and Quality (ESQ)-6.1 (Task Instruction 6.1.02)

Hearing Protection ï Wear hearing protective devices in accordance with manufacturersô instructions, including fitting and insertion. Use of specific devices will be limited to exposures within the noise reduction ratings.

Fall Protection ï For the activities covered by this SSHP, fall protection is not anticipated; however, if it becomes necessary, the Safety and Health Manager (SHM) will prepare a site-specific fall protection plan and submit it to the Contracting Officerôs Representative (COR) for acceptance before proceeding.

5.3 Work Mission Duration

Work mission durations will be limited to accommodate acceptable service life of the PPE.

Where PPE may cause a hazard, such as heat stress, work mission duration will be determined in the AHA by the SSHO with the assistance of the SHM. Employees must exit the exclusion zone (EZ) for rest or monitoring in accordance with the established schedule.

5.4 PPE Maintenance and Storage

It is important that all PPE be kept clean and properly maintained. Cleaning is particularly important for eye and face protection where dirty or fogged lenses could impair vision. Employees must inspect, clean, and maintain their PPE according to the manufacturersô instructions before and after each use. Supervisors are responsible for ensuring that users properly maintain their PPE in good condition.

Personal protective equipment must not be shared between employees until it has been properly cleaned and sanitized. PPE will be distributed for individual use whenever possible. Where employees provide their own protective equipment, ECC will be responsible to assure its adequacy, including proper maintenance, and sanitation of such equipment.

5.5 PPE Decontamination and Disposal

It is anticipated that most of the PPE utilized on the project, beyond the basic PPE elements (hard hat, safety glasses, steel-toed boots, leather gloves), will be of a disposable nature (nitrile or other chemical gloves, ear plugs, boot covers, and Tyvek ®). Contaminated PPE will be collected in a dedicated container and disposed of appropriately at a suitable facility. Based on the contaminants present and their concentrations it is anticipated that disposable PPE will be disposed of as non-hazardous waste.

Earmuffs, safety glasses, and other non-disposable forms of PPE will be routinely wiped clean of any visible contamination after each use.

5.6 PPE Training and Proper Fitting

Users will be trained on the selection, use and limitations of PPE. Each affected employee will demonstrate an understanding of the training specified in this section, and the ability to use PPE properly, before being allowed to perform work requiring the use of PPE.

Should ECC have reason to believe that any affected employee who has already been trained does not have the understanding and skill required of this section, the employer will retrain that employee.

Gloves, head gear, coveralls, and footwear must fit properly to avoid tripping and snagging hazards, or constriction and tearing. Hearing protection will be checked by the user and SSHO for proper fit and must be inserted/worn in accordance with manufacturer instructions.

5.7 PPE Donning and Doffing Procedures

The SSHO will train on and demonstrate proper donning and doffing procedures for PPE ensembles worn in EZs during site orientation.

5.8 PPE Inspection Procedures

Each person who is required to wear PPE will inspect their equipment prior to, during, and after each use. Defective or damaged equipment will not be used. Heavily contaminated PPE that cannot be adequately cleaned will be discarded. Stored PPE will be inspected every month to ensure that it has not been damaged and is suitable for use. Workers who wear PPE in the field will take note of the condition of the PPE worn by their co-workers and inform them of any apparent problems, such as missing equipment, tears in protective clothing, excessive contamination, improper use of PPE, inadequate PPE, etc.

5.9 Evaluation of Effectiveness of PPE Program

The SSHO will inspect the jobsite each day and as frequently as necessary to ensure that PPE has been properly selected and is being used as designed. The SSHO will also inspect PPE stored for emergency use every month. Similar PPE inspections will be conducted by ECCôs SHM during scheduled visits of the project site.

6.0 MEDICAL SURVEILLANCE

Employees on this project whose work involves potential exposure to site contaminants will be included in the medical surveillance program.

Personnel will have a current medical exam clearance (physicianôs written opinion) in accordance with Occupational Safety and Health Administration (OSHA) standards prior to entering regulated work areas in accordance with 29 Code of Federal Regulations (CFR) 1910.120. ECC uses the services of WorkCare, whose Principal is Dr. Peter Greaney, a Board-Certified Occupational Physician to review all exams and provide the clearances, which include an assessment of employee ability to wear respiratory protection and PPE safely. Complete results of each individualôs medical examination results are maintained by the medical provider and will not to be kept on-site. The SSHO will ensure appropriate subcontractorôs medical screenings are completed, documented, and the physicianôs written opinions are available at the work site.

7.0 EXPOSURE MONITORING AND AIR SAMPLING

Based on historical sampling analysis data (low-level concentrations of volatile organic compounds [VOCs]), elevated levels of VOCs in the breathing zone are not anticipated, air monitoring is not required during intrusive activities; however, air monitoring will be performed in the general work area and the breathing zone prior to starting intrusive activities to establish background concentrations. Personnel performing testing and monitoring will be trained in testing and monitoring procedures and hazards. Monitoring equipment will be used, inspected, maintained, and properly calibrated in accordance with the manufacturesô instructions and standard industrial hygiene practice.

Table A16-4 below lists the monitoring requirements and response actions for this project. All direct and integrated air monitoring equipment will be properly calibrated before and after each period of use in accordance with the manufacturesô instructions and standard industrial hygiene practice.

Table A16-4. Exposure Monitoring

Real Time (air, noise, heat, radiation, light)			
Instrument / Contaminant	**Frequency**	**Action Levels**	**Actions/Upgrade and Rationale**
Multi-RAE Plus or equivalent / VOCs	During any intrusive activities	Work Area: Sustained reading of 5 ppm in the breathing zone.	Stop activities, suspend work activities for 15 to 30 minutes; if readings are sustained then contact SHM[(a)].
OSHA/NIOSH HEAT Index App + Body Temp / Heart Rate Monitoring	Daily during work in hot conditions (> 85ÁF Level D, > 70ÁF when impervious coveralls worn)	Variable depending on the individual and work activity	Follow Precautions recommended by the HEAT Index app. Implement physiological monitoring when Heat Index indicates Moderate Risk for employees in protective clothing working in sunlight; and for other workers when Heat Index indicates High Risk; and for any workers indicating signs and symptoms of heat stress.

Notes:
(a) Contact with the SHM must be made prior to continuance of work. The SHM may then initiate perimeter/integrated air sampling along with additional engineering controls.
ÁF ï degrees Fahrenheit
> ï greater than
PID ï Photoionization detector
ppm ï parts per million
NIOSH ï National Institute for Occupational Safety and Heath
OSHA ï Occupational Safety and Health Administration
VOC ï Volatile organic compounds

Records will include the date, time, substances or hazards monitored, person conducting monitoring, calibration date and method, operations and location of monitoring, and results. Records are available to employees, their representatives, and to the Army.

8.0 HEAT STRESS/COLD STRESS

See Attachments 12A and 12B in the APP.

9.0 STANDARD OPERATING PROCEDURES

The following procedures will be employed on this project where appropriate.

9.1 Site Rules/Prohibitions

The following site rules are applicable to all ECC projects:

- Eat, drink, use gum or tobacco products, or apply cosmetics in designated areas only.
- Do not smoke within site areas or near flammable or combustible materials; areas shall be marked where smoking is permitted.
- Use the buddy system when working in EZ. Know who your buddy is, communicate regularly with each other, and be alert to signs of distress in your buddy.
- Wash hands, face, and any exposed skin during decontamination, before eating, drinking or using tobacco products, and at the end of each shift.
- Participate in Daily Safety Tailgate Meetings.
- Continually observe work location and be alert to changes that may affect safety.

- Avoid direct contact with contamination by not purposefully walking, touching, or contacting any obviously contaminated surfaces.
- Immediately report any mishaps, including near misses, or unusual situations to SSHO.
- Use PPE provided and as instructed by the SSHO.
- Avoid hand-to-mouth or hand-to-face activities.
- Testing and monitoring instruments, safety equipment, rigging, hand and power tools, vehicles and mobile construction equipment shall be inspected prior to use.
- Minimize the number of personnel in a work area to reduce potential exposures.
- Work within physical and mental limits.
- Take adequate rest breaks and replace body fluids (water and electrolyte) continuously.
- At all times follow the instructions of the SSHO or designee.
- Do not deviate from the APP or the instruction of the SSHO.
- Avoid rushing and/or taking short cuts.
- Handle and dispose all waste generated from decontamination procedures per contract requirements.
- Conduct visual checks on machinery and equipment prior to use, and complete the daily inspection form.
- Take precautions to prevent spillage and splashing; contain spilled liquid if possible.
- Alert your senses to potentially dangerous situations (e.g., strong, irritating, or nauseating odors).
- Familiarize yourself with the physical characteristics of the sites.
- Dispose of all wastes generated during activities as directed by the Supervisor, SSHO or designee.

Conformance with these site rules is mandatory for continued project participation.

9.2 Work Permit Requirements

Excavation/Digging Permit: Where required, ECC will obtain a dig permit from the authority having jurisdiction. The dig permit will be updated prior to expiration. Work will stay within the parameters on the permit. If excavation is extended in terms of area or time, a new/revised permit will be obtained.

Control of Hazardous Energy Permits: Where equipment or systems must be de-energized to safely work on them, and a specific written procedure does not exist for the equipment, a Lockout/Tagout permit will be completed in accordance with ECC SOP ESQ 7.3.

9.3 Material Handling Procedures

Contaminated groundwater and soil from sampling activities will be contained, labeled and disposed of properly in accordance with appropriate characterization.

9.4 Drum/Container/Tank Handling Procedures

Investigation Derived Waste (IDW) generated during the field activities will consist of soil, sediment, surface water, and groundwater. Field sampling team will ensure that the containers are labeled, handled, stored, and secured in accordance with applicable regulations. IDW will be characterized and disposed of at the proper facility.

10.0 CONTAMINATION CONTROL, SANITATION AND WASTE MANAGEMENT

The following sections describe the contamination control during the field activities.

10.1 Work Zones

Access to the sites are limited to authorized project personnel, approved subcontractors and their employees, and local/State/Federal agency staff escorted by site personnel.

For the purposes of Work Zone Delineation, the site perimeters will encompass an area slightly larger than the portion of the site identified for activities. The perimeter of the sites will be properly delineated (caution tape or high visibility fencing).

10.1.1 Support Zone

The Support Zone (SZ) is located outside the Contamination Reduction Zone (CRZ) and within the site perimeter. The support zone is an uncontaminated (clean) area where personnel will not be exposed to hazardous materials or contaminants.

10.1.2 Contamination Reduction Zone

The CRZ is located in between and serves as a buffer between the SZ and the EZ. The CRZ is intended to prevent the spread of contamination and is utilized for both personnel and equipment decontamination.

10.1.3 Exclusion Zone

The EZ is the work area where, based on planned activities, there is potential for worker exposure to site contaminants. The EZ is bounded by the CRZ and accessed only through the Contamination Reduction Corridor (CRC). The EZ perimeter will be delineated with caution tape or high visibility fencing.

10.2 Access Controls

The SSHO and Site Superintendent will establish the physical boundaries of each zone and instruct all workers and visitors on the limits of the restricted areas. No one will be allowed to enter the restricted area without the required PPE for that area. The Site Superintendent will ensure compliance with all restricted area entry and exit procedures. The Site Superintendent will also designate a decontamination point for personnel to exit the contaminated area and to enter the clean area, which is where personnel may eat and rest.

All site personnel and/or visitors entering and exiting the EZ or the CRZ will be required to log-in/log-out from the site on a daily basis. The log will be maintained at the entrance.

10.3 Hazard Briefing

No person will be allowed on the site during site operations without first participating in a hazard briefing. In general, the briefing will consist of a review of the SSHP and the tailgate safety meeting. All persons on the site, including visitors, must sign the SSHP Acknowledgment Sheet and Tailgate Safety Meeting Form. Tailgate safety meetings will be held daily before site activities begin.

10.4 Visitor Access

The following section describes how to handle visitors to the site.

10.4.1 Approach

If unannounced visitors arrive at a site, ECC employees should approach them, introduce themselves, and respectfully ask the visitors to identify themselves and state their business. An effort should be made to distinguish between ECC workers and subcontractors and people for whom ECC is not responsible for enforcing health and safety rules on job sites, such as client representatives, agency representatives, and other visitors authorized by the client. For example, hardhats and safety glasses may be a requirement in the SZ or anywhere on the site for workers, but to enforce this requirement on all visitors may not be necessary. A respectful explanation of what areas to avoid may be all that is necessary.

10.4.2 Unauthorized Visitors

If visitors are unauthorized, ECC employees should explain to the visitors that entry to the site is restricted because the site contains hazards. The site boundaries and any other relevant restrictions should be pointed out to the visitors.

10.4.3 Visitors Authorized to View the Site from the SZ

If visitors are authorized by the client to see the site from the SZ, ECC employees should do the following:

- Review the tailgate safety meeting form with them and ask them to sign it;
- Provide the visitors with hardhats, safety glasses, and safety vests, if applicable; and,
- Prohibit entry to the EZ.

10.4.4 Visitors Authorized to Enter the EZ During Ongoing Work Activities

If the visitors are authorized by the client to enter the EZ, ECC employees should do the following:

- Verify that they have current Hazardous Waste Operations and Emergency Response (HAZWOPER) training;
- Verify that they had a current physical exam authorizing work on hazardous waste sites;
- Review the SSHP and the tailgate safety meeting form and have the visitors sign the acknowledgement forms of all documents;
- Provide the PPE required for the site; and,
- Escort the visitor while in the EZ.

10.4.5 Refusal

If visitors refuse to comply with any one of the requirements listed in the previous sections, and the **client authorizes** the visitor to enter the EZ anyway, ECC will **shut down** any potentially hazardous equipment and take all practicable steps to eliminate other hazards and exposures. The event will be thoroughly documented.

Visitors who refuse to comply and are not authorized by the client should be asked to leave. Contact the local police if problems occur with visitors who refuse to leave.

10.5 Emergency Entry and Exit

People who will enter the site on an emergency basis will be briefed by the Site Superintendent regarding the hazards. All hazardous activities will cease in the event of an emergency. Attachment 1, ñEmergency Action Plan,ò provides more information for emergency procedures.

10.6 Personal Hygiene and Decontamination Procedures

The importance of good hygiene practices will be emphasized with all site workers. Upon exiting the EZ and CRZ, workers and/or site visitors will enter the CRZ and carefully remove all designated PPE, wash their hands, face, and forearms prior to eating, drinking or smoking. Smoking, eating and drinking will only be allowed in clean work areas (i.e. SZ).

10.7 Equipment Decontamination Procedures

Heavy equipment will be decontaminated using dry methods, a pressure washer, and/or equivalent. Hand tools and smaller equipment will be decontaminated using a non-phosphate detergent scrub, followed by fresh water and distilled or deionized water rinses. Prior to removal from site, decontaminated equipment and material will be inspected and accepted by the SSHO and the Site Superintendent.

11.0 EMERGENCY PLANNING

See the Emergency Action Plan, Attachment 1 to the APP.

12.0 PRE-ENTRY BRIEFING

As discussed in Section 6 of the APP and above, all personnel entering the site will be provided with site-orientation training, and must be present at the daily tailgate meeting.

13.0 EFFECTIVENESS OF PLAN

The effectiveness of this SSHP will be determined by the inspections listed in Section 7 of the APP, as well as from incident investigations and input by site personnel including reports of hazards, safety observations, and suggestions for improvement

APPENDIX I

GROUNDWATER MONITORING PLAN

This page intentionally left blank.

Revision 2
Groundwater Monitoring Plan
RSA-263, CWS Depot Motor Pool (Building 8017), Change House (Building 8020)
Operable Unit 20

ENVIRONMENTAL REMEDIATION SERVICES
U.S. ARMY GARRISON-REDSTONE ARSENAL
REDSTONE ARSENAL

August 2023

Prepared for:

U.S. ARMY ENVIRONMENTAL COMMAND
Southeast-Environmental Service and Support Division
2450 Connell Road, Building 2264
Fort Sam Houston, TX 78234-7664

Prepared by:

ECC
9300 West Courthouse Rd
Suite 303
Manassas, VA 20110

Contract No.: W9124J-18-D-0004, Delivery Order W9124J21F0020

This page intentionally left blank.

TABLE OF CONTENTS

1.0 INTRODUCTION 1-1

1.1 Objective and Scope 1-1

2.0 DESCRIPTION OF RSA-263 2-1

2.1 Overview 2-1
2.2 Site History and Description 2-2
2.3 Geology 2-3
2.3.1 Soil 2-3
2.3.2 Bedrock 2-4
2.3.3 Hydrogeology 2-4

3.0 GROUNDWATER MONITORING PROGRAM 3-1

3.1 Scope and Implementation Strategy for the Groundwater Monitoring Program 3-1
3.2 Applicable Standard Operating Project Procedures 3-1
3.3 RSA-263 Project Specific QAPP Worksheets 3-2
3.4 Monitoring Wells Proposed for Groundwater Monitoring 3-2
3.5 Constituent List and Sampling Frequency 3-3
3.6 Sampling and Analytical Protocol 3-3
3.7 Quality Assurance/Quality Control 3-4

4.0 DATA EVALUATION AND REPORTING 4-1

4.1 Data Evaluation and Interpretation 4-1
4.2 Reporting 4-2

5.0 MONITORING WELL MAINTENANCE PLAN 5-1

5.1 Well Redevelopment 5-1
5.2 Well Replacement or Closure 5-1
5.3 Well Inspections 5-1

6.0 REFERENCES 6-1

LIST OF TABLES

Table I-1 Worksheet #12: Measurement of Performance Criteria
Table I-2 Worksheet #15: Preliminary Screening Values and Laboratory Specific Limits - Groundwater
Table I-3 Worksheet #17 Sampling Design and Rationale
Table I-4 Worksheet #18 Sample Locations, Analytical, and SOPP Requirements
Table I-5 Worksheet #19 & 30 Sample Containers, Preservation, and Hold Times
Table I-6 Worksheet #20 Field Quality Control Sample Summary
Table I-7 Worksheet #23 Analytical Laboratory Standard Operating Procedures
Table I-8 Worksheet #24 Analytical Instrument Calibration
Table I-9 Worksheet #25 Analytical Instrument and Equipment Maintenance, Testing, and Inspection
Table I-10 Worksheet #26 Sample Handling, Custody, and Disposal
Table I-11 Worksheet #28 Analytical Quality Control and Corrective Action
Table I-12 Worksheet #36 Data Validation Procedures

TABLE OF CONTENTS

LIST OF ATACHMENTS

Attachment 1 Field Documentation

ACRONYMS AND ABBREVIATIONS

±	plus or minus
<	less than
≤	less than or equal to
>	greater
≥	greater than or equal to
%	percent
% Rec.	percent recovery
°C	degrees Celsius
µg/L	micrograms per liter
µg/mL	micrograms per milliliter
A	Analytical
AAC	Alabama Administrative Code
ADEM	Alabama Department of Environmental Management
AEL	Advanced Environmental Laboratories
amu	atomic mass unit
APP	Accident Prevention Plan
B(a)A	benzo(a)anthracene
BFB	Bromofluorobenzene
bgs	below ground surface
BSV	background screening value
CA	Corrective Action
CAS	Chemical Abstract Service
CB&I	CB&I Federal Services LLC
CCB	Continuing Calibration Blank
CCV	Continuing Calibration Verification
CG	Cleanup goals
CLP	Contract Laboratory Program
CMI	Corrective Measures Implementation
CMO	Corrective Measure Objective
COC	Contaminant of concern
CT	carbon tetrachloride
DIA	Defense Intelligence Agency
DDT	Dichlorodiphenyltrichloroethane
DFTPP	Decafluorotriphenylphosphine
DL	Detection limit
DO	dissolved oxygen
DoD	Department of Defense
DPT	Direct push technology
DQI	Data Quality Indicator
DVW	Data validation worksheet
ECC	Environmental Chemical Corporation
EDD	Electronic Data Deliverable
EDL	Estimated detection limit
EDMS	Environmental Data Management System
Eff.	effective
ER	equipment rinsate
ERIS	Environmental Remediation Information System
FD	field duplicate
ft	feet
GC-MS	Gas chromatography-mass spectrometry
GW	groundwater
GWMP	Groundwater Monitoring Plan
HCl	hydrochloric acid
HDPE	high-density polyethylene
HGL	HydroGeoLogic, Inc.
HHRA	Human Health Risk Assessment
HNO_3	nitric acid
ICAL	Initial calibration
ICB	Initial calibration blank
ICP-AES	Inductively coupled plasma-Atomic emission spectroscopy
ICP-MS	Inductively coupled plasma-Mass spectrometry
ICV	Initial calibration verification
IDW	Investigation-Derived Waste
IS	Internal Standard
IT	IT Corporation
IW-QAPP	Installation-Wide Quality Assurance Program Plan
LCS	Laboratory control sample
LCSD	Laboratory control sample duplicate
LDR	Linear dynamic range
LOD	Limit of detection
LOQ	Limit of quantitation
MAG	Monitoring acceptance goal
MB	Method Blank
MCL	Maximum Contaminant Level
MDL	Method Detection Limit
mg/L	milligrams per Liter
mL	milliliter
mL/min	milliliters per minute
Mn	manganese

ACRONYMS AND ABBREVIATIONS

MNA	Monitored Natural Attenuation
MPC	Measurement Performance Criteria
MS	Matrix spike/Mass Spectrometry
MSD	Matrix spike duplicate
MW	monitoring well
NA	not applicable
ORP	oxidation-reduction potential
PAH	Polycyclic aromatic hydrocarbons
PDS	Post-digestion spike
ppb	parts per billion
PQL	Practical quantitation limit
PSA	Potential Source Area
PSV	Preliminary Screening Value
QA	Quality Assurance
QAPP	Quality Assurance Project Plan
QC	Quality Control
QSM	Quality Systems Manual
RCRA	Resource Conservation and Recovery Act
REG	regular sample
Rev.	Revision
RFI	RCRA Facility Investigation
RPD	Relative percent difference
RRT	Relative retention time
RSA	Redstone Arsenal
RSD	Relative standard deviation
RSL	Regional screening level
RT	Retention time
S	Sampling
SAP	Sampling and Analysis Plan
Shaw	Shaw Environmental, Inc.
SIM	Selected ion monitoring
SOP	Standard Operating Procedure
SOPP	Standard Operating Project Procedures
SVOC	Semivolatile organic compound
SW	Solid Waste 846
TAT	Turnaround time
TB	Trip blank
TBD	To be Determined
TV	Threshold volume
UPL	upper prediction limit
USEPA	United States Environmental Protection Agency
UST	underground storage tank
UTL	upper tolerance limit

1.0 INTRODUCTION

This Groundwater Monitoring Plan has been developed in support of the Redstone Arsenal (RSA)-263 Corrective Measures Implementation (CMI) Work Plan. This document provides details for implementation of groundwater monitoring as a component of the corrective measures for RSA-263 contaminated groundwater in order to achieve the cleanup goals (CGs). The plan will include identification of wells scheduled for monitoring, monitoring parameters, the monitoring period, analytical methods, reporting, and records maintenance. The corrective measures to be implemented at RSA-263 include groundwater monitoring to track progress of natural attenuation in reducing the concentrations of contaminants of concern (COC) to CGs.

1.1 Objective and Scope

The primary objective of the groundwater monitoring program for RSA-263 is to verify that the corrective measures (monitored natural attenuation [MNA]) reduced concentrations of COCs (carbon tetrachloride (CT), manganese, and benzo[a]anthracene) in groundwater beneath the site to levels determined to be acceptable to human health (i.e., CGs). This plan is designed to be modified, if necessary, in response to new hydrologic or geochemical data or changes in remedial, hydrologic, technical, or land-use conditions. Recommendations for changes to the groundwater monitoring program will be documented in annual CMI effectiveness reports.

Groundwater contaminated with CT, manganese, and benzo(a)anthracene will be monitored as part of the corrective measures for the site. This groundwater monitoring program is needed to track the progress of groundwater toward attaining the CGs so the site can be released for unrestricted use.

Through groundwater MNA, natural processes have reduced the CT, manganese, and benzo(a)anthracene groundwater contamination to below their respective CGs. Closure for groundwater will be achieved when the concentrations in groundwater have been verified for three consecutive years of sampling events below the CGs.

This page intentionally left blank.

2.0 DESCRIPTION OF RSA-263

2.1 Overview

RSA is located in the southwestern portion of Madison County, which is in the northern portion of Alabama (Figure 1 of the CMI Work Plan). RSA is a United States Army facility that encompasses approximately 38,300 acres and is approximately 10 miles long from north to south and six miles wide from east to west. The Army controls 36,459 acres of the total acreage, of which approximately 15,500 acres are woodlands, 5,360 acres are leased for agricultural use, and approximately 12,000 acres are managed as military test areas/ranges. Development within RSA has largely centered on the historical production (and later disposal) of conventional and chemical munitions and, more recently, development and testing of missiles and rockets. These processes have produced chemical wastes since operations began in the early-1940s.

RSA-263 is located in the southern-central portion of RSA, north of Buxton Road (Figure 1 of the CMI Work Plan). The site covers approximately three acres within the RSA-154 groundwater unit. An abrupt topographic break, running approximately east-west, is present which divides the site into northern and southern sections. The difference in ground elevation between the two sections is approximately nine to 10 feet. Each of the sections is itself relatively flat. All buildings at the site have been demolished. The site is mostly vegetated with mowed grass. Wooded areas are located to the west and north of the site (Figure 2 of CMI Work Plan).

The following investigations have been conducted at RSA-263:

- RSA-150/153/154/155 Potential Source Area (PSA) investigation in 2005 (Shaw Environmental, Inc. [Shaw], 2006)
- RFI Phase I field investigation (Shaw, 2012)
- RFI Phase II field investigation (Shaw, 2013a)
- RFI Phase III field investigation (Shaw, 2013b)
- RFI Phase IV field investigation (CB&I Federal Services LLC [CB&I], 2014).
- 2022 Pre-Design Sampling Event

Available analytical results indicate historical activities have led to localized contamination of groundwater by CT, manganese, and benzo(a)anthracene. The site falls geographically within RSA-154 groundwater unit, which also encompasses other surface sites within the south-central area of RSA.

The evaluation of human health risk indicates that the future potable use of groundwater would potentially pose an unacceptable threat to human health due to the concentrations of CT and manganese (see Table 3 of the CMI Work Plan). CT and manganese in groundwater were identified as COCs requiring further action. Benzo(a)anthracene exceeded the preliminary screening value (PSV) in groundwater but was not determined to contribute significantly to cumulative risk; thus, benzo(a)anthracene is retained as a COC for monitoring only during the corrective measures. For relevant COCs in groundwater with Maximum Contaminant Level (MCLs), MCLs are selected as the CGs. Background metals concentrations were determined in a

background study performed by Shaw (Shaw, 2003). The BSV is higher than the manganese PSV, thus, the background screening value (BSV) is selected as the CG for manganese. The CGs for RSA-263 groundwater are summarized below.

Summary of Cleanup Goals – RSA-263

Groundwater COCs	Cleanup goals (µg/L)	Basis
COC Requiring Monitoring Only		
Carbon Tetrachloride	5	MCL
Manganese	3,220	BSV
Benzo(a)anthracene	0.03	RSL

Notes:
µg/L – micrograms per liter
COC – contaminant of concern

The Corrective Measure Objective (CMO) for RSA-263 is to prevent human exposure via any exposure route (ingestion, inhalation, or dermal contact) to groundwater contaminated with either of the COCs at concentrations that exceed the groundwater CGs. Further information on RSA-263 can be obtained from the RFI report (CB&I, 2016).

2.2 Site History and Description

RSA occupies approximately 38,300 acres in Madison County, Alabama. The RSA is bounded on the north and east by the city of Huntsville, on the west by the city of Madison, on the west and southwest by Wheeler National Wildlife Refuge, and on the south by the Tennessee River. Huntsville has a population of nearly 165,000; Madison County population is about 320,000. Approximately 330 military families reside in government quarters on RSA and approximately 40,000 government employees and contractors work at the facility. The primary mission of RSA is the development, acquisition, testing, fielding, and sustainment of aviation and missile weapon systems. Most of the installation tenants support this effort; however, RSA is also home to such diverse activities as training for handling explosives and ordnance devices, Defense Intelligence Agency (DIA) activities, and the production of iron carbonyl. The RSA is home to over 70 different tenant organizations.

RSA-263 is located in the southern-central portion of RSA, north of Buxton Road (Figure 1 of the CMI Work Plan). The site covers approximately three acres within the RSA-154 groundwater unit. An abrupt topographic break, running approximately east-west, is present which divides the site into northern and southern sections. The difference in ground elevation between the two sections is approximately nine to 10 feet. Each of the sections is itself relatively flat. All buildings at the site have been demolished. The site is mostly vegetated with mowed grass. Wooded areas are located to the west and north of the site.

The Army constructed Building B-8017 in 1943 for use as a Motor Repair Shop to support the CWS area. According to historical building lists, it was used as a Storage and Repair Shop after 1957 before being used as dry boat storage for the RSA Recreation Department. The building was demolished between 2007 and 2010.

The Army constructed Building B-8020 in 1943 as a change house for Gulf Chemical Warfare Depot workers. Over time, building lists indicate that the building became a laboratory and testing building. Very little is known about these operations; however, typically, these types of buildings at RSA were rarely chemical laboratories but rather equipment testing areas. The building was demolished between 1997 and 2000.

The Army constructed Buildings B-8015 and B-8016 in 1943. The two buildings were located approximately 150 feet north of Building B-8017 and across the main driveway to the facility. The buildings shared the same foundation and were used as a Gasoline Pump Station (B-8015) and a Motor Grease and Wash Stall (B-8016). A gasoline underground storage tank (UST) was located to the east of the building. The UST (size unknown) was removed during the 1980s; a depression in the soil marks its former location. Based on aerial photographs, the buildings were demolished between 1977 and 1979.

2.3 Geology

General installation-wide environmental setting information is presented in Chapter 2.0 of the Installation-Wide Work Plan (IT Corporation [IT], 2002), which includes discussions of regional stratigraphic and structural geology, surface and subsurface hydrology, and other physiographic and geographic topics. Logs of soil borings advanced at the site were used to interpret the site-specific geology, which consists of a soil cover situated upon limestone bedrock.

2.3.1 Soil

Based on direct-push technology (DPT) and auger refusal depths, thickness of the overburden at RSA-263 ranges from approximately 13 to more than 32 feet below ground surface (bgs). The lithological logs from soil and well borings indicate native soils consisting predominantly of medium- to high-plasticity clay with trace to small amounts of silt and fine-grained sand. Weathered limestone fragments were also observed in the soil borings together with traces of chert and manganese nodules.

The overburden or unconsolidated soil layer across most of RSA is called residuum because it formed from in situ chemical weathering of the underlying karstic limestone bedrock. This overburden layer consists mainly of clay and silty clay and also includes varying amounts of residual chert fragments which were present within the parent limestone and have resisted chemical weathering because of their siliceous composition. The chert can be found scattered within the clay matrix as nodules or concentrated locally as near-horizontal layers within the soil. Although there is little compositional variation within the overburden, the residuum does not transmit groundwater uniformly. Groundwater infiltration follows preferred pathways because zones of higher hydraulic conductivity developed during soil-forming processes. Preferred pathways within the overburden directly affect contaminant migration and distribution within the soil column.

Residual clay generally has low horizontal and vertical hydraulic conductivities. At a given location, a layer of chert within the clay may decrease vertical hydraulic conductivity and increase horizontal conductivity, while isolated nodules of chert may increase the vertical conductivity.

Additionally, microfractures may be created within the clay during raveling, a process in which the clay slowly subsides as it is eroded and carried away by groundwater in bedrock fractures and conduits. Vertical movement of the soil caused by raveling or sloughing into fractures and conduits results in the development of microfractures in the overlying material. The microfractured clay soils have higher hydraulic conductivities than undisturbed clay and also act as preferred groundwater flow pathways.

2.3.2 Bedrock

Depth to bedrock across this portion of RSA is variable over short distances due to solution weathering of the upper bedrock surface (epikarst). Lithologic data from bedrock wells installed across this portion of RSA indicate that the shallow bedrock first encountered correlates with middle to upper Tuscumbia Limestone and exhibits well-developed karst features. The Tuscumbia Formation beneath this area is characterized by thinly bedded to massive, fine to medium crystalline, stylolitic limestone with numerous chert nodules and chert lenses. The Tuscumbia is underlain by the Fort Payne Chert, which consists of thinly bedded, fossiliferous limestones interbedded with chert. The Fort Payne is underlain by the Chattanooga Shale, a dark gray to black, fissile shale.

2.3.3 Hydrogeology

Surface Water. There are no permanent or seasonal surface water features present within the boundary of RSA-263. Site drainage is controlled by ephemeral unlined ditches.

Groundwater. Groundwater beneath RSA-263 occurs in the unconsolidated overburden and the upper portion of the carbonate bedrock. The overburden and upper bedrock comprise a single interconnected, unconfined water table aquifer. At depth, groundwater occurs under semiconfined conditions, flowing along discrete joints and bedding-plane partings. Figures 3 through Figure 6 of the CMI Work Plan show the July 2013, March 2014, June 2014, and January 2022 groundwater potentiometric data. Based on measurements obtained between 2013 and 2022, depth to groundwater at the site ranges from approximately 4.1 to 13.0 feet bgs in the northern wells and from approximately 17.3 to 20.5 feet bgs in the southern wells (CB&I, 2016). Measurements collected in July 2013, March 2014, June 2014, and January 2022 show that the potentiometric surface is relatively flat, with a maximum groundwater elevation difference of approximately two feet across the site, based on measurements obtained in January 2022. Flow at the site varies with the season and is generally in the north-northeast direction.

3.0 GROUNDWATER MONITORING PROGRAM

The groundwater monitoring program for RSA-263 includes wells proposed for monitoring, sampling frequency and sampling parameters, sampling and analytical protocol, and quality assurance (QA)/quality control (QC) requirements. The measurement performance criteria are presented in **Table I-1**. The laboratory-specific reference limits and evaluation tables are presented in **Table I-2**, PSVs and Laboratory Specific Limits. The sampling design and rationale is presented in **Table I-3**. Well identifiers, sampling frequency and analytical parameters, sampling and analytical protocols, and QA)/QC requirements are presented in **Tables I-4** through and **I-6**. Tables I-7 through I-12 are itemized in **Section 3.3**. The selected wells, including eight existing, are shown on Figure 2 of the CMI Work Plan. The duration of monitoring is estimated at three years for the RSA-263 site. Subject to Alabama Department of Environmental Management (ADEM) approval, in the event that COC concentrations for action in all eight monitoring wells have reached CGs before that time, groundwater monitoring will be proposed for early termination. Changes in the groundwater monitoring program can be adjusted in the recommendations section of each annual groundwater monitoring report.

3.1 Scope and Implementation Strategy for the Groundwater Monitoring Program

Groundwater monitoring will be performed to evaluate the effectiveness and permanence of the RSA-263 corrective measure; MNA for groundwater.

The groundwater monitoring program is designed to maximize cost-effectiveness without compromising program and data quality using the following general strategies:

- Select and maintain an optimal number of sampling points and an appropriate analytical suite to evaluate the progress of MNA in groundwater;
- Select wells that act as indicators of contaminant concentration changes or expansion;
- Maintain surveillance for contaminant migration away from RSA-263;
- Maintain an adequate frequency of conventional and/or mainstream sampling;
- Where appropriate, utilize cost-effective analytical programs; and
- Initiate a streamlined data management and reporting information system.

3.2 Applicable Standard Operating Project Procedures

Copies of the following applicable Standard Operating Project Procedures (SOPPs) to be applied at RSA-263 are presented in Volume II of the Installation-Wide Quality Assurance Program Plan IW-QAPP (HydroGeoLogic, Inc. [HGL], 2019):

- SOPP 1.0, Field Documentation
- SOPP 3.0, Field Equipment Decontamination
- SOPP 4.0, Investigation-Derived Waste (IDW)
- SOPP 7.0, Groundwater Sampling
- SOPP 11.0, Field Generated Records Management

- SOPP 12.0, Field Measurable Physical Characteristics
- SOPP 15.0, Non-Hazardous Sample Handling, Packaging and Shipping
- SOPP 16.0, Groundwater Level Measurements
- SOPP 24.0, Field Equipment Calibration

3.3 RSA-263 Project Specific QAPP Worksheets

The IW-QAPP (HGL, 2019) requires project-specific worksheets that are not included in the generic IW-QAPP. **Tables I-1** though **I-12** provide the following RSA-263 project-specific IW-QAPP worksheets:

- **Table I-1: Worksheet #12** Measurement of Performance Criteria
- **Table I-2: Worksheet #15** Preliminary Screening Values and Laboratory Specific Limits - Groundwater
- **Table I-3: Worksheet #17** Sampling Design and Rationale
- **Table I-4: Worksheet #18** Sample Locations, Analytical, and SOPP Requirements
- **Table I-5: Worksheet #19 & 30** Sample Containers, Preservation, and Hold Times
- **Table I-6: Worksheet #20** Field Quality Control Sample Summary
- **Table I-7: Worksheet #23** Analytical Laboratory Standard Operating Procedures
- **Table I-8: Worksheet #24** Analytical Instrument Calibration
- **Table I-9: Worksheet #25** Analytical Instrument and Equipment Maintenance, Testing, and Inspection
- **Table I-10: Worksheet #26** Sample Handling, Custody, and Disposal
- **Table I-11: Worksheet #28** Analytical Quality Control and Corrective Action
- **Table I-12: Worksheet #36** Data Validation Procedures

Additional Site-specific information can be found in the Project Management Plan (Environmental Chemical Corporation [ECC], 2021a) and the Quality Control Plan provided in Appendix F of the CMI Work Plan.

3.4 Monitoring Wells Proposed for Groundwater Monitoring

The following existing wells at RSA-263 are scheduled for groundwater monitoring:

Well ID	Zone	Screened Interval (ft bgs)	COC	Rationale
263-RS1903	Overburden	6.5 - 21.5	NA	Verify MNA Effectiveness
263-RS1904	Overburden	7.4 - 17.4	NA	Verify MNA Effectiveness
263-RS1905	Overburden	7.4 - 22.4	Mn, B(a)A	Verify MNA Effectiveness
263-RS1906	Overburden	8.5 – 23.5	B(a)A	Verify MNA Effectiveness
263-RS1907	Overburden	15.7 - 30.7	NA	Verify MNA Effectiveness
263-RS1908	Overburden	16 - 31	CT	Verify MNA Effectiveness
263-RS2388	Overburden	9 - 19	NA	Verify MNA Effectiveness
263-RS2389	Overburden	13.6 - 28.6	NA	Verify MNA Effectiveness

Notes:

B(a)A – benzo(a)anthracene
Bgs - below ground surface
COC – Contaminant of Concern
CT – carbon tetrachloride
Ft - feet
Mn – manganese
MNA - monitored natural attenuation

Well locations included in the groundwater monitoring program were selected based on their proximity to the COC plume area and upgradient and downgradient locations as shown on Figure 2 of the CMI Work Plan.

3.5 Constituent List and Sampling Frequency

Based on the Human Health Risk Assessment (HHRA) presented in the Resource Conservation and Recovery Act (RCRA) Facility Investigation (RFI) (CB&I, 2016), only CT, manganese, and benzo(a)anthracene will be monitored as part of the corrective measures. As discussed in Section 2.4 of the CMI Work Plan, dibenz(a,h)anthracene was originally identified as a groundwater COC in the HHRA based the exceedance of its method detection limit (MDL). However, subsequent revisions to the dibenz(a,h)anthracene toxicity values resulted in dibenz(a,h)anthracene no longer being identified as a groundwater COC requiring further action. In addition to the laboratory analytical parameters, water quality parameters including pH, temperature, conductivity, oxidation-reduction potential (ORP), dissolved oxygen (DO), and turbidity will be collected in the field. Water levels will also be measured during each sampling event. This groundwater monitoring program will be used to evaluate progress towards meeting the CMOs for groundwater and the CGs. The analytical program will monitor for COCs for action to track the progress of the MNA.

In order to meet the objectives of this groundwater monitoring program, groundwater sampling will be conducted semiannually for CT, manganese, and benzo(a)anthracene from Years 1 through 3 following the baseline groundwater sampling in Year 0, or until three consecutive years of sampling events have been conducted with groundwater COCs concentrations below CGs. As determined by an evaluation of previous monitoring results, semiannual groundwater sampling will be performed in the seasons that are most appropriate to properly assess seasonal variability in the groundwater flow and provide the most representative picture of groundwater quality for the site. The Army review of these data during this selection process will be completed in consultation with ADEM.

Groundwater monitoring will continue until it is demonstrated that the CGs have been achieved for COCs for action. A COC for action will be omitted from future monitoring after it has reached the CG for three consecutive years.

3.6 Sampling and Analytical Protocol

All data will be collected, stored, and managed in accordance with the requirements defined by the IW-QAPP (HGL, 2019 or as updated based on submissions to ADEM) and the Installation-Wide Accident Prevention Plan (APP) (ECC, 2021b). Prior to sampling the wells, static water levels will be measured in all wells. Water level measurements will be performed in accordance with SOPP No. 16.0, Groundwater Level Measurements. Groundwater sampling will be performed

using a submersible pump for purging and low-flow sampling techniques in accordance with SOPP No. 7.0, Groundwater Sampling Rev. 4.

The sampling technician will measure and record physical parameters of the groundwater during well purging to help determine when the well is ready to be sampled. Complete and accurate records in the groundwater well development/purge log are necessary in order to ensure representative groundwater samples are being collected. Samples will be analyzed using the United States Environmental Protection Agency (USEPA) SW-846 methods as presented in the IW QAPP (HGL, 2019 or most recent submission to ADEM) including updates resulting from changes in USEPA and ADEM guidance documents.

The analytical laboratory will provide sample containers. Sample containers are purchased precleaned and treated according to USEPA specifications for the methods. Sample containers are not reused. Containers are stored in clean areas to prevent exposure to fuels, solvents, and other contaminants. The required sample containers for the analysis of constituents in groundwater at RSA-263 are provided in **Table I-5**, along with sample volumes, preservation requirements, and holding times for the analytical methods performed on the groundwater samples.

Sample preservation, packaging, and shipping will follow the procedures as specified in SOPP No. 15, Non-Hazardous Sampling Handling, Packaging, and Shipping, in the IW QAPP (HGL, 2019 or as updated based on submissions to ADEM).

Completed analysis request/chain-of-custody records will be secured and included with each shipment of coolers to the contracted laboratory.

Recommendations to modify the groundwater monitoring program will be made in the annual CMI effectiveness reports.

3.7 Quality Assurance/Quality Control

Groundwater media will be sampled and analyzed to meet the objectives of the groundwater monitoring program. QA/QC samples will be collected for all sampling events in accordance with requirements established in the IW QAPP (HGL, 2019 or as updated based on submissions to ADEM) to assure long-term comparability of data. Samples will be analyzed by USEPA-approved SW-846 methods of analysis where applicable, comply with USEPA definitive data requirements, and be reported using both hard copy and electronic data packages.

The chemical data will be reported via hard-copy packages by the laboratory using Contract Laboratory Program-like forms, in addition to electronic deliverables, and will include all raw analytical and QC data for each analysis.

All sample preparation and analysis shall be completed within the method-required holding times specified in **Table I-5**. The holding time of a sample begins at the time of sample collection. If holding times are exceeded and the analyses are performed, the results shall be flagged accordingly.

.

4.0 DATA EVALUATION AND REPORTING

4.1 Data Evaluation and Interpretation

During the baseline sampling event, groundwater samples will be collected from the three groundwater monitoring wells as shown on Figure 2 of the CMI Work Plan. The samples will be collected using low-flow purging and sampling techniques. The samples will be analyzed for the same analytes and field parameters as the baseline sampling event.

The primary objective of the groundwater monitoring program for RSA-263 is to determine whether the corrective measures (MNA) reduce concentrations of COCs in groundwater beneath the site to levels determined to be acceptable to human health (i.e., CGs). This will be determined based on the results of a statistical test or other methods. Statistical analysis will follow Alabama Administrative Code (AAC) 335-14-5-.06(8)(h) (ADEM, 2021) and USEPA guidance for groundwater monitoring at RCRA facilities (USEPA, 1989; 1992; and 2009). Groundwater data collected during sampling events will be compared to the CGs. COCs that exceed these values may be subjected to additional analysis as allowed in ACC 335-14-5-.06(8)(h). The additional analyses may include, for example, control charts, Wilcoxon rank sum tests, box plots, and/or temporal trend analysis, as appropriate. Specific evaluation techniques will depend upon detection frequencies and statistical distributions of each COC. For example, one COC concentration at a given well may exceed the site-specific upper tolerance limit (UTL) or upper prediction limit (UPL), and that could be either a random occurrence or indicative of an increasing trend. Trend analysis will indicate if a trend is present and whether it has statistical significance.

Well data sets that pass statistical comparison tests (i.e., wells that do not demonstrate statistically significant increases over baseline concentrations) for all COCs will be sampled in accordance with planned activities. Wells that fail statistical comparison tests for one or both COCs will be resampled. Following the collection of these additional data, statistical evaluation will again be performed and reported, along with recommendations for adjustment to sampling frequency, if appropriate.

The following non-statistical methods may also be used to characterize RSA-263 groundwater conditions:

- **Hydrographs:** Graph water levels versus time may be constructed to determine increases, decreases, seasonal, or man-made fluctuations in groundwater levels;
- **Potentiometric Surface Maps:** Depths to groundwater from multiple wells may be used to construct potentiometric surface contour maps to estimate flow directions;
- **Concentration-versus-Time Plots:** Graphs of COC concentration versus time at each well will be constructed for each data set subjected to trend analysis. This supports the identification of trends and helps determine if concentration changes are related to changes in water level, changes in groundwater flow directions, or natural attenuation.
- **Plume Maps:** Map depicting the physical distribution of chemical constituents will aid in determining movement of plumes.

COCs will be evaluated for compliance with the CMO by comparison of groundwater monitoring results with the established CGs. After an actionable COC is present in a concentration below the CG for three consecutive years, the Army will petition ADEM to eliminate that constituent from the groundwater monitoring program.

4.2 Reporting

Based on the proposed sampling schedule, an annual CMI effectiveness report will be prepared. Letter reports summarizing the activities and the analytical results for each semiannual sampling event will be issued upon receipt of the analytical data. The annual report will present and summarize the analytical data from all sampling events completed in that calendar year and will include well redevelopment records, completed well inspection checklist forms, well repair or closure records, and other pertinent information. The annual report will discuss the most recent sampling events and relate the findings as they pertain to the CGs for the groundwater contaminants. Recommendations for changes to the sampling frequency, wells sampled, and parameters for analysis, if appropriate, will be included in the reports. At a minimum, the annual report will include a discussion of sampling activities, tables and maps to document contaminant concentrations in groundwater, an evaluation of the groundwater contaminant data, and all activities completed as part of the Monitoring Well Maintenance Plan. Other recommendations may include installation of additional monitoring wells and resampling for verification of sampling results. Record keeping for data and reports is described in the IW QAPP (HGL, 2019 or most recent submission to ADEM).

5.0 MONITORING WELL MAINTENANCE PLAN

In order to maintain consistent data quality and track contaminant concentrations and migration, the groundwater monitoring wells at RSA-263 will be maintained and replaced, as necessary. Further details are presented in the IW QAPP (HGL, 2019 or as updated based on submissions to ADEM).

5.1 Well Redevelopment

A well may be redeveloped prior to sampling if any of the following conditions are exhibited:

- Sediment accumulation in the well covers more than 5 percent (%) of the total length of the well screen.
- Turbidity of groundwater is greater than 20 nephelometric turbidity units after the well has been purged prior to sampling.
- Recharge rate to the well has declined through time (e.g., recharge rates have declined to less than 60% of the recharge rate recorded in the initial development).

5.2 Well Replacement or Closure

If the well still does not meet the above requirements after two episodes of redevelopment, the well may be deemed nonfunctional and scheduled for replacement or closure. Consultation with RSA personnel and ADEM staff will be made to determine whether closure or replacement is necessary. The procedures for well replacement or closure are outlined in the IW QAPP (HGL, 2019 or most recent submission to ADEM).

5.3 Well Inspections

Site inspections will be performed to help ascertain the condition of monitoring wells and confirm the integrity of the monitoring wells has not been compromised. Wells will be inspected during each sampling event. At a minimum, all monitoring wells in the groundwater monitoring program will be inspected annually. The groundwater monitoring wells at the site will be inspected for the integrity of the following:

- Locks
- Locking cap
- Protective casing
- Bollards (stick-up wells only)
- Concrete pad.

Well redevelopment, replacement, or closure will be documented in the annual report. In addition, well inspection checklist forms for all pertinent site wells will be included in the annual reports. Deficiencies will be documented and corrected as soon as practical, but not less than annually. If a well cannot be properly repaired, it should be replaced or closed.

This page intentionally left blank

6.0 REFERENCES

Alabama Department of Environmental Management (ADEM). 2021. *Administrative Code r.335-14-8, Land Division – Hazardous Waste Program*. March.

CB&I Federal Services LLC (CB&I). 2014. *Phase IV Sampling Work Plan, Petroleum, Oil, and Lubricants Program Site RSA-263, CWS Depot Motor Pool (B-8017)/Change House (B-8020), and RSA-154 Groundwater Site,* U.S. Army Garrison-Redstone, Madison County, Alabama. June.

CB&I. 2016. *Revision 1 RCRA Facility Investigation Report RSA-263, CWS Depot Motor Pool (B-8017)/Change House (B-8020), Operable Unit 20.* January.

Environmental Chemical Corporation (ECC). 2021a. *Project Management Plan*, Environmental Remediation Services, U.S. Army Garrison-Redstone Arsenal. March.

ECC. 2021b. *Accident Prevention Plan*, Environmental Remediation Services, U.S. Army Garrison-Redstone Arsenal. February.

HydroGeoLogic, Inc. (HGL), 2019. *Final Revision 4 Installation-Wide Quality Assurance Program Plan*, U.S. Army Garrison-Redstone, Madison County, Alabama. December.

IT Corporation (IT). 2002. *Draft Final Installation-Wide Work Plan, Revision 2,* Redstone Arsenal, Madison County, Alabama, prepared for the U.S. Army Corps of Engineers, Savannah District, Savannah, Georgia. June.

Shaw Environmental, Inc. (Shaw). 2003. *Final Methodology for the Comparison of Site and Background Data,* Redstone Arsenal, Madison County, Alabama*, prepared for the U.S. Army Corps of Engineers, Mobile District*. November.

Shaw. 2006. RSA-150/153/154/155 Potential Source Area Investigation, Redstone Arsenal, Madison County, Alabama. Draft. April.

Shaw. 2012. *Site-Specific Field Sampling Plan for RCRA Facility– Additional Investigation Petroleum, Oil, and Lubricants Site RSA-263, CWS Depot Motor Pool (B 8017)/Change House (B 8020), Operable Unit 20,* U.S. Army Garrison-Redstone, Madison County, Alabama. November.

Shaw. 2013a. *RCRA Facility Investigation Report, RSA-145 Groundwater Site, Groundwater Unit GW-01, Operable Unit 19,* Redstone Arsenal, Madison County, Alabama. May.

Shaw. 2013b. *Phase III Site-Specific Field Sampling Plan for RCRA Facility Investigation, Petroleum, Oil, and Lubricants Program Site RSA-263, CWS Depot Motor Pool (B-8017)/Change House (B-8020), Operable Unit 20,* U.S. Army Garrison-Redstone, Madison County, Alabama. November.

United States Environmental Protection Agency (USEPA). 1989. *Statistical Analysis of Ground-Water Monitoring Data at RCRA Facilities, Interim Final Guidance,* Office of Solid Waste, Waste Management Division, EPA/530/SW-89/026. July.

USEPA. 1992. *Statistical Analysis of Groundwater Monitoring Data at RCRA Facilities, Addendum to Interim Guidance*, Office of Resource Conservation and Recovery. July.

USEPA. 2009. *Statistical Analysis of Groundwater Monitoring Data at RCRA Facilities: Unified Guidance*, EPA/530/R-09/007, Office of Resource Conservation and Recovery Program Implementation and Information Division. March.

TABLES

This page intentionally left blank.

Table I-1. Worksheet #12 Measurement Performance Criteria
RSA-263 Groundwater Monitoring Plan

Matrix	Groundwater
Analytical Group	Metals by ICP-MS 3010A/6020A
Concentration Level	Low

Analytical Method &SOP	DQIs	MPC	QC Sample and / or Activity Used to Assess Measurement Performance	QC Sample Assesses Error for S, A or both (S&A)
USEPA 3010A & MET-002/ MET-016	Precision	RPD from **Worksheet #28**	Lab duplicates and LCS/LCSD	A
	Precision	Sampling per QAPP/SOP	Field duplicates and MS/MSD	S&A
	Accuracy/Bias	% Rec. from **Worksheet #28**	LCS	A
	Accuracy/Bias (contamination)	Acceptable Blanks Levels	MB	A
	Accuracy/Bias (contamination)	Sampling per QAPP/SOP	Field Blanks and/or Equipment Blanks	S&A
	Completeness	Laboratory Analysis	> 90%	S&A
	Representativeness	Sampling per QAPP/SOP	Field Notes	S
	Comparability	Use of promulgated Methodology	QAPP compliance, data review	A
	Sensitivity	PQL/EDL to meet project objectives	ICAL level acceptable, MB acceptable	A

Notes:

> – greater than
% – percent
% Rec. – percent recovered
A – analytical
DQI – Data Quality Indicator
EDL – estimated detection limit
ICAL – initial calibration
ICP-MS – inductively coupled plasma-mass spectrometry
LCS – laboratory control sample
LCSD – laboratory control sample duplicate
MB – method blank
MPC – Measurement Performance Criteria
MS – matrix spike
MSD – matrix spike duplicate
PQL – practical quantitation limit
QAPP –quality assurance project plan
QC – Quality Control
RPD – relative percent difference
S – sampling
SOP – standard operating procedure
USEPA – United States Environmental Protection Agency

Table I-1. Worksheet #12 Measurement Performance Criteria
RSA-263 Groundwater Monitoring Plan

Matrix	Groundwater
Analytical Group	VOCs by 5030C/8260C GC-MS
Concentration Level	Low

Analytical Method & SOP	DQIs	MPC	QC Sample and / or Activity Used to Assess Measurement Performance	QC Sample Assesses Error for S, A or both (S&A)
USEPA 5030C/8260C & VOC-001/VOC-003	Precision	RPD from Worksheet #28	Lab duplicates and LCS/LCSD	A
	Precision	Sampling per QAPP/SOP	Field duplicates and MS/MSD	S&A
	Accuracy/Bias	% Rec. from **Worksheet #28**	LCS	A
	Accuracy/Bias (contamination)	Acceptable Blanks Levels	MB	A
	Accuracy/Bias (contamination)	Sampling per QAPP/SOP	Field Blanks and/or Equipment Blanks	S&A
	Completeness	Laboratory Analysis	> 90%	S&A
	Representativeness	Sampling per QAPP/SOP	Field Notes	S
	Comparability	Use of promulgated Methodology	QAPP compliance, data review	A
	Sensitivity	PQL/EDL to meet project objectives	ICAL level acceptable, MB acceptable	A

Notes:

> – greater than
% – percent
% Rec. – percent recovered
A – analytical
DQI – Data Quality Indicator
EDL – estimated detection limit
GC-MS – Gas chromatography-mass spectrometry
ICAL – initial calibration
LCS – laboratory control sample
LCSD – laboratory control sample duplicate
MB – method blank
MPC – Measurement Performance Criteria
MS – matrix spike
MSD – matrix spike duplicate
PQL – practical quantitation limit
QAPP –quality assurance project plan
QC – Quality Control
RPD – relative percent difference
S – sampling
SOP – standard operating procedure
VOC – volatile organic compound
USEPA – United States Environmental Protection Agency

Table I-1. Worksheet #12 Measurement Performance Criteria
RSA-263 Groundwater Monitoring Plan

Matrix	Groundwater
Analytical Group	SIM PAH by 3510C/8270D SIM
Concentration Level	Low

Analytical Method & SOP	DQI	MPC	QC Sample and / or Activity Used to Assess Measurement Performance	QC Sample Assesses Error for S, A or both (S&A)
USEPA 3510C/8270D SIM & SVOC-001/SVOC-028	Precision	RPD from **Worksheet #28**	Lab duplicates and LCS/LCSD	A
	Precision	Sampling per QAPP/SOP	Field duplicates and MS/MSD	S&A
	Accuracy/Bias	% Rec. from Worksheet #28	LCS	A
	Accuracy/Bias (contamination)	Acceptable Blanks Levels	MB	A
	Accuracy/Bias (contamination)	Sampling per QAPP/SOP	Field Blanks and/or Equipment Blanks	S&A
	Completeness	Laboratory Analysis	> 90%	S&A
	Representativeness	Sampling per QAPP/SOP	Field Notes	S
	Comparability	Use of promulgated Methodology	QAPP compliance, data review	A
	Sensitivity	PQL/EDL to meet project objectives	ICAL level acceptable, MB acceptable	A

Notes:

> – greater than
% – percent
% Rec. – percent recovered
A – analytical
DQI – Data Quality Indicator
EDL – estimated detection limit
ICAL – initial calibration
LCS – laboratory control sample
LCSD – laboratory control sample duplicate
MB – method blank
MS – matrix spike
MPC – Measurement Performance Criteria
MSD – matrix spike duplicate
PAH – polycyclic aromatic hydrocarbons
PQL– practical quantitation limit
QAPP –quality assurance project plan
QC – Quality Control
RPD – relative percent difference
S – sampling
SIM – selected ion monitoring
SOP – standard operating procedure
SVOC – Semivolatile organic compound
USEPA – United States Environmental Protection Agency

Table I-2. Worksheet #15 Preliminary Screening Values and Laboratory Specific Limits – Groundwater
RSA-263 Groundwater Monitoring Plan

Hazardous Constituent	CAS Number	BSV [a]	PSV [b]	CG	MAG	Reference for PSV	Laboratory Specific LOQ	Laboratory Specific LOD	Laboratory Specific DL
Metals (µg/L) by SW6020A									
Manganese, Total	7439-96-5	3,220	43	3,220	NA	RSL	4.0	2.00	1.00
VOCs (µg/L) by SW8260C									
Carbon tetrachloride	56-23-5	NA	5	5	NA	MCL	1.0	0.5	0.25
PAH (µg/L) by SW8270D-SIM									
Benzo(a)anthracene	56-55-3	NA	*0.03*	NA	*0.03*	RSL	0.1	0.05	0.0124

Notes:

µg/L – micrograms per Liter
BSV – Background Screening Value
CAS – Chemical Abstract Service
CG – Cleanup Goal
DL – Detection limit
MAG – Monitoring Acceptance Goal
MCL – Maximum contaminant level
LOD – Limit of detection
LOQ – Limit of quantitation
NA – not applicable
PAH – polycyclic aromatic hydrocarbon
PSV – Preliminary Screening Value
RSL – Regional screening level
VOC – Volatile Organic Compound
SW – Solid Waste 846

a) BSV –for metals, except as noted in Shaw Environmental, Inc. (Shaw) (2003), are based on the 95 percent upper tolerance limit of the unfiltered groundwater background data set (*Final Methodology for the Comparison of Site and Background Data, Redstone Arsenal, Madison County, Alabama,* November [Shaw, 2003]). BSV values are presented only for reference purposes.

b) PSV –for groundwater based on the following hierarchy if not specified in the Corrective Measures Implementation Work Plan (CMI Work Plan): 1) MCL (*2018 Edition of the Drinking Water Standards and Health Advisories*, USEPA 822-S-12-001, Office of Water, Washington, District of Columbia, March, 2) most recent USEPA (May 2021) Tap-water RSL Table using a Hazard Quotient of 0.1 shall be used (https://www.epa.gov/risk/regional-screening-levels-rsls-generic-tables).

Table I-3. Worksheet #17 Sampling Design and Rationale
Redstone Arsenal, Madison County, Alabama

Sample Location	Sample Media	Sample Location Rationale[1]
Overburden Wells: 263-RS1903 263-RS1904 263-RS1905 263-RS1906 263-RS1907 263-RS1908 263-RS2388 263-RS2389	Groundwater	Groundwater sampling events (Year 0 through 2) will be used to evaluate the effectiveness and permanence of the RSA-263 corrective measure; soil contamination monitoring through groundwater concentration reduction and MNA for groundwater. Results from sampling events will be used to evaluate progress towards meeting the CMOs and CGs. The analytical program will monitor for COCs for action (CT and manganese) and monitoring (benzo(a)anthracene) to track the progress of MNA. Groundwater samples are to be collected from these eight monitoring wells (as presented in Figure 2 of the CMI Work Plan) and each groundwater sample will be analyzed for CT, manganese, and benzo(a)anthracene.

Notes:

1) The frequency of sampling and/or analyte lists may be modified over the life of the project, based upon sampling results, if approved by the Alabama Department of Environmental Management (ADEM). Permit modifications will be made in accordance with Permit Condition I.J.

COC – Contaminant of Concern
CG – Cleanup Goal
CMI – Corrective Measures Implementation
CT – Carbon Tetrachloride
CMO – Corrective Measures Objective
MNA – Monitored Natural Attenuation

Table I-4. Worksheet #18 Sampling Locations, Analytical Parameters, and SOPP Requirements
RSA-263 Groundwater Monitoring Plan

Sample Location	Sample Name [e]	Sample Depth (ft bgs)	QC Sample Designation		Analytical Suite	Field SOPP
			FD	MS/MSD		
RSA-263 YEAR 0 BASELINE SAMPLE LOCATIONS						
263-RS1903	263-RS1903-GW-ACC3047-REG	6.5 - 21.5			VOC, PAH, Metals, (**Worksheet #15**)	SOPP 7.0
263-RS1904	263-RS1904-GW-ACC3048-REG	7.4 - 17.4				
263-RS1905	263-RS1905-GW-ACC3049-REG	7.4 - 22.4	263-RS1905-GW-ACC3050-FD			
263-RS1906	263-RS1906-GW-ACC3051-REG	8.5 - 23.5		263-RS1906-GW-ACC3051-MS/MSD		
263-RS1907	263-RS1907-GW-ACC3052-REG	15.7 - 30.7				
263-RS1908	263-RS1908-GW-ACC3053-REG	16 - 31				
263-RS2388	263-RS2388-GW-ACC3054-REG	9 - 19				
263-RS2389	263-RS2389-GW-ACC3055-REG	13.6 - 28.6				
Trip Blanks						
RSA-263	RSA-263-WA-TB7002-TB	NA			VOC (**Worksheet #15**)	See note [a]
Equipment Rinsates						
RSA-263	RSA-263-BW-ACC8002-ER	NA			VOC, PAH, Metals, (**Worksheet #15**)	See notes [b]
IDW Water Samples						
RSA-263	RSA-263-WA-ACC9002-REG	NA			VOC, PAH, Metals or use groundwater results [d]	SOPP 4.0
RSA-263 YEAR 1, FIRST SEMIANNUAL SAMPLE LOCATIONS						
263-RS1903	263-RS1903-GW-ACC3056-REG	6.5 - 21.5			VOC, PAH, Metals, (**Worksheet #15**)	SOPP 7.0
263-RS1904	263-RS1904-GW-ACC3057-REG	7.4 - 17.4				
263-RS1905	263-RS1905-GW-ACC3058-REG	7.4 - 22.4	263-RS1905-GW-AGE3059-FD			
263-RS1906	263-RS1906-GW-ACC3060-REG	8.5 - 23.5		263-RS1906-GW-AGE3060-MS/MSD		
263-RS1907	263-RS1907-GW-ACC3061-REG	15.7 - 30.7				

Table I-4. Worksheet #18 Sampling Locations, Analytical Parameters, and SOPP Requirements
RSA-263 Groundwater Monitoring Plan

Sample Location	Sample Name [e]	Sample Depth (ft bgs)	QC Sample Designation		Analytical Suite	Field SOPP
			FD	MS/MSD		
263-RS1908	263-RS1908-GW-ACC3062-REG	16 - 31				
263-RS2388	263-RS2388-GW-ACC3063-REG	9 - 19				
263-RS2389	263-RS2389-GW-ACC3064-REG	13.6 - 28.6				
Trip Blanks						
RSA-263	RSA-263-WA-TB7003-TB	NA			VOC (**Worksheet #15**)	See note [a]
Equipment Rinsates						
RSA-263	RSA-263-BW-ACC8003-ER	NA			VOC, PAH, Metals, (**Worksheet #15**)	See notes [b]
IDW Water Samples						
RSA-263	RSA-263-WA-ACC9003-REG	NA			VOC, PAH, Metals or use groundwater results [d]	SOPP 4.0
RSA-263 YEAR 1, SECOND SEMIANNUAL SAMPLE LOCATIONS						
263-RS1903	263-RS1903-GW-ACC3065-REG	6.5 - 21.5			VOC, PAH, Metals, (**Worksheet #15**)	SOPP 7.0
263-RS1904	263-RS1904-GW-ACC3066-REG	7.4 - 17.4				
263-RS1905	263-RS1905-GW-ACC3067-REG	7.4 - 22.4	263-RS1905-GW-AGE3068-FD			
263-RS1906	263-RS1906-GW-ACC3069-REG	8.5 - 23.5		263-RS1906-GW-AGE3069-MS/MSD		
263-RS1907	263-RS1907-GW-ACC3070-REG	15.7 - 30.7				
263-RS1908	263-RS1908-GW-ACC3071-REG	16 - 31				
263-RS2388	263-RS2388-GW-ACC3072-REG	9 - 19				
263-RS2389	263-RS2389-GW-ACC3073-REG	13.6 - 28.6				
Trip Blanks						
RSA-263	RSA-263-WA-TB7004-TB	NA			VOC (**Worksheet #15**)	See note [a]
Equipment Rinsates						
RSA-263	RSA-263-BW-ACC8004-ER	NA			VOC, PAH, Metals, (**Worksheet #15**)	See notes [b]

Table I-4. Worksheet #18 Sampling Locations, Analytical Parameters, and SOPP Requirements
RSA-263 Groundwater Monitoring Plan

Sample Location	Sample Name [e]	Sample Depth (ft bgs)	QC Sample Designation		Analytical Suite	Field SOPP
			FD	MS/MSD		
IDW Water Samples						
RSA-263	RSA-263-WA-ACC9004-REG	NA			VOC, PAH, Metals or use groundwater results [d]	SOPP 4.0
RSA-263 YEAR 2, FIRST SEMIANNUAL SAMPLE LOCATIONS						
263-RS1903	263-RS1903-GW-ACC3074-REG	6.5 - 21.5			VOC, PAH, Metals, (**Worksheet #15**)	SOPP 7.0
263-RS1904	263-RS1904-GW-ACC3075-REG	7.4 - 17.4				
263-RS1905	263-RS1905-GW-ACC3076-REG	7.4 - 22.4	263-RS1905-GW-ACC3077-FD			
263-RS1906	263-RS1906-GW-ACC3078-REG	8.5 - 23.5		263-RS1906-GW-ACC3078-MS/MSD		
263-RS1907	263-RS1907-GW-ACC3079-REG	15.7 - 30.7				
263-RS1908	263-RS1908-GW-ACC3080-REG	16 - 31				
263-RS2388	263-RS2388-GW-ACC3081-REG	9 - 19				
263-RS2389	263-RS2389-GW-ACC3082-REG	13.6 - 28.6				
Trip Blanks						
RSA-263	RSA-263-WA-TB7005-TB	NA			VOC (**Worksheet #15**)	See note [a]
Equipment Rinsates						
RSA-263	RSA-263-BW-ACC8005-ER	NA			VOC, PAH, Metals, (**Worksheet #15**)	See notes [b]
IDW Water Samples						
RSA-263	RSA-263-WA-ACC9005-REG	NA			VOC, PAH, Metals or use groundwater results [d]	SOPP 4.0
RSA-263 YEAR 2, SECOND SEMIANNUAL SAMPLE LOCATIONS						
263-RS1903	263-RS1903-GW-ACC3083-REG	6.5 - 21.5			VOC, PAH, Metals, (**Worksheet #15**)	SOPP 7.0
263-RS1904	263-RS1904-GW-ACC3084-REG	7.4 - 17.4				
263-RS1905	263-RS1905-GW-ACC3085-REG	7.4 - 22.4	263-RS1905-GW-ACC3086-FD			

Table I-4. Worksheet #18 Sampling Locations, Analytical Parameters, and SOPP Requirements
RSA-263 Groundwater Monitoring Plan

Sample Location	Sample Name [e]	Sample Depth (ft bgs)	QC Sample Designation		Analytical Suite	Field SOPP
			FD	MS/MSD		
263-RS1906	263-RS1906-GW-ACC3087-REG	8.5 - 23.5		263-RS1906-GW-ACC3087-MS/MSD	VOC, PAH, Metals, (**Worksheet #15**)	SOPP 7.0
263-RS1907	263-RS1907-GW-ACC3088-REG	15.7 - 30.7				
263-RS1908	263-RS1908-GW-ACC3089-REG	16 - 31				
263-RS2388	263-RS2388-GW-ACC3090-REG	9 - 19				
263-RS2389	263-RS2389-GW-ACC3091-REG	13.6 - 28.6				
Trip Blanks						
RSA-263	RSA-263-WA-TB7006-TB	NA			VOC (**Worksheet #15**)	See note [a]
Equipment Rinsates						
RSA-263	RSA-263-BW-ACC8006-ER	NA			VOC, PAH, Metals, (**Worksheet #15**)	See notes [b]
IDW Water Samples						
RSA-263	RSA-263-WA-ACC9006-REG	NA			VOC, PAH, Metals or use groundwater results [d]	SOPP 4.0
RSA-263 YEAR 3, FIRST SEMIANNUAL SAMPLE LOCATIONS						
263-RS1903	263-RS1903-GW-ACC3092-REG	6.5 - 21.5			VOC, PAH, Metals, (**Worksheet #15**)	SOPP 7.0
263-RS1904	263-RS1904-GW-ACC3093-REG	7.4 - 17.4				
263-RS1905	263-RS1905-GW-ACC3094-REG	7.4 - 22.4	263-RS1905-GW-ACC3095-FD			
263-RS1906	263-RS1906-GW-ACC3096-REG	8.5 - 23.5		263-RS1906-GW-ACC3096-MS/MSD		
263-RS1907	263-RS1907-GW-ACC3097-REG	15.7 - 30.7				
263-RS1908	263-RS1908-GW-ACC3098-REG	16 - 31				
263-RS2388	263-RS2388-GW-ACC3099-REG	9 - 19				
263-RS2389	263-RS2389-GW-ACC3100-REG	13.6 - 28.6				
Trip Blanks						

Table I-4. Worksheet #18 Sampling Locations, Analytical Parameters, and SOPP Requirements
RSA-263 Groundwater Monitoring Plan

Sample Location	Sample Name [e]	Sample Depth (ft bgs)	QC Sample Designation		Analytical Suite	Field SOPP
			FD	MS/MSD		
RSA-263	RSA-263-WA-TB7007-TB	NA			VOC (**Worksheet #15**)	See note [a]
Equipment Rinsates						
RSA-263	RSA-263-BW-ACC8007-ER	NA			VOC, PAH, Metals, (**Worksheet #15**)	See notes [b]
IDW Water Samples						
RSA-263	RSA-263-WA-ACC9007-REG	NA			VOC, PAH, Metals or use groundwater results [d]	SOPP 4.0
RSA-263 YEAR 3, SECOND SEMIANNUAL SAMPLE LOCATIONS						
263-RS1903	263-RS1903-GW-ACC3101-REG	6.5 - 21.5			VOC, PAH, Metals, (**Worksheet #15**)	SOPP 7.0
263-RS1904	263-RS1904-GW-ACC3102-REG	7.4 - 17.4				
263-RS1905	263-RS1905-GW-ACC3103-REG	7.4 - 22.4	263-RS1905-GW-ACC3104-FD			
263-RS1906	263-RS1906-GW-ACC3105-REG	8.5 - 23.5		263-RS1906-GW-ACC3105-MS/MSD		
263-RS1907	263-RS1907-GW-ACC3106-REG	15.7 - 30.7				
263-RS1908	263-RS1908-GW-ACC3107-REG	16 - 31				
263-RS2388	263-RS2388-GW-ACC3108-REG	9 - 19				
263-RS2389	263-RS2389-GW-ACC3109-REG	13.6 - 28.6				
Trip Blanks						
RSA-263	RSA-263-WA-TB7008-TB	NA			VOC (**Worksheet #15**)	See note [a]
Equipment Rinsates						
RSA-263	RSA-263-BW-ACC8008-ER	NA			VOC, PAH, Metals, (**Worksheet #15**)	See notes [b]
IDW Water Samples						
RSA-263	RSA-263-WA-ACC9008-REG	NA			VOC, PAH, Metals or use groundwater results [d]	SOPP 4.0

Notes:

Table I-4. Worksheet #18 Sampling Locations, Analytical Parameters, and SOPP Requirements
RSA-263 Groundwater Monitoring Plan

bgs – below ground surface
ER – Equipment rinsate
FD – Field duplicate
ft – feet
GW – Groundwater
IDW – Investigation-Derived Waste
MS – Matrix spike
MSD –Matrix spike duplicate
MW – Monitoring well
NA – not applicable
PAH – Polycyclic Aromatic Hydrocarbon
QC – Quality control
REG – Regular sample
RSA – Redstone Arsenal
SOPP – Standard Operating Project Procedure
TB – Trip blank
VOC – Volatile organic compound

a) TBs are laboratory provided VOC vials filled with hazardous constituent free water and no headspace. TBs accompany the VOC sample containers into the field during sample collection and during shipment to the laboratory. One TB per sample shipping cooler containing RSA-263 groundwater VOC samples.
b) ERs are collected by pouring de-ionized water (obtained from the on-site deionized water treatment system) over non-dedicated decontaminated sampling equipment. One ER will be collected per sampling event.
c) The MS/MSD and FD locations are subject to change due to field conditions.
d) Optionally, groundwater sample results may be used instead of IDW sampling, which is contingent upon receiving facility.
e) The last four digits in the sample name are sequential.

Table I-5. Worksheet #19 & 30 Sample Containers, Preservation, and Hold Times
RSA-263 Groundwater Monitoring Plan

Analyte/ Analyte Group	Analytical Method	Matrix	Accreditation Expiration Date	Sample Container/ Preservation Requirements [b]	Holding Time	Total Number of Containers	Data Package Turnaround
Semiannual Sampling Event							
Metals	SW6020A	Water	31 July 2025	1 – 500 mL HDPE with HNO_3	180 days	12	15 days
VOC	SW8260C			3 – 40 mL vials; HCl to pH < 2	14 days	14	
PAH	SW8270D-SIM			2 – 1 Liter amber glass	7 days extraction; 40 days analysis	12	
IDW Water/Event							
Metals	SW6020A	Water	31 July 2025	1 – 500 mL HDPE with HNO_3	180 days	1	15 days
VOC	SW8260C			3 – 40 mL vials; HCl to pH < 2	14 days	1	
PAH	SW8270D-SIM			2 – 1 Liter amber glass	7 days extraction; 40 days analysis	1	

Notes:

< – less than
HCl – hydrochloric acid
HPDE – high-density polyethylene
HNO_3 – nitric acid
IDW – investigation-derived waste
mL – milliliter
PAH – Polycyclic aromatic hydrocarbon
SIM – Selected ion monitoring
SW – Solid Waste 846
VOC – volatile organic compound

a) Sample deliverables should include a Level IV, Contract Laboratory Program (CLP)-like data package and Electronic Data Deliverable (EDD) for all samples with the exception of IDW samples that require certificates of analysis and EDD only.
b) All samples should be cooled to 4 plus or minus (±) 2 degrees Celsius (°C) in conjunction with preservation requirements noted prior to shipment to the laboratory.
c) See **Worksheet #15** for the analyte list per method.

Table I-5. Worksheet #19 & 30 Sample Containers, Preservation, and Hold Times
RSA-263 Groundwater Monitoring Plan

Laboratory Point of Contact and Addresses

Lab Point of Contact:

Mr. Craig Meyers
Advanced Environmental Laboratories [AEL] Client Services Manager
Voice: 904-363-9350 Ext. 202
FAX: 904-363-9354
After Hours/Emergency: 904-710-7158

Laboratory Addresses:

For shipments Monday through Thursday, ship to:

Attn: Sample Receiving
Advanced Environmental Laboratories, Inc.
6681 Southpoint Parkway
Jacksonville, Florida 32216
904-363-9350

For shipments for Friday or Saturday delivery, there are specific instructions, they will be shipped and held for pickup at the following FedEx location across the street from the lab:

Attn: AEL
FedEx Shipping Center
3736 N Salisbury Rd
Jacksonville, Florida 32216
800-463-3339

Table I-6. Worksheet #20 Field Quality Control Sample Summary
RSA-263 Groundwater Monitoring Plan

Parameters[a]	Analytical Method	Matrix	Total Number of Samples	FD	MS	MSD	Equip. Rinsate (1/event)	Trip Blank (1/cooler)	TAT Needed [a]	Sample Container/ Preservation Requirements [b]	Holding Time	Total Number of Containers
Groundwater Monitoring Samples (Year 0, Year 1, Year 2 Events)												
Metals	SW6020A	Water	8	1	1	1	1	0	Normal	1 – 500 mL HDPE with HNO_3	180 days	7
VOC	SW8260C	Water	8	1	1	1	1	2	Normal	3 – 40 mL vials; HCl to pH < 2	14 days	8
PAH	SW8270D-SIM	Water	8	1	1	1	1	0	Normal	2 – 1 Liter amber glass	7 days extraction; 40 days analysis	7
IDW Water												
Metals	SW6020A	Water	1	0	0	0	0	0	Normal	1 – 500 mL HDPE with HNO_3	180 days	1
VOC	SW8260C	Water	1	0	0	0	0	0	Normal	3 – 40 mL vials; HCl to pH < 2	14 days	1
PAH	SW8270D-SIM	Water	1	0	0	0	0	0	Normal	2 – 1 Liter amber glass	7 days extraction; 40 days analysis	1

Notes:

< – less than
FD – field duplicate
HCl – hydrochloric acid
HPDE – high-density polyethylene
HNO_3 – nitric acid
IDW – investigation-derived waste
mL – milliliter
MS – matrix spike
MSD – matrix spike duplicate
SW – Solid Waste 846
TAT – turnaround time
VOC – volatile organic compound

a) Sample deliverables should include a Level IV, Contract Laboratory Program (CLP)-like data package and Electronic Data Deliverable (EDD) for all samples with the exception of IDW samples that require certificates of analysis and EDD only.
b) All samples should be cooled to 4 plus or minus (±) 2 degrees Celsius (°C) in conjunction with preservation requirements noted prior to shipment to the laboratory.
c) See **Worksheet #15** for the analyte list per method.

Table I-7. Worksheet #23 Analytical Laboratory Standard Operating Procedures
RSA-263 Groundwater Monitoring Plan

Analyte Group	Method	Laboratory SOP #	Title, Revision Date, and/or Number	Definitive or Screening Data	Matrix and Analytical Group	Instrument	Organization Performing Analysis	Modified for Project Work (Y/N)
Metals	SW3010A	MET-002	Method USEPA SW3010A: Acid digestion of aqueous samples and extracts, Rev. 15, Eff. 2021-02-12	Definitive	Metals Aqueous Sample Preparation	NA	AEL	N
	SW6020A	MET-016	Method SW6020A and B: Determination of Trace Elements in Waters and Wastes by ICP-MS, Rev.14, Eff. 2021-02-12	Definitive	Metals Aqueous Sample Analysis	ICP-MS		
VOCs	SW5030C	VOC-001	Method 5030C: Purge-and-Trap for Aqueous Samples, Rev. 06, Eff. 2020-08-10	Definitive	VOC Aqueous Sample Preparation	Purge and Trap		
	SW8260C	VOC-003	Methods 8260B, C, & D: VOCs by GC/MS, Rev. 16, Eff. 2021-04-19	Definitive	VOC Aqueous Sample Analysis	GC/MS		
PAHs	SW3510C	SVOC-001	Method 3510C: Separatory Funnel Liquid-Liquid Extraction, Rev. 07, Eff. 2020-03-27	Definitive	SVOC Aqueous Sample Preparation	NA		
	SW8270D-SIM	SVOC-028	Method 8270C/D/E SIM: SVOCs by GC/MS in SIM, Rev. 12, Eff. 2020-12-22	Definitive	SIM PAH Aqueous Sample Analysis	GC/MS		

Notes:

AEL – Advanced Environmental Laboratories
Eff – effective
GC/MS – Gas Chromatography/Mass Spectrometry
ICP-AES – Inductively Coupled Plasma-Atomic Emission Spectroscopy
ICP-MS – Inductively Coupled Plasma-Mass Spectrometry
NA – not applicable
PAH – Polycyclic aromatic hydrocarbon
Rev – revision
SIM – Selective Ion Monitoring
SOP – Standard Operating Procedure
SVOC – Semivolatile organic compound
USEPA – United States Environmental Protection Agency
VOC – Volatile organic compound

Table I-8. Worksheet #24 Analytical Instrument Calibration
RSA-263 Groundwater Monitoring Plan

Instrument	Calibration Procedure	Calibration Range	Frequency of Calibration	Acceptance Criteria	CA	Person Responsible for CA	SOP Reference
ICP-MS	LDR	High standard(s) at the upper limit of the range	At initial setup and every six months	To establish an upper limit where TV ± 10%	Data cannot be reported above upper limit within qualification or running a higher passing standard	Analyst	MET-016
	Tune Check	NA	Daily before ICAL	Mass Calibration ≤ to 0.1 amu from the true value; Resolution < 0.9 amu full width at 10% peak height.	Retune Instrument		
	IS	All QC and Samples	All QC and Samples	30-120% of Intensity in ICAL Blank	All samples out of range are to be diluted and rerun until IS returns to calibration range.		
	ICAL	Analytes at 10, 20, and 100 ppb.	Daily	Linear least squares regression for each analyte ≥ 0.99	Correct problem, rerun ICAL.		
	ICV	Analytes at 50 ppb.	Daily after ICAL.	All target elements ± 10% of true value	Correct problem, rerun ICV. If that fails, repeat ICAL.		
	CCV	Analytes at 20 ppb.	Every 10 field samples	All target elements ± 10% of true value	Immediately analyze two additional CCVs. If both pass, samples can be reported. If either fails, repair problem, rerun samples with new passing CCV. May require new ICAL. If reanalysis not possible, data must be qualified with case narration.		
	LDR	High standard(s) at the upper limit of the range	At initial setup and every six months	To establish an upper limit where TV ± 10%	Data cannot be reported above upper limit within qualification or running a higher passing standard		
VOC GC/MS	Tune Check	Ion ratio verified	Every 12 hours and beginning of the analytical batch.	Specific ion abundance criteria for BFB tune solution.	Retune Instrument	Analyst	VOC-003
	ICAL	On instrument: 1 to 200 µg/L, 0.1 to 1.2 µg/L for SIM	At instrument set-up and after ICV or CCV failure, prior to sample analysis	Either RSD for each analyte ≤ 15% or linear least squares regression for each analyte ≥ 0.99	Correct problem then repeat ICAL		

Table I-8. Worksheet #24 Analytical Instrument Calibration
RSA-263 Groundwater Monitoring Plan

Instrument	Calibration Procedure	Calibration Range	Frequency of Calibration	Acceptance Criteria	CA	Person Responsible for CA	SOP Reference
VOCs GC/MS	RT Windows Verification	NA	At ICAL at midpoint and daily at beginning CCV	Internal Standards shift ≤ 10 seconds otherwise reset. Analytes reported within ± 0.06 RRT	NA	Analyst	VOC-003
	ICV	At concentration level ± 25-50% of curve range	Once after ICAL	All target analytes within ± 20% of true value	Correct problem. Rerun ICV. If fails, repeat ICAL		
	CCV	At concentration level ± 25-50% of curve range	Daily before sample analysis, every 12 hours thereafter, and close of analysis	All target analytes within ± 20% of true value. Closing CCV ± 50%	Immediately analyze two additional CCVs. If both pass, samples can be reported. If either fails, repair problem, rerun samples with new passing CCV. May require new ICAL. If reanalysis not possible, data must be qualified with case narration.		
	IS	All QC and Samples	All QC and Samples	Retention time within ± 10 seconds at ICAL midpoint or first daily CCV. Area Counts -50% to +100% midpoint standard	Correct problem, reanalyze samples.		
SVOCs (PAH) GC/MS	Tune Check	Ion ratio verified	Every 12 hours and beginning of the analytical batch.	Specific ion abundance criteria for DFTPP tune solution.	Retune Instrument	Analyst	SVOC-028
	Tailing and Degradation Check	50 µg/mL	Every 12 hours and beginning of the analytical batch.	Degradation of DDT ≤ 20%, Benzidine and pentachlorophenol tailing factor < 2	Correct problem (Change liner and/or trim column)		
	Resolution Check	20 µg/mL	Every 12 hours and beginning of the analytical batch.	Resolution Criteria - The height of the valley between the 2 isomers (benzo(b) and benzo(k)) must be less 50% of the average height of the 2 peak heights. Correct problem and re-analyze all QC and project	Correct problem (Change liner and/or trim column)		
	ICAL	For PAH analytes, 0.025 to 100 mg/L on instrument. All other analytes, 5 to 100 mg/L.	At instrument set-up and after ICV or CCV failure, prior to sample analysis	Either RSD for each analyte ≤ 15%; linear or quadratic least squares regression for each analyte ≥ 0.99	Correct problem then repeat ICAL		

Table I-8. Worksheet #24 Analytical Instrument Calibration
RSA-263 Groundwater Monitoring Plan

Instrument	Calibration Procedure	Calibration Range	Frequency of Calibration	Acceptance Criteria	CA	Person Responsible for CA	SOP Reference
SVOCs (PAH) GC/MS	ICV	At concentration level ± 25-50% of curve range	Once after ICAL	All target analytes within ± 20% of true value	Correct problem. Rerun ICV. If fails, repeat ICAL	Analyst	SVOC-028
	RT Windows Verification	NA	At ICAL at midpoint and daily at beginning CCV	Internal Standards shift ≤ 10 seconds otherwise reset. Analytes reported within ± 0.06 RRT	NA		
	CCV	At concentration level ± 25-50% of curve range	Daily before sample analysis, every 12 hours thereafter, and close of analysis	All target analytes within ± 20% of true value. Closing CCV ± 50%	Immediately analyze two additional CCVs. If both pass, samples can be reported. If either fails, repair problem, rerun samples with new passing CCV. May require new ICAL. If reanalysis not possible, data must be qualified with case narration.		

Notes:

± – plus or minus
% – percent
< – less than
≤ – less than or equal to
≥ – greater than or equal to
µg/L – Micrograms per liter
µg/mL – Micrograms per milliliter
amu – atomic mass unit
BFB – Bromofluorobenzene
CA – Corrective action
CCV – Continuing calibration verification
DDT – Dichlorodiphenyltrichloroethane
DFTPP – Decafluorotriphenylphosphine
GC/MS – Gas Chromatography/Mass Spectrometry
ICAL – Initial calibration
ICV – Initial Calibration Verification
IS –Internal Standard
LDR – Linear dynamic range
mg/L – Milligrams per liter
NA – Not applicable
PAH – polycyclic aromatic hydrocarbon
ppb – parts per billion
QC – Quality control
RRT – Relative retention time
RSD – Relative standard deviation
RT – Retention time
SIM –Selected ion monitoring
SOP – Standard Operating Procedure
SVOC – Semivolatile organic compound
TV – Threshold value
VOC – Volatile organic compound

Table I-9. Worksheet #25 Analytical Instrument and Equipment Maintenance, Testing, and Inspection
RSA-263 Groundwater Monitoring Plan

Instrument/ Equipment	Maintenance Activity	Testing Activity	Inspection Activity	Frequency	Acceptance Criteria	CA	Title/Position Responsible for CA	Reference
ICP-MS	Pump/tubing	ICAL and CCV	• Checked daily • Replaced every 2 to 3 days	As Listed with Inspection	MBs < DL, ICAL, ICV, CCV, peak shape, & LCS, Area Counts, surrogate limits as seen on **Worksheet #28**	Normal replacement	Analyst/ Supervisor	MET-016
	Sample introduction		• All sample introduction items, nebulizer, injector tip, spray chamber and torch are cleaned and sonicated in a HNO_3 and HCl aqua-regia solution as needed. Dependent on sample load and sample concentrations.		MB, CCB, and QC passing criteria	Normal maintenance		
	Cones		• Cones are removed and cleaned in HNO_3 and sonicated. Replaced with new as needed.		Passing tunes and QC criteria.	Clean or replace as needed		
	Interference Checks		• Performance Maintenance	As needed	MB, CCB, and QC passing criteria	Performance Maintenance		
	Chiller/ Compressor		• Clean screens check and add fluid monthly • Drain and replace compressor oil monthly	As Listed with Inspection	Set to proper fluid levels	Set to proper fluid levels		
VOCs Purge and Trap System	Concentrating Trap	ICAL and CCV	• purge flow rate (40 mL/min) at least weekly • bake flow rate (80-120 mL/min) at least monthly • shape and tailing of chromatographic peaks continuously • monitor trending in surrogate & standard recoveries continuously • changes in tuning daily • instrument blank baselines continuously	As Listed with Inspection	Method blanks < DL, ICAL, ICV, CCV, and surrogate limits as seen on **Worksheet #28**	Trap replacement, sparge tube cleaning and replacement, trap conditioning, check for leaks by flow.	Analyst	VOC-001, VOC-002
VOCs GC/MS	Column performance	ICAL and CCV	• shape and tailing of chromatographic peaks continuously • monitor trending in surrogate & standard recoveries continuously • changes in tuning daily • instrument blank baselines continuously	As Listed with Inspection	Method blanks < DL, ICAL, ICV, CCV, peak shape, & LCS, Internal Area Counts, surrogate limits as seen on **Worksheet #28**	Trim or replace column	Analyst	VOC-003
	Vacuum System		• Check level of oil in rotary pump quarterly • Replace oil in vacuum rotary pump annually		Levels within level check marks	Add or change oil		

Table I-9. Worksheet #25 Analytical Instrument and Equipment Maintenance, Testing, and Inspection
RSA-263 Groundwater Monitoring Plan

Instrument/ Equipment	Maintenance Activity	Testing Activity	Inspection Activity	Frequency	Acceptance Criteria	CA	Title/Position Responsible for CA	Reference
VOCs GC/MS	Ion source/ chamber	ICV and CCV	• Clean MS ion source, check pre-rods and lenses quarterly • Deep cleaning of MS including ion source, pre-rods and lenses semi-annually or as needed.	As Listed with Inspection	Passing Tune criteria	Clean and/or replace ion source parts.	Senior Analyst/ Department Supervisor	VOC-003
	Filament		• Check filaments condition (filaments are replaced through the year as needed)		Passing Tune criteria, Passing QC, Area Counts and Sensitivity.		Analyst	
SVOCs (PAH) GC/MS	Column/liner performance	ICV and CCV	• shape and tailing of chromatographic peaks continuously • monitor trending in surrogate & standard recoveries continuously • changes in tuning daily • instrument blank baselines continuously	As Listed with Inspection	Method blanks < DL, ICAL, ICV, CCV, peak shape, & LCS, Internal Area Counts, surrogate limits as seen on **Worksheet #28**	Trim or replace column. Replace liner.	Analyst	SVOC-006 SVOC-028
	Vacuum System		• Check level of oil in rotary pump quarterly • Replace oil in vacuum rotary pump annually		Levels within level check marks	Add or change oil		
	Ion source/ chamber		• Clean MS ion source, check pre-rods and lenses quarterly • Deep cleaning of MS including ion source, pre-rods and lenses semi-annually or as needed.		Passing Tune criteria	Clean and/or replace ion source parts.	Senior Analyst/ Department Supervisor	
	Filament		• Check filaments condition (filaments are replaced through the year as needed)		Passing Tune criteria, Passing QC, Area Counts and Sensitivity.	Clean and/or replace ion source parts.	Analyst	

Notes:

< – less than
CA – Corrective action
CCB – Continuing calibration blank
CCV – Continuing calibration verification
DL – Detection limit
GC/MS – Gas Chromatography-Mass Spectrometry
HCl – hydrochloric acid
HNO_3 – nitric acid
ICAL – Initial calibration
ICP-MS – Inductively coupled plasma-mass spectrometry
ICV – Initial calibration verification
LCS – laboratory control sample
MB – Method blank
mL/min – milliliters per minute
MS – Mass spectrometry
PAH – polycyclic aromatic hydrocarbons
QC – Quality control
SVOC -semivolatile organic compound
VOC – volatile organic compound

Table I-10. Worksheet #26 Sample Handing, Custody, and Disposal
RSA-263 Groundwater Monitoring Plan

SAMPLE COLLECTION, PACKAGING, AND SHIPMENT (FIELD)
Sample Collection (Personnel/Organization): ECC Personnel To be Determined (TBD)
Sample Packaging (Personnel/Organization): ECC Personnel TBD
Coordination of Shipment (Personnel/Organization): ECC Personnel TBD
Type of Shipment/Carrier: Cooler/Lab Courier, FedEx
SAMPLE RECEIPT AND ANALYSIS
Sample Receipt (Personnel/Organization): Advanced Environmental Laboratories (AEL) Laboratory Personnel
Sample Custody and Storage (Personnel/Organization): AEL Laboratory Personnel
Sample Preparation (Personnel/Organization): AEL Laboratory Personnel
Sample Determinative Analysis (Personnel/Organization): AEL Laboratory Personnel
SAMPLE ARCHIVING
Field Sample Storage (number of days from sample collection): 60 days from receipt
Sample Extract/Digestate Storage (number of days from extraction/digestion): 3 months from sample extraction/digestion
Biological Sample Storage (number of days from sample collection): Not applicable (NA)
SAMPLE DISPOSAL
Personnel/Organization: AEL Laboratory Personnel
Number of Days from Analysis: 30 days from submittal of Final report or 60 days from receipt, whichever is longer

Notes:

Post sample collection in the field will be conducted in accordance with SOPP 15.0 *Non-Hazardous Sample Handling, Packaging, and Shipping.* This procedure is located in the Installation-Wide Quality Assurance Project Plan (IW-QAPP), Volume II (HydroGeoLogic, Inc. [HGL], 2019).

Specific laboratory sample custody procedures (receipt of samples, archiving, and disposal) will be used for all post-sample handling. Coolers will be received and checked for proper temperature. A sample cooler receipt form will be filled out to note the conditions and any discrepancies. The chain of custody will be checked against the sample containers for correctness. Samples will be logged into the data base and given a unique log number, which can be tracked through processing. The Project Chemist will be notified of any problems.

Table I-11. Worksheet #28 Analytical Quality Control and Corrective Action
RSA-263 Groundwater Monitoring Plan

Matrix: **Aqueous**
Analytical Group: **Metals**
Analytical Method/SOP: **USEPA 3010A / 6020A by MET-002 & MET-016**

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	MPC
MB	Once every prep/analytical batch of 20 or fewer samples	No analyte detected equal to or above the DL or > 1/10 the regulatory limit, whichever is greater (DoD: No analytes > ½ LOQ; common lab contaminants none detected > LOQ)	Correct problem. If required, reprep and reanalyze MB and all QC samples and field samples processed with the contaminated blank. If not enough sample volume to re-prep, data qualified with case narration.	Analyst with Department Supervisor and QA Officer review.	Same as Method/SOP
ICB/CCB	Immediately after the ICV and immediately after every CCV	The absolute values of all analytes must be > ½ LOQ	ICB: Correct problem and repeat ICV/ICB analysis. If that fails, rerun ICAL. All samples following the last acceptable Calibration Blank must be reanalyzed. CCBs may not be reanalyzed without reanalysis of the associated sample and CCV(s)	Analyst with Department Supervisor review .	
ICS	After ICAL and prior to sample analysis	Absolute value of concentration for all non-spiked target analytes < ½ LOQ (Unless there are a verified trace impurity from one of the spiked analytes)	Stop analysis and locate problem. Correct problem and reanalyze ICS and all associated samples. If corrective action fails and reanalysis cannot be performed, qualify data accordingly and notify client and or case narrate		
LCS	Once every prep/analytical batch of 20 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable.	Correct problem. If required, reprep and reanalyze LCS and all QC samples and field samples processed in batch. If not enough sample volume to re-prep, data qualified with case narration.	Analyst with Department Supervisor and QA Officer review.	
MS	Once every prep/analytical batch of 10 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable.	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.	Analyst with Department Supervisor review.	
MSD	Once every prep/analytical batch of 10 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable. RPD of all target compounds ≤ 20% between MS and MSD.	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.	Analyst with Department Supervisor review.	
Dilution Test	When MS or MSD fails	5 fold dilution must agree within ± 10% of original measurement	No specific CA unless a stated project requirement. Flag accordingly.	Analyst with Department Supervisor review.	

Table I-11. Worksheet #28 Analytical Quality Control and Corrective Action
RSA-263 Groundwater Monitoring Plan

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	MPC
PDS Addition	When MS or MSD fails using same parent sample of failure.	Recovery within ±80-120%	No specific CA unless a stated project requirement. Flag accordingly.	Analyst with Department Supervisor review.	Same as Method/SOP

Notes:

< – less than
≤ – less than or equal to
> – greater than
± – plus or minus
% – percent
CA – Corrective action
CCB – continuing calibration blank
DL – Detection limit
DoD – Department of Defense
ICB – Initial calibration blank
LCS – Laboratory control sample
LCSD – Laboratory control sample duplicate
LOQ – Limit of quantitation
MB – Method blank
MPC – Method Performance Criteria
MS – Matrix spike
MSD – Matrix spike duplicate
PDS – Post-digestion spike
QA – Quality assurance
QC – Quality control
QSM –Quality Systems Manual
RPD – Relative percent difference
SOP – Standard operating procedure
USEPA – United States Environmental Protection Agency

Table I-11. Worksheet #28 Analytical Quality Control and Corrective Action
RSA-263 Groundwater Monitoring Plan

Matrix: **Aqueous**
Analytical Group: **Volatiles**
Analytical Method/SOP: **USEPA 5030C & 8260C / VOC-001 & VOC-003**

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title/Position Responsible for CA	Project Specific MPC
MB	Once every prep/ analytical batch of 20 or fewer samples	No analyte detected equal to or above the DL or > 1/10 the regulatory limit, whichever is greater (DoD: No analytes > ½ LOQ; common lab contaminants none detected > LOQ)	Correct problem. If required, reprep and reanalyze MB and all QC samples and field samples processed with the contaminated blank. If not enough sample volume to re-prep, data qualified with case narration.	Analyst with Department Supervisor and QA Officer review.	MB detections used to qualify project samples per validation guidance.
LCS	Once every prep/ analytical batch of 20 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable.	Correct problem. If required, reprep and reanalyze LCS and all QC samples and field samples processed in batch. If not enough sample volume to re-prep, data qualified with case narration.		Same as Method/SOP
LCSD or lab dup	Alternative means of determining laboratory precision is MS/MSD no performed. Performed as needed.	RPD of all target compounds ≤ 20%	No specific corrective action unless a stated project requirement. Flag accordingly.		
MS	Once every prep/ analytical batch of 20 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable.	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.	Analyst with Department Supervisor review.	
MSD	Once every prep/ analytical batch of 20 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable. RPD of all target compounds ≤ 20% between MS and MSD.	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.		
Surrogate Spike (Surr)	All samples and QC (except tune)	QC limits set in QSM 5.3 tables or in-house generated limits when DoD limits unavailable.	Action dependent upon type. If MB or LCS, correct problem and reprep-reanalyze all associated samples. If sample, examine matrix. If obvious chromatographic interferences, reanalysis may not be required. Qualify recovery data and notify and/or case narrate.		

Notes:
> – greater than
≤ – less than or equal to
% – percent
CA – Corrective Action
DL – Detection limit
DoD – Department of Defense
LCS – Laboratory control sample
LCSD – Laboratory control sample duplicate
LOQ – Limit of quantitation
MB – Method blank
MPC – Method Performance Criteria
MS – Matrix spike
MSD – Matrix spike duplicate
QA – Quality assurance
QC – Quality control
QSM –Quality Systems Manual
RPD – Relative percent difference
SOP – Standard operating procedure
USEPA – United States Environmental Protection Agency

Table I-11. Worksheet #28 Analytical Quality Control and Corrective Action
RSA-263 Groundwater Monitoring Plan

Matrix: **Aqueous**
Analytical Group: **PAHs**
Analytical Method/SOP: **USEPA 3510C / 8270-SIM by SVOC-001 & SVOC-028**

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title/Position Responsible for CA	Project Specific MPC
MB	Once every prep/ analytical batch of 20 or fewer samples	No analyte detected equal to or above the DL or > 1/10 the regulatory limit, whichever is greater. (DoD: No analytes > ½ LOQ; common lab contaminants none detected > LOQ)	Correct problem. If required, reprep and reanalyze MB and all QC samples and field samples processed with the contaminated blank. If not enough sample volume to re-prep, data qualified with case narration.	Analyst with Department Supervisor and QA Officer review.	Same as Method/SOP
LCS	Once every prep/ analytical batch of 20 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable.	Correct problem. If required, reprep and reanalyze LCS and all QC samples and field samples processed in batch. If not enough sample volume to re-prep, data qualified with case narration.		
MS	Once every prep/ analytical batch of 20 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable.	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.	Analyst with Department Supervisor review.	
MSD	Once every prep/ analytical batch of 20 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable. RPD of all target compounds ≤ 20% between MS and MSD.	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.		
Surrogate Spike (Surr)	All samples and QC (except tune)	QC limits set in QSM 5.3 tables or in-house generated limits when DoD	Action dependent upon type. If MB or LCS, correct problem and reprep-reanalyze all associated samples. If sample, examine matrix. If obvious chromatographic interferences, reanalysis may not be required. Qualify recovery data and notify and/or case narrate.		

Notes:
> – greater than
≤ – less than or equal to
% – percent
CA – Corrective Action
DL – Detection limit
DoD – Department of Defense
LCS – Laboratory control sample
LCSD – Laboratory control sample duplicate
LOQ – Limit of quantitation
MB – Method blank
MPC – Measurement performance criteria
MS – Matrix spike
MSD – Matrix spike duplicate
QA – Quality assurance
QC – Quality control
QSM –Quality Systems Manual
RPD – Relative percent difference
SOP – Standard operating procedure
USEPA – United States Environmental Protection Agency

Table I-11. Worksheet #28 Analytical Quality Control and Corrective Action
RSA-263 Groundwater Monitoring Plan

Matrix: **Aqueous**
Analytical Group: **Metals**
Analytical Method/SOP: **USEPA 3010A / 6020A by MET-009 & MET-016**
3510C / 8270-SIM by SVOC-001 & SVOC-028

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title/Position Responsible for CA	Project Specific MPC
MB	Once every prep/analytical batch of 20 or fewer samples	No analyte detected equal to or above the DL or > 1/10 the regulatory limit, whichever is greater. (DoD: No analytes > ½ LOQ; common lab contaminants none detected > LOQ)	Correct problem. If required, reprep and reanalyze MB and all QC samples and field samples processed with the contaminated blank. If not enough sample volume to re-prep, data qualified with case narration.	Analyst with Department Supervisor and QA Officer review.	Same as Method/SOP
ICB/CCB	Immediately after the ICV and immediately after every CCV	The absolute values of all analytes must be > ½ LOQ	ICB: Correct problem and repeat ICV/ICB analysis. If that fails, rerun ICAL. All samples following the last acceptable Calibration Blank must be reanalyzed. CCBs may not be reanalyzed without reanalysis of the associated sample and CCV(s)	Analyst with Department Supervisor review.	
ICS	After ICAL and prior to sample analysis	Absolute value of concentration for all non-spiked target analytes < ½ LOQ (Unless there are a verified trace impurity from one of the spiked analytes)	Stop analysis and locate problem. Correct problem and reanalyze ICS and all associated samples. If corrective action fails and reanalysis cannot be performed, qualify data accordingly and notify client and or case narrate.		
LCS	Once every prep/ analytical batch of 20 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable.	Correct problem. If required, reprep and reanalyze LCS and all QC samples and field samples processed in batch. If not enough sample volume to re-prep, data qualified with case narration.	Analyst with Department Supervisor and QA Officer review.	
MS	Once every prep/ analytical batch of 10 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable.	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.	Analyst with Department Supervisor review.	
MSD	Once every prep/ analytical batch of 10 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable. RPD of all target compounds ≤ 20% between MS and MSD.	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.		
Dilution Test	When MS or MSD fails	5 fold dilution must agree within ± 10% of original measurement	No specific corrective action unless a stated project requirement. Flag accordingly.		

Table I-11. Worksheet #28 Analytical Quality Control and Corrective Action
RSA-263 Groundwater Monitoring Plan

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title/Position Responsible for CA	Project Specific MPC
PDS Addition	When MS or MSD fails using same parent sample of failure.	Recovery within ±80-120%	No specific corrective action unless a stated project requirement. Flag accordingly.	Analyst with Department Supervisor review.	Same as Method/SOP

Notes:

> – greater than
≤ – less than or equal to
± – plus or minus
% – percent
CCB – Continuing calibration blank
DL – Detection limit
DoD – Department of Defense
ICB – Initial calibration blank
ICS – Interference check solution
LCS – Laboratory control sample
LCSD – Laboratory control sample duplicate
LOQ – Limit of quantitation
MB – Method blank
MPC – Measurement performance criteria
MS – Matrix spike
MSD – Matrix spike duplicate
PDS – Post digestion spike
QA – Quality assurance
QC – Quality control
QSM –Quality Systems Manual
RPD – Relative percent difference
SIM – Selected ion monitoring
SOP – Standard operating procedure
USEPA - United States Environmental Protection Agency

Table I-12. Worksheet #36 Data Validation Procedures
RSA-263 Groundwater Monitoring Plan

Data validation is an analyte and sample-specific process for evaluating compliance with contract requirements, methods/Standard Operating Procedures (SOPs), and Measurement Performance Criteria (MPC).

All project field samples will undergo a Tier 1 Plus (Department of Defense [DoD] Quality Systems Manual [QSM] Stage 2B) data validation using lab limits as the MPC. Investigation-Derived Waste (IDW) samples will be reviewed for completeness only.

Data validation will be documented on Environmental Chemical Corporation (ECC) data validation worksheets (DVW). Project electronic data deliverables (EDDs) (ECC Environmental Data Management System [EDMS] EDD and Environmental Remediation Information System [ERIS]) will be updated with Installation-Wide Quality Assurance Program Plan (IW-QAPP) data validation qualifiers and rationale for validation qualifications provided in the DVW.

- U – Not detected by the lab or as a result of qualifying data due to cross contamination as determined by blank evaluation less than five times blank level) during data validation.
- UJ – Not detected with estimated reporting limits. Assigned due to data validation exceedance.
- R – Rejected data. Data determined to be unusable during data validation.

Step IIa/IIb	Matrix	Analytical Group	Concentration Level	Validation Criteria	Data Validator
IIa	Groundwater	All **Worksheet #15** Analytical groups	Low/Medium	Laboratory MPC evaluated in accordance with applicable USEPA National Functional Guidelines as applicable to analytical methods listed in the SAP.	ECC Project Chemist or designate

Notes:
ECC – Environmental Chemical Corporation
MPC – Measurement Performance Criteria
SAP – Sampling and Analysis Plan
USEPA – United States Environmental Protection Agency

ATTACHMENT 1

FIELD DOCUMENTATION

This page intentionally left blank.

Table 1

Water Level Survey Log
RSA-263
Redstone Arsenal, Madison County, Alabama

Date: _____

Personnel: _____

Weather: _____

Other Comments: _____

Well ID	Headspace PID (ppm)	Time	Depth to Water (ft btoc)
263-RS1903			
263-RS1904			
263-RS1905			
263-RS1906			
263-RS1907			
263-RS1908			
263-RS2388			
263-RS2389			

Notes:
ft btoc – feet below top of casing
PID – Photoionization detector
ppm – parts per million

Table 2

Monitoring Well Sampling Log
RSA-263
Redstone Arsenal, Madison County, Alabama

Date: _____

Personnel: _____

Weather: _____

Other Comments: _____

Well ID	Top of Casing Elevation (ft amsl)	Ground Elevation (ft amsl)	Installed Well Depth (ft bgs)	Screened Interval (ft bgs)	Date Sampled	Time	Depth to Water (ft btoc)
263-RS1903	574.47	572.15	21.9	6.5 - 21.5			
263-RS1904	573.03	573.17	17.8	7.4 - 17.4			
263-RS1905	575.41	573.19	22.8	7.4 - 22.4			
263-RS1906	577.31	574.65	23.9	8.5 - 23.5			
263-RS1907	584.34	581.97	31.1	15.7 - 30.7			
263-RS1908	585.82	583.61	31.4	16 - 31			
263-RS2388	571.77	569.42	19.5	9 - 19			
263-RS2389	585.24	582.51	29	13.6 - 28.6			

Notes:
amsl – above mean sea level
bgs – below ground surface
btoc – below top of casing
ft – feet

GROUNDWATER PURGE FORM

Redstone Arsenal, Madison County, Alabama

Site ID:_____ Sampling location ID:_____

Weather:_____ Sample Number:_____

Purge Equipment:_____ Collection Date/Time:_____

Pump Installation

Pump installation crew:_____ Installation date/beginning time:_____

PID/FID reading (well head/background):_____ Screen Interval (ft. bgs): _____ to _____

Casing diameter (inches):_____ Pump intake depth (ft btoc): _____

Measured Well Depth (ft. btoc):_____ Pre-installation DTW (ft btoc):_____

Discharge tube length (ft.):_____ Discharge tube diameter (3/8" or 1/4"):_____

Pneumatic Controller Tuning: Initial air pressure = H (ft.) X 0.43 = _____ psi

Purging

Purging/sampling crew:_____ Purge date/beginning time:_____

d_1 = screen diameter (inches) v_1 = screen volume (gallons) l_1 - screen length (feet)

d_2 = borehole diameter (inches) v_2 = filter pack volume (gallons) l_2 = filter pack length (feet)

V = purge volume (gallons or liters) p&t = pump and tubing volume (liters) t = tubing length (feet)

$v_1 = [(d_1)^2 \times 0.041] \times l_1$ $v_1 = [(_____)^2 \times 0.041] \times _____ = _____$gallons

$v_2 = [(d_2)^2 - (d_1)^2] \times 0.041 \times l_2 \times 0.3$ $v_2 = [(_____)^2 - (_____)^2] \times 0.041 \times _____ \times 0.3 = _____$gallons

$V = (v_1 + v_2) \times 3.79$ $V = (_____ + _____) \times 3.79 = _____$ liters

p&t = {[t x (multiplier)] + 500} /1000 p&t = [(_____ x _____) + 500] / 1000 = _____ liters

TOTAL PURGE VOLUME = V + required number of p&t volumes = _____ liters.

	Initial	2	3	4	5	6	7	8	Final
Pressure (psi)									
Refill Setting									
Discharge Setting									
Flow rate (mL/min)									

Water Quality Parameter Measurements

Time and Date	DTW (ft. BTOC)	Purge Rate (mL/min)	Cumulative Volume Purged (L)	Temp. (degree C)	Conductivity (mMhos/cm)	pH	Eh (mv)	DO (mg/L)	Turbidity (NTU)

Comments

Abbreviations: BTOC - Below top of casing; BGS - Below ground surface; DTW - Depth to water; H - head above pump intake; mL - milliliter; L - Liter; ft - feet; mL/min - milliliters per minute; degree C - degree Celsius; mMhos/cm - millimhos per centimeter; pH - hydrogen ion concentration; Eh - redox potential; mv - millivolts; DO - dissolved oxygen; mg/L - milligrams per liter; NTU - nephelometric turbidity unit; psi - pounds per square inch; PID/FID - photoionization detector/flame ionization detector

GROUNDWATER PURGE FORM

Continuation Sheet

Redstone Arsenal, Madison County, Alabama

Sampling location ID:_____ Sample Number:_____

Water Quality Parameter Measurements									
Time and Date	DTW (ft. BTOC)	Purge Rate (mL/min)	Cumulative Volume Purged (L)	Temp. (degree C)	Conductivity (mMhos/cm)	pH	Eh (mv)	DO (mg/L)	Turbidity (NTU)

SAMPLE COLLECTION LOG

Site _____ **Project:** ___**Redstone Arsenal**_____

Location Code:_____ **Sample Date:** _____

Sample Number:_____ **Time:** _____

Sample Name: _____ **Sample Matrix:** _____

Well Depth:_____ **Depth to Water:** _____

Sampling Equipment: _____ **Sample Team (name/Company):** _____

QC Partners:

Trip Blanks: _____ Rinsate:_____ Field Blank _____

Containers:

Analytical Suite	FLT	Quantity	Size	Units	Type

Flt- Filtered (Y/N)

Purge Record (Last 3 readings for groundwater, single set of readings for any other water)

Date	Time	Depth to Water (ft)	Eh (mV)	pH (SU)	Conductivity (mS/cm)	DO (ppm)	Turbidity (NTU)	Temp (°C)	Purge Volume (gal)

ft – feet
mV – millivolts
SU – standard unit
mS/cm – microsiemens per centimeter
ppm – parts per million
NTU – nephelometric turbidity units
°C – degrees Celsius
gal – gallons

Logged By/Date_____ **Reviewed by/Date** _____

REDSTONE ARSENAL WELL INSPECTION CHECKLIST

WELL LOCATION		DATE INSPECTED	INSPECTION CREW
SITE #			
WELL #			

WELL TYPE	
WELL TYPE: (CIRCLE ONE)	OVERBURDEN BEDROCK PIEZOMETER EXTRACTION OTHER _____

WELL CONSTRUCTION		
(CIRCLE ONE)	FLUSH MOUNT	STICKUP

PHYSICAL APPEARANCE	
EXCELLENT	WELL INTEGRITY HAS NO DEFIENCIES
GOOD	MINOR DEFIENCIES - PAD CRACKED, NO LOCK, MISSING EXPANDABLE CAP
POOR	MAJOR DEFIENCIES - PAD DESTROYED, NO STENCILING, POST MISSING

	YES	NO	N/A	CONDITION	COMMENTS
CONCRETE PAD				EXCELLENT GOOD POOR	
PROTECTIVE POST				EXCELLENT GOOD POOR	
PROTECTIVE CASING				EXCELLENT GOOD POOR	
STENCILING				EXCELLENT GOOD POOR	
LOCK				EXCELLENT GOOD POOR	
EXPANDABLE CAP				EXCELLENT GOOD POOR	
ACCESSIBLE				EXCELLENT GOOD POOR	
REPAIRS NEEDED					

Notes: N/A - not applicable

DAILY SITE REPORT

Project Title: Redstone
Activity Name:
Location: U.S Army Garrison - Redstone
Contract No.: W9124J-18-D-0004, DO W9124J18F0085

Weather	Sunny	Clear	Overcast	Rain	Snow
Temperature	< 32	32 – 50	50 – 70	70-85	> 85
Wind	Still	Moderate	High		
Humidity	Dry	Moderate	Humid		

Personnel On Site:

Name	Hrs.	Affiliation	Location/ Description of Work

Field Changes: YES _____ NO _____

If yes, filed Nonconformance and Corrective Action Report number (NCR No.):_____

Work Performed:	
Equipment Used:	
Health & Safety (Briefing held, PPE, injuries, near misses, etc.):	
Samples Collected/ Shipped:	
IDW Generated and Disposition:	
Verbal Instructions Received/Given:	
Changed Conditions/ Delays/ Conflicts Encountered or Resolved:	
Other Comments or Additional Information:	
Next Day's Planned Activities:	

Contractor Verification: On behalf of the contractor, ECC, I certify this report is complete and correct, and all materials and equipment used and work performed during this reporting period are in compliance with the contract plans and specifications, to the best of my knowledge, except as may be noted above.

_____ _____
Signature Date

Notes:

PPE - personal protective equipment

IDW - investigation derived waste

INSTRUMENT CALIBRATION LOG

Project: Redstone 5211.014 **Site:** _____ **Date** _____

Calibrated By _____ **Instrument** _____ **Serial Number** _____

Weather: _____

Parameters	Calibration	Calibration Temp	Post Calibration	Comments
Conductivity (mS/cm^{c})				
pH (7)				
pH (4)				
pH (10)				
ORP (mV)				
Dissolved Oxygen (%)				
Barometric Pressure (mmHg)				
Turbidity	**<0.10 NTU**	**15.0 NTU**	**100 NTU**	**750 NTU**
PID		**Isobutylene / 100ppm**		

Notes: mS/cm - microsiemens per centimeter; pH - hydrogen ion concentration; ORP - oxidation-reduction potential; mV - millivolts; mmHg - millimeters of mercury; NTU - nephelometric turbidity unit; PID - photoionization detector; ppm - parts per million

PHOTO IONIZATION DETECTOR
INSTRUMENT CALIBRATION LOG

Project/Site Name Redstone Arsenal **Calibrated By**_____

Instrument/Serial Number	Pre-calibration Reading	Post-calibration Reading	Calibration Gas/Concentration	Date
			Isobutylene / 100ppm	
			Isobutylene / 100ppm	
			Isobutylene / 100ppm	
			Isobutylene / 100ppm	
			Isobutylene / 100ppm	
			Isobutylene / 100ppm	
			Isobutylene / 100ppm	
			Isobutylene / 100ppm	
			Isobutylene / 100ppm	
			Isobutylene / 100ppm	
			Isobutylene / 100ppm	
			Isobutylene / 100ppm	

Notes: ppm - parts per million

Vision Integrity Results	ECC	DAILY SAFETY MEETING SIGN-IN SHEET

Date: _____ Project Name/Location: Redstone Arsenal

Company: ECC Person Conducting Briefing: _____

1. AWARENESS (e.g., Hazards, special EHS concerns, pollution prevention, recent incidents, etc.):

2. OTHER ISSUES (HASP changes, new AHAs, attendee comments, etc.):

3. DISCUSSION OF DAILY ACTIVITIES/TASKS AND SAFETY (PPE) MEASURES TO BE USED:

4. Hospital Information

Name:

Address:

Phone:

Directions

5. ATTENDEES (Print Name):

1.	2.
3.	4.
5.	6.
7.	8.
9.	10.

Notes:

EHS - Environment, Health, and Safety

HASP - Health and Safety Plan

AHA - Activity Hazard Analysis

PPE - Personal Protective Equipment