DEPARTMENT OF THE ARMY
US ARMY INSTALLATION MANAGEMENT COMMAND
HEADQUARTERS, UNITED STATES ARMY GARRISON, REDSTONE
4488 MARTIN ROAD
REDSTONE ARSENAL, ALABAMA 35898-5000

Received
NOV 08 2023
Land Division

REPLY TO
ATTENTION OF

Environmental Management Division

Mr. Stephen A. Cobb, P.E.
Chief, Land Division
Alabama Department of Environmental Management
Post Office Box 301463
Montgomery, Alabama 36130-1463

11/08/2023

Reference:

a. The Installation Restoration Program at Redstone Arsenal, Alabama, AMIM-REP-ER (EPA ID AL7 210 020 742).

b. Resource Conservation and Recovery Act Corrective Action Program at Redstone Arsenal, Alabama (EPA ID AL7 210 020 742)).

c. Redstone Arsenal's Alabama Hazardous Wastes Management and Minimization Act Hazardous Waste Storage Facility/Thermal Treatment/Solid Waste Management Unit Corrective Action (AHWMMA) Permit dated July 19, 2021, and Modification No.1, dated August 12, 2022.

d. Revision 0, Corrective Measures Implementation Work Plan RSA-262, CWS Warehouse Area (Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027) Operable Unit 08, U.S. Army Garrison-Redstone, Madison County, Alabama, July 2023

Dear Mr. Cobb:

This letter transmits responses to Alabama Department of Environmental Management (ADEM) comments on Revision 0, Corrective Measures Implementation Work Plan RSA-262, CWS Warehouse Area (Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027) Operable Unit 08, U.S. Army Garrison-Redstone, Madison County, Alabama, received in an email correspondence from Mr. Kieth West to Ms. Holly Gallier, dated 31 October 2023

Responses to the comments are provide below.

1) Figure 7 denotes well 262-RS1699 in red, indicating a PSV exceedance. However, the Explosives section of Table 2 doesn't list this well.

Response: Concur. Figure 7 was revised for monitoring well 262-RS1699 to not indicate an exceedance with a green icon.

2) Table 2 has well 262-RS2769 listed as a well with the MDC for 2-nitrotoluene. However, this well is colored green on Figure 7. Please address this discrepancy between Table 2 and Figure 7.

Response: Concur. Figure 7 was revised to indicate an exceedance at 262-RS2769 with a red icon.

Theis letter also transmits the Revision 1, Corrective Measures Implementation Work Plan RSA-262, CWS Warehouse Area (Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027) Operable Unit 08, U.S. Army Garrison-Redstone, Madison County, Alabama, which incorporates ADEM comments.

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision according to a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

Copies of this document are being furnished to Mr. Keith West, and Ms. Ashley Mastin, Alabama Department of Environmental Management. Copies are also provided to Mr. Robert Pope, Superfund and Emergency Management Division USEPA Region 4, and Mr. Cesar Zapata, Land, Chemicals, and Redevelopment Division USEPA Region 4.

My point of contact for this request is Mr. Jesse Wheat, Environmental Management Division, 256-876-9675 or email jesse.j.wheat.ctr@army.mil.

Sincerely,

Clint Howard

Clint Howard
Chief, Environmental Restoration Branch

Corrective Measures Implementation Work Plan
RSA-262, CWS Warehouse Area
(Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027)
Operable Unit 08
Revision 1

ENVIRONMENTAL REMEDIATION SERVICES
U.S. ARMY GARRISON-REDSTONE ARSENAL

November 2023

Prepared for:

U.S. ARMY ENVIRONMENTAL COMMAND
Southeast-Environmental Service and Support Division
2450 Connell Road, Building 2264
Fort Sam Houston, TX 78234-7664

Prepared by:

ECC
9200 Church St
Suite 305
Manassas, VA 20110

Contract No.: W9124J-18-D-0004, Delivery Order W9124J21F0020

This page intentionally left blank.

Corrective Measures Implementation Work Plan
RSA-262, CWS Warehouse Area,
Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027
Operable Unit 08

U.S Army Garrison-Redstone
Madison County, Alabama
USEPA ID No. AL7 210 020 742

CERTIFICATION

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Approvals

6 NOV 2023

Michael Klosky, PE
Alabama PE No. 26910
Expiration 12/31/2023

Date

This page intentionally left blank.

TABLE OF CONTENTS

EXECUTIVE SUMMARY ES-1

1.0 INTRODUCTION 1-1

1.1 Purpose 1-1
1.2 Redstone Arsenal Location and Description 1-3
1.3 RSA-262 Site Description and History 1-3
1.4 Ecology 1-3
1.5 Climate 1-4
1.6 Topography and Surface Hydrology 1-4
1.7 Geology 1-4
1.8 Groundwater Hydrogeology 1-5
1.9 Document Organization 1-5

2.0 INVESTIGATION RESULTS 2-1

2.1 Investigation History 2-1
2.2 Nature and Extent of Contamination 2-2
2.3 Contaminant Fate and Transport Summary 2-3
2.3.1 Migration Mechanisms 2-3
2.3.2 Fate of Groundwater Contaminants 2-4
2.4 Site Risk Summary 2-6
2.4.1 Current and Potential Future Land and Resources Use 2-7
2.4.2 Human Health ARBCA 2-7
2.4.3 Preliminary Screening-Level Ecological Risk Assessment 2-10
2.5 Conceptual Site Model 2-10

3.0 DECISION SUMMARY 3-1

3.1 Basis for the Action 3-1
3.1.1 Corrective Measure Objectives 3-2
3.1.2 Applicable Regulations 3-2
3.1.3 Selected Corrective Measure Cleanup Goals 3-3
3.1.4 Identification of the Area and Volume of Contaminated Media Requiring Corrective Measures 3-4
3.1.4.1 Soil 3-4
3.1.4.2 Groundwater 3-4
3.2 Scope and Role of the Response Action 3-5
3.2.1 Overall Corrective Measures for Redstone Arsenal and RSA-262 3-5
3.3 Corrective Measures Evaluation and Selection 3-5
3.3.1 Soil 3-6
3.3.2 Groundwater 3-6
3.3.3 Soil Alternatives 3-6
3.3.4 Groundwater Alternatives 3-7
3.3.5 Selection of Corrective Measures for RSA-262 3-8
3.4 Request for Permit Modification 3-9

4.0 CORRECTIVE MEASURES IMPLEMENTATION FOR RSA-262 4-1

4.1 General Scope 4-1
4.1.1 Procurement and Subcontracting 4-1

TABLE OF CONTENTS

4.1.2 Field Personnel 4-2
4.1.3 Quality Control Inspections for Field Activities 4-2
4.1.4 Daily Reports 4-3
4.1.5 Safety and Health Requirements 4-3
4.2 Preliminary Activities 4-3
4.2.1 Mobilization 4-3
4.2.1.1 Access to Redstone Arsenal 4-3
4.2.2 Digging Permit and Utility Marking 4-4
4.2.3 Vegetation Clearing 4-4
4.2.4 Soil Excavation Activities 4-4
4.2.4.1 Site Control 4-4
4.2.4.2 Storm Water Erosion and Sediment Controls 4-4
4.2.4.3 Locating, Marking, and Surveying of Excavation and Consolidation 4-5
4.2.4.4 Excavation Activities 4-5
4.2.4.5 Confirmation Sampling 4-6
4.2.4.6 Waste Soil Transportation and Disposal 4-7
4.2.4.7 Backfilling and Site Restoration 4-8
4.2.5 Groundwater Treatment Activities 4-8
4.2.5.1 ISEB Injection Locations 4-8
4.2.5.2 ISEB Injection Activities 4-8
4.2.5.3 Monitoring to Evaluate MNA 4-10
4.2.5.4 Temporary Facilities and Work Areas 4-11
4.2.5.5 Injection Reagent Mixing 4-11
4.2.5.6 Material Handling and Storage 4-12
4.2.5.7 Reagent Injection 4-12
4.3 Record Keeping 4-12
4.4 Decontamination/Investigation-Derived Waste 4-12
4.5 Demobilization 4-13
4.6 Implementation of LUCs 4-13
4.6.1 Survey Plat 4-13
4.6.2 Notice of Environmental Use Restriction 4-13
4.7 Corrective Measure Implementation Reporting 4-14
5.0 CONTINGENCIES 5-1
5.1 Residual Risk Assessment 5-1
5.2 ISEB Injection Contingencies 5-1
5.3 MNA Contingencies 5-1
5.4 Variances 5-2
6.0 REFERENCES 6-1

LIST OF TABLES

Table 1 Chemicals of Concern PSV Exceedances - Soil
Table 2 Chemicals of Concern PSV Exceedances - Groundwater
Table 3 Monitored Natural Attenuation Parameters

Table 4 Summary of Receptor Cancer Risks and Noncancer Hazards
Table 5 Summary of Vapor Intrusion Screening Level Comparison - Soil Gas
Table 6 Summary of Vapor Intrusion Screening Level Comparison - Indoor Air Evaluation
Table 7 Conclusions of the ARBCA RM-2 Evaluation
Table 8 Potential Federal and State Regulations Applicable to Corrective Measures
Table 9 Derivation of Cleanup Goals - Residential Soil and Groundwater
Table 10 Excavation Areas and Volumes
Table 11 Area and Volume of Contaminated Groundwater

LIST OF FIGURES

Figure 1 Redstone Arsenal RSA-262 Site Location Map
Figure 2 Site Layout
Figure 3 RSA-262 and Nearby Sites
Figure 4 Potentiometric Surface Maps, March 2012 and June 2016
Figure 5 Sample Location Map
Figure 6 SVOCs in Soil Exceeding PSVs
Figure 7 Explosives Concentrations in Groundwater Exceeding PSVs
Figure 8 Trichloroethene Concentrations in Groundwater
Figure 9 Tetrachloroethylene Concentrations in Groundwater
Figure 10 Conceptual Site Model
Figure 11 Alternative S2: Excavation and Off-Site Disposal
Figure 12 Monitoring Wells for Alternatives GW2 (MNA) and GW3 (ISEB and MNA)
Figure 13 Proposed Injection Locations for Alternative GW3 using EVO (ISEB and MNA)
Figure 14 Proposed Injection Locations for Alternative GW3 using EVO and FMed (ISEB and MNA)
Figure 15 MNA Duration

LIST OF APPENDICES

Appendix A USEPA RSL Calculator Output
Appendix B Regulatory Concurrence Letters
Appendix C Redstone Arsenal RCRA Permit Modification Request
Appendix D Corrective Measures Implementation Schedule
Appendix E Quality Control Plan
Appendix F Accident Prevention Plan
Appendix G Site Monitoring Plan
Appendix H UIC Permit
Appendix I Injection Design Calculations

This page intentionally left blank.

ACRONYMS AND ABBREVIATIONS

%	percent
µg/L	micrograms per liter
AAC	Alabama Administrative Code
ADEM	Alabama Department of Environmental Management
AEIRG	Alabama Environmental Investigation and Remediation Guidance
AHWMMA	Alabama Hazardous Wastes Management and Minimization Act
amsl	above mean sea level
APP	Accident Prevention Plan
APTIM	Aptim Federal Services, LLC
ARBCA	Alabama Risk-Based Corrective Action
Army	U.S. Army Garrison - Redstone
ASWCC	Alabama Soil and Water Conservation Committee
bgs	below ground surface
BMP	Best Management Practices
BSV	Background Screening Value
CB&I	CB&I Federal Services LLC
CFR	Code of Federal Regulations
CG	Cleanup Goal
CMI	Corrective Measures Implementation
CMO	Corrective Measures Objective
COC	Contaminant of Concern
COPC	Contaminants of Potential Concern
COPEC	Contaminants of Potential Ecological Concern
CSM	Conceptual Site Model
CT	carbon tetrachloride
CWS	Chemical Warfare Service
DAF	Dilution-Attenuation Factor
DCE	dichloroethene
DHC	*Dehalococcoides* sp.
DIA	Defense Intelligence Agency
DNAPL	Dense Non-Aqueous Phase Liquid
DO	Dissolved Oxygen
DPT	Direct Push Technology
DPW	Directorate of Public Works
ECC	Environmental Chemical Corporation
ERA	Ecological Risk Assessment
ESV	Ecological Screening Value
EUR	Environmental Use Restriction
EVO	emulsified vegetable oil
ft	feet
FMed	Feather Meal Electron Donor
GCWD	Gulf Chemical Warfare Depot
GPS	Global Positioning System
GW1	Groundwater 1
GW2	Groundwater 2
GW3	Groundwater 3
HGL	HydroGeoLogic, Inc.
HHRA	Human Health Risk Assessment
HI	Hazard Index
HMW	High Molecular Weight
IDW	Investigation Derived Waste
IELCR	Individual Excess Lifetime Cancer Risk
IROD	Interim Record of Decision
ISEB	In-Situ Enhanced Bioremediation
ITRC	Interstate Technology and Regulatory Council
IW-QAPP	Installation Wide-Quality Assurance Program Plan
IWGW	Installation-Wide Groundwater
LTM	Long-Term Monitoring
LUC	Land Use Control
MAG	Monitoring Acceptance Goal
MCL	Maximum Contaminant Level
MDC	Maximum Detected Concentration
mg/kg	Milligrams per Kilogram
MICC	Mission & Installation Contracting Command
MNA	Monitored Natural Attenuation
MS	Matrix Spike
MSD	Matrix Spike Duplicate
NA	Not applicable
NEUR	Notice of Environmental Use Restriction
NFA	No Further Action
ORP	Oxidization-Reduction Potential
OSHA	Occupational Safety and Health Administration

OU	Operable Unit
PAH	Polynuclear aromatic hydrocarbon
PCE	tetrachloroethene
PMP	Project Management Plan
PSL	Preliminary Screening Level
PSV	Preliminary Screening Value
QA	Quality Assurance
QC	Quality Control
QCP	Quality Control Plan
RCRA	Resource Conservation and Recovery Act
RFI	RCRA Facility Investigation
ROI	Radius of Influence
RM	Risk Management
RSA	Redstone Arsenal
RSL	Regional Screening Levels
S1	Soil 1
S2	Soil 2
S3	Soil 3
S4	Soil 4
SAC	Site Access Control
Shaw	Shaw Environmental, Inc.
SLERA	Screening-Level Ecological Risk Assessment
SSHP	Site Safety and Health Plan
SSL	Soil Screening Level
SVOC	Semivolatile Organic Compound
SWMU	Solid Waste Management Unit
TCA	trichloroethane
TCE	trichloroethene
TCLP	Toxicity Characteristics Leaching Procedure
TDS	Total Dissolved Solid
TeCA	tetrachloroethane
TOC	total organic carbon
UIC	Underground Injection Control
USAEC	United States Army Environmental Command
USEPA	United States Environmental Protection Agency
VC	vinyl chloride
VISL	Vapor Intrusion Screening Level
VOC	Volatile Organic Compound

EXECUTIVE SUMMARY

Environmental Chemical Corporation (ECC), on behalf of the United States Army Garrison–Redstone, prepared this Redstone Arsenal (RSA)-262 Corrective Measures Implementation (CMI) Work Plan for RSA, Madison County, Alabama, under the management of the United States Army Environmental Command (USAEC). The Mission & Installation Contracting Command (MICC) contracted ECC under Contract Number W91ZLK-09-D-0006, Delivery Order W9124J21F0020 to perform environmental remediation and restoration and program management services at RSA under the Resource Conservation and Recovery Act (RCRA) Corrective Action program in accordance with RSA's hazardous waste permit (United States Environmental Protection Agency [USEPA] ID # AL7 210 020 742). This CMI Work Plan was developed to provide technical guidance for implementing the corrective measures selected for groundwater at RSA-262, CWS Warehouse Area (Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027), located within Operable Unit (OU) 08.

RSA-262 occupies approximately 50 acres in the south-central portion of RSA, in the former Gulf Chemical Warfare Depot (GCWD) area. This site falls within OU 08 and is located within the RSA-154 groundwater unit. Approximately 15.2 acres of the site are covered by eight buildings or former building slabs. The Open Storage Area comprises 8.7 acres and contained former Building 8010 (open-ended Quonset hut for equipment storage and metal cutting). A small area of the site is paved with asphalt roadway, and the remainder of the site is vegetated with maintained grass. Five of the eight buildings (Buildings 8021, 8022, 8023, 8024, and 8026) remain and are used primarily for general storage and administrative purposes. Buildings 8025 and 8027 were demolished in 2004. The foundation slab for former Building 8027 was removed; however, the foundation slabs for former Buildings 8010 and 8025 are used for storage purposes. Each of the warehouse buildings occupy/occupied an area of approximately 110,370 square feet.

This CMI Work Plan summarizes the interim measures already performed at RSA-262 and details the remaining tasks to complete the corrective measures for the site. Corrective Measure Objectives (CMOs) have been developed to address potential unacceptable risks posed to human health by the current soil and groundwater quality. Historical operations at RSA-262 have resulted in contamination in both soil and groundwater. Four polynuclear aromatic hydrocarbons (PAHs) (benzo[a]anthracene, benzo[a]pyrene, benzo[b]fluoranthene, and dibenz[a,h]anthracene) were identified as relevant contaminants of concern (COCs) in soil. Five volatile organic compounds (VOCs) (1,1,2,2-tetrachloroethane [TeCA], 1,1,2-trichloroethane [TCA], carbon tetrachloride (CT), tetrachloroethene [PCE], and trichloroethene [TCE]), one semivolatile organic compound (SVOC) (dibenz[a,h]anthracene), and one explosive (2-nitrotoluene) were identified as relevant COCs warranting action in groundwater. Nitrobenzene was also identified as requiring groundwater monitoring based on a Preliminary Screening Value (PSV) exceedance. Lastly, a single VOC (chloroform) was identified as a relevant soil gas COC warranting action. Corrective measures are therefore needed at RSA-262 to:

1) minimize or eliminate ongoing PAHs migration from soil to groundwater at levels resulting in groundwater concentrations above cleanup goals (CGs), and
2) address unacceptable risks to potential receptors from exposure to VOCs, SVOCs, and explosives in groundwater.

Alternatives to address COCs were developed to meet the CMOs for soil contamination and to prevent exposure to contaminated groundwater at RSA-262, which include:

- **Alternative Soil 2 (S2)** – Soil Excavation to Unrestricted Use (Residential) CGs and Offsite Disposal
- **Alternative Groundwater 3 (GW3)** – In-Situ Enhanced Bioremediation (ISEB), Monitored Natural Attenuation (MNA), and Maintenance of Existing Groundwater Land Use Controls (LUCs)

Alternative S2 (Soil Excavation to Residential CGs) most appropriately addresses the soil contamination at RSA-262. Alternative S2 involves soil removal and offsite disposal to achieve the CMO for soil and would require management of wastes.

Alternative GW3 (ISEB, MNA, and Maintenance of Existing Groundwater [LUCs]) most appropriately addresses the groundwater contamination at RSA-262. Alternative GW3 involves the injection of a carbon source (food source) and a microbial culture if needed to initiate biotic reduction dichlorination (i.e., ISEB) of the primary source zones of the chlorinated VOCs within the overburden aquifer beneath the site. MNA is an additional component of the alternative to address long-term groundwater attenuation, as well as the low concentration fringes of the groundwater contamination. LUCs prohibiting groundwater use are already in place and will be maintained RSA-wide.

1.0 INTRODUCTION

Environmental Chemical Corporation (ECC), on behalf of the United States Army Garrison–Redstone (hereinafter referred to as the Army), prepared this RSA-262 Corrective Measures Implementation (CMI) Work Plan for Redstone Arsenal (RSA), Madison County, Alabama, under the management of the United States Army Environmental Command (USAEC). The Mission and Installation Contracting Command (MICC) contracted ECC under Contract Number W91ZLK-09-D-0006, Delivery Order W9124J21F0020 to perform environmental remediation and restoration and program management services at RSA under the Resource Conservation and Recovery Act (RCRA) Corrective Action program in accordance with RSA's Alabama Hazardous Wastes Management and Minimization Act (AHWMMA) Hazardous Waste Storage Facility/ Thermal Treatment/Solid Waste Management Unit (SWMU) Corrective Action Permit, Modification No. 1, dated 12 August 2022 (hereinafter referred to as the Permit) (United States Environmental Protection Agency [USEPA] ID # AL7 210 020 742) (Alabama Department of Environmental Management [ADEM], 2022). This CMI Work Plan was developed to provide technical guidance for implementing the remaining corrective measures selected for RSA-262, Chemical Warfare Service (CWS) Warehouse Area (Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027), located within Operable Unit (OU) 08 (**Figure 1**).

This CMI Work Plan incorporates applicable elements of the Permit (ADEM, 2022) and the most recent edition of the Alabama Environmental Investigation and Remediation Guidance (AEIRG) (ADEM, 2017). This CMI Work Plan is submitted to fulfill in part the requirements listed in Section VI.E of the Permit. As specified in Sections VI.E.3 and VIII.B.6 of the Permit, requests for permit modification and an environmental use restriction are included as part of this Work Plan. This CMI Work Plan protects human health and the environment from hazardous constituents at concentrations exceeding applicable limits.

1.1 Purpose

Historical operations at RSA-262 have resulted in contamination in both soil and groundwater. This CMI Work Plan documents the interim measures already completed at RSA-262 and presents the remaining corrective measures selected to address remaining soil and groundwater contamination. The nature and extent of contamination was presented in the Revision 2 RCRA Facility Investigation (RFI) report (Aptim Federal Services, LLC [APTIM], 2018), submitted on 9 May 2018, which was approved by ADEM on 2 August 2018. Four polynuclear aromatic hydrocarbon (PAHs) (benzo[a]anthracene, benzo[a]pyrene, benzo[b]fluoranthene, and dibenz [a,h]anthracene) were identified as relevant contaminants of concern (COCs) in soil. Five volatile organic compounds (VOCs) (1,1,2,2-tetrachloroethane [TeCA], 1,1,2-trichloroethane [TCA], carbon tetrachloride (CT), tetrachloroethene [PCE], and trichloroethene [TCE]), one semivolatile organic compound (SVOC) (dibenz[a,h]anthracene), and one explosive (2-nitrotoluene) were identified as relevant COCs warranting action in groundwater. Nitrobenzene was also identified as requiring groundwater monitoring based on a Preliminary Screening Value (PSV) exceedance. Lastly, a single VOC (chloroform) was identified as a relevant soil gas COC warranting action.

An Alabama Risk-Based Corrective Action (ARBCA) Human Health Risk Assessment (HHRA) and Ecological Risk Assessment (ERA) were performed for RSA-262 in accordance with the

ARBCA guidance manual (ADEM, 2017) as part of the RFI (APTIM, 2018). Separate soil risk evaluations were conducted for the three areas of RSA-262 because the activities and historical uses of the three areas varied and were not consistent across the entire site; these areas are referred to as Former Oil Service Pit, Former Rail Spur, and Remainder of the Site. Groundwater data under the entire site were evaluated as one data set. The ARBCA evaluation concluded that:

- Several PAHs in surface and shallow subsurface at the Former Oil Service Pit pose an unacceptable health threat to a hypothetical residential receptor. However, soil concentrations in the Former Rail Spur Area and the Remainder of the Site do not pose an unacceptable health threat to any receptor.
- Groundwater does not pose a current threat because the development of groundwater as a potable source is currently precluded and non-potable uses are managed by RSA's Site Access Control (SAC) program according to the terms of the *Installation-Wide Groundwater (IWGW) Interim Record of Decision (IROD)* (Shaw Environmental, Inc. [Shaw], 2007). This IROD is interim in nature, and potable use of groundwater remains a potential future exposure pathway.
- Chemicals present in groundwater beneath RSA-262 pose unacceptable risks to receptors if groundwater is developed for potable use. Relevant COCs for groundwater include 2-nitrotoluene, dibenz(a,h)anthracene, 1,1,2,2-TeCA, 1,1,2-TCA, CT, PCE, and TCE. The Maximum Detected Concentrations (MDCs) of CT, 1,1,2-TCA, PCE, and TCE also exceed their respective Maximum Contaminant Level (MCLs).
- A screening-level vapor intrusion evaluation performed in the 2018 RFI showed that VOC concentrations in soil, soil gas, and groundwater are unlikely to pose an unacceptable health threat to occupants of existing buildings or buildings erected on the site in the future. However, as discussed further in **Section 2.4.2**, corrective measures are warranted for chloroform in soil gas based on an updated risk evaluation resulting in unacceptable future residential health risk. Soil gas will be addressed through the implementation of groundwater corrective measures.
- The results of this Screening-Level Ecological Risk Assessment (SLERA) indicate that none of the Contaminants of Potential Ecological Concern (COPECs) in surface soil within Former Oil Service Pit, Former Rail Spur, or Remainder of Site subareas are likely to pose hazards to ecological receptor communities and/or populations, and further evaluation of ecological hazards from these COPECs in surface soil is not warranted.

The RFI report recommended that corrective measures be implemented for soil and groundwater at RSA-262 to address the PAH contamination associated with the Former Oil Service Pit Area, as well as VOCs, SVOCs and explosives in groundwater associated with a potential future threat to human health if the groundwater is developed for potable use.

This CMI Work Plan was prepared to describe the technical approach and rationale for conducting the field activities that will be performed prior to and during implementation of the soil and groundwater corrective measures.

1.2 Redstone Arsenal Location and Description

RSA occupies approximately 38,300 acres in Madison County, Alabama. The RSA is bounded on the north and east by the city of Huntsville, on the west by the city of Madison, on the west and southwest by Wheeler National Wildlife Refuge, and on the south by the Tennessee River. Huntsville has a population of nearly 165,000; Madison County's population is about 320,000. Approximately 330 military families reside in government quarters on RSA and approximately 40,000 government employees and contractors work at the facility. The primary mission of RSA is the development, acquisition, testing, fielding, and sustainment of aviation and missile weapon systems. Most of the installation tenants support this effort; however, RSA is also home to such diverse activities as training for handling explosives and ordnance devices, Defense Intelligence Agency (DIA) activities, and the production of iron carbonyl. The RSA is home to over 70 different tenant organizations.

1.3 RSA-262 Site Description and History

RSA-262 occupies approximately 50 acres in the south-central portion of RSA, in the former Gulf Chemical Warfare Depot (GCWD) area. This site falls within OU 08 and is located within the RSA-154 groundwater unit (**Figure 1**). Approximately 15.2 acres of the site are covered by eight buildings or former building slabs. The Open Storage Area comprises 8.7 acres and contained former Building 8010 (open-ended Quonset hut for equipment storage and metal cutting). A small area of the site is paved with asphalt roadway, and the remainder of the site is vegetated with maintained grass. Five of the eight buildings (Buildings 8021, 8022, 8023, 8024, and 8026) remain and are used primarily for general storage and administrative purposes. Buildings 8025 and 8027 were demolished in 2004. The foundation slab for former Building 8027 has been removed; however, the foundation slabs for former Buildings 8010 and 8025 are used for storage purposes. Each of the warehouse buildings occupy/occupied an area of approximately 110,370 square feet. **Figure 2** illustrates the location of roads, buildings, and other features at RSA-262. Eight other surface media sites listed in the Permit lie within 0.5 miles of RSA-262 (**Figure 3**).

The GCWD warehouses were constructed in October 1942 and used for storage of inert materials, such as spare parts and shipping crates, and for rehabilitation of unserviceable munitions and equipment. Rehabilitation of unserviceable items involved the inspection, classification, and repackaging of materials received from other facilities, including those overseas. A railroad spur ran between the two rows of warehouses to facilitate materials loading and unloading (**Figure 2**) By 1960, the warehouses became general purpose warehouses.

1.4 Ecology

The site is vegetated primarily with maintained grass. The site borders an area of pine trees and brush where deer, small mammals, snakes, and birds likely visit periodically. No permanent surface water/aquatic habitat features exist within the boundary of RSA-262. However, wetlands border the site on all sides except for the west-southwest portion. The Tennessee River is approximately one mile southwest of the site.

1.5 Climate

Climate is a primary component in the hydrologic cycle and water budget and is an integral element of the hydrogeologic framework of a site. Seasonal and storm-related trends in temperature and rainfall influence surface water and groundwater flow conditions. Therefore, climate plays a role in groundwater flow and contaminant transport. Precipitation is the principal source of groundwater recharge, either directly through infiltration and percolation through the vadose zone (unsaturated overburden) or as runoff to streams, which may also recharge groundwater. On an annual basis, 75 to 90 percent (%) of rainfall at RSA is lost to evapotranspiration (Shaw, 2003). Discounting runoff to surface water, 5 to 13 inches of rainfall remain available to recharge groundwater. Rainfall contributes to groundwater recharge primarily during the winter when deciduous trees are leafless, reducing overall transpiration. With the onset of the growing season in April, temperatures increase dramatically, and most potential recharge is lost through evaporation and transpiration.

1.6 Topography and Surface Hydrology

The RSA-262 site lies north of Buxton Road and east of Shields Road. The site is primarily vegetated with maintained lawn and unmaintained fields. It is located approximately one mile northeast of the Tennessee River and is surrounded by low-lying, flood-prone areas adjacent to the river. The buildings associated with the former GCWD are located on a topographic high bordered by forested areas, wetlands, and a small pond (Cribbs Pond) located to the northwest of the site. Drainage is radial from the main portion of the property. Surface runoff is collected by a series of small ditches and directed to the pond or lower-lying areas bounding the site. No surface water bodies are within the site boundary. Approximately 0.26 acres in the northwestern corner of the site lie within the 100-year floodplain.

1.7 Geology

The subsurface geologic setting beneath RSA-262 includes overburden consisting of low permeability, residual red, brown, and gray clay; silty clay; and silt. Intervals of chert and chert fragments increase with depth and represent residual deposits formed by in situ chemical weathering of chert nodules and layers within the limestone bedrock.

The RSA-154 groundwater unit, which encompasses RSA-262, is underlain primarily by Mississippian-age carbonates (Tuscumbia Limestone and Fort Payne Formation), which are underlain by the Mississippian/Devonianage Chattanooga Shale, a regional stratigraphic and structural marker. In the highland area along the southern boundary between RSA-154 and RSA-156/157 and the eastern boundary with RSA-146, younger Mississippian-age rocks (Monteagle Limestone and Hartselle sandstone) are mapped as remnants of an eroded Cumberland Plateau (Shaw, 2013). The RSA-154 surface is underlain by a residual clay overburden derived from chemical weathering of the underlying bedrock. Borehole data indicate bedrock within RSA-154 lies generally from 14 to 107 feet below ground surface (ft bgs), covering a range of elevation from 453 to 590 feet above mean sea level (amsl).

The structural framework of the RSA-154 area is complex. Seismic surveys completed within RSA-154 revealed widespread faulting, with faults extending through the entire bedrock stratigraphic section, including the Chattanooga Shale and overlying Fort Payne Formation and Tuscumbia Limestone. A number of normal faults and fault splays have been mapped, with an overall north-south trend across RSA-154 and RSA, in general. As shown in **Figure 2**, RSA-262 is bordered on the east and northwest by two of these north-south-trending faults and is bisected by a third north-south-trending fault.

Depth to the bedrock surface generally ranges from 26 to 70 ft bgs beneath RSA-262. The variability over such short distances is attributed to localized solution weathering of the limestone bedrock. During drilling into bedrock at RSA-262, cavities were encountered at various depths (**Figure 2**). These features are consistent with the development of epikarstic bedrock at RSA-262, similar to other locations throughout the southeastern portion of RSA (Shaw, 2003).

As previously discussed, north-south-trending faults border RSA-262 to the east and northwest and a third fault bisects the site north to south (**Figure 2**). Wells 152-RS1804D, 154-RS1765, 152-RS2232D, and 152-RS1802D are drilled immediately south of the site along the traces of these referenced faults. These faults are no longer active; however, the bedrock along the fault traces has been weakened, and these features likely form preferential flow pathways for groundwater.

1.8 Groundwater Hydrogeology

Groundwater beneath RSA-262 occurs in the unconsolidated overburden and in the upper portion of the carbonate bedrock. The overburden and upper bedrock comprise a single interconnected aquifer. The potentiometric surface maps shown on **Figure 4** are based on the groundwater elevations measured in March 2012 and June 2016. The potentiometric surface across RSA-262 mimics local topography across the site (**Figure 4**). Groundwater flow is directed radially from a northwest-southeast-trending potentiometric surface high, which generally parallels the long axis of the site. There is a smaller low-relief groundwater potentiometric surface high associated with RSA-268 (March 2012). Based on the June 2016 groundwater elevation measurements, this low-relief groundwater potentiometric surface high appears to be persistent but manifests itself within the northwestern portion of the RSA-262 site instead of near the RSA-268 site (**Figure 4**).

1.9 Document Organization

This CMI Work Plan is organized into the following five chapters:

- **Chapter 1.0, *Introduction***, presents the purpose and overview of the document and includes a brief site history and description, including the topography, geology, and hydrogeology associated with the site.
- **Chapter 2.0, *Investigation Results***, presents additional background information about the site, including investigations and reporting history, nature and extent of contamination, fate and transport, site risks, and the final Conceptual Site Model (CSM).
- **Chapter 3.0, *Decision Summary***, describes the basis for the action, including the Corrective Measures Objectives (CMOs), Cleanup Goals (CGs), and the selected corrective measures.

- **Chapter 4.0, *Corrective Measure Implementation***, describes the planned CMI activities necessary to implement the corrective measures at RSA-262.
- **Chapter 5.0, *Contingencies***, describes the potential for variances that could arise during execution of the corrective measures described herein.
- **Chapter 6.0, *References***, provides the references that contributed to the preparation of this CMI Work Plan.

The following plans and supporting documentation are included as appendices to this CMI Work Plan:

- **Appendix A**: USEPA Regional Screening Level (RSL) Calculator Output
- **Appendix B**: Regulatory Concurrence Letters
- **Appendix C**: RSA RCRA Permit Modification Request
- **Appendix D**: CMI Schedule
- **Appendix E**: Quality Control Plan (QCP)
- **Appendix F**: Accident Prevention Plan (APP)
- **Appendix G**: Site Monitoring Plan
- **Appendix H**: Underground Injection Control (UIC) Permit
- **Appendix I**: Injection Design Calculations

As the Army implements the corrective measures using support contractors, variations from this CMI Work Plan may be proposed prior to or during field activities. Proposed changes will be submitted by the construction contractor to the Army as field variances for approval prior to implementation as part of the corrective measures process. As part of their approval process, the Army will discuss applicable field variances with ADEM to determine if the variance process is suitable for documenting the proposed changes, or whether revisions to the CMI Work Plan along with a permit modification may be needed. Any variances will be documented and included with the CMI report for the sites.

2.0 INVESTIGATION RESULTS

This chapter presents additional background information for RSA-262, including the investigation history, nature and extent of contamination, fate and transport summary, human health and ecological risks, and the final CSM.

2.1 Investigation History

Environmental investigations conducted at RSA-262 include the following:

- RSA-154 potential source area investigation (Shaw, 2006)
- RSA RCRA facility assessment (ADEM, 2008)
- RSA-154 and RSA-152 RFIs (Shaw, 2013 and CB&I Federal Services LLC [CB&I], 2016)
- RSA-262 RFI (APTIM, 2018)

These investigations generated usable analytical results from surface soil samples, subsurface soil samples, soil vapor, and groundwater samples. Detailed discussions of these investigations and the associated results are described in the RFI Report (APTIM, 2018). The RFI report was completed and submitted to ADEM in May 2018. The RFI report received ADEM concurrence on 2 August 2018. Further discussion of the investigative results is included in the RFI report (APTIM, 2018).

The RSA-262 usable data set includes validated analytical results from the following:

- 56 surface soil samples
- 190 subsurface soil samples
- Two soil vapor samples
- 49 groundwater samples (33 overburden and 16 interface/bedrock) from permanent monitoring wells
- 36 groundwater samples collected from piezometers.

The sampling locations from the RFI investigation are provided in **Figure 5**. The site was divided into three areas of investigation (Former Railroad Spur, Former Oil Service Pit, and Remainder of Site) to evaluate the potential differences in the level of soil contamination arising from difference sources, as shown on **Figure 2**. The investigative results were compared to Background Screening Values (BSV) for metals (Gannett Fleming, Inc. and Shaw, 2010; Shaw, 2003). The then current Residential Soil and Tapwater RSLs were selected as the RSA-specific PSVs for chemicals in soil and groundwater, respectively (USEPA, 2017). In instances where MCLs were available, these were selected as RSA-specific groundwater PSVs. As discussed further in **Sections 2.2** and **2.4**, soil and groundwater COCs identified in the Preliminary Screening Level (PSL) evaluation were brought forward for evaluation in an ARBCA HHRA and SLERA which were completed for the Former Oil Service Pit Area, the Rail Spur Area, and the Remainder of the Site. Results concluded that unacceptable risks were identified for PAH soil contamination associated with the Former Oil Service Pit Area and groundwater VOCs, SVOCs and explosives associated with the north-northeast and south-central portions of the site, requiring further action. As such, this CMI Work Plan focuses on soil contamination within the Former Oil Service Pit Area and site-wide

groundwater. Soil contamination associated with the Former Rail Spur and Remainder of the Site require No Further Action (NFA).

The RFI concluded that although the vertical and horizontal delineation of contamination at RSA-262 has been achieved, there is the potential for exposure to soils within the Former Oil Service Pit Area of RSA-262 to pose unacceptable risks to human health under residential future use. Additionally, groundwater developed as a potable source would pose an unacceptable risk to all receptors.

2.2 Nature and Extent of Contamination

The investigations to date have provided sufficient characterization data for determining the nature and extent of contamination (see Section 3.0 of the RFI Report [APTIM, 2018]). The following sections present a summary of the nature and extent of contamination for PAHs in soil (Former Oil Service Pit Area only) and explosives, SVOCs, and VOCs in site-wide groundwater as documented in the RSA-262 RFI report (APTIM, 2018).

PSV exceedances within the Former Oil Service Pit Area soil and site-wide groundwater from the 2018 RFI are presented on **Figures 6** through **9**. Data summaries and PSV exceedances are summarized in **Tables 1** and **2** for COCs within Former Oil Service Pit Area soil and site-wide groundwater, respectively. Note that in accordance with ADEM policy, groundwater COCs have been identified and evaluated further in the risk evaluation even if the established MCL is not exceeded. The following summarizes the 2018 RFI nature and extent of contamination at RSA-262:

- A total of six PAHs (benzo[a]anthracene, benzo[a]pyrene, benzo[b]fluoranthene, dibenz[a,h]anthracene, indeno[1,2,3-cd]pyrene, and naphthalene) were detected at concentrations greater than their respective PSV in at least one soil sample within the Former Oil Service Pit Area, driven by surface (0-1 ft bgs) and shallow subsurface (1-10 ft bgs) samples collected from 15403A-HP13 (**Figure 6** and **Table 1**).
- Four explosives (2-nitrotoluene, 1,3-dinitrobenzene, 3-nitrotoluene, and nitrobenzene) have also been detected in groundwater samples at concentrations exceeding PSVs at RSA-262 (**Figure 7** and **Table 2**). These exceedances are sporadic in nature and do not form plumes. 2-Nitrotoluene was detected in one well (262-RS1699), 1,3-dinitrobenzene and 3-nitrotoluene were detected in one well (262-RS2771), and nitrobenzene was detected in two wells (262-RS2771 and 262-RS2772). However, as discussed further in the RFI, the nitrobenzene detection at 262-RS2772 was not confirmed using the USEPA Method 8270D method.
- Two SVOCs, benzo(a)anthracene and dibenz(a,h)anthracene, were detected in groundwater at concentrations exceeding PSVs (**Table 2**). Although frequency of detection is low for both benzo(a)anthracene and dibenz(a,h)anthracene, these SVOCs were retained as COCs based on PSV exceedances at monitoring well 262-RS2770 and 262-RS2857.
- Five VOCs (1,1,2-TCA, 1,1,2,2-TeCA, CT, PCE, and TCE) exceeded their respective PSVs in groundwater at RSA-262 (**Table 2**). As shown in **Figures 8** and **9**, two separate

groundwater VOC plumes are present beneath the site. A small, well-defined plume exists in the northern portion of the warehouse area (between Buildings 8021 and 8023), and a larger, more concentrated plume exists within the former rail spur area (just southeast of Building 8025).

- The TCE concentrations from within 262-RS1699 (concentrated plume southeast of Building 8025) have been reported at 23,000 micrograms per liter (µg/L) (2011), 36,000 µg/L (2012), and 23,200 µg/L (2016). Dense nonaqueous phase liquid (DNAPL) (i.e., free-phase TCE) may be present in this area of the site because the TCE concentrations in 262-RS1699 exceed 1% of the solubility of TCE in water, although actual DNAPL has not been gauged in the monitoring well.

2.3 Contaminant Fate and Transport Summary

This chapter describes the major contaminant migration pathways and routes. Contaminant fate and transport in the environment depend on a variety of chemical, physical, and biological processes.

2.3.1 Migration Mechanisms

The following routes of contaminant migration were evaluated during the RFI and are discussed further below (APTIM, 2018):

- Migration of contaminants from soils to groundwater via leaching
- Migration of free-phase nonaqueous liquids
- Transport of contaminants in subsurface soil vapors.

At RSA-262, the major potential contaminant migration pathway is migration from soil to groundwater. Organic and inorganic chemicals present in soil may undergo dissolution by rainfall, partition into leachate, and be transported to groundwater via percolation and downward migration. Prior to reaching groundwater, contaminant concentrations are attenuated during transport by mechanical dispersion, degradation, and/or adsorption to soil particles. Three contaminants in soil (benzo[a]anthracene, naphthalene, and TCE) were detected but were below soil screening levels (SSLs) based on an RSA-specific Dilution Attenuation Factor (DAF) of 4.0. These constituents were determined not to pose a leaching threat to groundwater.

The presence of free-phase nonaqueous liquids is suspected at the site, therefore an evaluation of the migration of DNAPL was included in the RFI (APTIM, 2018). DNAPL, if present, would act as an ongoing source to groundwater contamination at the site. As discussed previously, TCE from overburden well 262-RS1699 (23,200 µg/L) exceeded the 1% TCE solubility value in water, suggesting DNAPL may be present. DNAPL transport is density driven and results in vertical migration of the mass of DNAPL in response to gravity. Some lateral spreading of the DNAPL is possible once a lower permeable surface or lateral pathway, such as a bedding plane, is encountered. However, bedrock and deep bedrock groundwater analytical results from wells 154-RS1764S and 154-RS1764D, approximately 450 feet to the southeast, do not suggest the presence of DNAPL at depth beneath the site. Maximum reported TCE concentrations from bedrock/deep bedrock wells were 26.9 and 0.717 µg/L, respectively. These concentrations are significantly lower

than the MDC reported from the overburden/interface zones (23,200 µg/L). Given that the concentrations of TCE in bedrock/deep bedrock wells are less than 10% of TCE solubility in water, DNAPL is more likely to be present as droplets collected and held within the saturated zone rather than as free liquid capable of gravity-driven migration. Although the potential for DNAPL at the site exists, no direct evidence has been found. DNAPL, if present, would act as an ongoing source of groundwater contamination at the site.

Transport of vapors from groundwater through subsurface soil is discussed in **Section 2.4.2**. The 2018 RFI concluded that concentrations of VOCs in groundwater and soil gas are unlikely to pose an unacceptable health threat to occupants of existing buildings or buildings erected on the site in the future (APTIM, 2018). However, as discussed further in **Section 2.4.2**, corrective measures are warranted for chloroform in soil gas based on an updated risk evaluation resulting in unacceptable future residential health risk. Soil gas will be addressed through the implementation of groundwater corrective measures.

2.3.2 Fate of Groundwater Contaminants

Over time, groundwater contaminant concentration and mass are reduced due to the combined effects of physical/abiotic attenuation (adsorption, dilution, and sorption) and biotic attenuation (intrinsic biodegradation).

- ***Physical Attenuation Mechanisms.*** Generally, physical attenuation refers to the dilution and dispersion of contaminant concentrations in groundwater over time. Dilution and dispersion tend to enlarge contaminant plumes, causing a net decrease in contaminant levels at any one location. As the contaminant plume moves through the saturated medium, adsorption/desorption processes tend to slow chemical migration rates. Additionally, adsorption/desorption processes tend to separate individual chemical plumes, as contaminants with high affinities to organic matter or clay minerals lag behind compounds with lower soil adsorption coefficients. Physical attenuation tends to depend on the velocity of groundwater flow and its rate of mixing. Other abiotic processes also include chemical oxidation or reduction, dehydrochlorination, dilution and dispersion, dichloroelimination, elimination, hydrolysis and hydrogenolysis, or similar processes.
- ***Biochemical Attenuation Mechanisms.*** Biochemical or biologically enhanced chemical attenuation refers to a collective assemblage of naturally occurring reactions resulting in the attenuation of the released chemicals mediated by microorganisms living in the immediate environment with the contaminant. Biodegradation can occur in groundwater under aerobic or anaerobic conditions. In most aquifers, biotic or biological degradation tends to dominate, depending on the type of contaminant and the groundwater chemistry.

Natural attenuation refers to naturally occurring processes that act without human intervention to reduce the mass, toxicity, mobility, volume, or concentration of contaminants in a particular environmental medium. Groundwater contamination is attenuated by a number of processes, including biodegradation, dispersion, dilution, adsorption, volatilization, and chemical or biological stabilization or destruction of contaminants (Interstate Technology and Regulatory Council [ITRC], 1999). Monitored Natural Attenuation (MNA) is the implementation of a program to track the natural attenuation processes and their effectiveness in achieving CMOs for a site.

MNA is more likely to be applied as a corrective measure when the following conditions are met (USEPA, 2004):

- Natural attenuation processes will achieve groundwater cleanup objectives within a reasonable period
- Measures for source control of groundwater contamination will be implemented
- The dominant natural attenuation process causes degradation or destruction of contaminants as opposed to dilution or containment
- The contaminant plume is stable in size or shrinking
- MNA is used in conjunction with an active remedy of the contamination source or as a follow-up measure.

Groundwater data necessary to evaluate the MNA parameters for COCs at RSA-262 are available to varying degrees. The following MNA parameters are pertinent to RSA-262 COCs:

- COCs for RSA groundwater: TCE, 1,1,2,2-TeCA, 1,1,2-TCA, CT, PCE, and 2-nitrotoluene.
- Degradation products of TCE, cis-1,2-dichloroethene (DCE), and 1,1-DCE: Vinyl chloride (VC), ethene, ethane, and chloride.
- Degradation products of CT: Chloroform, methylene chloride (dichloromethane), chloromethane, and methane.
- Geochemical indicators of reduction-oxidation (redox) conditions in groundwater: Dissolved oxygen (DO), oxidation-reduction potential (ORP), alkalinity, and methane.
- Total organic carbon (TOC) – Availability of carbon sources that are electron donors for microbial respiration.
- pH – In situ biodegradation of the COCs typically occur within an optimal pH range of 6 to 8.4.

Table 3 presents the MNA data for wells containing COCs above the CGs. The results of the MNA evaluation are summarized below:

- There is very limited evidence of intrinsic biodegradation of the COCs. COCs have shown no significant reduction in concentration over the period of sampling.
- There is little evidence of reductive dichlorination by comparing the relative concentration of the COCs to their primary degradation products. With the exception of 154-RS1764S ADA3119, concentrations of cis-1,2-DCE, the primary degradation product of TCE, are either non-detect or 1 to 2 orders of magnitude below those of TCE. VC, the primary degradation product of 1,1-DCE and cis-1,2-DCE, was only detected in monitoring well 154-RS1764S. There has been some degradation of CT to chloroform. Concentrations of chloroform are typically within the range of CT concentrations, but reductive dichlorination of CT to chloroform appears to have slowed, because the degradation product of chloroform to methylene chloride was only detected in one well (262-RS2772) and was not detected in any of the wells during the last sampling event.
- The degradation products of CT are susceptible to aerobic degradation to carbon dioxide, but few alkalinity measurements are available. The limited alkalinity measurements are

stable across the plume, showing no significant change from areas of higher to lower TCE concentration.

- Geochemical conditions in all the wells are oxic and not conducive to wide-spread reductive dichlorination or reductive transformation of the COCs, either through biological or abiotic pathways. Although some chlorinated VOCs may undergo aerobic biodegradation in the presence of elevated DO concentrations (or anaerobically in micro-environments), aerobic degradation pathways are generally insignificant.
- Sulfate and nitrate concentrations are generally low, average nitrate concentrations are at or below 1,000 µg/L, and sulfate concentrations are generally below 4,000 µg/L or less. These concentrations are not inhibitory to anaerobic biodegradation of the COCs.
- As shown in **Table 3**, the groundwater pH is within the optimal range (6-8.4) for the biodegradation of chlorinated ethenes. The well with the highest concentration of TCE (262-RS1699) has an average pH (6.41), which is at the low end of the optimal range.
- Measured TOC concentrations were typically less than 2,000 µg/L, indicating that there is not a large source of available carbon to support microbial respiration needed for biodegradation of the COCs. TOC concentrations greater than 20,000 µg/L are considered adequate to support microbial activity (USEPA, 1998).
- Methane was detected in monitoring well 154-RS1764S at concentrations of 427 and 2,300 µg/L and in 262-RS1700 at 21 µg/L. Methane concentrations of 500 µg/L or greater are considered to be supportive of microbial activity needed to support complete reductive dichlorination (USEPA, 1998).

The physical properties presented above indicate that intrinsic biodegradation is likely not a significant driver of natural attenuation of COCs in groundwater. The decreasing concentrations of COCs downgradient of the peak COC concentrations are most likely due to a combination of the physical attenuation processes of dilution, dispersion, and adsorption, or abiotic geochemical transformation. MNA will be retained for low concentration portions of the contaminated plumes but is not appropriate as a stand-alone remedial alternative for RSA-262. MNA processes will contribute to long-term aquifer restoration once source areas are actively treated.

2.4 Site Risk Summary

An ARBCA evaluation for human health and an ecological risk evaluation were performed for RSA-262 in accordance with the ARBCA guidance manual (ADEM, 2017) as part of the RFI (APTIM, 2018). The site area was divided into three areas for the purposes of evaluation and risk assessment:

- ***Former Oil Service Pit*** – Potential release of petroleum products and PAHs from the vehicle service pit in Building 8024.
- ***Former Rail Spur*** – Primarily PAHs associated with the rail spur that ran between the two rows of warehouses.
- ***Remainder of Site*** – Expected to be relatively uncontaminated.

The features and activities occurring in each of these areas are described further in the RFI Report. The complete HHRA and SLERA ARBCA evaluation are provided in the RFI Report (APTIM, 2018).

2.4.1 Current and Potential Future Land and Resources Use

This site is located in an area designated as an Industrial Use Zone in the RSA Master Plan. Where practical, the Army has restricted entry into SWMUs by fencing them and/or placing warning signs at key entry points. RSA-262 is not fenced but lies within the secure RSA facility.

The site contains five permanent buildings, two former building slabs, an open gravel storage area, and maintained grass. The existing buildings (warehouses) are used primarily for storage and administrative purposes.

The current use of RSA-262 is not residential, nor is it expected to be in the future. The residential scenario was included in the ARBCA evaluation in order to determine whether this site is eligible for unrestricted reuse in accordance with ADEM requirements. In the Permit, issued under the AHWMMA, ADEM has specified that investigations must comply with AEIRG and ARBCA guidance. In order to determine whether this site is eligible for unrestricted reuse as defined in Alabama Administrative Code (AAC) 335-5, risks to a residential site user were assessed.

There is no current potable use of groundwater at RSA-262. To achieve short-term goals for groundwater remedies, an IWGW IROD was instituted to prevent potable use now and in the future and provide management control over non-potable uses of all groundwater beneath RSA (Shaw, 2007). The goal of this interim remedial action, coupled with the existing RSA SAC program (U.S. Army Garrison-Redstone [Army], 2012), is to protect RSA workers and on- and off-post residents from exposure to contaminants in RSA groundwater until final corrective measures are in place.

2.4.2 Human Health ARBCA

The ARBCA (ADEM, 2017) for human health consists of a three-tiered process: the PSL evaluation (first tier), the Risk Management (RM)-1 evaluation (second tier), and the RM-2 evaluation (third tier). In the case of RSA-262, the RM-1 evaluation was not performed; instead, the evaluation proceeded directly from the PSL evaluation to the cumulative risk assessment in the RM-2 evaluation.

The APTIM, 2018 PSL evaluation consisted of a simple comparison of site concentrations with PSVs, which generally were the then current USEPA (2017) RSLs, based on the lower of an Individual Excess Lifetime Cancer Risk (IELCR) of 1E-06 and a noncancer Hazard Index (HI) of 0.1. In the case of groundwater, MCLs were used as the PSVs, if available. Otherwise, the then current tap water RSLs (USEPA, 2017) were used. Residential PSVs were selected for the RSA-262 evaluation in order to consider alternatives to attain unrestricted land use.

The PSL evaluation is conducted for all chemicals that are determined to be site-related. Inorganics with MDCs that did not exceed their BSVs or shown in a site-to-background evaluation to be naturally occurring were judged not to be site related and therefore not evaluated further. All other detected chemicals were initially identified as chemicals of potential concern (COPCs), and site

concentrations were compared to PSVs in the PSL evaluation. A COPC is identified as a COC if the maximum detected concentration is greater than a PSV.

The soil and groundwater COCs identified in the PSL evaluation were brought forward for evaluation in the cumulative risk assessment (RM-2 evaluation). As discussed previously, an updated PSL evaluation was performed using the most recent USEPA RSLs (USEPA, 2022a). Results of the 2022 RSL comparison are consistent with those presented in the RFI Report (APTIM, 2018). Receptor scenarios evaluated in the cumulative risk assessment included a commercial worker, a construction worker, and a hypothetical residential receptor. A hypothetical future residential receptor was evaluated as required by ADEM to evaluate future use without restrictions and determine whether or not remedial measures and/or Land Use Controls (LUCs) are warranted to achieve NFA status (ADEM, 2008).

Groundwater was evaluated as if developed as a source of potable water in the future. Risks from exposure to groundwater were assessed even though groundwater use at this site is currently precluded by the terms of the IROD (Shaw, 2007) and non-potable uses are managed by RSA's SAC program (Army, 2012). The ARBCA guidance considers an IELCR of 1E-05 to be the target cumulative risk. The target cumulative noncancer hazard is an HI of 1.0. Estimated cumulative risks/hazards at or below these targets do not require additional action.

Cumulative Former Oil Service Area and Site groundwater IELCR and HI estimates from the 2018 RFI Report (APTIM, 2018) for all receptor scenarios for RSA-262 are summarized in **Table 4**. These totals are based on the contributions from all the relevant COCs carried forward from the approved RFI Report (APTIM, 2018). These tables include the risks associated with exposure to soil in the Former Oil Service Area, as well as those associated with exposure to RSA-262 groundwater as a whole. **Table 7** presents a summary of the relevant COCs that require action for RSA-262.

As presented in **Tables 4** and **7**, the IELCR estimates for exposure to Former Oil Service Area soil alone are less than the ADEM trigger level of 1E-05 for the commercial worker and the construction worker but are above for the hypothetical lifetime resident due to the presence of PAHs (benzo[a]anthracene, benzo[a]pyrene, benzo[b]fluoranthene, and dibenz[a,h]anthracene). The total HI values based on exposure to Former Oil Service Area soil alone are less than the trigger level of 1.0 for all receptors.

The groundwater IELCR and total HI estimates for all receptors are greater than 1E-05 and 1.0, respectively (**Table 4**). Relevant COCs identified in groundwater for the hypothetical resident were 2-nitrotoluene, dibenz(a,h)anthracene, 1,1,2,2-TeCA, 1,1,2-TCA, CT, PCE, and TCE. In addition, the MDCs for 1,1,2-TCA, CT, PCE, and TCE exceed their MCLs.
As the ARBCA RM-2 Evaluation was performed for inclusion in the 2018 RFI Report (APTIM, 2018), an updated risk evaluation for the relevant COCs was performed based on the most recent toxicity criteria presented in the USEPA RSL Table (USEPA, 2022a). As the hypothetical lifetime resident previously exceeded carcinogenic (soil and groundwater) and noncarcinogenic (groundwater) risk criteria, hypothetical lifetime residents were conservatively evaluated using updated toxicity criteria presented in the November 2022 USEPA RSLs through the USEPA RSL Calculator (USEPA, 2022a). Similar to the RFI findings, both the IELCR (soil and groundwater)

and total HI (groundwater) based on hypothetical residential exposure exceeded their respective risk thresholds (**Table 4**). The USEPA RSL Calculator Output is provided in **Appendix A**.

A screening-level vapor intrusion evaluation was also performed at RSA-262 as part of the ARBCA evaluation in the 2018 RFI (APTIM, 2018). Data were available from two soil gas samples collected near the highest onsite concentrations of CT and TCE in groundwater. To provide the most comprehensive vapor intrusion evaluation, both groundwater and soil gas VOC data were evaluated. However, the soil gas data are judged to provide the more reliable basis for evaluating the potential for VOCs in groundwater to impact human health by the vapor intrusion pathway.

Two soil gas samples were taken at RSA-262, one in close proximity to the highest TCE concentrations in groundwater, thereby providing a more representative basis for evaluating the potential for indoor air than groundwater. VOCs detected in soil gas were compared with their target soil gas screening levels (**Table 5**). Concentrations of CT, PCE, and TCE detected in soil gas were less than their screening levels, and VC and 1,1,2-TCA were not detected. Although the MDCs of acrolein and bromodichloromethane exceeded their target soil gas screening levels, they were evaluated further in the 2018 RFI by estimating potential concentrations in indoor air in a hypothetical residential building. Both compounds were less than their target indoor air screening levels. Furthermore, neither of these compounds is expected to be related to releases at RSA-262 and were therefore not included as COCs requiring further action. The 2018 RFI provides a detailed discussion regarding the evaluation of acrolein and bromodichloromethane.

Similar to the hypothetical future residential evaluation, the vapor intrusion evaluation was evaluated based on updated toxicity criteria provided in the USEPA Vapor Intrusion Screening Level (VISL) Calculator (USEPA, 2022b). As presented in **Table 5**, soil gas concentrations exceeded their respective VISLs for acrolein, bromodichloromethane, and chloroform. As acrolein and bromodichloromethane were previously evaluated and unlikely to pose an unacceptable health threat by the vapor intrusion pathway, only chloroform was further evaluated. The USEPA VISL Calculator was used to estimate the indoor air concentration for chloroform based on the soil gas MDC, as well as the hypothetical future residential IELCR and Total HI. As presented in **Table 6**, although the residential IELCR slightly exceeded a target risk of 1E-05, the noncancer total HI was below 1. Both the commercial IELCR and total HI were both below their respective risk thresholds. Chloroform is therefore unlikely to pose an unacceptable health threat by the vapor intrusion pathway to current and/or future commercial workers. However, chloroform could potentially result in an unacceptable health threat to hypothetical future residents through the vapor intrusion pathway. Chloroform has therefore been identified as a COC requiring further evaluation at RSA-262.

Table 7 summarizes the ARBCA RM-2 and vapor intrusion pathway evaluation conclusions.

The soil and groundwater RM-2 human health evaluations, indicating the relevant COCs that require action for RSA-262, are summarized in **Table 7**.

2.4.3 Preliminary Screening-Level Ecological Risk Assessment

A SLERA assessment was completed for RSA-262 as part of the RFI (APTIM, 2018). The surface soil data for RSA-262 for each of the three areas were compared to their respective BSVs and Ecological Screening Values (ESVs). A weight-of-evidence evaluation was completed to further evaluate the constituents identified in the initial screening. The weight-of-evidence evaluation examined a number of lines of evidence in order to draw conclusions as to whether site-related constituents at RSA-262 have the potential to pose hazards to ecological receptors. As discussed previously, this CMI Work Plan focuses on contamination within the Former Oil Service Pit Area and groundwater only. Therefore, only the SLERA for the Former Oil Service Pit Area is discussed herein.

An initial comparison of the detected constituent concentrations in surface soil within the Former Oil Service Pit Area to ESVs and BSVs identified total high molecular weight (HMW) PAHs, carbazole, and dibenzofuran that exceeded their respective ESVs and/or BSVs and required further evaluation. The weight-of-evidence evaluation concluded that total HMW PAHs warranted further evaluation for potential effects on community-level receptors and food chain receptors. Carbazole and dibenzofuran warranted further evaluation for potential effects on community-level receptors but not food chain receptors because carbazole and dibenzofuran are not important bio-accumulative compounds.

Based on the results of the community-level and food chain assessments, it was concluded that COPECs in surface soil at the Former Oil Service Pit Area are unlikely to pose hazards to ecological receptor communities and/or populations and further evaluation of ecological hazards in this area is not warranted. In summary, the results of the SLERA indicate that further evaluation of ecological hazards at RSA-262 is not warranted. Chemicals present in surface soil are unlikely to pose a threat to communities or populations of ecological receptors.

2.5 Conceptual Site Model

A CSM was developed during the RFI to guide the investigation at RSA-262 based on historical operations, site information, and evaluation of available soil and groundwater data. **Figure 10** presents a visual representation of the site listing potential contaminants, their likely sources, possible migration pathways, investigated media, potentially impacted media, and current and future hypothetical receptors. The most likely potential contaminants from the noted activities include metals, VOCs and SVOCs. Although samples have been analyzed for explosives, perchlorate and mustard breakdown products, it is unlikely that these constituents are associated with the site based on documented site history indicating that chemical agents were stored in open storage areas (Toxic Yards) and munitions were stored (warehoused) in igloos/magazines, in addition to warehouse building construction (e.g., combustible roof construction). Activities associated with McKinley Range have included the use of explosives.
Release mechanisms and locations include the following:

- On/off-loading areas associated with warehouse loading docks and the former rail spur may have provided a pathway for metals, VOCs and SVOCs to impact surface and subsurface soil and groundwater.

- The Oil Service Area may have provided a pathway for metals, VOCs and SVOCs to impact surface and subsurface soil and groundwater.
- The concrete vehicle/oil service pit associated with Building 8024 may have provided a pathway for metals, VOCs and SVOCs to impact surface and subsurface soil and groundwater.

As they are unlikely to have been used at RSA-262, a number of chemicals included in RSA's standard analytical list for SVOCs and VOCs are not in the CSM for this site including 2,4,6-trichorophenol, 2,4-dinitrophenol, 3,3-dichlorobenzidene, 4,6-dinitro-2-methylphenol, 4-chloroaniline, 4-nitroaniline, bis(2-chloroethyl)ether, bis(2-chloro-isopropyl)ether, hexachlorobenzene, hexachlorobutadiene, hexachlorocyclopentadiene, n-nitroso-di-n-propylamine, pentachlorophenol, bromomethane, cis-1,2-dichloropropene, and trans-1,2-dichloropropene. A detailed discussion of these chemicals is presented in Section 3.2 of the RFI (CB&I, 2017).

As shown on **Figure 10**, potential receptors could be exposed to contaminated groundwater. Current human receptors are limited to commercial and construction workers. Future potential receptors include all current receptors plus, under a land reuse scenario, hypothetical child and adult residents.

This page intentionally left blank.

3.0 DECISION SUMMARY

The RFI report (APTIM, 2018) for RSA-262 concluded that PAHs in soil (benzo([a]anthracene, benzo[a]pyrene, benzo[b]fluoranthene, and dibenz[a]h)anthracene], VOCs in groundwater (2-nitrotoluene, dibenz[a,h]anthracene, 1,1,2,2-TeCA, 1,1,2-TCA, CT, PCE, and TCE), and a single VOC in soil gas (chloroform) pose an unacceptable risk under future residential use and/or if groundwater is ever used for potable water. The results of the RFI SLERA indicate that COPECs in surface soil at RSA-262 are unlikely to pose hazards to ecological receptor communities and/or populations, and further evaluation of ecological hazards at RSA-262 is not warranted. This chapter identifies the CMOs based on the results of the RFI and provides CGs that can be used in evaluating alternatives that rely on reduction in concentrations to achieve the CMOs.

3.1 Basis for the Action

A fate and transport evaluation, an ARBCA evaluation for human health, and a SLERA were performed for RSA-262 as part of the RFI (APTIM, 2018). The RFI concluded that exposure to soils within the Former Oil Service Pit Area of RSA-262 pose unacceptable risks to human health under residential future use. As a result, further action is warranted at RSA-262.

- ***Soil:*** Four PAHs (benzo[a]anthracene, benzo[a]pyrene, benzo[b]fluoranthene, and dibenz[a,h]anthracene) were identified in the ARBCA RM-2 evaluation as relevant COCs warranting action within the Former Oil Service Pit Area. No further action is warranted within the Former Rail Spur Area and the Remainder of the Site as soils were not found to pose an unacceptable health risk to any receptor.
- ***Groundwater:*** Groundwater at RSA-262 developed as a potable source would pose an unacceptable risk to all receptors. Corrective measures are also warranted for the groundwater because the RM-2 evaluation identified the following relevant COCs in groundwater for the hypothetical resident and industrial receptor: 2-nitrotoluene, dibenz(a,h)anthracene, 1,1,2,2-TeCA, 1,1,2-TCA, CT, PCE, and TCE. Additionally, 1,1,2-TCA, CT, PCE, and TCE were present at concentrations greater than their MCLs. Nitrobenzene was also identified as requiring groundwater monitoring based on a PSV exceedance.
- ***Soil Gas:*** Corrective measures are warranted for **s**oil gas based on unacceptable future residential health risk resulting from chloroform concentrations. Soil gas will be addressed through the implementation of groundwater corrective measures.

The Army intends to achieve CGs for soils and groundwater at RSA-262 through the implementation of corrective measures as they are needed to protect human health. LUCs implemented as part of the IWGW IROD will be maintained to prohibit groundwater development for potable purposes and to require management of groundwater withdrawals for non-potable uses until groundwater under final remedies for the groundwater unit located beneath RSA-262 have been selected.

3.1.1 Corrective Measure Objectives

Based on the results of the RFI, the CMOs for RSA-262 are as follows:

- Reduce or prevent exposure of future residents to soil in the Former Oil Service Pit Area contaminated with PAHs (benzo[a]anthracene, benzo[a]pyrene, benzo[b]fluoranthene, and dibenz[a,h]anthracene) such that no unacceptable hazard or risk is present.
- Reduce or prevent human exposure to groundwater used for potable purposes that is contaminated with 2-nitrotoluene, dibenz(a,h)anthracene, 1,1,2,2-TeCA, 1,1,2-TCA, CT, PCE, and TCE such that applicable or relevant and appropriate requirements are met and no unacceptable hazard or risk is present.
- Reduce or prevent human exposure to indoor air that is contaminated with chloroform through the vapor intrusion pathway such that no unacceptable hazard or risk is present.

While the above is the overarching goal, the Army has additional objectives that will be considered in the selection of corrective measures, in particular, because it is recognized that the achievement of the above goals may require an extended period of time. These additional objectives are oriented towards the selection of corrective measures that will reduce, to the extent feasible, the time to achieve the above objective. The additional objectives that will be considered in the development and selection of corrective measures are as follows:

- Reduce contaminant mass (through source reduction)
- Minimize the footprint of contamination (plumes)
- Minimize life-cycle costs associated with Long-Term Monitoring (LTM) and maintaining institutional controls (e.g., SAC program)

3.1.2 Applicable Regulations

In considering corrective measures, various laws and regulations (State and Federal) may apply. Consideration of applicable laws and regulations may affect the alternative evaluation and selection. The following primary laws and regulations are relevant to groundwater and its potential for potable use:

- Safe Drinking Water Act of 1974 non-zero MCL goals and MCLs (40 Code of Federal Regulations [CFR] Part 141)
- Alabama MCLs (AAC r. 335-7-2).

Federal MCLs have generally been adopted by Alabama. As a result, Federal MCLs are used as CGs for groundwater unless superseded by a State MCL.

Other laws and regulations that may affect alternative evaluation and selection. **Table 8** provides a list of Federal and State laws and regulations that may be relevant to the RSA-262 corrective measures.

3.1.3 Selected Corrective Measure Cleanup Goals

Corrective measure CGs are established to protect human health and the environment while also meeting applicable regulations for alternatives that rely on concentration reduction. The identification of CGs must consider the environmental issues at the site and the receptors that are affected. CGs are relevant to alternatives that reduce concentrations, such as groundwater treatment or MNA. Federal MCLs are adopted as groundwater CGs for those substances which have them (1,1,2-TCA, CT, chloroform, PCE, and TCE), unless superseded by a State MCL. CGs for other substances, as is the case with 2-nitrotoluene, dibenz(a,h)anthracene, and 1,1,2,2-TeCA, are typically based on risk considerations. The CGs for RSA-262 were developed in accordance with ADEM guidance where an IELCR of 1E-05 is assumed for the target cumulative cancer risk level and an HI of 1.0 is assumed as the target hazard limit (ADEM, 2008).

The derivation of the soil and groundwater CGs is shown in **Table 9**. Note that the risk-based CGs, presented below, reflect updated toxicity criteria not included previously used in the ARBCA HHRA. The CGs for RSA-262 groundwater are summarized below.

Summary of Cleanup Goals – RSA-262

Contaminant of Concern Requiring Action	Cleanup Goal	Basis
Soil (mg/kg)		
Polynuclear Aromatic Hydrocarbons (PAHs)		
Benzo(a)anthracene	2.8	Risk-Based
Benzo(a)pyrene	0.29	Risk-Based
Benzo(b)fluoranthene	2.9	Risk-Based
Dibenz(a,h)anthracene	0.29	Risk-Based
Groundwater (µg/L)		
Volatile Organic Compounds (VOCs)		
1,1,2,2-Tetrachloroethane (TeCA)	0.058	Risk-Based
1,1,2-Trichloroethane (TCA)	5	MCL
Carbon tetrachloride (CT)	5	MCL
Chloroform	80	MCL
Tetrachloroethene (PCE)	5	MCL
Trichloroethene (TCE)	5	MCL
Explosives		
2-Nitrotoluene	2.1	Risk-Based
Semivolatile Organic Compounds (SVOCs)		
Dibenz(a,h)anthracene	0.019	Risk-Based

Notes:
µg/L – micrograms per liter
mg/kg – Milligrams per kilogram
MCL – Maximum Contaminant Level

Daughter products of 1,1,2-TCA, TCE and CT and nitrobenzene will also be sampled for monitoring. The monitoring acceptance criteria are summarized below.

Summary of Daughter Products – RSA-262

Contaminant	Criteria (µg/L)	Basis
Dichloroethane	NA	NA
cis-1,2-Dichloroethene	70	MCL
Chloromethane	19	RSL

Contaminant	Criteria (µg/L)	Basis
Dichloromethane	5	MCL
Methane	NA	NA
Nitrobenzene	0.14	RSL
Vinyl Chloride	2	MCL

Notes:
µg/L – micrograms per liter
MCL – Maximum Contaminant Level
NA – No regulatory criteria available for monitoring
RSL – Tapwater Regional Screening Value (USEPA, 2022a)

3.1.4 Identification of the Area and Volume of Contaminated Media Requiring Corrective Measures

3.1.4.1 Soil

The RFI report identified one soil sample location with concentrations of relevant COCs exceeding CGs. PAHs were detected in surface (0-1 ft bgs) and subsurface soil (4 to 6 and 8 to 10 ft bgs) samples at concentrations greater than CGs at location 15403A-HP13.

Table 10 presents the area and volume of soil at the sole location containing relevant COCs in soil at concentrations greater than CGs. Volume calculations assume soils will require an excavation depth 1 foot below the contaminated interval. An estimated 53 cubic yards (loose volume) of soil would require corrective measures (**Table 10**).

3.1.4.2 Groundwater

The areas of overburden groundwater exceeding the CGs for TCE and PCE are presented on **Figures 8** and **9**, respectively. **Table 11** presents the areas and volumes of the TCE and PCE above CGs in overburden plumes. The PCE plume is separate from the TCE plumes. The volume of each plume is based on the average saturated thickness of the overburden wells within each isoconcentration contour.

The saturated thickness values for monitoring wells 262-RS2009, 262-RS2007, and 262-RS1699 were averaged to calculate the volumes for the 100 and 1,000 µg/L isoconcentration contours. Groundwater volumes were calculated assuming an average total porosity of 42% (the median value for the RSA site-wide porosity from 71 measurements). Areas and volumes are not calculated for explosives because these relevant COCs were not detected in surface or subsurface soils and were only detected at low (mostly estimated) concentrations in groundwater. Explosives were detected at concentrations above CGs in only two overburden wells (262-RS1699 and 262-RS2771). The maximum concentration of TCE was detected in monitoring well 262-RS1699, as shown in **Figure 8**.

Active treatment would be focused upon the portion of the TCE plume in overburden groundwater with concentrations greater than 1,000 µg/L (target treatment zone inside the TCE isoconcentration contour of the southern TCE plume). This target area is approximately 55,000 square feet. Given the thickness of the groundwater plume and a total porosity of 0.42, the volume of overburden groundwater with TCE greater than 1,000 µg/L is approximately 732,000 cubic feet or 5,476,000 gallons.

3.2 Scope and Role of the Response Action

The environmental concerns at RSA are extremely complex. Work is underway at over 300 sites in the Installation Restoration Program at RSA. To ensure protection from exposure to potentially contaminated groundwater under these sites and elsewhere on RSA, an IWGW IROD has been approved for LUCs (Shaw, 2007 and 2009a). This IROD selected LUCs for groundwater as the interim remedy. LUCs have been implemented to prevent potable use of groundwater and manage non-potable uses such that exposure to contaminated groundwater is minimized (Shaw, 2009a). This interim remedy will remain in place for the groundwater under RSA-262 until a Notice Environmental Use Restriction (NEUR) is recorded and approved as part of the final remedy.. In accordance with the provisions of the IWGW IROD, as implemented via Army's SAC program, the installation of wells for drinking water is prevented on sites without a final remedy, and all requests for the installation of wells for industrial processes or agricultural purposes on RSA are subject to Army review and approval.

3.2.1 Overall Corrective Measures for Redstone Arsenal and RSA-262

The overall strategy for cleanup at RSA has been presented to the regulators in two cleanup strategy documents, the *IWGW Cleanup Strategy* (Shaw, 2009b) and the *Installation-Wide Strategy for Cleanup of Impacted Wetlands* (Shaw, 2010). The overall RSA cleanup strategy includes the following elements:

1) Expedite evaluation and release of surface media sites to allow for efficient, mission-related property reuse.
2) Expedite cleanup of sources area at surface media sites and secondary sources of ongoing groundwater contamination, including DNAPL.
3) Prevent exposures to surface media and groundwater that may result in unacceptable risks through the use of the Army's SAC program and from implementation of the groundwater LUCs selected in RSA's IWGW IROD until site-specific corrective measures can be implemented. This IROD is interim in nature. However, the decision to implement permanent LUCs will occur in conjunction with the RSA-146 groundwater unit.
4) Coordinate the evaluation of groundwater units and their associated surface sites so that approval of groundwater RFIs is not delayed by unresolved surface media site issues.
5) Design and implement an IWGW monitoring network to monitor remedial progress and ensure that the selected remedies are protective of human health and the environment on a long-term basis.

The corrective measure for RSA-262 is consistent with the overall corrective measures strategy for RSA. The selected remedy will provide protection of human and ecological receptors.

3.3 Corrective Measures Evaluation and Selection

The following information summarizes the analysis of technologies and alternatives and the selection of the corrective measures for RSA-262 that are potentially applicable to the PAHs in soil and to the VOC-, PAH-, and explosive compound-contaminated groundwater under RSA-262, including no action (APTIM, 2018). The technologies were screened against the criteria of long-

term reliability and effectiveness; reduction of toxicity, mobility, or volume of wastes; short-term effectiveness; ease of implementation; and cost.

The following soil and groundwater technologies were considered and retained for further evaluation either as stand-alone remedies or parts of another corrective measure:

3.3.1 Soil

- ***No action***: Contaminants would be left in place without implementing any containment, removal, treatment, or other mitigating actions to prevent exposure to human or ecological receptors.
- ***Excavation***: Removal of PAH-contaminated subsurface soil and confirmation sampling to demonstrate PAH-contaminated soil above the CG has been removed.
- ***On-site and off-site disposal***: Disposal of PAH-contaminated soil on site when coupled with another technology or off site at a Subtitle D disposal facility (nonhazardous waste).
- ***LUCs***: Administrative, engineering, and legal measures to limit access to PAH-contaminated soil.
- ***Erosion and Storm Water Controls***: Use of erosion and storm water controls along with site conditions to serve as a barrier to underlying contaminants.
- ***Closure in place:*** Installation of an impermeable cover over the PAH-contaminated soil to provide a barrier to potential dermal contact, inhalation, and ingestion by human and ecological receptors.

3.3.2 Groundwater

- ***No action:*** No action means that no controls, monitoring, or active corrective measures would be undertaken to address risks associated with site contamination.
- ***MNA:*** MNA involves the passive reduction in the concentrations of groundwater COCs over time. Sampling tracks the natural attenuation processes and their effectiveness in achieving COC CGs.
- ***In-Situ Enhanced Bioremediation (ISEB)***: Injection of a carbon substrate and other additives into groundwater to promote biological conversion of organic contaminants to less toxic compounds.
- ***LUCs:*** Administrative, engineering, and legal measures to limit access by receptors to contaminated groundwater under the site.

3.3.3 Soil Alternatives

The following four soil corrective measure alternatives were selected for detailed analysis:

- ***Alternative Soil 1 (S1): No Action***. Under the no-action alternative, a corrective measure would not be taken to address the PAH-contaminated soil at RSA-262. Because this alternative would not be protective of human health, it is not considered a candidate for implementation but presents a baseline for the comparison of anticipated risk reduction and costs between other retained alternatives.
- ***Alternative Soil 2 (S2)***: ***Soil Excavation to Unrestricted Use (Residential) CGs and Off-Site Disposal***. Soils containing relevant COCs at concentrations exceeding residential

CGs would be excavated. Excavated soils would be transported for disposal at a properly licensed Subtitle D landfill. Following confirmation sampling to demonstrate the CGs were achieved, the excavation would then be backfilled with clean soil to complete site restoration.

- ***Alternative Soil 3 (S3)***: ***Closure in Place, LUCs, and Erosion and Storm Water Controls***. This alternative includes an impermeable barrier such as a geosynthetic-based cover over the PAH-contaminated soil. LUCs would be required to prevent or reduce future human exposure to contaminants remaining in place. Installation of appropriate erosion and storm water management controls would help ensure the long-term integrity of the engineered cover system.
- ***Alternative Soil 4 (S4)***: ***LUCs***. This alternative provides LUCs to restrict access to contaminated soils at the site. The land use would be restricted to industrial, and this restriction would be entered in RSA's Master Plan. Signs would be installed to warn of potential hazards and the prohibition of intrusive activities without Army permission. Routine inspections and sign repair/replacement would be required along with a soils management plan to provide procedures required for all intrusive activities performed within the area of the LUC.

3.3.4 Groundwater Alternatives

The following three groundwater corrective measure alternatives were selected for detailed analysis:

- ***Alternative Groundwater 1 (GW1): No Action***. Under the no-action alternative, corrective measures would not be taken to address the contaminated groundwater under RSA-262. Because this alternative would not be protective of human health, it is not considered a candidate for implementation but presents a baseline for the comparison of anticipated risk reduction and costs between other retained alternatives.
- ***Alternative Groundwater 2 (GW2)***: ***MNA and Maintenance of Groundwater LUCs***. This alternative involves the passive reduction in the concentrations of COCs via MNA. Sampling would be conducted to ensure that the concentrations of COCs requiring action meet the CGs over time. Additionally, monitoring will be conducted for nitrobenzene until the concentrations meet the Monitoring Acceptance Goal (MAG). LUCs prohibiting groundwater use are already in place installation-wide under the IWGW IROD (Shaw, 2007) and the SAC program (Army, 2012). The IROD is interim in nature and would be enforced through the corrective measures at RSA-262. However, the decision to implement permanent LUCs will occur with the RSA-152/154 groundwater units corrective measures.
- ***Alternative Groundwater 3 (GW3)***: ***ISEB, MNA, and Maintenance of Groundwater LUCs***. Alternative 3 involves direct injection of emulsified vegetable oil (EVO) or equivalent carbon substrates and other necessary amendments (bacterial cultures, pH amendments, vitamins, etc.) to promote bioremediation of the COCs in groundwater. Groundwater sampling would be conducted for performance monitoring of the ISEB treatment and MNA portions of the plume until the CGs for the COCs requiring action are reached over time. Additionally, monitoring will be conducted for nitrobenzene until the concentrations meet the MAG. LUCs prohibiting groundwater use are already in

place under the IWGW IROD (Shaw, 2007) and the SAC program (Army, 2012). The IROD is interim in nature and would be enforced through the corrective measures at RSA-262. However, the decision to implement permanent LUCs will occur with the RSA-152/154 groundwater units corrective measures.

3.3.5 Selection of Corrective Measures for RSA-262

Alternative S2 (Soil Excavation and Off-Site Disposal) was selected as the corrective measure for soil. Full removal of the PAH-contaminated soil is likely with this alternative, resulting in clean site closure without the financial liability of LUCs in Alternative S4 or maintaining a cap over the PAH contamination and LUCs in Alternative S3. Alternative S2 is expected to allow full future use of the site.

Alternative GW3 (ISEB, MNA and LUCs) was selected as the corrective measure to fully address the site CGs within a reasonable time frame. The use of ISEB as active treatment for the VOC contamination is expected to reduce the time required to reach the CGs by more than 50% over use of only a passive technology such as MNA in Alternative GW2.

The major components of the selected corrective measures for soil in Alternative S2 include:

- Preparation of a CMI Work Plan
- Site preparation, including site clearing and placement of storm water controls
- Benching, shoring, or other means of worker protection for the excavation
- Removal of contaminated soils with relevant COC (PAHs) concentrations above the residential CG. A total of 41 bank cubic yards around boring 15403-HP13 will be excavated to 11 ft bgs (**Figure 11**).
- Collection and analysis of post-excavation confirmation and waste characterization samples.
- Transportation of excavated material for final disposal at an approved off-site nonhazardous waste disposal facility.
- Backfilling and grading of the excavated area.
- Site restoration, including revegetation of the disturbed area.

Alternative S2 meets the four ADEM general standards for corrective measures (overall protection of human health and the environment, attainment of media cleanup standards, control of the source of release, and compliance with standards for management of wastes). The selected corrective measures in Alternative S2 were chosen over the other alternatives because they best protect human health and the environment.

The major components of the selected corrective measures for groundwater in Alternative GW3 include the following:

- Prepare an UIC permit application for ADEM approval
- Baseline sampling of 16 existing monitoring wells in Year 0 for the COCs (and degradation products of 1,1,2-TCA, TCE and CT for performance monitoring) and MNA parameters (DO, ORP, alkalinity, dissolved gases ethane/ethene/methane, TOC, and pH).

Additionally, monitoring will be conducted for nitrobenzene until the concentrations meet the MAG.

- Census®, a molecular biological tool used to accurately quantify genetic markers associated with the fecal material from specific origins/hosts,® or equivalent will be performed on select monitoring wells (262-RS1699, 262-RS2007, and 262-RS2008) during the baseline sampling event to establish existing conditions.
- Initial full-scale implementation of ISEB within the target treatment zone inside the 1,000-µg/L TCE isoconcentration contour of the southern TCE plume (approximately 55,000 square foot area) (**Figure 13**). If liquid carbon sources like EVO are used as the ISEB amendment, it would be injected into an estimated 79 points arranged in a grid pattern with a spacing of 25 feet based on a 15-foot radius of injection. If a combination of liquid and solid carbon sources like feather meal are used, the liquid carbon sources would be injected at approximately 39 points covering the concrete pad, arranged in a grid pattern with a spacing of 25 feet. The solid carbon sources would be injected at approximately 78 points in the grassy area, arranged in a grid pattern with a spacing of 12.5 feet (**Figure 14**).
- CMI construction report.
- Semiannual MNA sampling of 16 existing monitoring wells in Years 1 through 3 for the COCs (and degradation products for performance monitoring) and MNA parameters starting at the year of initial full-scale implementation of ISEB. Additionally, monitoring will be conducted for nitrobenzene until the concentrations meet the MAG.
- Annual monitoring report through attainment of the CGs (Years 1 through 35 or until CGs are achieved and confirmed).
- Annual groundwater MNA sampling of 12 monitoring wells in Years 4 through 35 for the COCs (and degradation products for performance monitoring) and MNA parameters or until CGs are achieved and confirmed. Additionally, monitoring will be conducted for nitrobenzene until the concentrations meet the MAG.
- Closure of 20 overburden monitoring wells and one bedrock well after the CGs are attained.

3.4 Request for Permit Modification

The RFI (APTIM, 2018) received ADEM concurrence on 2 August 2018. A copy of the ADEM concurrence letter for the RFI report is included in **Appendix B**. The request for permit modification (**Appendix C**) presents the supporting information, including all procedures necessary to implement and monitor the final corrective measures for RSA-262 in accordance with AAC R. 335-14-8-04 (2). The inclusion of this request for permit modification meets requirements specified in Section VI.E.3 of the Permit.

This page intentionally left blank.

4.0 CORRECTIVE MEASURES IMPLEMENTATION FOR RSA-262

This chapter provides an overview of the field activities planned to complete groundwater corrective measures at RSA-262. Work discussed in this chapter will be completed in accordance with the procedures outlined in this CMI Work Plan and other approved documentation as appropriate.

4.1 General Scope

The general scope of work for RSA-262 activities is expected to include the following:

- Procurement and Subcontracting
- Mobilization/Demobilization
- Utility Marking / Dig Permits
- Vegetation Clearing
- Direct Push Technology (DPT) Injections
- Repairing Concrete Damage Caused by DPT Injections
- Groundwater Monitoring
- Record Keeping
- Decontamination
- Implementation of LUCs
- CMI Reporting

The general schedule for implementation of corrective measures at RSA-262 is provided in **Appendix D**. The actual start date is pending approval of this CMI Work Plan, incorporation of the site corrective measures into the revised Permit, and availability of funding.

Stakeholder communication and coordination during the CMI will follow the procedures outlined in the *Installation-Wide Quality Assurance Project Plan (IW-QAPP)* (HydroGeoLogic, Inc. [HGL], 2019) and the Project Management Plan (PMP) (ECC, 2021a).

4.1.1 Procurement and Subcontracting

The following subcontracted service will be required for the completion of the project:

- Surveying
- Utility locating
- Drilling DPT Points
- Concrete Repair
- Analytical laboratory services
- Remediation-derived waste transportation and disposal (e.g., sampling purge and decontamination water)

Support materials will be procured through equipment vendors and shipped directly to the site. Support materials and equipment include DPT injection equipment, sampling supplies and equipment, health and safety supplies and equipment (personal protective equipment, air monitoring equipment [e.g., photoionization detector]), and other miscellaneous supplies (e.g., wooden stakes and pin flags). Copiers and a fax machine at the contractor's office will also be used to support the work at RSA-262.

4.1.2 Field Personnel

The following field personnel may be utilized to complete field corrective measure activities:

- Site supervisor
- Site safety officer
- Field quality control site manager
- Two groundwater sampling technicians
- One or two equipment operators (subcontractors)
- One or two laborers (subcontractors)

Groundwater sampling may be performed in-house or subcontracted. The number and schedule of personnel will be adjusted during the project as required for completion. The same staff may satisfy several roles.

4.1.3 Quality Control Inspections for Field Activities

Inspections will be performed to determine compliance with this CMI Work Plan. The inspection criteria are discussed further in the QCP presented in **Appendix E**. Inspections may be performed and verified through visual observation, measurement of materials or equipment, examination of documentation/certification, evaluation of performance, or testing.

Inspections will be performed using a three-phase inspection method. Participants in the inspections typically include, but are not limited to, the field personnel, the project quality control manager, the regulatory representative, and the project health and safety representative. The preparatory inspection(s) are performed prior to start-up and will examine training, procedures, equipment and materials, work plans and documents, and overall readiness to perform work. Initial inspection(s) are performed upon beginning a particular phase of work and include an examination of the quality of workmanship and a review of control testing for compliance with work plan requirements. Follow-up inspection(s) are then performed to verify compliance with procedures. Follow-up inspections will ensure a continuation of quality and safety standards established during preparatory and initial inspections until completion of the definable work feature. Final follow-up inspection(s) will be conducted at the completion of the activity. The final follow-up inspection will be performed to ensure that the completed feature of work meets the work plan requirements. Any deficiencies noted during this inspection will be documented and a determination will be made as to the corrective actions necessary to mitigate the deficiency. All significant deficiencies will be corrected prior to completion of the activity.

Records of inspections will be maintained in the project files. At a minimum, inspection files will include inspection reports/checklists, inspection responses, any supporting documents, and applicable comments.

4.1.4 Daily Reports

The requirements for preparation and submittal of daily project documentation are outlined in the QCP (**Appendix E**). As indicated, the daily reports (including daily construction logs, etc.) will be provided to the Project Manager or designee during CMI activities.

4.1.5 Safety and Health Requirements

All personnel involved in the corrective measures will follow this Work Plan and abide by the health and safety requirements presented in the APP (ECC, 2021b) (**Appendix F**).

4.2 Preliminary Activities

Preliminary activities are summarized in further detail below. All field personnel will follow this Work Plan and abide by the health and safety requirements presented in the Site Safety and Health Plan (SSHP).

4.2.1 Mobilization

Upon notice to proceed, the contractor will begin mobilization, including the deployment of personnel, equipment, subcontractors, and materials necessary to commence CMI activities at RSA-262. After field mobilization, contractor personnel will attend a safety tailgate meeting and safety orientation to review the tasks and the sequencing of work to ensure safe work activities and a clear line of communication is established. All necessary site-specific safety training will be conducted at this time and in accordance with APP (Health and Safety Plan) (ECC, 2021b).

4.2.1.1 Access to Redstone Arsenal

RSA is a secure facility; visitors gain access through badging at the visitor control center at Gate 9. Badge requests for access to RSA should be submitted at least two weeks ahead of the date needed to allow for approval and processing by the RSA host organization. On the approved pickup date, new contractor personnel and subcontractor personnel will register at the RSA Visitor's Center at Gate 9 and receive a security badge. Personnel with prior approval from a host RSA organization will be issued a personnel badge upon presentation of proper identification. All personnel requesting access to RSA must be U.S. citizens in good standing (i.e., no convictions or outstanding warrants).

Military and government personnel will present current military (active, retired, or family) or Federal government identification cards and do not require a host RSA organization. Further information may be obtained by contacting the RSA Visitor's Center located at Gate 9 at 256-876-1122.

Registered personnel may access RSA-262 using Gate 1 at Martin Road. Directions from Gate 1 are east on Martin Road to Patton Road SW, south on Patton Road to Buxton Rd. The site will be

on the north side of Buxton Road. Gate 1 is open five days a week (Monday through Friday) from 0530 to 2100. Gate hours and conditions are subject to change; therefore, operational hours should be verified.

4.2.2 Digging Permit and Utility Marking

In advance of any new underground activity (i.e., DPT injections and soil excavation), a job order request that describes the proposed activities will be submitted. This information will be provided to RSA through a system that affords various RSA entities the opportunity to review the proposed activities and verify that impacts to RSA resources (e.g., natural, cultural, etc.) are properly managed.

Prior to any ground-penetrating activity, a digging permit will be requested from the RSA DPW. As part of this permit, RSA will locate and mark underground utilities in the vicinity of the proposed intrusive working area. The procedure requires notification by telephone (256-876-9881) within 14 days of intrusive activities and requesting a work order for a digging permit.

The digging permit must be renewed every 30 days, if required. To avoid temporary shutdown, a request for permit extension will be made at least 1.5 weeks prior to expiration for the extension to be granted.

4.2.3 Vegetation Clearing

If necessary, brush and vegetation currently covering the routes to the groundwater monitoring wells at RSA-262 will be cleared in preparation for the groundwater sampling activities. Tree clearing (greater than three inches) will only be performed between 16 October and 1 April and will be coordinated with the RSA forester. Cleared brush and trees will be chipped for mulch (beneficial use) for Army reuse or sale. All cleared vegetation not chipped, including brush, limbs, and large tree trunks and limbs, will be transported to a construction and demolition landfill for disposal. As necessary, the contractor will coordinate with the appropriate RSA personnel to arrange for the removal of any trees necessary for completion of the CMI field activities.

4.2.4 Soil Excavation Activities

4.2.4.1 Site Control

Temporary construction fencing materials, barricades, and warning tape will be used, as necessary, to delineate the site exclusion zone, contamination reduction zone, and site support zone. Warning signs will be posted at conspicuous locations around the perimeter of the construction areas to discourage unauthorized entry. An equipment storage and material laydown area will be designated during mobilization.

4.2.4.2 Storm Water Erosion and Sediment Controls

Storm water management and erosion and sediment control will be provided according to the *Alabama Handbook for Erosion Control, Sediment Control and Stormwater Management on Construction Sites and Urban Areas* (Alabama Soil and Water Conservation Committee [ASWCC], 2014). Best Management Practices (BMP) (surface stabilization, runoff conveyance, sediment control, storm water management, etc.) will be used to divert clean water away from a

disturbed site, minimize erosion and sedimentation, and prevent pollution of water and land at the sites. These BMPs will be in place prior to ground disturbance and remain until establishment of vegetative cover. Installation of temporary controls will be coordinated to maintain effective and continuous control of erosion and pollution. The following BMPs may be included:

- Land grading
- Dust control
- Erosion control blankets
- Mulching
- Temporary and permanent seeding
- Sediment barrier (silt fence)
- Check Dam
- Diversion
- Grass swale
- Straw bale sediment trap.

If needed, silt fencing will be installed in areas where surface water runs off from the site. In addition, fiber rolls and check dams will be used to control off-site sediment transport. Erosion control devices will be inspected weekly and also within 72 hours of any qualifying precipitation event (any precipitation of 0.75 inch or greater in any 24-hour period). Check dams will also be utilized in channels adjacent to the sites to trap sediments during runoff events. Sediment deposits will be manually removed from the silt fence/check dams after each qualifying rainfall event or when sediment reaches one-half of the barrier height. Removed sediment will be added to the contaminated soil for subsequent disposal. Damaged erosion control devices and damaged areas around and beneath the devices will immediately be repaired. To reduce the amount of soil transported onto paved roads by motor vehicles or runoff, stone pads with a filter fabric underlayment (construction exit pad) will be constructed at points of vehicular ingress or egress. The construction exit pads will be installed in accordance with ASWCC (2014) (see **Figure 11**). New stone will be added as necessary at the entrance to aid in removing soil from vehicle tires.

4.2.4.3 Locating, Marking, and Surveying of Excavation and Consolidation

A Global Positioning System (GPS) will be used to delineate the project work boundary and mark the excavation areas.

4.2.4.4 Excavation Activities

The limits of the soil excavation areas at RSA-262 are depicted on **Figure 11**. The excavation of soils will cover an approximate 100 square foot area. Soil at boring 15403-HP13 would be excavated down to 11 ft bgs (1 foot below the contaminated intervals of 4 to 6 and 8 to 10 ft bgs). Excavation will not continue beyond encountered groundwater. Note that as presented on **Figure 11**, a water line bordering the northwestern boundary of the excavation area will be protected and supported during all excavation activities. Following excavation, common fill will be placed as needed to promote proper drainage, and a minimum of 4 inches of topsoil will be spread over the affected areas in order to establish vegetation.

Water will be used during excavation and hauling activities to control fugitive dust, if necessary. Excavation will be conducted in accordance with the Safety and Health Regulations for Excavations (Occupational Safety and Health Administration [OSHA] 29 CFR Part 1926 Subpart P). As the excavation will extend beyond 4 ft bgs, sidewalls of the excavation will be sloped/benched. An initial minimum slope of 1.5:1 (horizontal:vertical) will be used that may be reduced at the engineer's discretion as site conditions allow. Spoils must be placed a minimum of 3 feet from the edge of the excavation. Soil generated by benching/sloping near the perimeter of the excavations will be segregated and sampled to determine if it may be used for backfilling. Excavated soils will be stockpiled prior to waste characterization sampling and off-site disposal. The soil from benching/sloping and excavated material will be staged on impervious material such as plastic sheeting and covered with waterproof material (i.e., tarpaulin or 10-mil plastic sheeting), which will be secured with sandbags (see **Figure 11**). Containment should control runoff, leaching, or fugitive dust emissions.

Waste characterization will be performed to obtain waste acceptance approval by the disposal facility. In lieu of stockpile sampling, a characterization plan may be submitted to ADEM, which describes an in-situ characterization process. If approved by ADEM and the disposal facility, pre-characterization sampling via DPT will be performed prior to excavation activities. If approved, soils will be direct loaded to trucks for disposal at the landfill, eliminating the need for stockpiling. Alternatively, excavated soil will be stockpiled and sampled at a frequency of one sample per 200 cubic yards of material, or as required by the landfill. For each stockpile, grab samples will be randomly retrieved from three exterior points of each pile from a depth between 0 and 2 feet. Two additional samples will be taken from the interior of the pile at a depth between 2 to 5 feet. The five grab samples will be composited, representing 200 cubic yards. No additional quality assurance (QA)/quality control (QC) samples (other than the method-required batch QC) will be required for the waste characterization samples. Each sample would be analyzed for the full Toxicity Characteristic Leaching Procedure (TCLP) analysis to confirm that the contaminated soil can be characterized and disposed of as nonhazardous waste. One composite sample would be collected for waste characterization based on the volume of excavated soil. This nonhazardous soil would be disposed of in a Subtitle D disposal facility.

Dust at the site will be controlled with water applied by a water truck equipped with hose and sprayers. Mulch, such as straw, may also be used. Water will be applied to dry exposed areas until the surface is wet and repeat as needed. Water will be applied at rates so that runoff does not occur. Polymers, tackifiers, stabilizers, or chlorides will not be used for dust control. Dust suppression will commence when aerosol levels in the work area reach 2.5 milligrams per cubic meter. This level is one-half the OSHA particulate "not otherwise specified" threshold respirable fraction. Measurements will be collected continuously during the CMI excavation using a Data Ram PDR 1000 or equivalent real-time aerosol monitor in accordance with the SSHP (**Appendix F**).

4.2.4.5 Confirmation Sampling

Following completion of the excavations, confirmation soil samples will be collected along the sidewalls of the RSA-262 excavation to ensure that the soil contaminant concentrations do not exceed the CGs. The excavation depth is estimated to be 11 ft bgs. Approximately nine confirmation soil samples (two from each sidewall and one from the floor) would be collected and

analyzed to confirm that relevant COC concentrations do not exceed the CG. If the sidewall confirmation samples do not achieve the CG, then the excavation will be expanded out a minimum of three feet and resampled. Once confirmation sampling results demonstrate PAH concentrations in soil are less than the CG, the excavation would be backfilled with clean fill and graded to facilitate runoff and minimize erosion.

Since PAHs are the relevant COCs, as opposed to VOCs, and given the small area of excavation, confirmation samples will be collected from the sidewalls and floor using an excavator bucket. Samples will then be collected from the excavator bucket and placed in a stainless-steel bowl. Samples will be composited and thoroughly mixed (homogenized) and then placed in the appropriate sample containers provided by the subcontracted chemical analysis laboratory. Samples will be analyzed for PAHs using USEPA Test Methods for Evaluating Solid Waste, Physical/Chemical Methods (SW-846) in accordance with the RSA Sampling and Analysis Plan (USEPA Method 1311). Confirmation samples will be collected using routine QA/QC sample frequencies (i.e., 10% field duplicates, 5% matrix spike [MS]/matrix spike duplicate [MSD]). All sample containers, preservatives, and holding times will conform to the requirements specified in the IW-QAPP (HGL, 2010).

Sample documentation, custody, packaging, and shipping will follow the procedures specified in the IW-QAPP (HGL, 2010). Custody will be maintained at all times by the sampling team prior to shipment to the analytical laboratory using typical chain-of-custody forms. Analytical data generated from this project will be managed in accordance with the procedures specified in the IW-QAPP (HGL, 2010). Confirmation soil sampling data will be evaluated and summarized in the CMI Report. This information will be provided to the Army for review and approval.

4.2.4.6 Waste Soil Transportation and Disposal

A licensed transportation and disposal subcontractor will be used to complete these activities. It is assumed that the soil will be disposed as special waste (nonhazardous) at a Subtitle D landfill. Transportation and disposal of the excavated waste will begin after approval by the selected waste disposal facility and ADEM or the applicable regulatory agency for the selected disposal facility (typically four to six weeks after receipt of solid waste profile sheet). Prior to transport, an RSA representative will review and sign the waste manifest. During loading, quantities of waste loaded onto the dump truck will be documented and the bill of lading or shipping paper documentation for the nonhazardous waste shipments will be facilitated. All hazardous waste sent off site for disposal shall be on a hazardous waste manifest and have a land disposal restriction notification. Transportation will comply with all U.S. Department of Transportation regulations. Waste shipment will be coordinated to arrive on schedule at the landfill. Written approval from the landfill (and ADEM) prior to shipping waste to their facility will be received and the landfill will provide a certificate of disposal for each load received and processed.

Any excavated soil determined to be hazardous will be managed and includes disposal in a landfill certified to accept the waste. Hazardous soil will be containerized in 55-gallon drums or other suitable containers with tight-fitting lids or covers. These drums/containers will be labeled, moved to a satellite accumulation area or 90-day storage within 72 hours. If additional storage space is required for Investigation-Derived Waste (IDW), the contractor will utilize lined roll-off

containers. Hazardous soil IDW disposal includes disposal in a landfill certified to accept the waste.

4.2.4.7 Backfilling and Site Restoration

During soil excavation activities, common fill will be placed as needed to promote proper drainage, and a minimum of 4 inches of topsoil will be spread over the affected areas in order to establish vegetation. If sampling of the borrow source material has not been conducted, sampling of the material will be performed to confirm it is acceptable for use as backfill at the site. If an existing borrow source is utilized, the analytical parameters and acceptance limits will be at least as stringent as those proposed for new borrow sources.

The fill material will be dumped adjacent to the excavation area using a dump truck and placed in lifts no greater than 6 inches, with each lift compacted by the excavator prior to placement of the next lift. No compaction testing will be required. During backfilling, dust control will be implemented. Once the areas have been backfilled and compacted, a minimum of 4 inches of clean topsoil will be placed over them. The disturbed areas will then be seeded and mulched to stimulate revegetation and reduce the potential for soil erosion. Seed and mulch will be applied to all disturbed areas consistent with ASWCC (2014).

Supplemental irrigation (watering) will be performed to assure proper seed germination and vegetation establishment during dry seasons. Watering must be applied within one week of seeding. Where temporary irrigation is possible, aboveground piping and sprinklers shall be installed. Water application rates will be carefully controlled to prevent runoff. A site inspection will be conducted two to four weeks after the seeding to confirm the revegetation is successful. If revegetation is unsuccessful, the site will be reseeded until an adequate stand of vegetation is present. The silt fence will remain in place until after the vegetation is established. Once the silt fence is removed, the posts will be removed, and the remaining disturbed area will be reseeded. Upon completion of site restoration activities, all temporary fencing, plastic sheeting, hay bales, wooden stakes, and other project-related items will be removed from the site and disposed offsite at the RSA construction debris landfill in accordance with the IW-QAPP (HGL, 2019).

4.2.5 Groundwater Treatment Activities

4.2.5.1 ISEB Injection Locations

A licensed land surveyor will be subcontracted to delineate the project work boundary and mark and survey the locations of the proposed ISEB injection locations. The surveyor will mark items in the field with highly visible wooden stakes, tape, or pin flags. The proposed monitoring well and ISEB injection locations are shown on **Figures 13** and **14**.

4.2.5.2 ISEB Injection Activities

There are two proposed injection methodologies that may be applied to this injection event. The first involves injecting EVO into the estimated 79 injection locations displayed on **Figure 13** using a combination of temporary DPT and permanent injection points. These points will be spaced 25 feet apart with an estimated 15-foot radius of injection. Injections will target the treatment zone inside the 1,000 µg/L TCE isoconcentration contour of the southern TCE plume (approximately

55,000 square ft area) seen in **Figure 13**. Multiple injections may be required in the permanent injection points due to the elevated TCE concentration at 262-RS1699.

In the second proposed injection alternative, two different amendment materials would be used for injections: a) EVO and b) Feather Meal Electron Donor (FMed). The EVO will be injected into the 42 temporary DPT and permanent injection points on the concrete shown on **Figure 14** because these points will need to be backfilled with soil and a new concrete patch that will minimize settling. As referenced in **Section 3.3.5**, the proposed injection points in **Figure 14** are 25 feet apart. With Fmed, twice as many injection points will be used for each row, spaced 12.5 feet apart. The proposed 74 injection points for the Fmed are shown on **Figure 14**. However, supply and market fluctuations for Fmed may require EVO to be used at all points. If this is the case, the map from **Figure 13** will serve as the proposed injection locations for EVO. In either scenario, five permanent injection locations will be installed surrounding monitoring well 262-RS1699 for any future injections that may be needed (**Figure 13** and **14**).

The ISEB injection activities will include preparation of the application and acquisition of an UIC permit (**Appendix H**), mobilization/demobilization, drilling, injection of the selected ISEB amendments into the locations indicated on **Figures 13** and **14**, quarterly post-injection sampling (**Appendix H**), and reporting (**Section 4.7**).

Overburden plume treatment will focus on the approximate 1,000 µg/L TCE isoconcentration line, which corresponds to an area of approximately 55,000 square feet (**Figure 12**). This also corresponds to the area with the highest concentrations of TCE.

The contractor will inject a food-grade EVO carbon source, such as Tersus EDS-ER or equivalent, along with additional nutrient amendments as needed into injection locations on the concrete pad (**Figure 14**) to enhance the biological degradation of the six chlorinated VOCs that are COCs listed in **Table 9**. By adding the EVO solution to groundwater, anaerobic conditions will be produced and promote reductive dechlorination. Commercially available EVOs are designed to be initially transported through the pore spaces and eventually adhere to the aquifer matrix, providing a carbon source that will stay active for three to five years, depending on the amount of substrate injected and site conditions. As the EVO degrades, the fermentation products will travel with groundwater flow, thereby extending the bioremediation treatment area beyond the injection location.

In addition, FMed will be used at the injection locations in the grassy area seen in **Figure 14**. Using FMed as an electron donor and carbon source in groundwater and soil remediation is a new, innovative process developed by researchers at Clemson University's Environmental Engineering Department (Rogier, 2018). FMed is made of rendered chicken parts, the same kind used in pet foods, and is a widely available alternative to EVO. FMed will be purchased from a supplier in Huntsville once work begins. The material comes in a non-pathogenic, powdered solid form that can be slurried with water for application. Rather than pumping the slurried material into the ground, the temporary DPT injection points will be filled with Fmed before being capped by one foot of bentonite and 4 feet of topsoil. To donate electrons and facilitate ISEB, groundwater will flow through the pillars of FMed to facilitate fermentation. To account for the lower dispersion with the FMed product, twice as many temporary DPT points will be installed in the grassy area.

The EVO solution will be injected into the contaminated saturated zone from bedrock to the top of the groundwater table. A design Radius of Influence (ROI) of 12.5 feet was assumed for this injection event, which results in a preliminary layout of 79 injection locations, if EVO is the only injection media used (**Figure 13**). If a combination of EVO and Fmed are used, 42 injection locations on the concrete pad will be used for EVO, and 74 injection locations will be used on the grassy area for Fmed. Injection intervals will be determined by the lead field geologist and/or engineer using field measurements of depths to water and bedrock. As described in **Section 4.6**, an assumed depth of 19 feet bgs will be used if the depth to groundwater cannot be determined during drilling. For the purpose of the design, a saturated thickness of 27 feet has been assumed across the target plume area.

Determining an appropriate dosage for the various reagents is a function of the expected reagent distribution radius, thickness of the target horizon, soil type, groundwater velocity, effective pore space volume, electron acceptor demand for the dissolved and sorbed-phase COCs, and quantity of competing electron acceptors (e.g., DO, nitrate, sulfate, and iron).For the purposes of calculating dosages, the target injection volume at any given injection point is 7% of the estimated average groundwater volume in the aquifer, using an estimated effective porosity of 0.2. The VOC and electron acceptor concentrations measured during recent groundwater sampling events and past experience were considered for the dosage calculations.

If EVO is the only injection media used, as calculated using a design tool provided by EOS Remediation (**Appendix I**), the contractor would inject approximately 8,690 gallons of Tersus EDS-ER or equivalent in an approximately 5% EVO solution in potable water (173,800 gallons) across the 79 injection points. If FMed is used in the grassy area, approximately 4,400 gallons of the 5% EVO solution (88,000 gallons) will be injected at 42 injection points and Fmed will be injected at 74 injection points. At each injection location, approximately 107 gallons of Tersus EDS-ER or equivalent will be injected.

4.2.5.3 Monitoring to Evaluate MNA

A groundwater monitoring program will be implemented to evaluate the effectiveness of ISEB and MNA.

Groundwater monitoring will be performed semi-annually from Years 1 through 3 and annually from Years 4 through 35 or until CGs are achieved and confirmed. The proposed monitoring well network is shown on **Figure 12**.

- One baseline groundwater sampling event would be conducted in Year 0, prior to any groundwater treatment activities. Groundwater samples would be collected from the existing 16 monitoring wells. Groundwater samples would be analyzed for COCs (and degradation products for performance monitoring) and MNA parameters (DO, ORP, alkalinity, dissolved gases ethane/ethene/methane, TOC, and pH). Degradation products of 1,1,2-TCA (dichloroethane), TCE (cis-1,2-DCE and VC) and CT (chloroform, dichloromethane, chloromethane, and methane) will also be analyzed for performance monitoring. Monitoring will also be conducted for nitrobenzene until the concentrations meet the MAG.

- Census®, or equivalent will also be performed in select monitoring wells (262-RS1699, 262-RS2007, and 262-RS2008) to establish existing microbial conditions.
- In compliance with the anticipated UIC permit, total dissolved solids (TDS), pH, and nitrates will be monitored quarterly at 262-RS1699, 262-RS2007, and 262-RS2008 to monitor site conditions post-injection. The first samples will be taken within 30 days of the injection's completion.
- Following ISEB injections, semiannual groundwater sampling would be conducted in Years 1 through 3. Groundwater samples would be collected from the existing 16 monitoring wells during each sampling event and analyzed for COCs (and degradation products for performance monitoring) and MNA parameters. MNA analytes will be optimized for each subsequent event based on the results of the previous events. Monitoring will also be conducted for nitrobenzene until the concentrations meet the MAG.
- Annual monitoring would be conducted for the existing 16 monitoring wells for Years 4 through Year 35 or until CGs are achieved and confirmed. Groundwater samples would be analyzed for COCs (and degradation products for performance monitoring) and MNA parameters. MNA analytes will be optimized for each subsequent event based on the results of the previous events. Monitoring will also be conducted for nitrobenzene until the concentrations meet the MAG.
- At the end of the duration of the project (Year 35), it is assumed that the CGs/MAG will be achieved, and site monitoring wells would be decommissioned. All groundwater monitoring for MNA will be discontinued if CGs are attained for all COCs in each of the monitoring wells for three consecutive years (individual wells may be removed from the program sooner if this criterion is satisfied). A model detailing MNA duration has been included in **Figure 15**.

If MNA indicates that a change to the monitoring schedule is appropriate, the Army will submit a request to ADEM for review and approval prior to any changes in the analytes or frequency of sampling.

Appendix G provides the plan for the implementation of the site monitoring program. This plan includes the wells scheduled for monitoring, sampling worksheets, analysis methods, and data management. The Site Monitoring Plan (**Appendix G**) is intended to be used in conjunction with the IW-QAPP (HGL, 2019).

4.2.5.4 Temporary Facilities and Work Areas

Upon mobilizing to the site for reagent injection, a temporary facility or facilities will be established adjacent to the treatment area. Placement of the tanks and the storage area will be coordinated with RSA. If a nearby hydrant connection is available, it will be fitted with a backflow preventer and a flowmeter. If a hydrant is not available, a water truck (approximately 2,000 gallon) may be used. Upon completion of the injection effort, the temporary facilities will be demobilized, and the site returned to its original condition.

4.2.5.5 Injection Reagent Mixing

Potable water and EVO will be transferred into a reagent mixing tank stationed adjacent to the injection pump for the preparation of the 5% EVO solution. Minimal potable water will be used with FMed before being injected to control dust.

4.2.5.6 Material Handling and Storage

All materials will be stored under ambient temperature in the designated equipment staging and storage area. The EVO will be transferred via pumps. FMed will be transferred by field techs using wheelbarrows to dump material into injection locations. Safety data sheets will be provided in an SSHP to be prepared by the contractor and are included with the draft UIC Permit application (**Appendix H**).

4.2.5.7 Reagent Injection

The EVO solution reagents will be directly injected using a variable speed positive displacement pump. The EVO solution injections will begin at the perimeter injection locations and then work into the center of the plume to reduce the potential for the injections to displace contaminated groundwater. The temporary DPT injection points will be backfilled by tremie with a cement/bentonite grout in accordance with RSA and ADEM requirements and completed at the surface accordingly.

4.3 Record Keeping

Daily safety tailgate meetings will be recorded and field sample collection and well installation logs will be prepared during the corrective measures activities at RSA-262 and will be provided in the Corrective Measures Report and subsequent Monitoring Reports. Variances, inspection forms, survey data, and dig permits will be included in the project reporting in accordance with the IW-QAPP (HGL, 2019) and the PMP (ECC, 2021a).

4.4 Decontamination/Investigation-Derived Waste

Non-disposable sampling equipment will be decontaminated prior to beginning work at the site and prior to the collection of individual samples to prevent cross-contamination and maintain the integrity of the environmental samples collected. All sampling equipment will be decontaminated in accordance with procedures specified in the IW-QAPP (HGL, 2019).

All solid and liquid IDW generated during CMI activities will be handled in accordance with the most recent versions of AEIRG and AAC 335-14, as well as in accordance with the IW-QAPP (HGL, 2019). Hazardous liquid IDW will be containerized in 55-gallon drums, sampled as specified in the Site Monitoring Plan (**Appendix G**), and disposed of offsite at a permitted landfill or sanitary sewer if acceptable. For non-hazardous liquid IDW, possible management options include processing through RSA's sewage treatment plant or an appropriate RCRA-permitted facility.

4.5 Demobilization

Personnel, equipment, and subcontractors will be demobilized from the project site after completion of corrective measures activities.

4.6 Implementation of LUCs

Administrative controls currently in place for groundwater include the IWGW IROD (Shaw, 2007) as implemented using the RSA SAC program (Army, 2012). While this IROD is interim in nature, it will apply to groundwater at RSA-262 until groundwater at the site meets CGs. The decision to implement permanent LUCs for groundwater will occur in conjunction with the RSA-146 groundwater unit. RSA will perform LUC inspections as described in the Site Monitoring Plan (**Appendix G**). LUC signs are not needed since site soils will be excavated to achieve CGs resulting in unrestricted use.

4.6.1 Survey Plat

In accordance with the Permit (ADEM, 2022), where residual contaminant concentrations remain in place at levels greater than those appropriate for unrestricted land use, RSA will submit a survey plat indicating the locations and dimensions of the contaminated areas within RSA-262 and the concentrations of hazardous constituents. This survey plat shall be submitted to the Madison County Probate Judge's Office and to ADEM as part of the Environmental Use Restriction (EUR) in the CMI report (**Section 4.7**). This plat must be prepared and certified by a professional land surveyor registered in the State of Alabama and contain a prominently displayed note stating RSA's obligations to limit property to the specified restricted uses. The survey plat shall be maintained as described in the Permit until RSA can demonstrate to ADEM that the levels of hazardous constituents in all contaminated media are within limits appropriate for unrestricted land uses.

4.6.2 Notice of Environmental Use Restriction

A NEUR is required when an approved CMI allows corrective measures that will not result in remediation of the property or portions of the property to unrestricted use. The purpose of an NEUR is to ensure that risks to human health and/or the environment are properly managed by imposing activity and use restrictions on the applicable portions of the property and making these restrictions a legal obligation until the EUR is removed. The NEUR will be included in the CMI report for this site once all corrective measures are completed.

ADEM will be notified within 10 days after uses inconsistent with the NEUR are identified. Additionally, notice regarding any observed changes in use, identified proposed changes in use, applications for building permit, or proposals for site work inconsistent with the NEUR will be provided to ADEM as part of the annual monitoring report. Once the NEUR is approved, ADEM will execute and return the original document to RSA to be filed in the appropriate land records (Madison County Probate Judge's Office) within 30 days of receipt. Certification that the notice of NEUR was recorded with the Madison County Probate Judge's Office will be submitted to ADEM within 30 days of recording per AAC 335-1-05(3).

This certification will include a copy of the NEUR and the document in which the notation was placed. RSA will maintain the NEUR until demonstrating to the satisfaction of ADEM that hazardous constituents in all contaminated media at RSA-262 are within limits appropriate for unrestricted land use.

If the property is transferred to an owner that is not the federal government, an environmental covenant will be executed and filed at that time in accordance with AAC 335-5-1-.02(3)(a)(1)(i) (ADEM, 2013).

4.7 Corrective Measure Implementation Reporting

CMI reporting will be conducted in accordance with Section VIII.D of the Permit and AEIRG (ADEM, 2017) as follows:

a. ***CMI Report*** – Prepared following baseline groundwater sampling event (Year 0), initial injection and completion of soil removal.
b. ***CMI Effectiveness Report*** – Prepared annually to present the results of groundwater monitoring data and progress toward the CGs for groundwater.
c. ***Final Report of Corrective Measures*** – Prepared upon attainment of CGs for constituents in groundwater.

Field documentation (e.g., daily reports, daily field logs, calibration logs, etc.) will be provided to the Project Manager or designee during CMI activities. The requirements for preparation and submittal of daily project documentation are outlined in the IW-QAPP (HGL, 2019) and the PMP (ECC, 2021a).

5.0 CONTINGENCIES

The implementation of corrective measures is based on the best information currently available for RSA-262. The following sections include contingency plans to address different situations that could occur as part of this implementation. Any contingencies implemented will be documented and included with the CMI report for the sites.

5.1 Residual Risk Assessment

Due to the presence of the existing water line along the northwest boundary of the soil excavation area, a residual HHRA may be necessary to ensure that CGs have been met and no adverse health effects remain based on any soil left in place in order to avoid damaging the water line. Confirmatory samples will be used as the basis of the residual HHRA evaluation.

5.2 ISEB Injection Contingencies

A second round of ISEB injections may be necessary after the initial injection to address any remaining residual VOC contamination within the treatment area. Additional injections may be required if statistical analysis (Mann-Kendall or equivalent) following approximately 10 rounds (or however many are required for a trend to be identified) of post-injection sampling identifies sampling locations where COCs do not have a decreasing trend. Follow-up ISEB injections would be assumed for approximately 25% of the initial injections. The permanent injection wells and/or new injection borings would be advanced for the second round of injections. The locations and number of borings would be determined following review of the treatment performance data from the sampling conducted with the first injection round.

It is common in ISEB injections that an injection point will not accept the planned amount of solution when injecting, or a point will not accept any solution. If this occurs, the planned amount of solution for that location will be injected into one or several adjacent DPT points.

The reagent concentrations and quantities may be adjusted based on observed site conditions. The reagent concentrations may be adjusted to provide the required amount of individual reagents to degrade the contaminants while limiting both excess reagent, which may result in excessive methane production, and insufficient reagent, which potentially results in incomplete degradation.

Furthermore, based on Site conditions, non-pathogen bioaugmentation culture of *Dehalococcoides* sp. (DHC) like SDC-9TM, KB-1 or similar may be injected into the overburden groundwater to stimulate biodegradation of the VOC contaminants present in groundwater, depending on performance of initial injections.

5.3 MNA Contingencies

Historical data supports the corrective measure alternatives that was selected for RSA-262; Alternative S2 (Soil Excavation and Off-Site Disposal) and Alternative GW3 (ISEB and MNA). Several conditions could potentially arise in the future that may require alternative actions to complete the corrective measures. These include the measurement of constituents at levels

exceeding groundwater cleanup levels along the perimeter of the site or increasing concentrations in the site interior. As part of this CMI Work Plan, two wells in the south/southeaster portion of the site have been included in the baseline sampling and will be sampled during the semi-annual/annual monitoring events to track any plume migration.

Recommendations for contingency measures will be presented, as required, in the CMI Effectiveness Reports. Following baseline sampling, analytical results will be collected from the eighteen monitoring wells semi-annually (Years 1 through 3) and annually (Years 4 through 35 or until CGs are achieved) to determine the effectiveness of MNA. Recommendations may include changes to the monitoring plan (frequency and/or parameters), adding additional monitoring wells, or the implementation of additional remedial technologies, as appropriate.

5.4 Variances

The Army recognizes that variations from this CMI Work Plan in addition to the contingencies included above may be required during the execution phase of the work to fully address actual site conditions in a timely manner that is protective of human health and the environment. The Army may grant variances from this CMI Work Plan submitted by the contractor during the corrective measures process. As part of their approval process, the Army will discuss applicable field variances with ADEM to determine if the variance process is suitable for documenting the proposed changes, or whether revisions to the CMI Work Plan along with a permit modification may be needed. Any variance will be documented and included with the CMI report for the site.

6.0 REFERENCES

Alabama Department of Environmental Management (ADEM). 2008. *Draft RCRA Facility Assessment,* Redstone Arsenal, Huntsville, Alabama, USEPA ID Number AL7 210 020 742. September.

ADEM. 2013. *Alabama Administrative Code r.335-5, Land Division – Uniform Environmental Covenants Program*. March.

ADEM. 2017. *Alabama Environmental Investigation and Remediation Guidance.* September.

ADEM. 2022. *Redstone Arsenal's Alabama Hazardous Wastes Management and Minimization Act Hazardous Waste Storage Facility, Thermal Treatment, Solid Waste Management Unit Corrective Action Permit, Modification No. 1*. 12 August.

Alabama Soil and Water Conservation Committee (ASWCC). 2014. *Alabama Handbook for Erosion Control, Sediment Control and Stormwater Management on Construction Sites and Urban Areas.* September.

Aptim Federal Services, LLC (APTIM). 2018. *Revision 2, RCRA Facility Investigation Report RSA-262, CWS Warehouse Area (Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027) Operable Unit 08.* U.S. Army Garrison-Redstone Madison County, Alabama. 9 May.

CB&I (CB&I Federal Services LLC). 2016. *Revision 1 RCRA Facility Investigation Report, RSA-152 Groundwater Site, Groundwater Unit GW-08, Operable Unit 19,* U.S. Army Garrison-Redstone, Madison County, Alabama. Prepared for the U.S. Army Mission & Installation Contracting Command, Fort Sam Houston, Texas. January.

Environmental Chemical Corporation (ECC). 2021a. *Project Management* Plan*, Environmental Remediation Services,* U.S. Army Garrison-Redstone Arsena*l*. March.

ECC. 2021b. *Accident Prevention Plan*, Environmental Remediation Services, U.S. Army Garrison-Redstone Arsenal. February.

Gannett Fleming, Inc. and Shaw Environmental, Inc. (Shaw). 2010. *Final Supplemental Installation-Wide Background Soil Study, Redstone Arsenal, Madison County, Alabama*, prepared for the U.S. Army Corps of Engineers, Savannah District. September.

HydroGeoLogic, Inc. (HGL). 2019. *Final Revision 4 Installation-Wide Quality Assurance Program Plan,* U.S. Army Garrison-Redstone, Madison County, Alabama. December.

Interstate Technology and Regulatory Council (ITRC). 1999. *Natural Attenuation of Chlorinated Solvents in Groundwater: Principles and Practices.* September.

Rogier, Alexander, "Animal Co-Products as Novel Electron Donors for Biodegradation of Trichlorethylene" (2018). All Theses. 2912. https://tigerprints.clemson.edu/all_theses/2912

Shaw Environmental, Inc. (Shaw). 2003. *Final Sitewide Karst Hydrogeologic Investigation Phase I Report of Findings*, *Redstone Arsenal, Madison County, Alabama*. Prepared for U.S. Army Corps of Engineers, Savannah District, Savannah, Georgia. May.

Shaw. 2006. *RSA-150/153/154/155 Potential Source Area Investigation*, Redstone Arsenal, Madison County, Alabama. Draft. April.

Shaw. 2007. *Final Interim Record of Decision, Interim Remedial Action for Installation-Wide Groundwater*, Redstone Arsenal, Madison County, Alabama. Prepared for the U.S. Army Corps of Engineers, Savannah District. September.

Shaw. 2009a. *Installation-Wide Groundwater Land-Use Control Remedial Design, Redstone Arsenal,* Madison County, Alabama, prepared for U.S. Army Corps of Engineers-Savannah District. February.

Shaw. 2009b. *Final Installation-Wide Groundwater Cleanup Strategy*, Redstone Army Garrison, Madison County, Alabama, prepared for U.S. Army Environmental Command. December.

Shaw. 2010. *Final Installation-Wide Strategy for Cleanup of Impacted Wetlands*, *Redstone Army-Garrison, Madison County, Alabama, Rev. 1*. May.

Shaw. 2013. *RCRA Facility Investigation Report, RSA-154 and RSA-155 Groundwater Sites, Groundwater Units GW-10/GW-11, Operable Unit 19.* Prepared for the Mission and Installation Contracting Command. August.

U.S. Army Garrison-Redstone (Army). 2012. *Redstone Arsenal Environmental Site Access Control Program.* Redstone Arsenal Regulation 200-7. September.

U.S. Environmental Protection Agency (USEPA). 1998. *Technical Protocol for Evaluating Natural Attenuation of Chlorinated Solvents in Ground Water*, EPA/600/R-98/128, Office of Research and Development, Washington, DC. September.

USEPA. 2004. *Handbook of Groundwater Protection and Cleanup Policies for RCRA Corrective Action*, EPA530-R-04-030. April.

USEPA. 2017. *Regional Screening Levels for Chemical Contaminants at Superfund Sites.* June.

USEPA. 2022a. *Regional Screening Levels for Chemical Contaminants at Superfund Sites.* October.

USEPA. 2022b. *Vapor Intrusion Screening Level Calculator.* December.

FIGURES

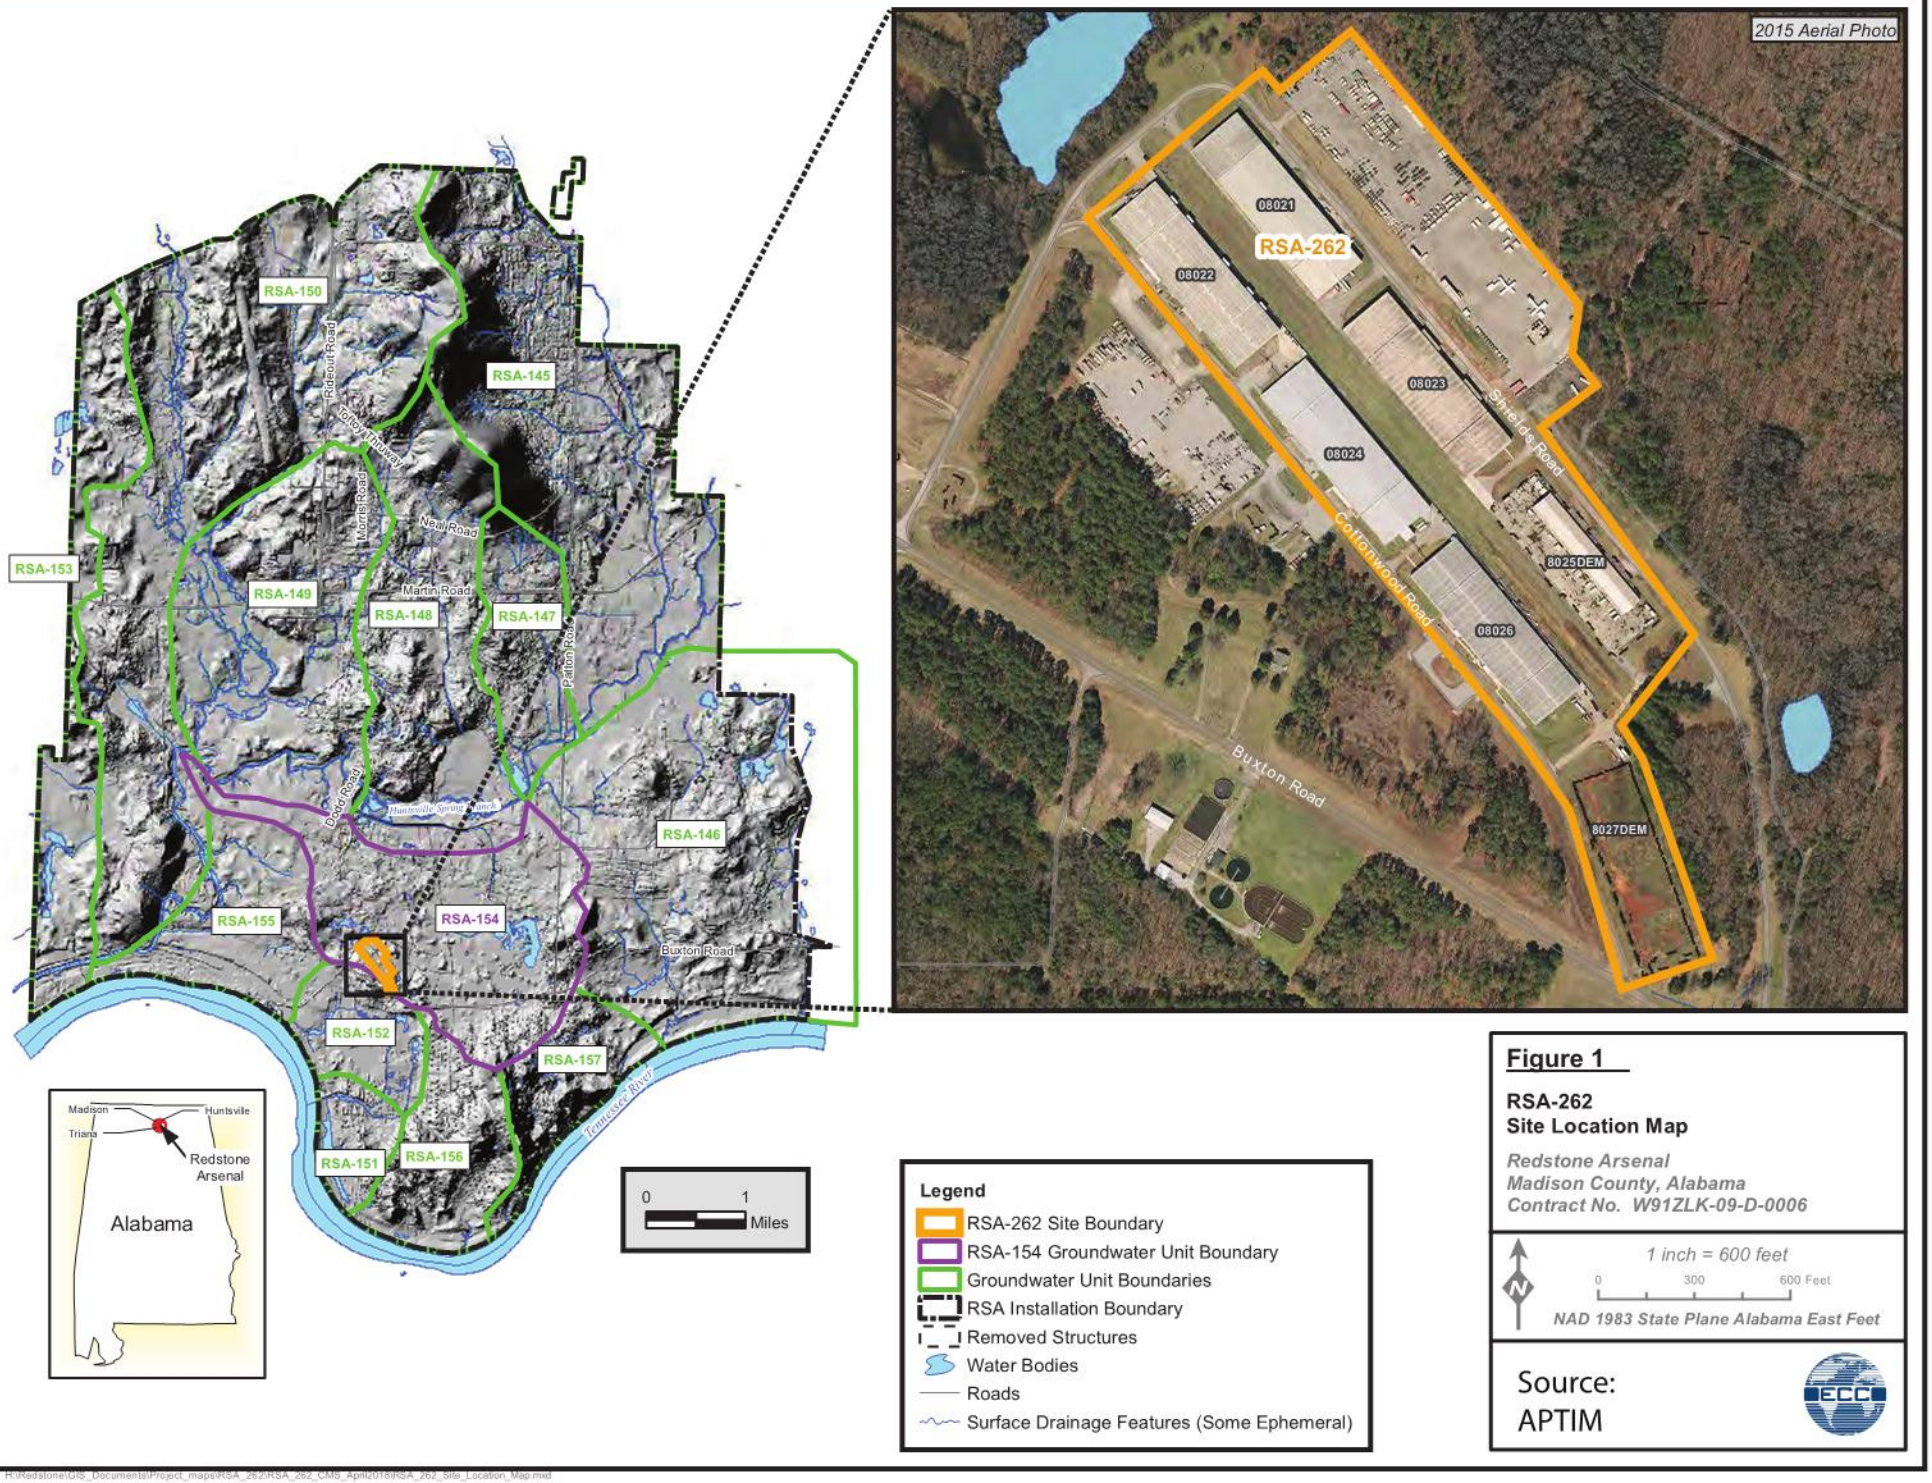

H:\Redstone\GIS_Documents\Project_maps\RSA_262\RSA_262_CMS_April2018\RSA_262_Site_Location_Map.mxd

This page intentionally left blank.

2015 Aerial Photo

Shields Road
Concrete Pad
Steel Structure
Loading Dock
Former Rail Spur Bed
Loading Dock
Former Rail Spur Bed
Loading Dock
Loading Dock
08021
08022
Former Rail Spur and Loading Dock Area
Open Storage Area
Exhaust Vent
Propane AST
Sheet Metal Trench Drain
Metal Melting Area
08010DEM
Loading Docks
08023
Propane AST
Saw Dust Collection System
Former Rail Spur Bed
Loading Dock
Former Oil and Grease Pit
Concrete Pad
Loading Docks
08024
Loading Dock
Former Rail Spur Bed
Former Oil Service Pit Area
Small Propane AST
Steel Grate Covered Trench Drain
Fuel Oil ASTs
Cottonwood Road
Loading Dock
8025DEM
Loading Dock
Loading Dock
Loading Dock
08026
Concrete Pad
Building 8013 Sewer System Lift Station
Concrete Pad w/Open Pipe (Possible lid for vault)
Buxton Road
8027DEM

Figure 2
RSA-262
Site Layout

Redstone Arsenal
Madison County, Alabama
Contract No. W91278-016-D-0059

1 inch = 200 feet
0 100 200 400 Feet
NAD 1983 State Plane Alabama East Feet

Source:
APTIM 2019

Legend
- Site Drainage
- Surface Drainage Features
- Former Railroads
- Roads
- Topographic Contour - 10 ft. Interval
- Fault Line
- Area of Specific Interest
- RSA-262 Environmental Site Boundary
- Removed Structures
- Sinkholes
- Wetland Area

H:\Redstone\GIS_Documents\Project_maps\RSA_262\RSA_262_CMS_April2018\RSA_262_Site_Features_Map.mxd

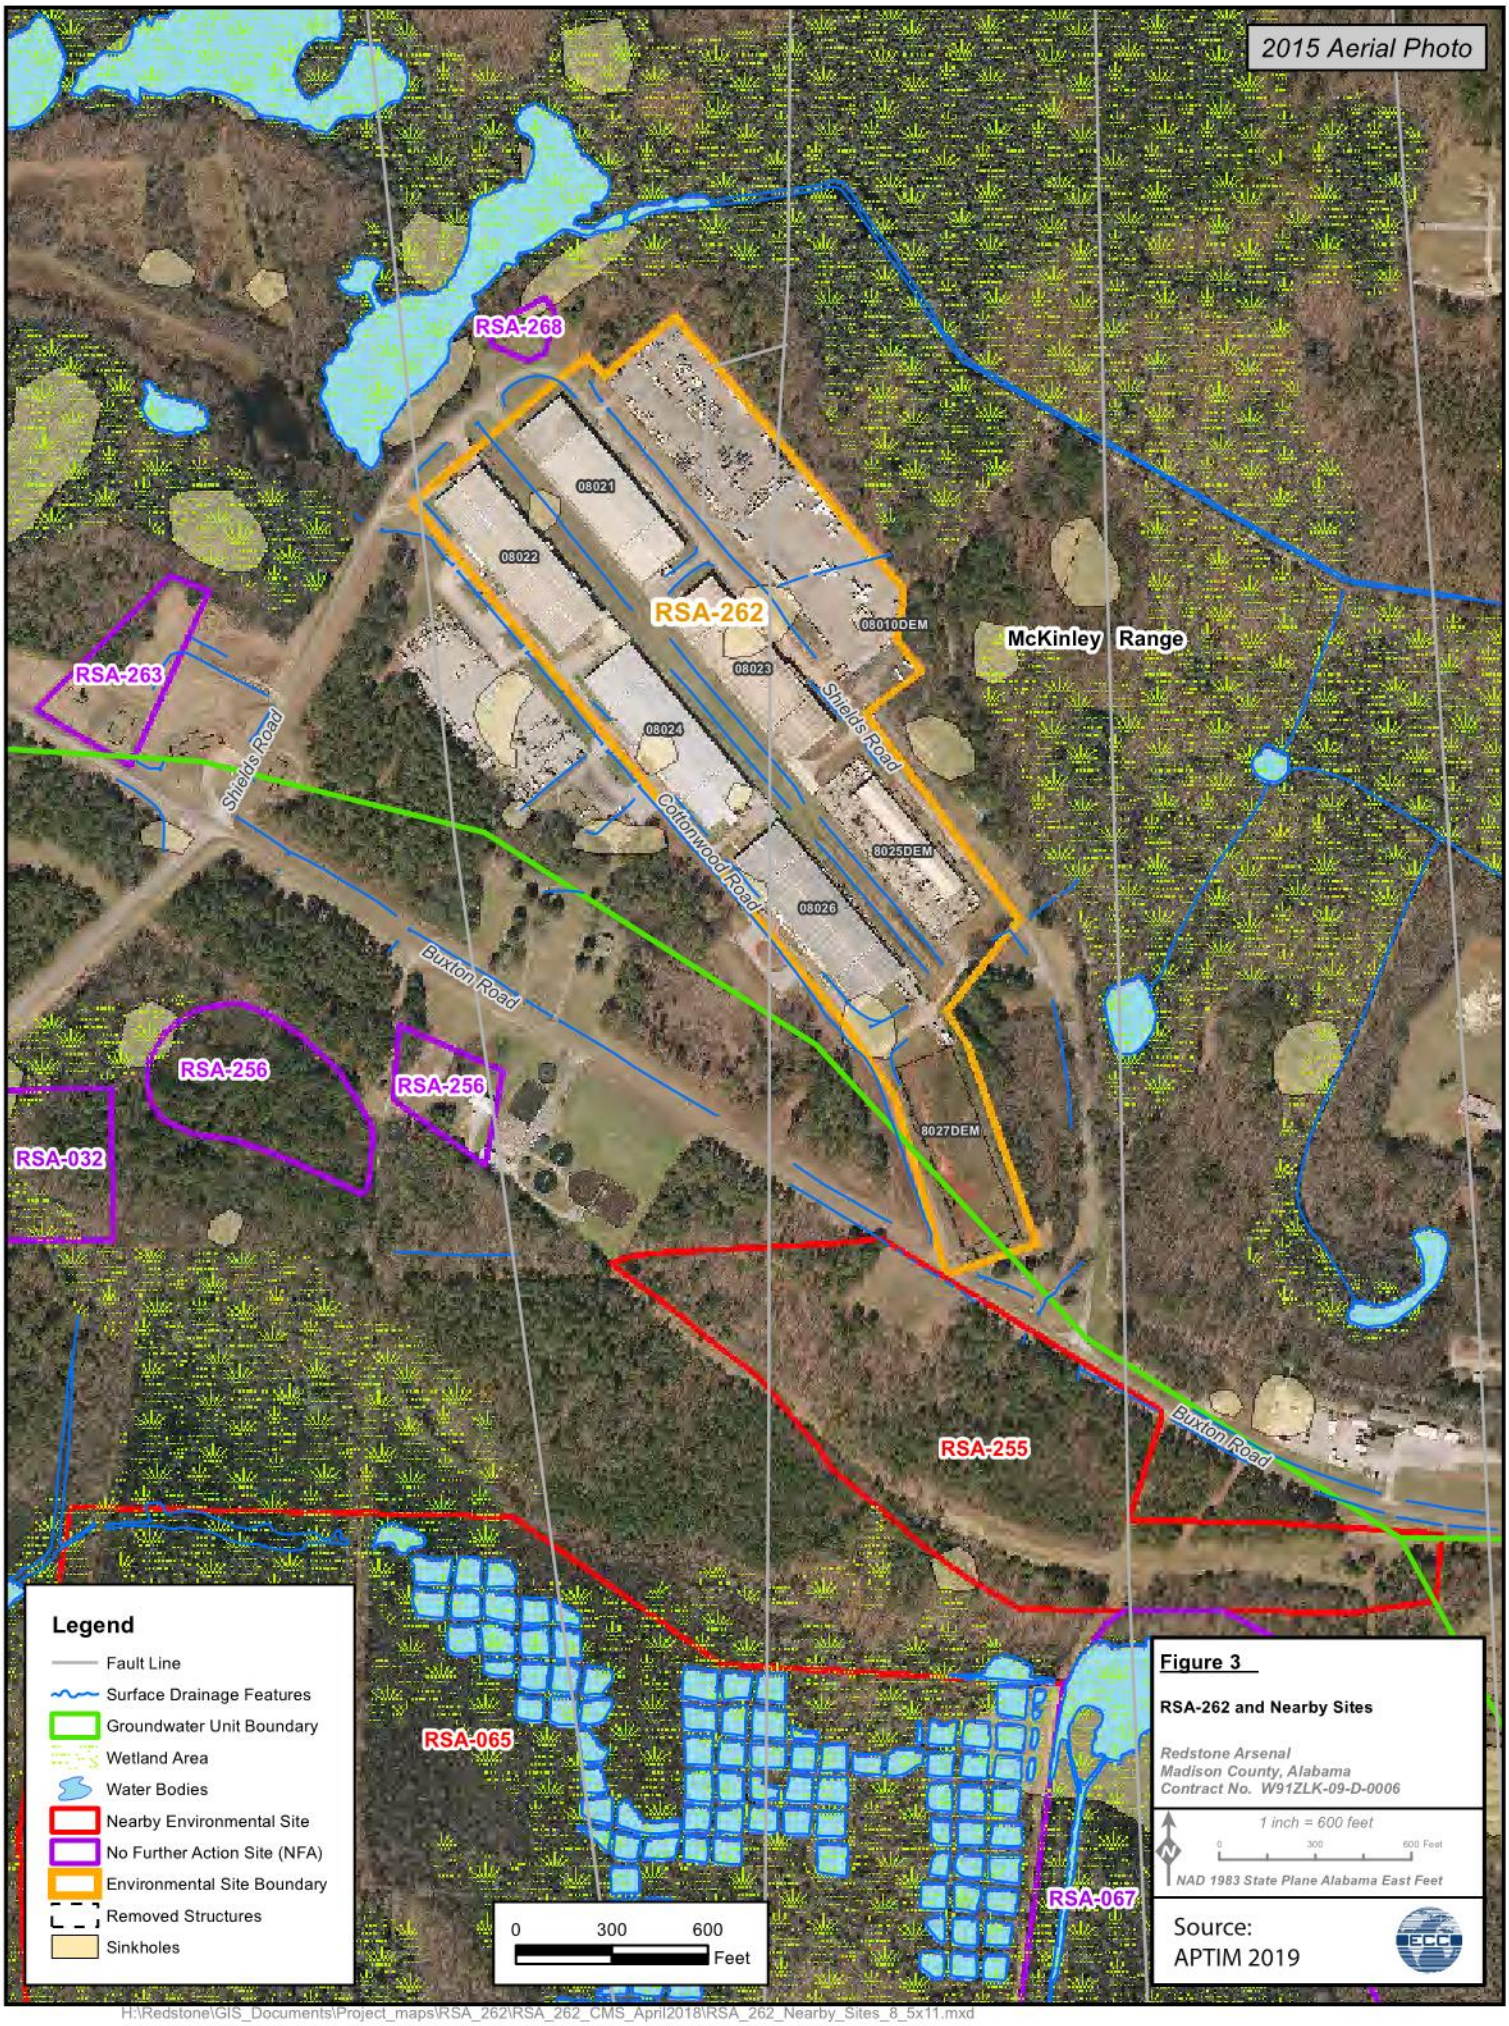
2015 Aerial Photo
RSA-268
RSA-262
RSA-263
RSA-256
RSA-256
RSA-032
RSA-255
RSA-065
RSA-067
08021
08022
08023
08024
08010DEM
8025DEM
08026
8027DEM
McKinley Range
Shields Road
Shields Road
Cottonwood Road
Buxton Road
Buxton Road
Legend
Fault Line
Surface Drainage Features
Groundwater Unit Boundary
Wetland Area
Water Bodies
Nearby Environmental Site
No Further Action Site (NFA)
Environmental Site Boundary
Removed Structures
Sinkholes
0
300
600
Feet
Figure 3
RSA-262 and Nearby Sites
Redstone Arsenal
Madison County, Alabama
Contract No. W91ZLK-09-D-0006
1 inch = 600 feet
0
300
600 Feet
N
NAD 1983 State Plane Alabama East Feet
Source:
APTIM 2019
ECC
H:\Redstone\GIS_Documents\Project_maps\RSA_262\RSA_262_CMS_April2018\RSA_262_Nearby_Sites_8_5x11.mxd

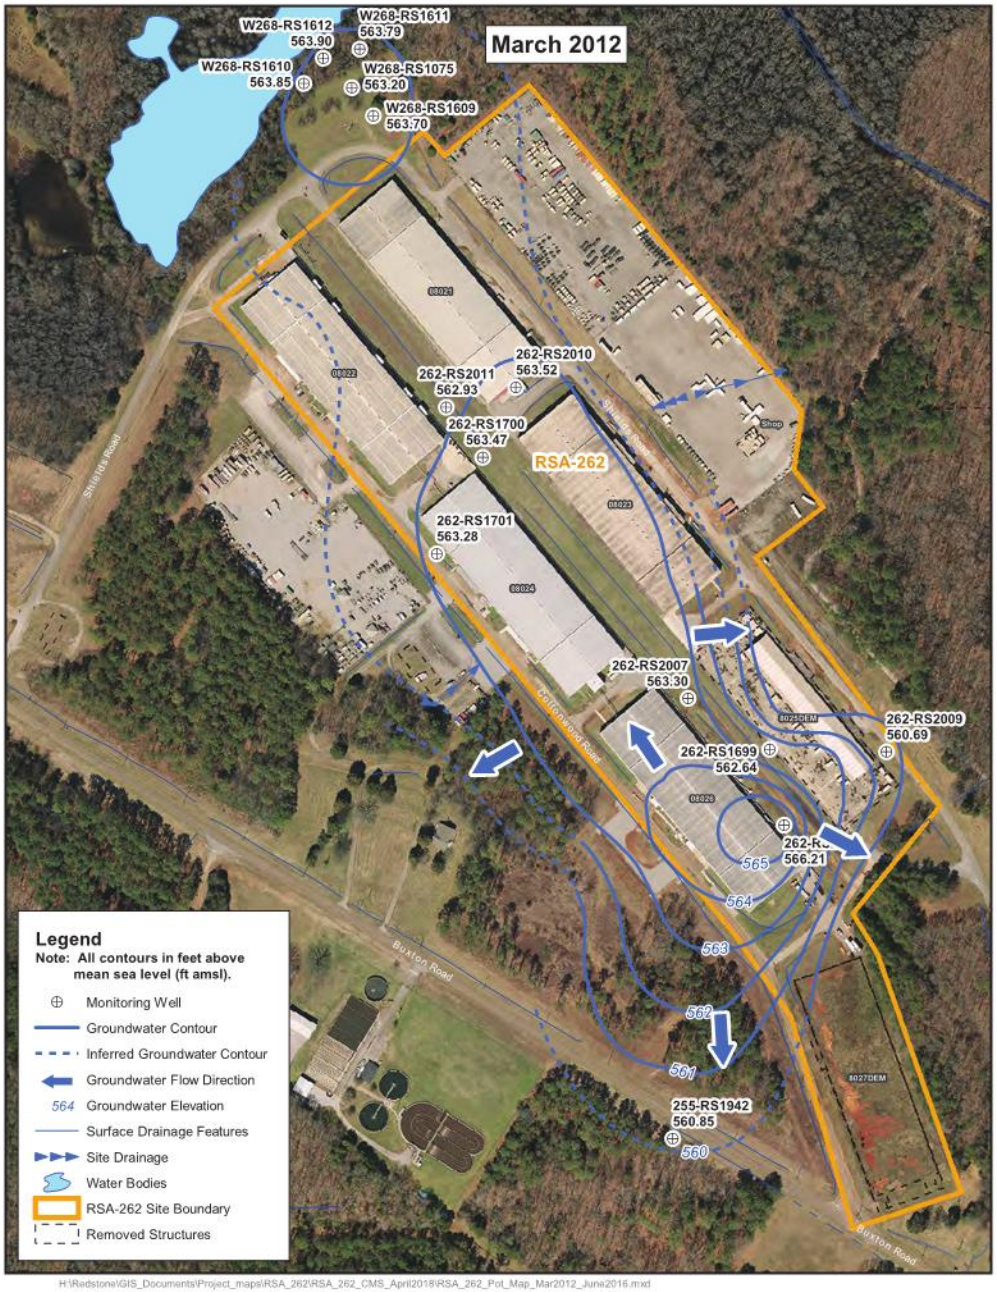

H:\Redstone\GIS_Documents\Project_maps\RSA_262\RSA_262_CMS_April2018\RSA_262_Pot_Map_Mar2012_June2016.mxd

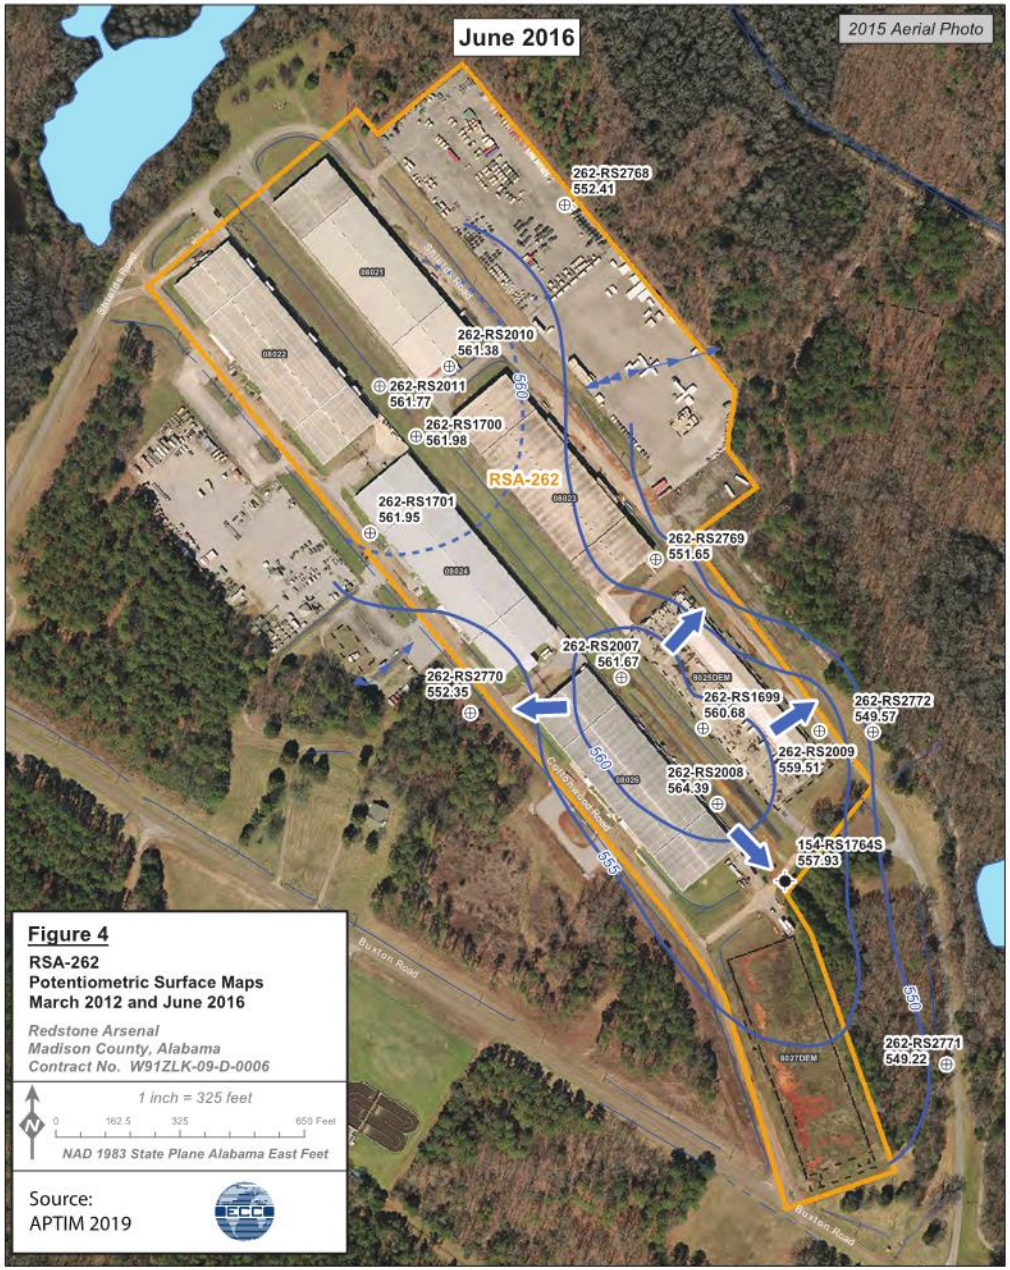

Figure 4

RSA-262
Potentiometric Surface Maps
March 2012 and June 2016

Redstone Arsenal
Madison County, Alabama
Contract No. W91ZLK-09-D-0006

1 inch = 325 feet

0 162.5 325 650 Feet

NAD 1983 State Plane Alabama East Feet

Source:
APTIM 2019

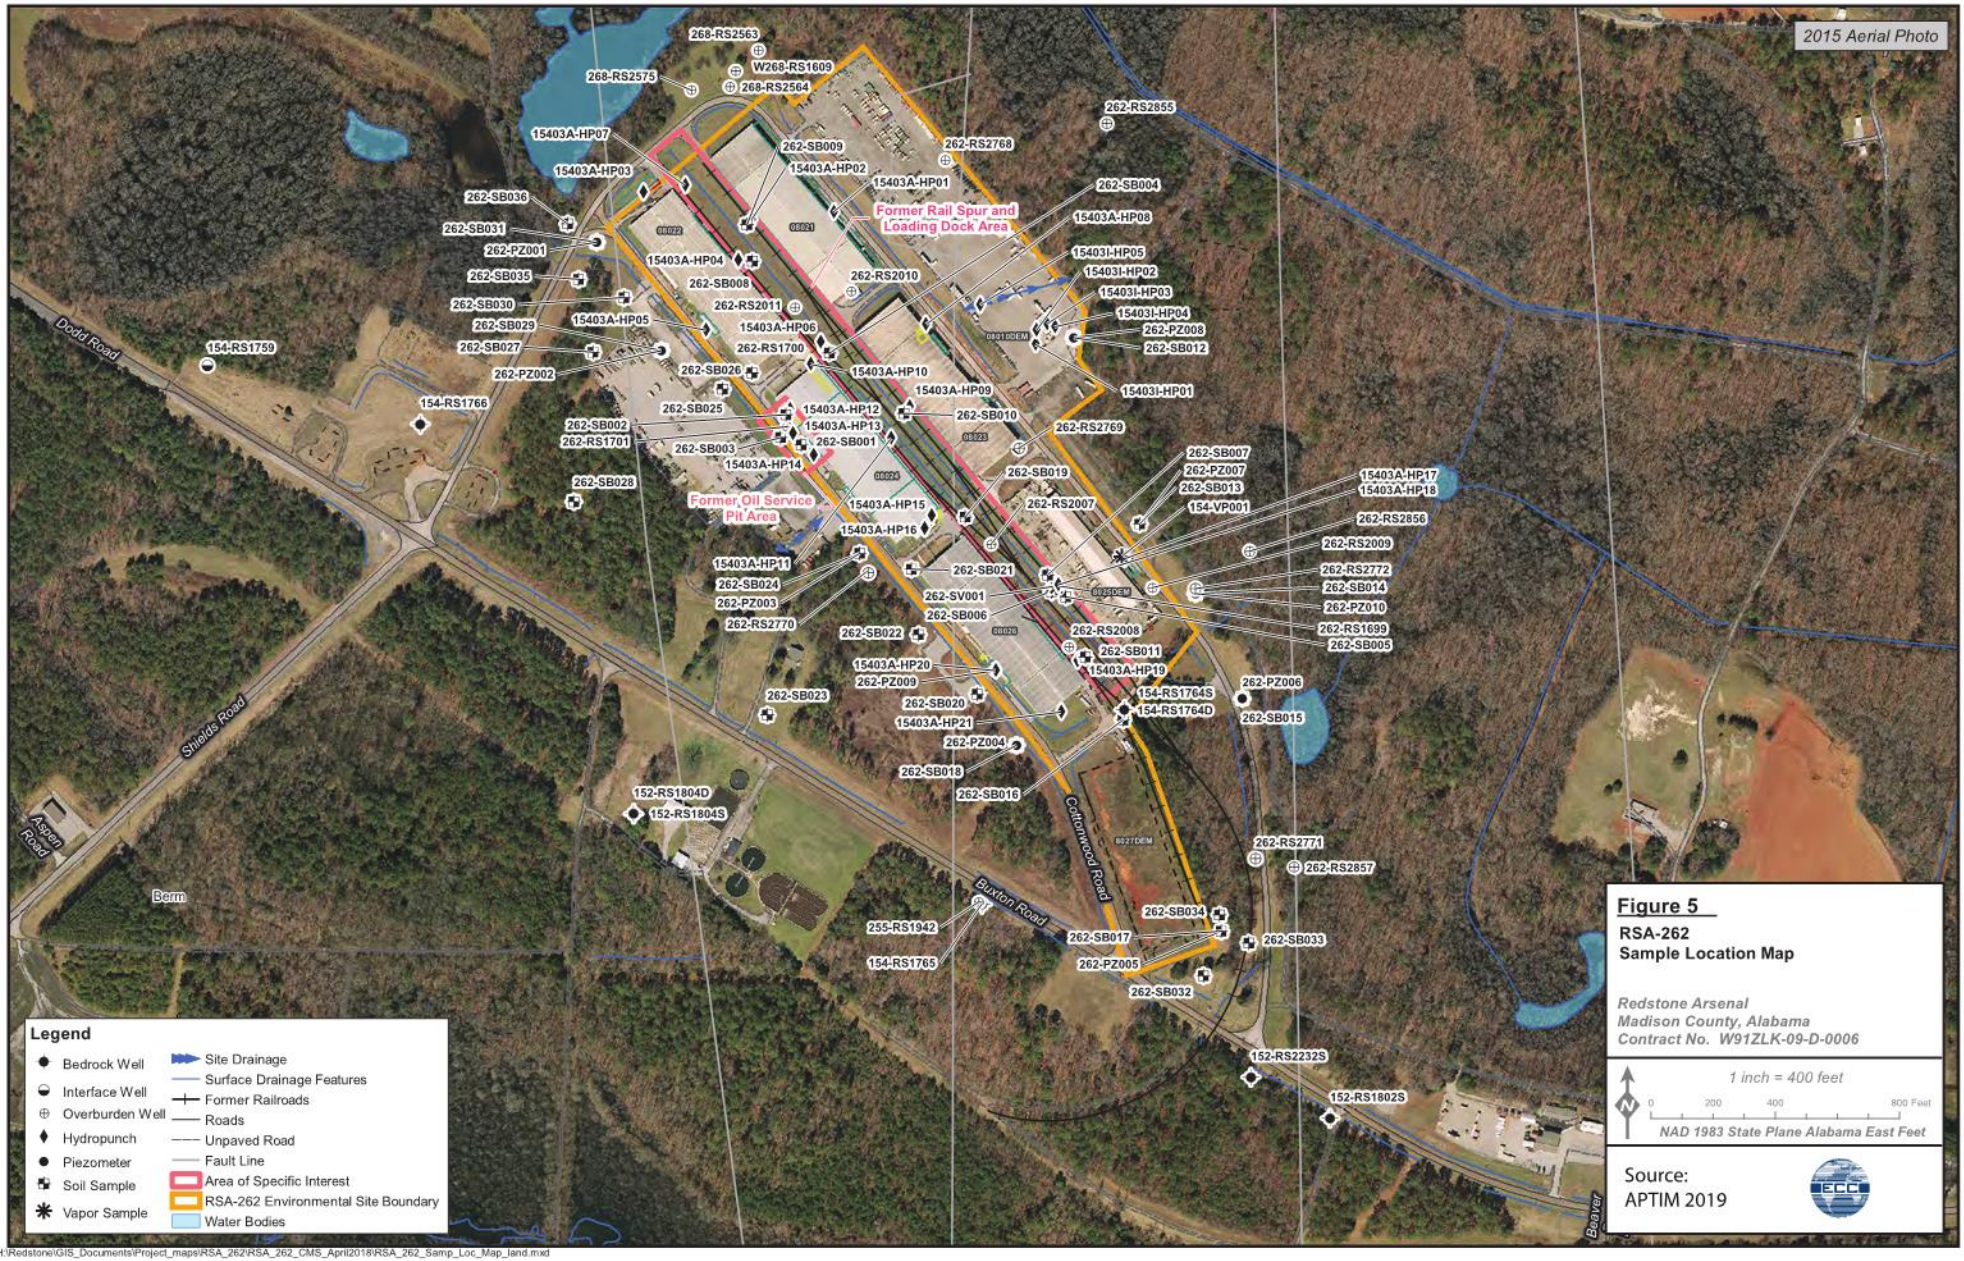

H:\Redstone\GIS_Documents\Project_maps\RSA_262\RSA_262_CMS_April2018\RSA_262_Samp_Loc_Map_land.mxd

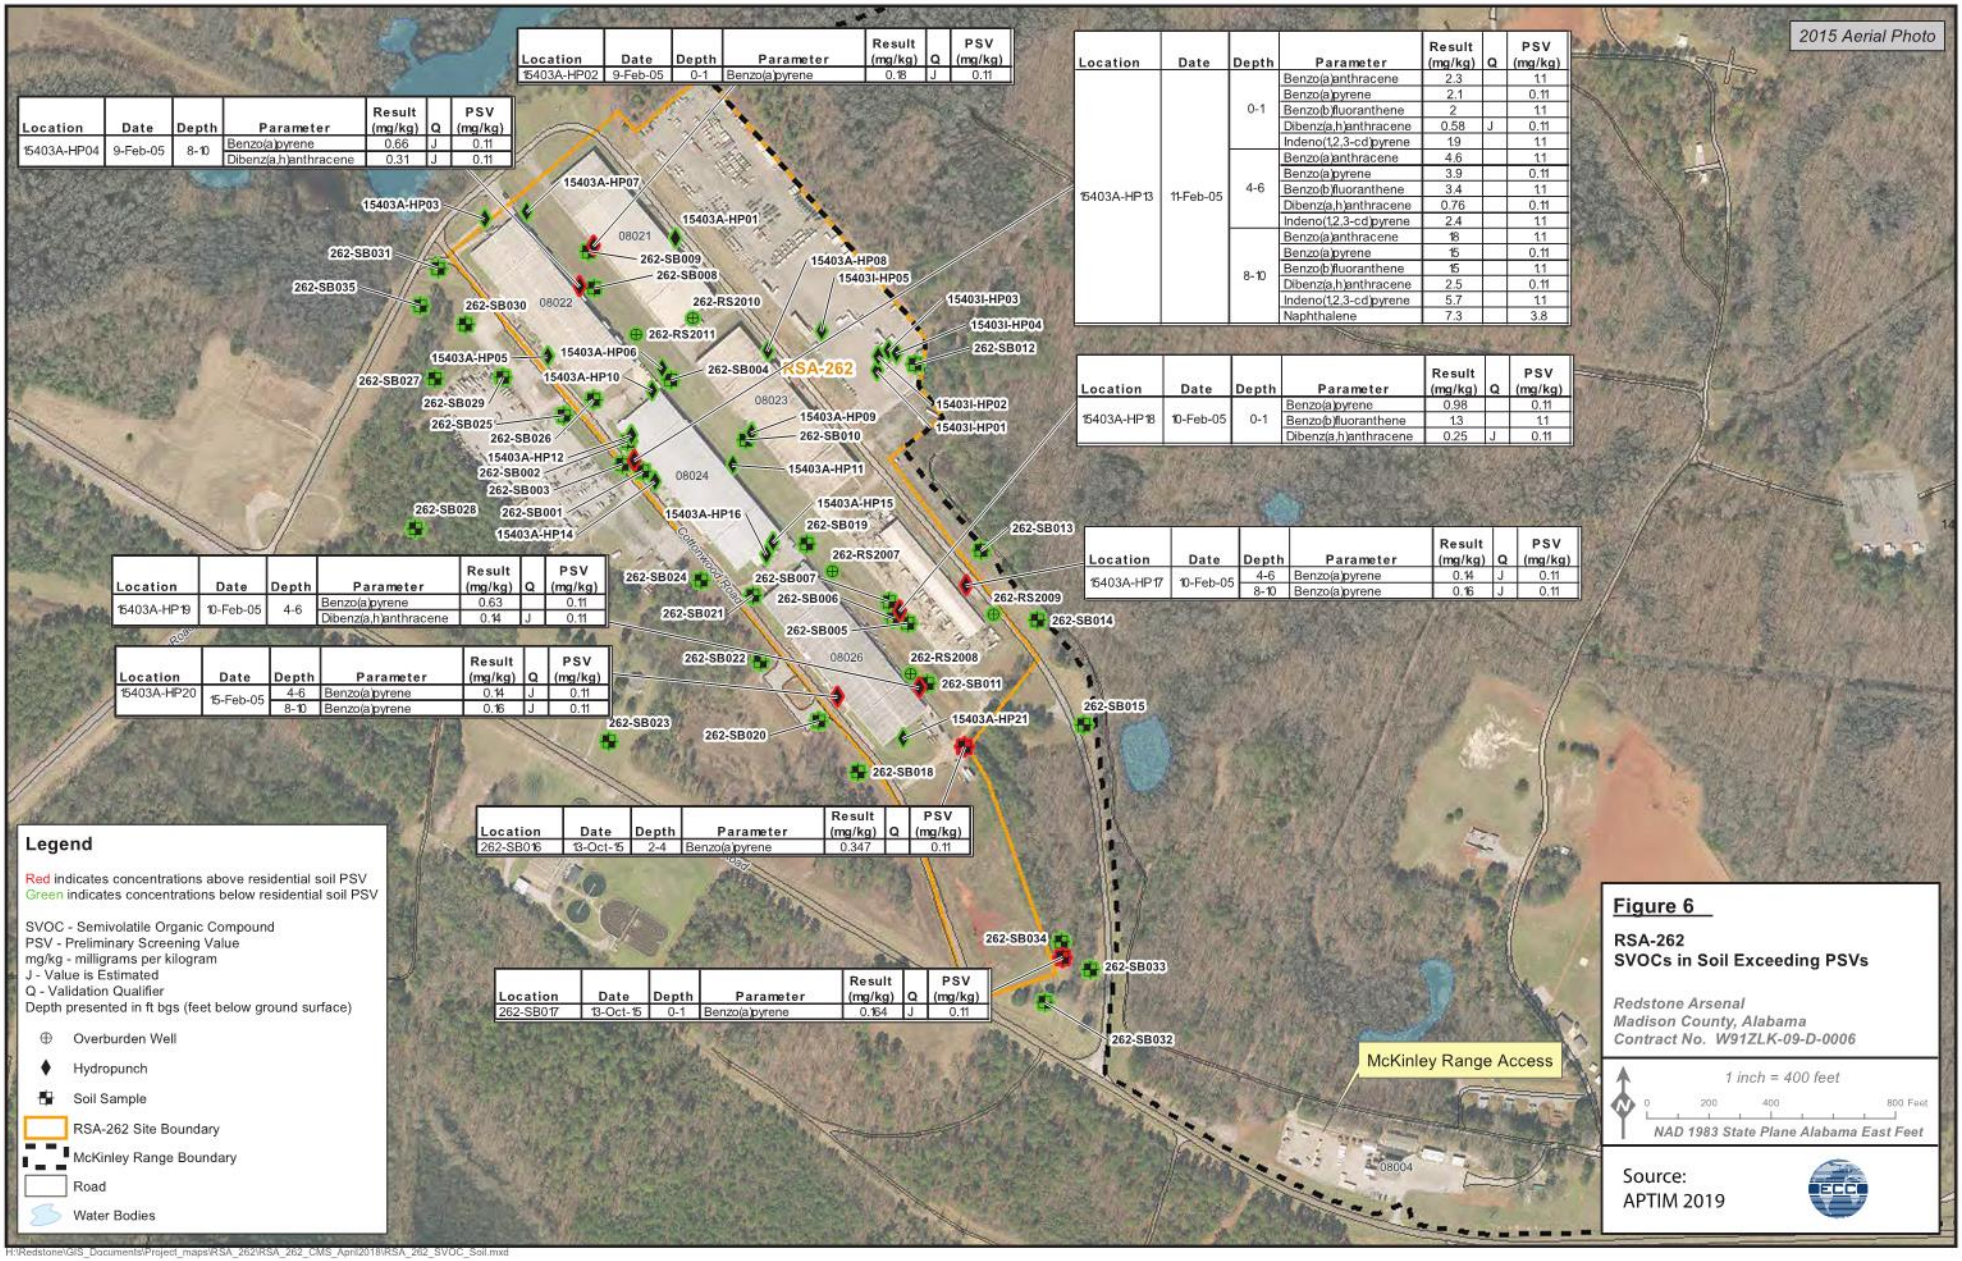

Location	Date	Depth	Parameter	Result (mg/kg)	Q	PSV (mg/kg)
15403A-HP02	9-Feb-05	0-1	Benzo(a)pyrene	0.18	J	0.11

Location	Date	Depth	Parameter	Result (mg/kg)	Q	PSV (mg/kg)
15403A-HP04	9-Feb-05	8-10	Benzo(a)pyrene	0.66	J	0.11
			Dibenz(a,h)anthracene	0.31	J	0.11

Location	Date	Depth	Parameter	Result (mg/kg)	Q	PSV (mg/kg)
15403A-HP13	11-Feb-05	0-1	Benzo(a)anthracene	2.3		1.1
			Benzo(a)pyrene	2.1		0.11
			Benzo(b)fluoranthene	2		1.1
			Dibenz(a,h)anthracene	0.58	J	0.11
			Indeno(1,2,3-cd)pyrene	1.9		1.1
		4-6	Benzo(a)anthracene	4.6		1.1
			Benzo(a)pyrene	3.9		0.11
			Benzo(b)fluoranthene	3.4		1.1
			Dibenz(a,h)anthracene	0.76		0.11
			Indeno(1,2,3-cd)pyrene	2.4		1.1
		8-10	Benzo(a)anthracene	18		1.1
			Benzo(a)pyrene	15		0.11
			Benzo(b)fluoranthene	15		1.1
			Dibenz(a,h)anthracene	2.5		0.11
			Indeno(1,2,3-cd)pyrene	5.7		1.1
			Naphthalene	7.3		3.8

Location	Date	Depth	Parameter	Result (mg/kg)	Q	PSV (mg/kg)
15403A-HP18	10-Feb-05	0-1	Benzo(a)pyrene	0.98		0.11
			Benzo(b)fluoranthene	1.3		1.1
			Dibenz(a,h)anthracene	0.25	J	0.11

Location	Date	Depth	Parameter	Result (mg/kg)	Q	PSV (mg/kg)
15403A-HP17	10-Feb-05	4-6	Benzo(a)pyrene	0.14	J	0.11
		8-10	Benzo(a)pyrene	0.16	J	0.11

Location	Date	Depth	Parameter	Result (mg/kg)	Q	PSV (mg/kg)
15403A-HP19	10-Feb-05	4-6	Benzo(a)pyrene	0.63		0.11
			Dibenz(a,h)anthracene	0.14	J	0.11

Location	Date	Depth	Parameter	Result (mg/kg)	Q	PSV (mg/kg)
15403A-HP20	15-Feb-05	4-6	Benzo(a)pyrene	0.14	J	0.11
		8-10	Benzo(a)pyrene	0.16	J	0.11

Location	Date	Depth	Parameter	Result (mg/kg)	Q	PSV (mg/kg)
262-SB016	13-Oct-15	2-4	Benzo(a)pyrene	0.347		0.11

Location	Date	Depth	Parameter	Result (mg/kg)	Q	PSV (mg/kg)
262-SB017	13-Oct-15	0-1	Benzo(a)pyrene	0.164	J	0.11

Legend

Red indicates concentrations above residential soil PSV
Green indicates concentrations below residential soil PSV

SVOC - Semivolatile Organic Compound
PSV - Preliminary Screening Value
mg/kg - milligrams per kilogram
J - Value is Estimated
Q - Validation Qualifier
Depth presented in ft bgs (feet below ground surface)

- Overburden Well
- Hydropunch
- Soil Sample
- RSA-262 Site Boundary
- McKinley Range Boundary
- Road
- Water Bodies

Figure 6

RSA-262
SVOCs in Soil Exceeding PSVs

Redstone Arsenal
Madison County, Alabama
Contract No. W91ZLK-09-D-0006

1 inch = 400 feet

0 200 400 800 Feet

NAD 1983 State Plane Alabama East Feet

Source:
APTIM 2019

H:\Redstone\GIS_Documents\Project_maps\RSA_262\RSA_262_CMS_April2018\RSA_262_SVOC_Soil.mxd

LEGEND

Red indicates explosives concentrations above PSV
Green indicates explosives concentrations below PSV
Gray shading indicates explosives were not analyzed at the well location
The nitrobenzene concentration at 262-RS2772 detected using EPA Method 8330 was not confirmed using EPA Method 8270D. Refer to Section 3.5.3 and Table 3-4 of the RFI Report (APTIM, 2018).
PSV - Preliminary Screening Value
RFI - RCRA Facility Investigation

- Overburden Well
- Bedrock Well
- RSA-262 Site Boundary
- McKinley Range Boundary
- Surface Water Body
- Wetland

Figure 7
RSA-262
Explosives Concentrations in Groundwater Exceeding PSVs

Redstone Arsenal
Madison County, Alabama
Contract No. W9124J-18-D-0004

1 in = 400 ft
0 400 800 Feet
NAD 1983 State Plane Alabama East Feet

ENVIRONMENTAL CHEMICAL CORPORATION

ECC GIS Server: E:\Projects\Redstone\MapDocument\CMP\RSA262\Fig07_RSA262_Explosives.mxd

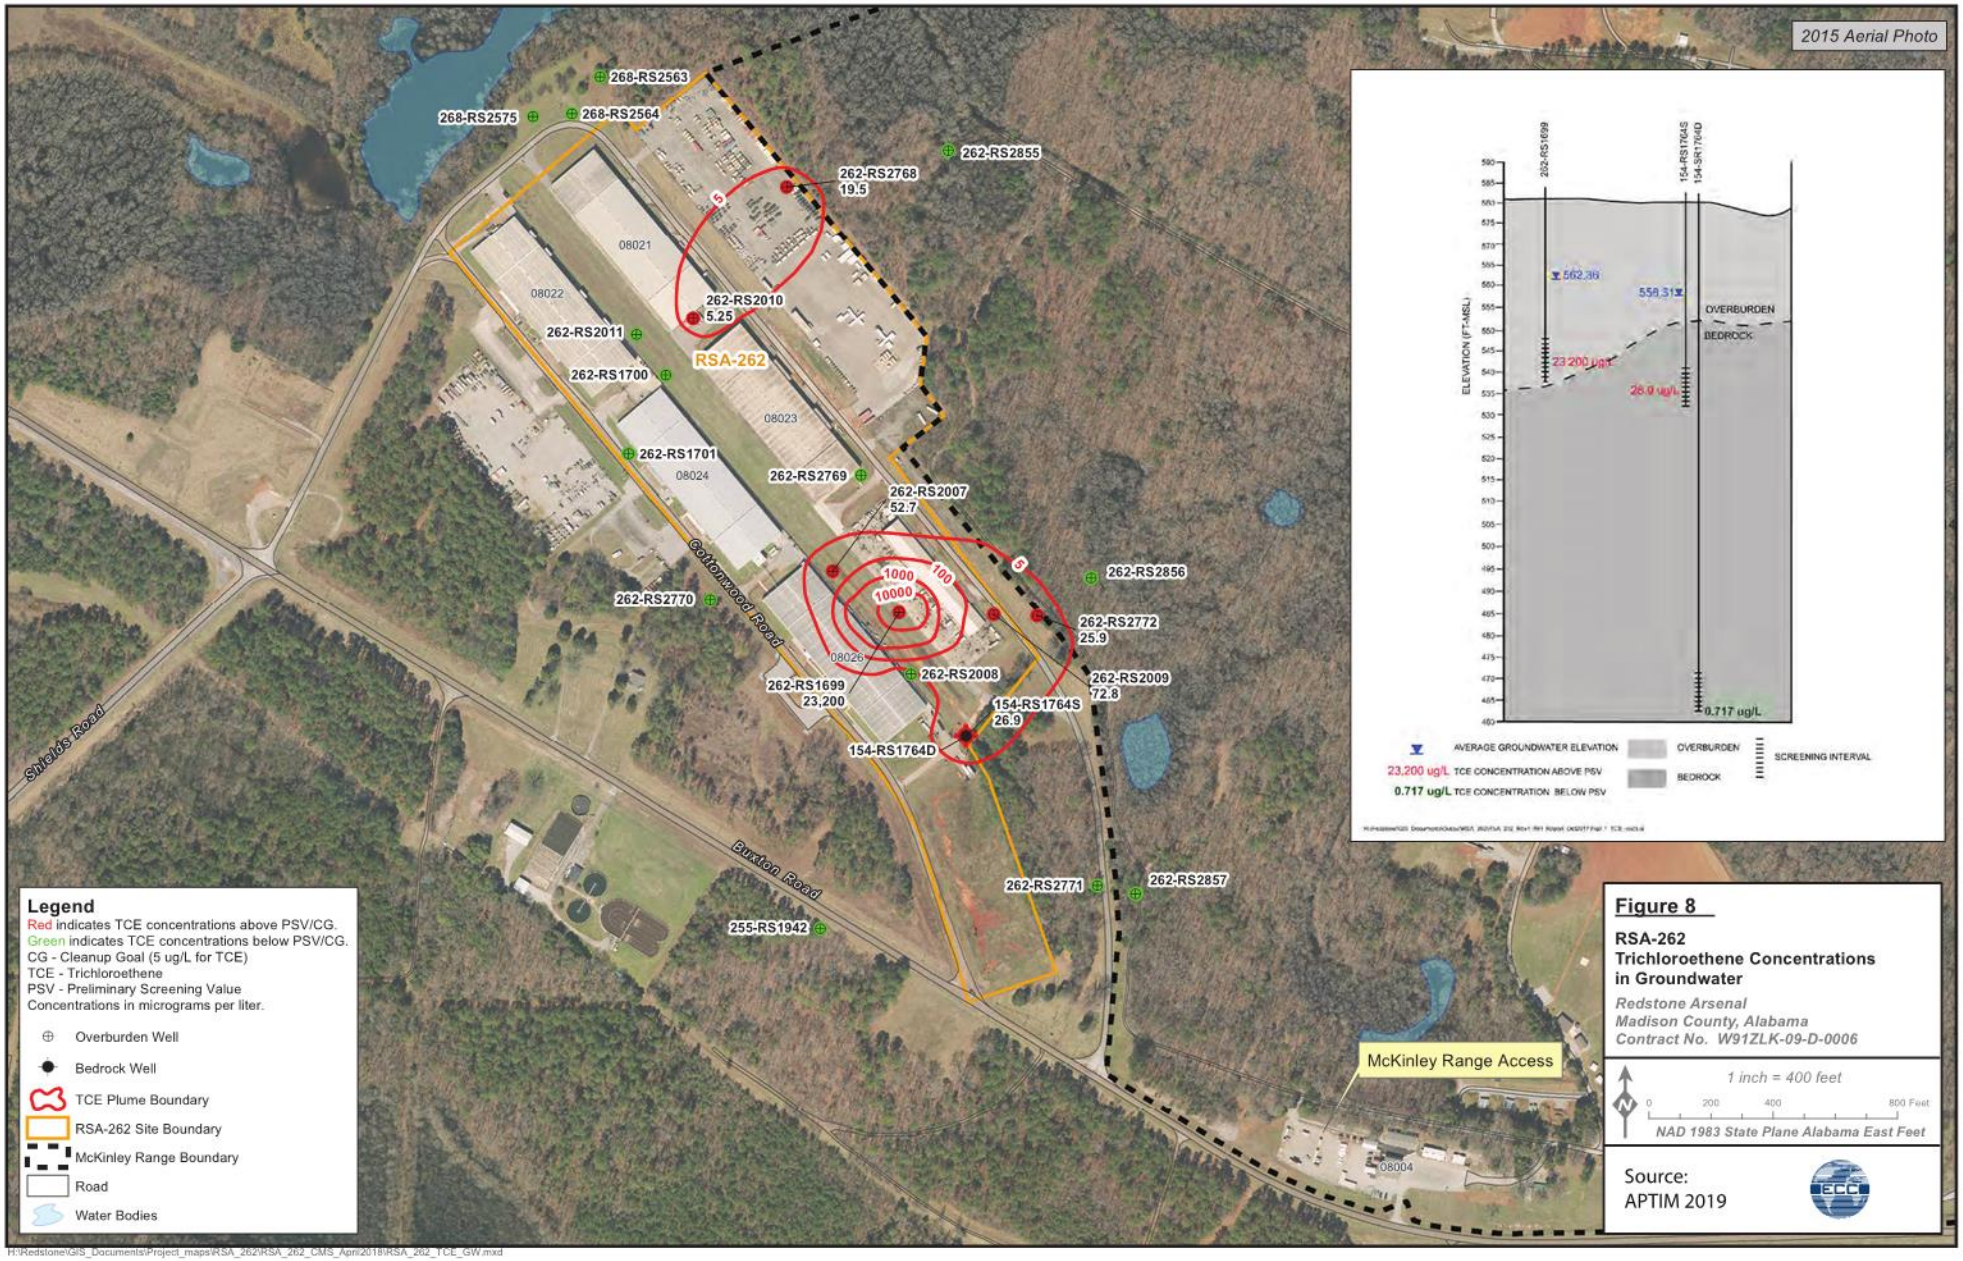

Figure 8

RSA-262
Trichloroethene Concentrations in Groundwater

Redstone Arsenal
Madison County, Alabama
Contract No. W91ZLK-09-D-0006

1 inch = 400 feet

0 200 400 800 Feet

NAD 1983 State Plane Alabama East Feet

Source:
APTIM 2019

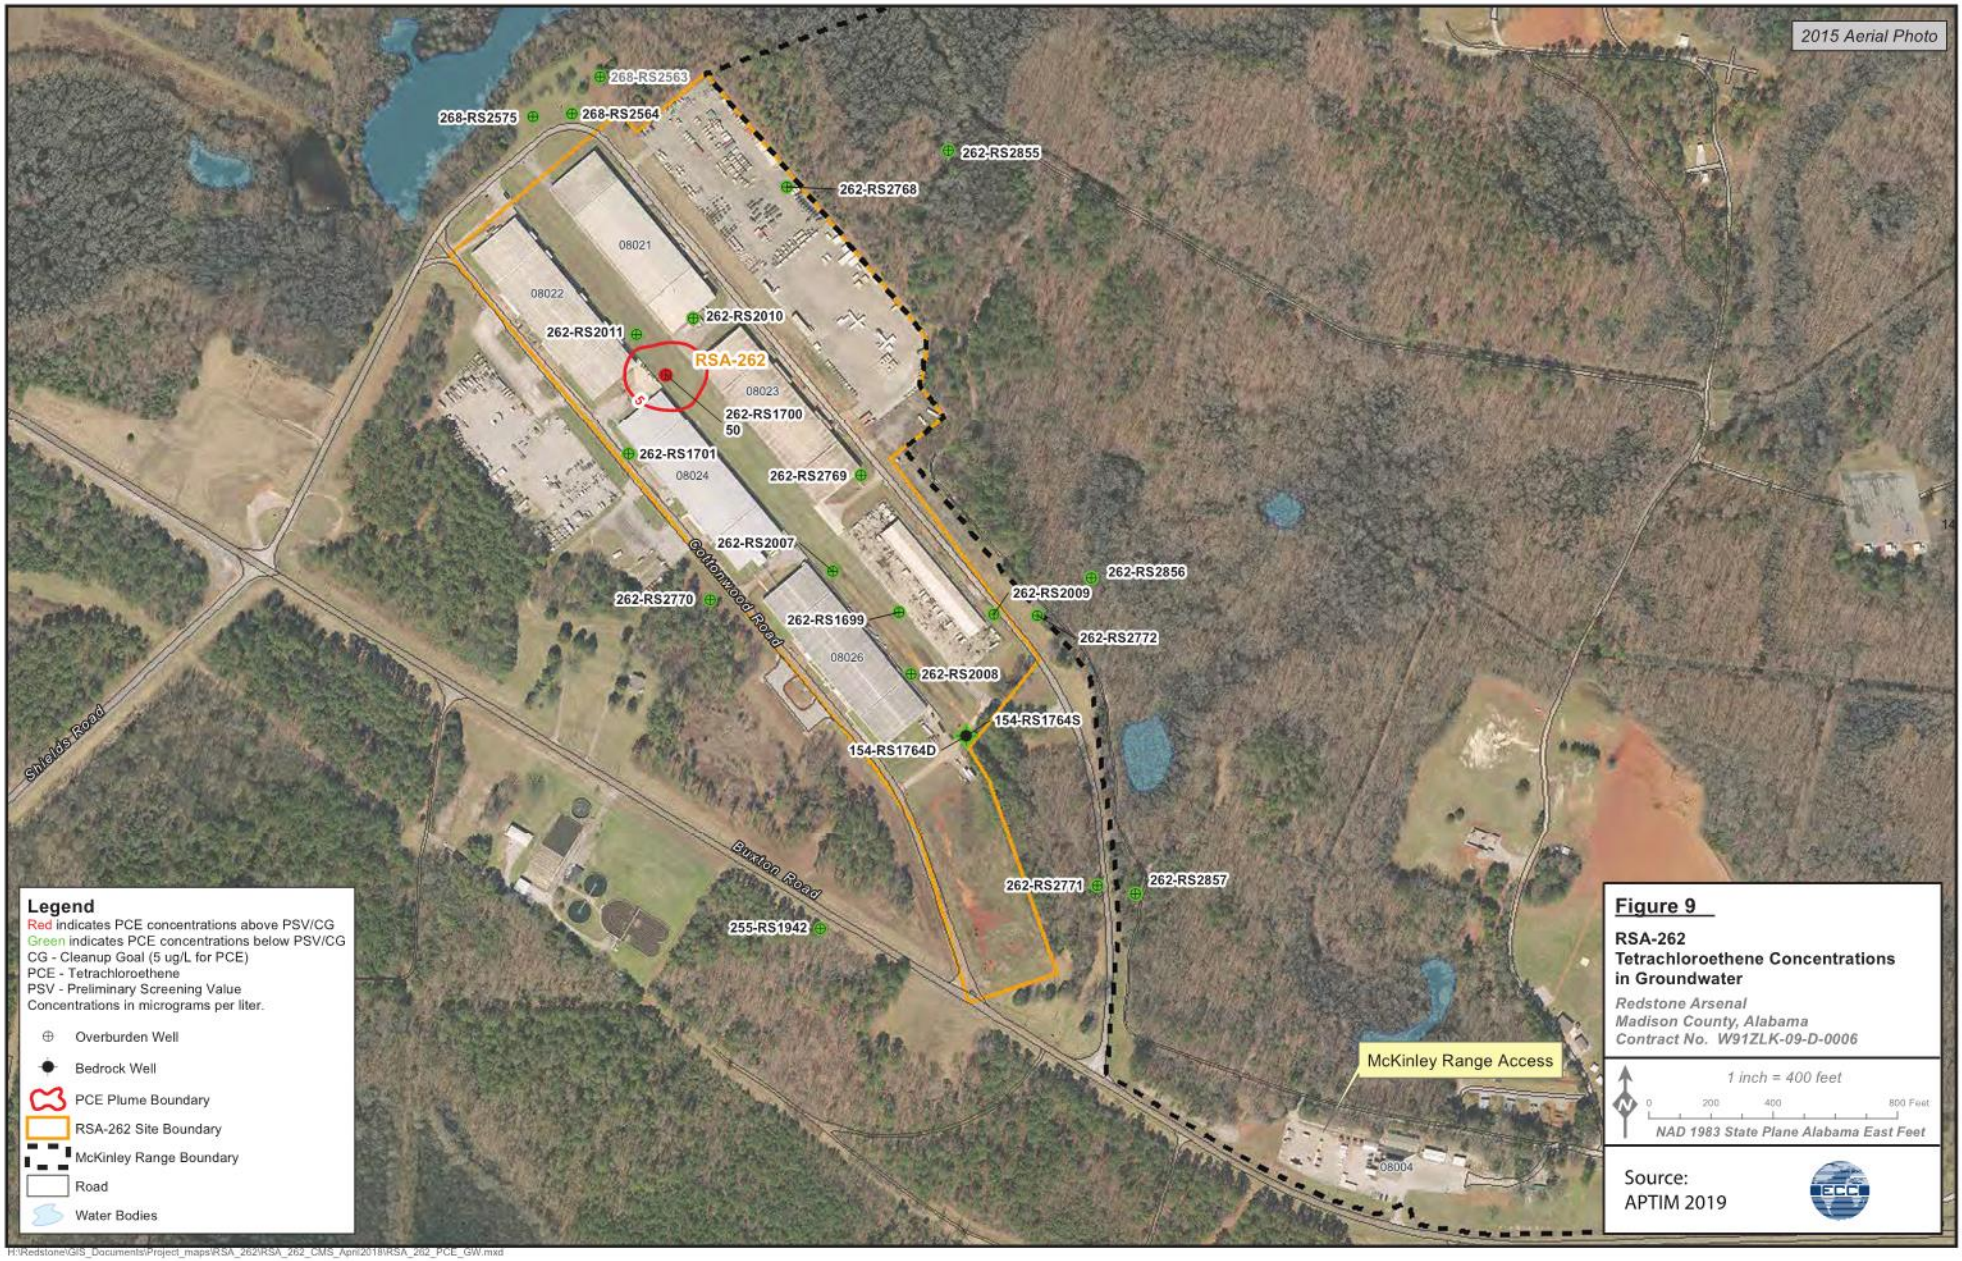
2015 Aerial Photo
268-RS2563
268-RS2575
268-RS2564
262-RS2855
262-RS2768
08021
08022
262-RS2010
262-RS2011
RSA-262
08023
262-RS1700
50
262-RS1701
08024
262-RS2769
262-RS2007
Cottonwood Road
262-RS2856
262-RS2009
262-RS2770
262-RS1699
262-RS2772
08026
262-RS2008
154-RS1764S
154-RS1764D
Shields Road
Buxton Road
262-RS2771
262-RS2857
255-RS1942
McKinley Range Access
08004
Legend
Red indicates PCE concentrations above PSV/CG
Green indicates PCE concentrations below PSV/CG
CG - Cleanup Goal (5 ug/L for PCE)
PCE - Tetrachloroethene
PSV - Preliminary Screening Value
Concentrations in micrograms per liter.
Overburden Well
Bedrock Well
PCE Plume Boundary
RSA-262 Site Boundary
McKinley Range Boundary
Road
Water Bodies
Figure 9
RSA-262
Tetrachloroethene Concentrations in Groundwater
Redstone Arsenal
Madison County, Alabama
Contract No. W91ZLK-09-D-0006
1 inch = 400 feet
0 200 400 800 Feet
NAD 1983 State Plane Alabama East Feet
Source:
APTIM 2019
H:\Redstone\GIS_Documents\Project_maps\RSA_262\RSA_262_CMS_April2018\RSA_262_PCE_GW.mxd

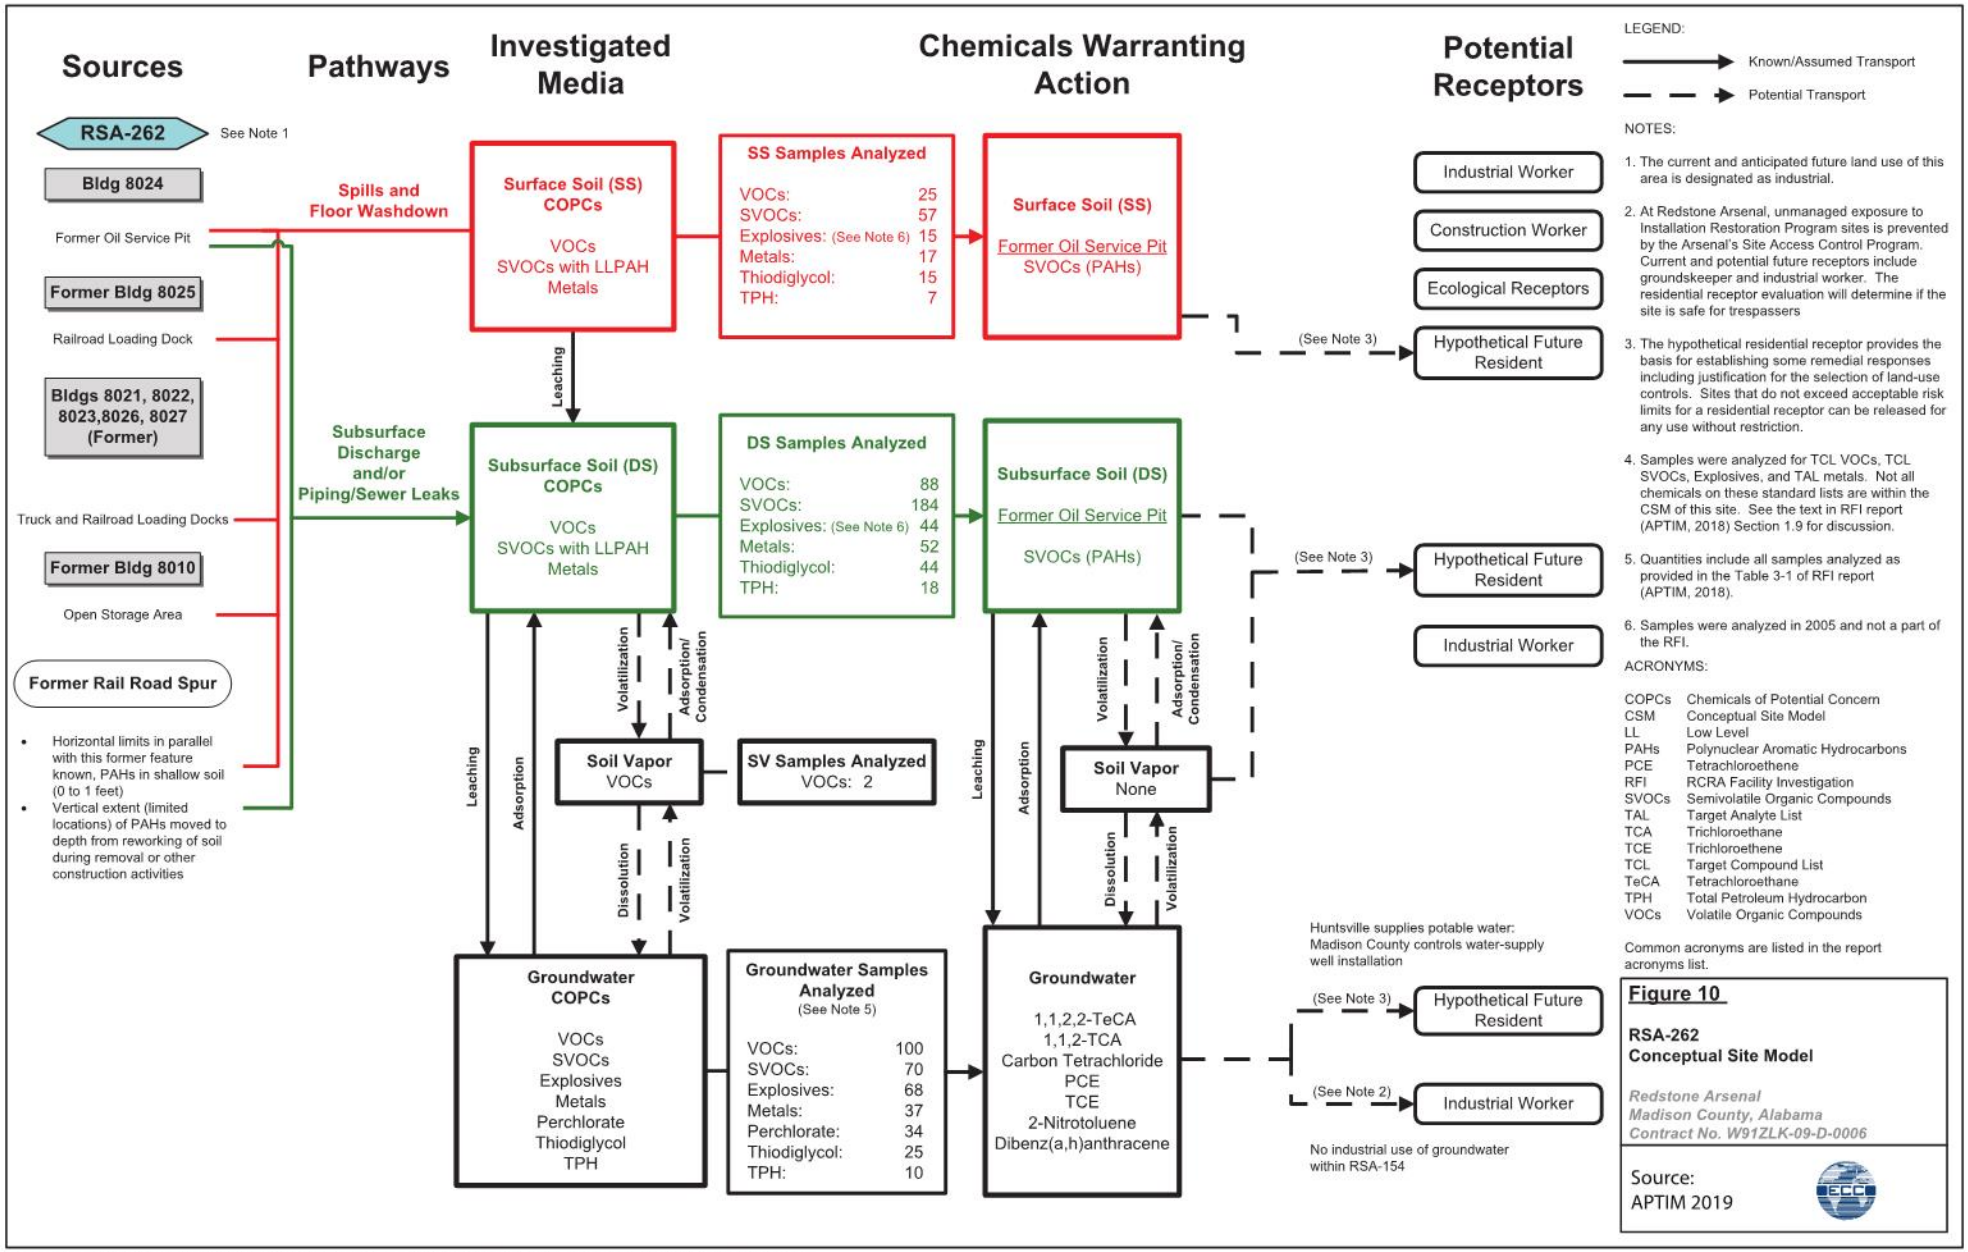

\\cfsfs01.cfs.com\ArcGISProd3\Redstone\GIS_Documents\Output\RSA_262\RSA_262_CMS_Mar2018\Figure_2_9_RSA_262_CSM

S. Bentley

2018 Aerial Photo

15403A-HP12

262-SB002

Cottonwood Road

Drain Line

Oil Service Pit

262-RS1701

8024

RSA-262

15403A-HP13

262-SB003

262-SB001

LEGEND

Red indicates concentrations above Cleanup Goal
Green indicates concentrations below Cleanup Goal

- Overburden Well
- Hydropunch
- Soil Sample
- Area to be Excavated
- Proposed Stockpile and Stone Pad Area
- Underground Water Line
- Underground Wastewater Line
- RSA-262 Site Boundary

Figure 11
RSA-262
Alternative S2: Excavation and Off-Site Disposal

Redstone Arsenal
Madison County, Alabama
Contract No. W9124J-18-D-0004

1 in = 15 ft
0 15 30 Feet
NAD 1983 State Plane Alabama East Feet

Environmental Chemical Corporation

ECC GIS Server: E:\Projects\Redstone\MapDocument\CMIP\RSA262\Fig11_RSA262_Excavation.mxd

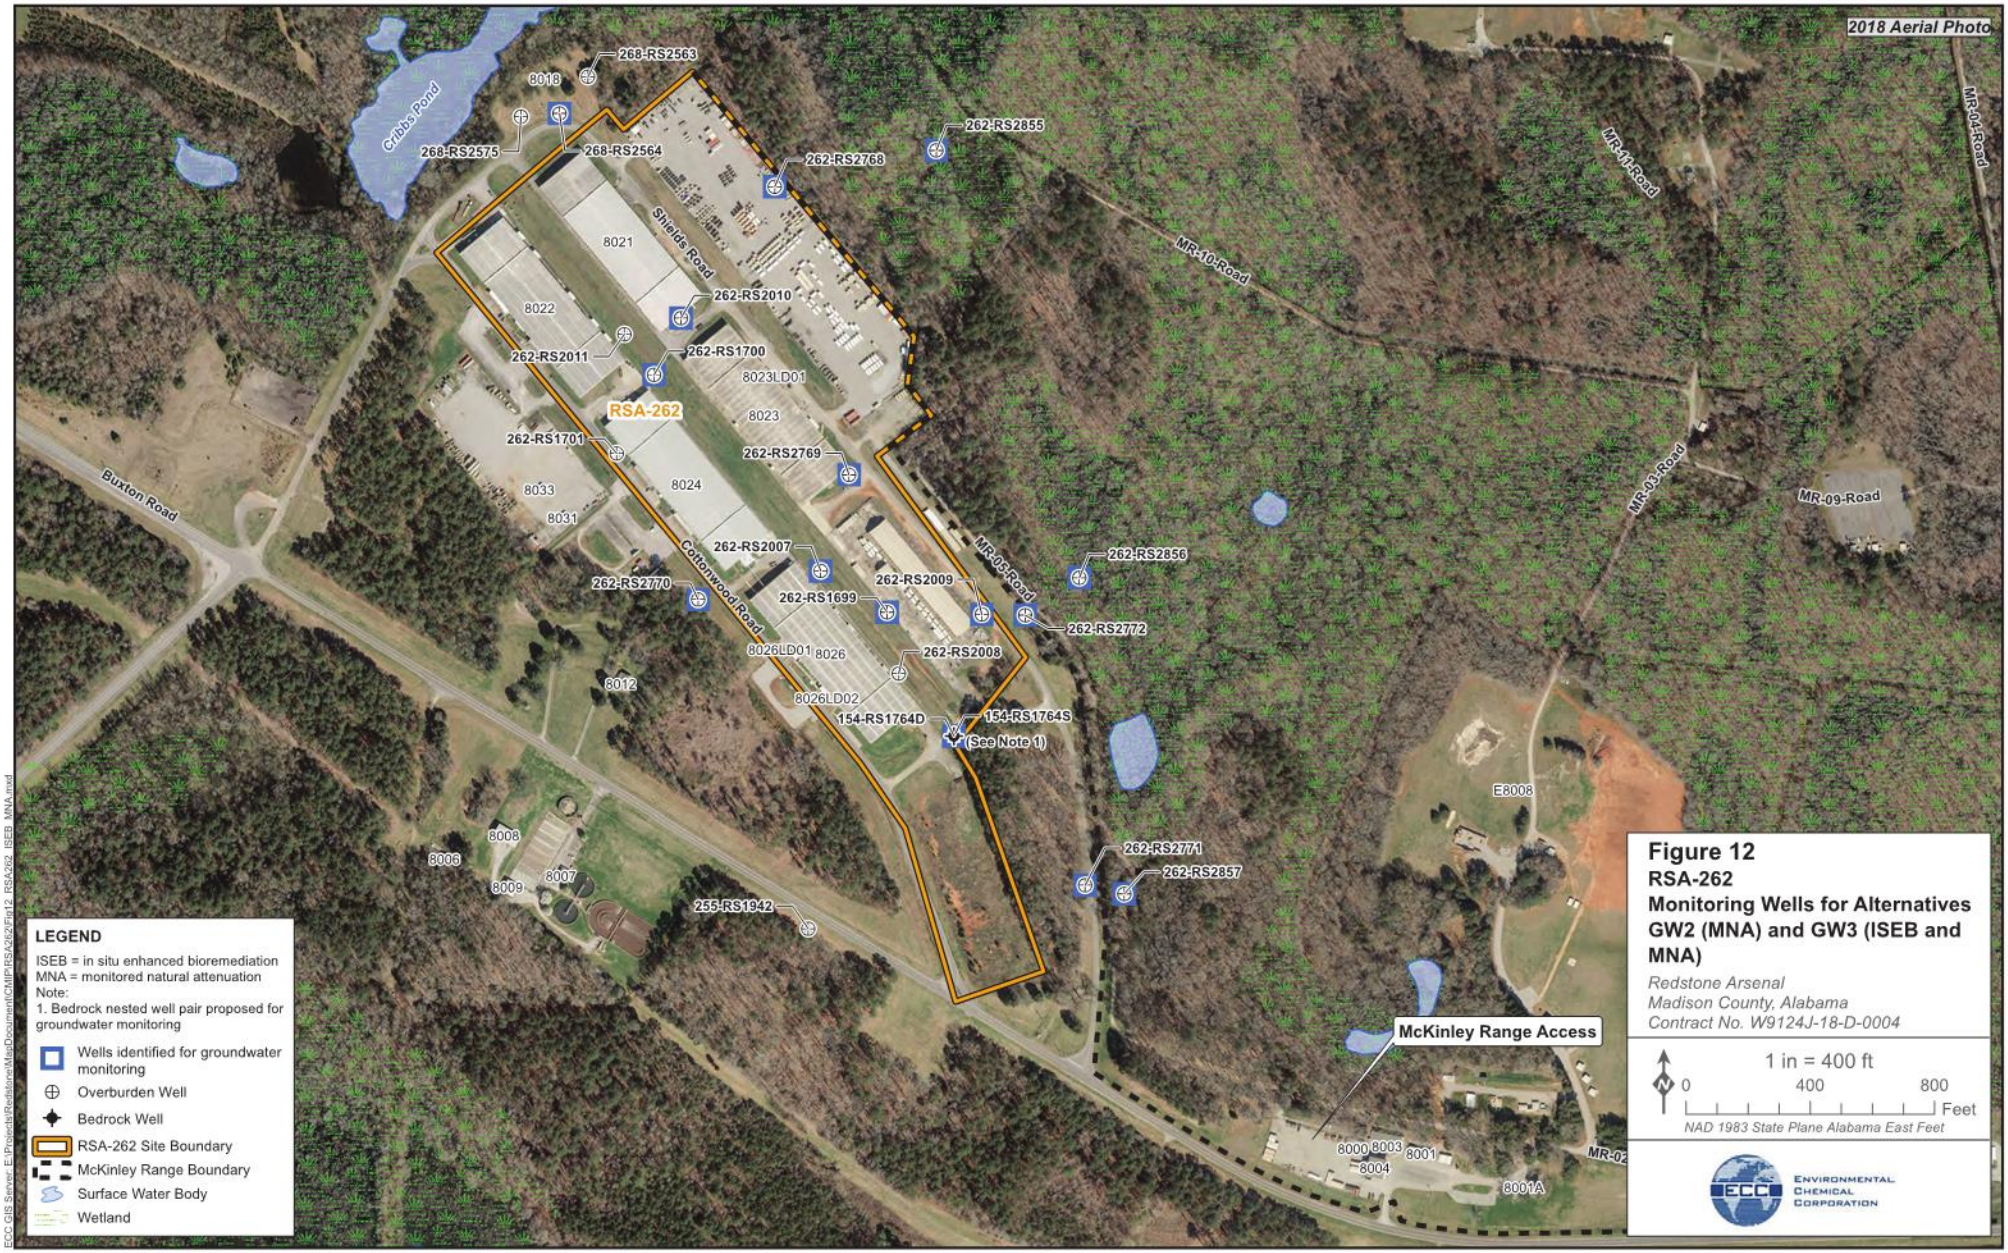
2018 Aerial Photo
268-RS2563
8018
268-RS2575
268-RS2564
Gribbs Pond
262-RS2855
262-RS2768
Shields Road
8021
MR-11-Road
MR-04-Road
MR-10-Road
262-RS2010
8022
262-RS2011
262-RS1700
8023LD01
RSA-262
8023
262-RS1701
262-RS2769
Buxton Road
8033
8024
MR-03-Road
MR-09-Road
8031
262-RS2007
262-RS2856
MR-05-Road
262-RS2770
262-RS1699
262-RS2009
262-RS2772
Cottonwood Road
8026LD01
8026
262-RS2008
8012
8026LD02
154-RS1764D
154-RS1764S
(See Note 1)
E8008
8008
8006
8009
8007
262-RS2771
262-RS2857
255-RS1942
McKinley Range Access
8000
8003
8001
8004
8001A
MR-02
LEGEND
ISEB = in situ enhanced bioremediation
MNA = monitored natural attenuation
Note:
1. Bedrock nested well pair proposed for groundwater monitoring
Wells identified for groundwater monitoring
Overburden Well
Bedrock Well
RSA-262 Site Boundary
McKinley Range Boundary
Surface Water Body
Wetland
Figure 12
RSA-262
Monitoring Wells for Alternatives GW2 (MNA) and GW3 (ISEB and MNA)
Redstone Arsenal
Madison County, Alabama
Contract No. W9124J-18-D-0004
1 in = 400 ft
0
400
800
Feet
NAD 1983 State Plane Alabama East Feet
ECC
Environmental Chemical Corporation
ECC GIS Server: E:\Projects\Redstone\MapDocument\CMIP\RSA262\Fig12_RSA262_ISEB_MNA.mxd

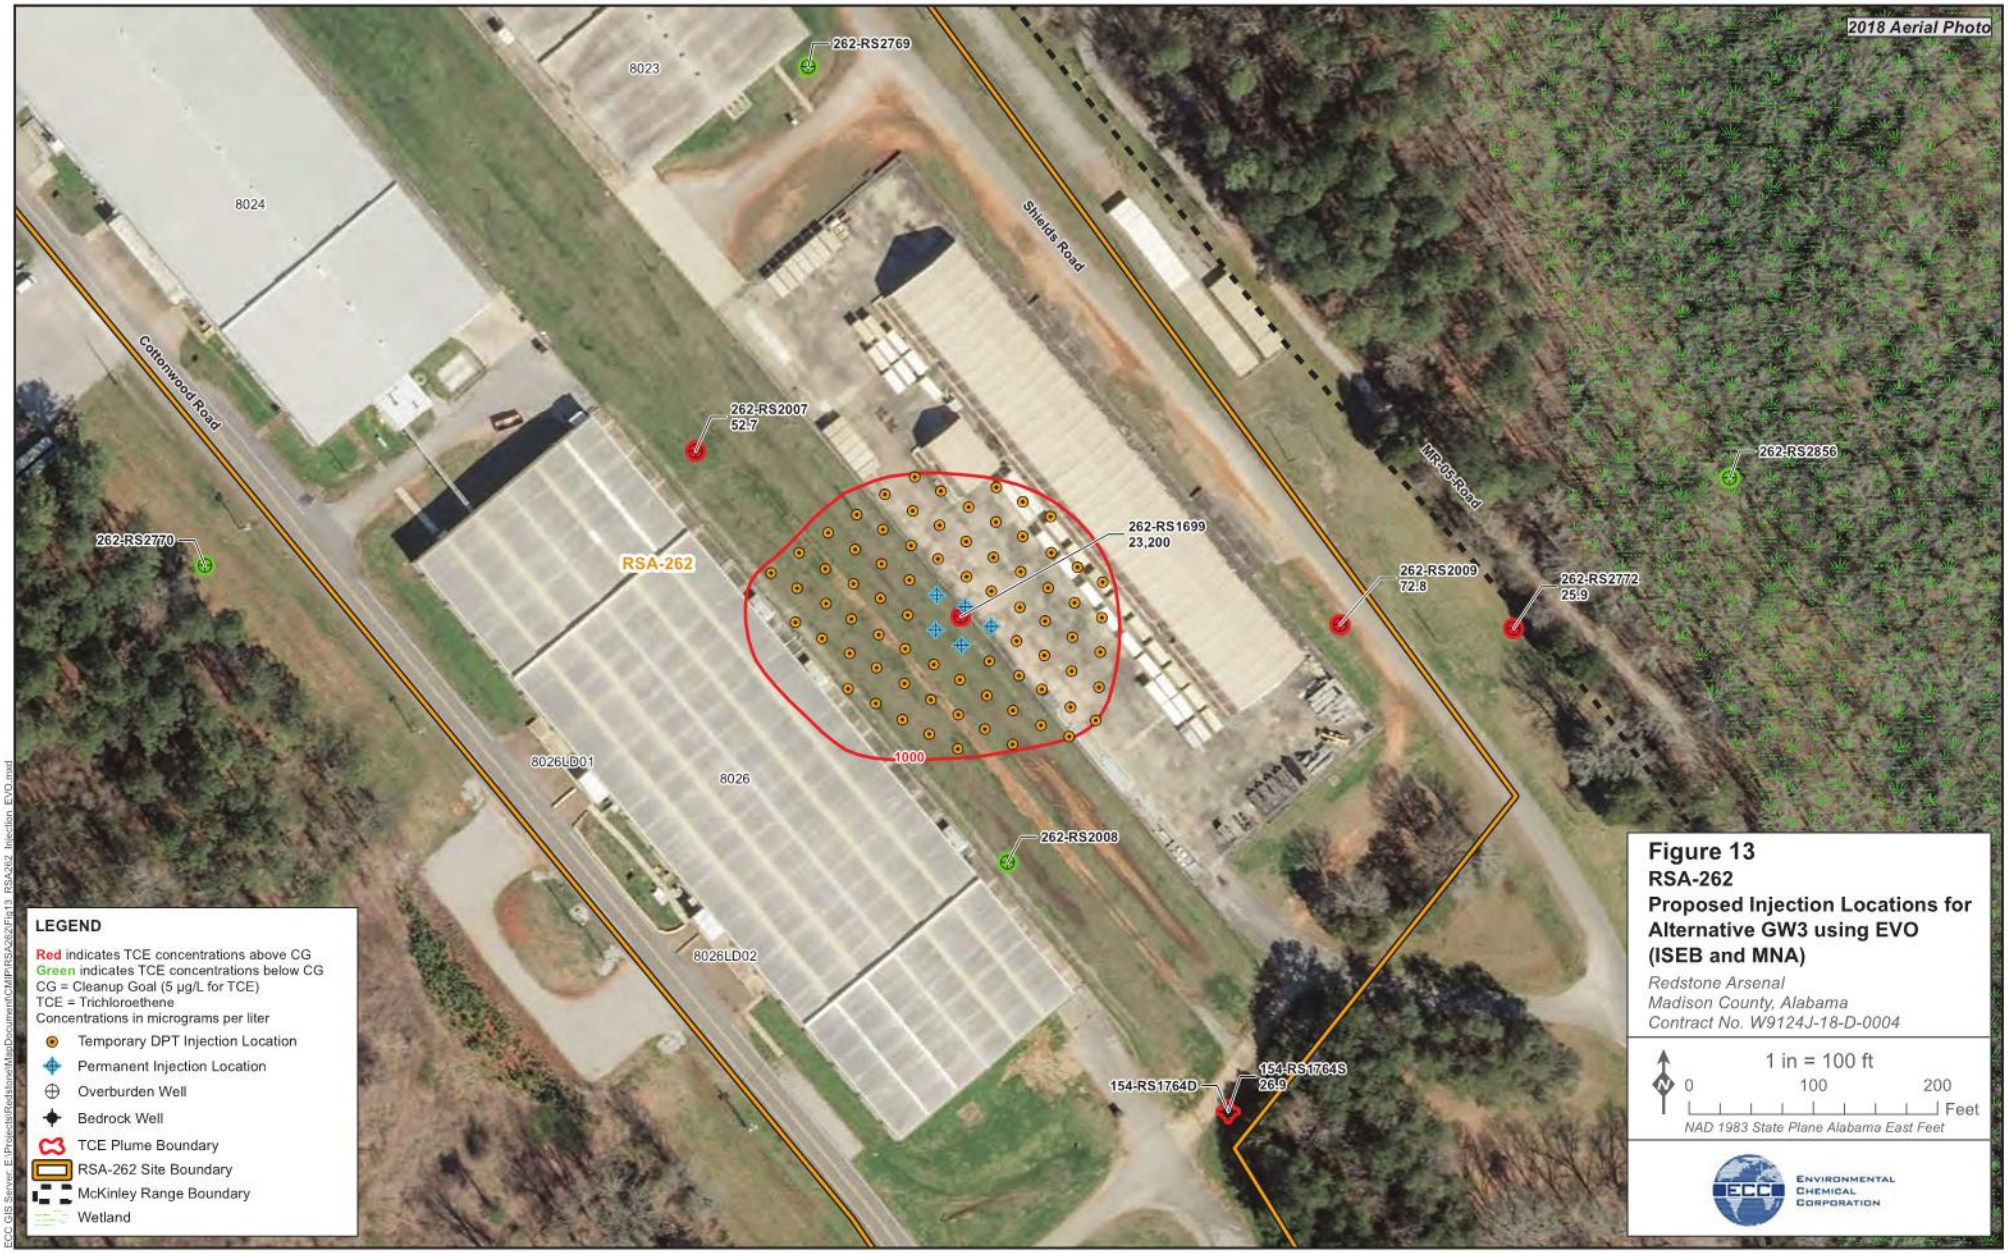
2018 Aerial Photo
262-RS2769
8023
8024
Shields Road
Cottonwood Road
262-RS2007
52.7
MR-05-Road
262-RS2856
262-RS2770
RSA-262
262-RS1699
23,200
262-RS2009
72.8
262-RS2772
25.9
1000
8026LD01
8026
262-RS2008
8026LD02
154-RS1764S
26.9
154-RS1764D
LEGEND
Red indicates TCE concentrations above CG
Green indicates TCE concentrations below CG
CG = Cleanup Goal (5 µg/L for TCE)
TCE = Trichloroethene
Concentrations in micrograms per liter
Temporary DPT Injection Location
Permanent Injection Location
Overburden Well
Bedrock Well
TCE Plume Boundary
RSA-262 Site Boundary
McKinley Range Boundary
Wetland
Figure 13
RSA-262
Proposed Injection Locations for Alternative GW3 using EVO (ISEB and MNA)
Redstone Arsenal
Madison County, Alabama
Contract No. W9124J-18-D-0004
1 in = 100 ft
0
100
200
Feet
NAD 1983 State Plane Alabama East Feet
ECC
Environmental Chemical Corporation
ECC GIS Server: E:\Projects\Redstone\MapDocument\GMP\RSA262\Fig13_RSA262_Injection_EVO.mxd

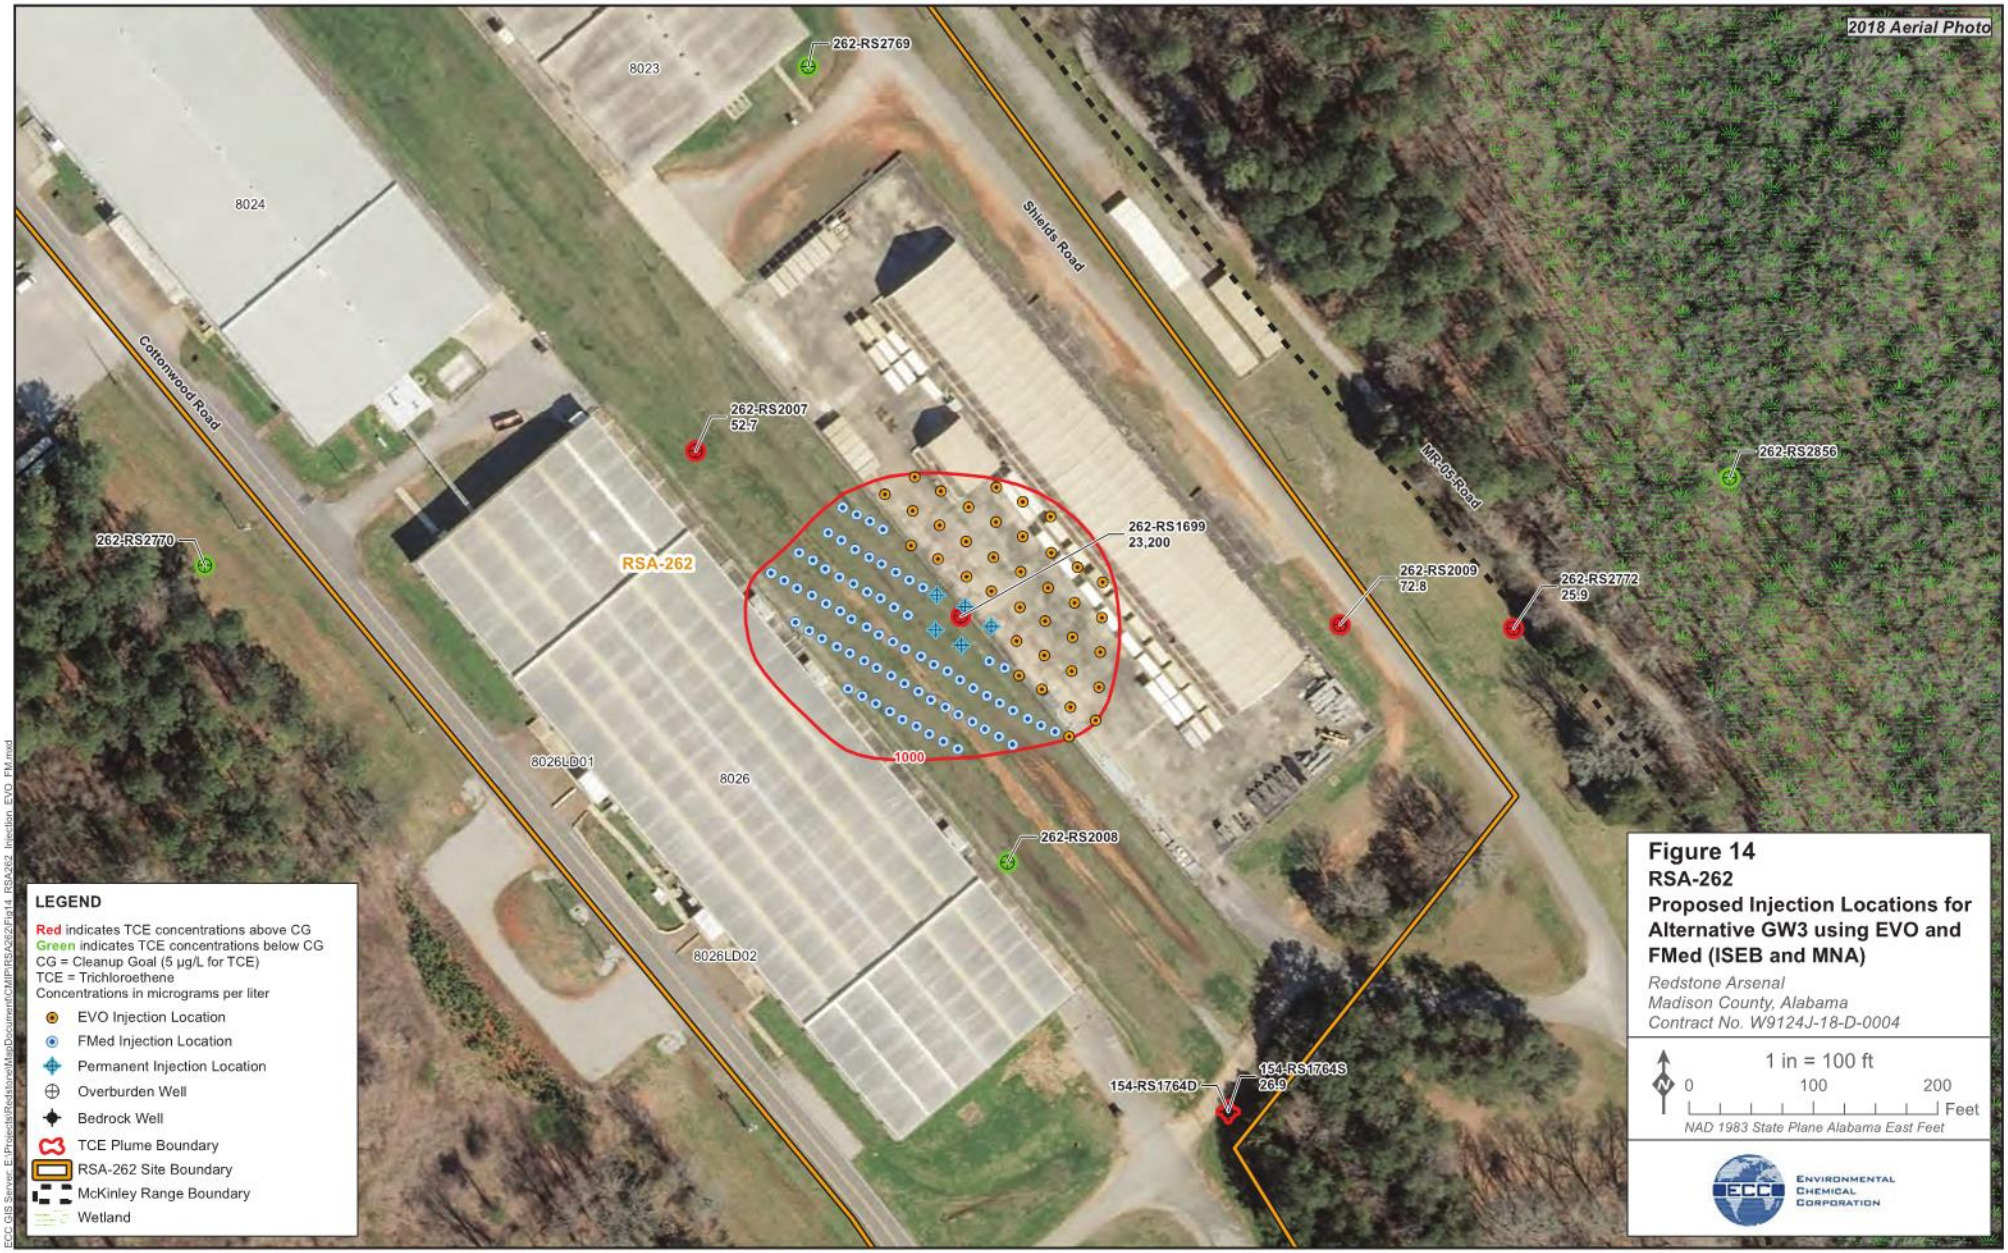
2018 Aerial Photo
262-RS2769
8023
8024
Shields Road
Cottonwood Road
262-RS2007
52.7
MR-05-Road
262-RS2856
262-RS2770
RSA-262
262-RS1699
23,200
262-RS2009
72.8
262-RS2772
25.9
1000
8026LD01
8026
262-RS2008
8026LD02
154-RS1764S
26.9
154-RS1764D
LEGEND
Red indicates TCE concentrations above CG
Green indicates TCE concentrations below CG
CG = Cleanup Goal (5 µg/L for TCE)
TCE = Trichloroethene
Concentrations in micrograms per liter
EVO Injection Location
FMed Injection Location
Permanent Injection Location
Overburden Well
Bedrock Well
TCE Plume Boundary
RSA-262 Site Boundary
McKinley Range Boundary
Wetland
Figure 14
RSA-262
Proposed Injection Locations for Alternative GW3 using EVO and FMed (ISEB and MNA)
Redstone Arsenal
Madison County, Alabama
Contract No. W9124J-18-D-0004
1 in = 100 ft
0
100
200
Feet
NAD 1983 State Plane Alabama East Feet
ECC
Environmental Chemical Corporation
ECC GIS Server: E:\Projects\Redstone\MapDocument\GMP\RSA262\Fig14_RSA262_Injection_EVO_FM.mxd

Figure 15
ISEB Remedial Duration
RSA-262 TCE Plume
Redstone Arsenal, Madison County, Alabama

TCE

Location	262-RS1699	262-RS2009	262-RS2772
Distance (ft)	0	305	445
Concentration (µg/L)	23,200	72.8	18.1

Slope	R^2
0.0170	0.9836
(from graph)	

$C_{final} = C_{initial}e^{-kt}$

C_{final} = final concentration at time t (µg/L)
$C_{initial}$ = initial concentration in plume (µg/L)
k = attenuation (1/year) = J10
(EPA 1998, Equation 9)
t = time (years)

Hydraulic Conductivity 1.63 ft/day (RSA average)
Hydraulic Gradient 0.022 ft/ft (site specific)
Effective Porosity 0.42 (RSA-wide geometric mean of 71 measurements)
Average groundwater velocity, v_s = 0.096 ft/day
Apparent groundwater velocity, v_{xa} = 0.020
Average groundwater velocity, v_s = 35 ft/year
Apparent groundwater velocity, v_{xa} = 7

Bulk Attenuation Rate
Slope (k/v_x) = 0.0170 /ft
Bulk attenuation rate (k) = 0.1218 /year
Half-life = 5.69 years

Assume initial concentration = 36000 (May 2011)
Assume no TCE in soil acting as a source

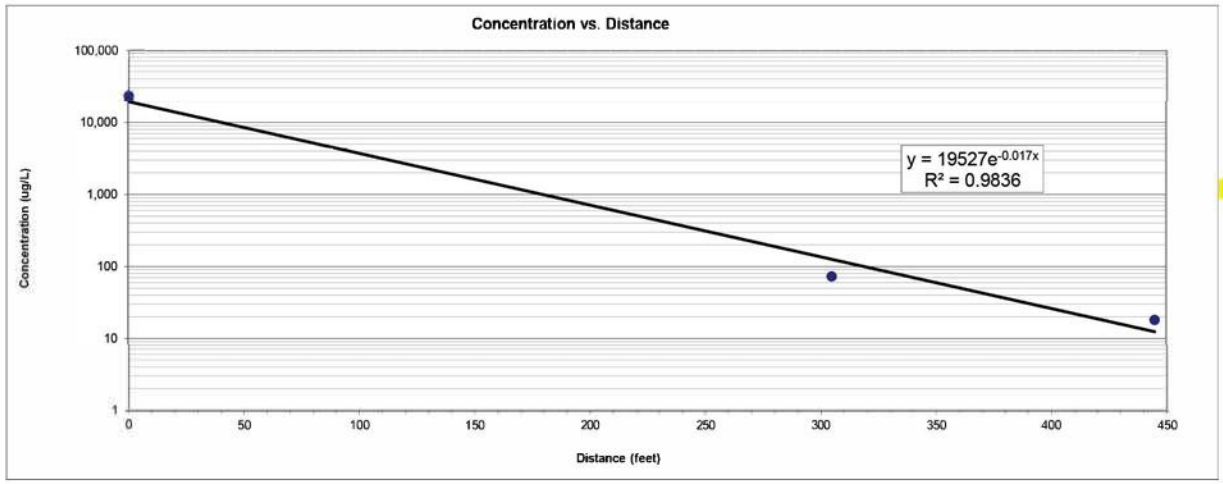

	Time (t) - years	Groundwater Concentration, µg/L	Time (t) - years	Groundwater Concentration, µg/L
2011 result	-7	33000	15	46
2012 result	-6	36000	16	41
	-5	31873	17	36
	-4	28219	18	32
	-3	24984	19	29
23200 (measured)	-2	22120	20	25
	-1	19584	21	22
2018	0	17339	22	20
2019	1	1000	23	18
	2	885	24	16
Polishing	3	200	25	14
	4	177	26	12
	5	157	27	11
	6	139	28	10
	7	123	29	8
	8	109	30	7
	9	96	31	7
	10	85	32	6
	11	76	33	5
	12	67		
	13	59		
	14	52		

Reference: U.S. Environmental Protection Agency (EPA), 1998, *Technical Protocol for Evaluating Natural Attenuation of Chlorinated Solvents in Ground Water, EPA/600/R-98/128, September.*

Source:
APTIM 2019

This page intentionally left blank.

TABLES

This page intentionally left blank.

APPENDIX A

USEPA RSL CALCULATOR OUTPUT

This page intentionally left blank.

Table A-1
USEPA RSL Calculator - Soil Input - Hypothetical Future Resident
Former Oil Service Pit - RSA-262
Redstone Arsenal, Madison County, Alabama

Variable	Resident Soil Default Value	Site-Specific Value
A (PEF Dispersion Constant)	16.2302	16.2302
A (VF Dispersion Constant)	11.911	11.911
A (VF Dispersion Constant - mass limit)	11.911	11.911
B (PEF Dispersion Constant)	18.7762	18.7762
B (VF Dispersion Constant)	18.4385	18.4385
B (VF Dispersion Constant - mass limit)	18.4385	18.4385
City (PEF Climate Zone) Selection	Default	Default
City (VF Climate Zone) Selection	Default	Default
C (PEF Dispersion Constant)	216.108	216.108
C (VF Dispersion Constant)	209.7845	209.7845
C (VF Dispersion Constant - mass limit)	209.7845	209.7845
foc (fraction organic carbon in soil) g/g	0.006	0.006
F(x) (function dependent on U_m/U_t) unitless	0.194	0.194
n (total soil porosity) L_{pore}/L_{soil}	0.43396	0.43396
p_b (dry soil bulk density) g/cm^3	1.5	1.5
p_b (dry soil bulk density - mass limit) g/cm^3	1.5	1.5
PEF (particulate emission factor) m^3/kg	1359344438	1359344438
p_s (soil particle density) g/cm^3	2.65	2.65
Q/C_{wind} (g/m^2-s per kg/m^3)	93.77	93.77
Q/C_{vol} (g/m^2-s per kg/m^3)	68.18	68.18
Q/C_{vol} (g/m^2-s per kg/m^3 - mass limit)	68.18	68.18
A_s (PEF acres)	0.5	0.5
A_s (VF acres)	0.5	0.5
A_s (VF mass-limit acres)	0.5	0.5
AF_{0-2} (mutagenic skin adherence factor) mg/cm^2	0.2	0.2
AF_{2-6} (mutagenic skin adherence factor) mg/cm^2	0.2	0.2
AF_{6-16} (mutagenic skin adherence factor) mg/cm^2	0.07	0.07
AF_{16-26} (mutagenic skin adherence factor) mg/cm^2	0.07	0.07
AF_{res-a} (skin adherence factor - adult) mg/cm^2	0.07	0.07
AF_{res-c} (skin adherence factor - child) mg/cm^2	0.2	0.2
AT_{res} (averaging time - resident carcinogenic)	365	365
BW_{0-2} (mutagenic body weight) kg	15	15
BW_{2-6} (mutagenic body weight) kg	15	15
BW_{6-16} (mutagenic body weight) kg	80	80
BW_{16-26} (mutagenic body weight) kg	80	80
BW_{res-a} (body weight - adult) kg	80	80
BW_{res-c} (body weight - child) kg	15	15
$DFS_{res-adj}$ (age-adjusted soil dermal factor) mg/kg	103390	103390
$DFSM_{res-adj}$ (mutagenic age-adjusted soil dermal factor) mg/kg	428260	428260
ED_{res} (exposure duration) years	26	26
ED_{0-2} (mutagenic exposure duration) years	2	2
ED_{2-6} (mutagenic exposure duration) years	4	4
ED_{6-16} (mutagenic exposure duration) years	10	10

Table A-1
USEPA RSL Calculator - Soil Input - Hypothetical Future Resident
Former Oil Service Pit - RSA-262
Redstone Arsenal, Madison County, Alabama

Variable	Resident Soil Default Value	Site-Specific Value
ED_{16-26} (mutagenic exposure duration) years	10	10
ED_{res-a} (exposure duration - adult) years	20	20
ED_{res-c} (exposure duration - child) years	6	6
EF_{res} (exposure frequency) days/year	350	350
EF_{0-2} (mutagenic exposure frequency) days/year	350	350
EF_{2-6} (mutagenic exposure frequency) days/year	350	350
EF_{6-16} (mutagenic exposure frequency) days/year	350	350
EF_{16-26} (mutagenic exposure frequency) days/year	350	350
EF_{res-a} (exposure frequency - adult) days/year	350	350
EF_{res-c} (exposure frequency - child) days/year	350	350
ET_{res} (exposure time) hours/day	24	24
ET_{0-2} (mutagenic exposure time) hours/day	24	24
ET_{2-6} (mutagenic exposure time) hours/day	24	24
ET_{6-16} (mutagenic exposure time) hours/day	24	24
ET_{16-26} (mutagenic exposure time) hours/day	24	24
ET_{res-a} (adult exposure time) hours/day	24	24
ET_{res-c} (child exposure time) hours/day	24	24
THQ (target hazard quotient) unitless	0.1	0.1
$IFS_{res-adj}$ (age-adjusted soil ingestion factor) mg/kg	36750	36750
$IFSM_{res-adj}$ (mutagenic age-adjusted soil ingestion factor) mg/kg	166833.3	166833.3
IRS_{0-2} (mutagenic soil intake rate) mg/day	200	200
IRS_{2-6} (mutagenic soil intake rate) mg/day	200	200
IRS_{6-16} (mutagenic soil intake rate) mg/day	100	100
IRS_{16-26} (mutagenic soil intake rate) mg/day	100	100
IRS_{res-a} (soil intake rate - adult) mg/day	100	100
IRS_{res-c} (soil intake rate - child) mg/day	200	200
LT (lifetime) years	70	70
SA_{0-2} (mutagenic skin surface area) cm^2/day	2373	2373
SA_{2-6} (mutagenic skin surface area) cm^2/day	2373	2373
SA_{6-16} (mutagenic skin surface area) cm^2/day	6032	6032
SA_{16-26} (mutagenic skin surface area) cm^2/day	6032	6032
SA_{res-a} (skin surface area - adult) cm^2/day	6032	6032
SA_{res-c} (skin surface area - child) cm^2/day	2373	2373
TR (target risk) unitless	0.000001	0.000001
T_w (groundwater temperature) Celsius	25	25
$Theta_a$ (air-filled soil porosity) L_{air}/L_{soil}	0.28396	0.28396
$Theta_w$ (water-filled soil porosity) L_{water}/L_{soil}	0.15	0.15
T (exposure interval) s	819936000	819936000
T (exposure interval) yr	26	26
U_m (mean annual wind speed) m/s	4.69	4.69
U_t (equivalent threshold value)	11.32	11.32
V (fraction of vegetative cover) unitless	0.5	0.5

Table A-2
USEPA RSL Calculator - Soil Output - Hypothetical Future Resident
Former Oil Service Pit - RSA-262
Redstone Arsenal, Madison County, Alabama

Chemical	Sfo (mg/kg-day)$^{-1}$	SF_oRef	IUR (ug/m^3)$^{-1}$	IUR Ref	RfD (mg/kg-day)	RfD Ref	RfC (mg/m^3)	RfC Ref	GIABS	ABS	RBA	Concentration (mg/kg)	Ingestion Risk	Dermal Risk
Benz[a]anthracene	1.00E-01	E	6.00E-05	E	-		-		1.00E+00	1.30E-01	1.00E+00	7.61E+00	4.97E-06	1.66E-06
Benzo[a]pyrene	1.00E+00	I	6.00E-04	I	3.00E-04	I	2.00E-06	I	1.00E+00	1.30E-01	1.00E+00	5.88E+00	3.84E-05	1.28E-05
Benzo[b]fluoranthene	1.00E-01	E	6.00E-05	E	-		-		1.00E+00	1.30E-01	1.00E+00	5.82E+00	3.80E-06	1.27E-06
Dibenz[a,h]anthracene	1.00E+00	E	6.00E-04	E	-		-		1.00E+00	1.30E-01	1.00E+00	1.46E+00	9.53E-06	3.18E-06
**Total Risk/HI*	-		-		-		-		-	-	-	-	*5.85E-05*	*1.95E-05*

Table A-2
USEPA RSL Calculator - Soil Output - Hypothetical Future Resident
Former Oil Service Pit - RSA-262
Redstone Arsenal, Madison County, Alabama

Chemical	Inhalation Risk	Carcinogenic Risk	Ingestion Child HQ	Dermal Child HQ	Inhalation Child HQ	Non-carcinogenic Child HI	Ingestion Adult HQ	Dermal Adult HQ	Inhalation Adult HQ	Non-carcinogenic Adult HI
Benz[a]anthracene	1.02E-07	6.73E-06	-	-	-	-	-	-	-	-
Benzo[a]pyrene	2.56E-09	5.12E-05	2.51E-01	7.73E-02	2.07E-03	3.30E-01	2.35E-02	1.29E-02	2.07E-03	3.85E-02
Benzo[b]fluoranthene	2.53E-10	5.07E-06	-	-	-	-	-	-	-	-
Dibenz[a,h]anthracene	6.36E-10	1.27E-05	-	-	-	-	-	-	-	-
**Total Risk/HI*	*5.45E-07*	*7.57E-05*	*2.52E-01*	*7.76E-02*	*1.37E-02*	*3.30E-01*	*2.36E-02*	*1.30E-02*	*1.37E-02*	*3.85E-02*

Table A-3
USEPA RSL Calculator - Groundwater Input - Hypothetical Future Resident
Former Oil Service Pit - RSA-262
Redstone Arsenal, Madison County, Alabama

Variable	Resident Tap Water Default Value	Site-Specific Value
BW_{0-2} (mutagenic body weight) kg	15	15
BW_{2-6} (mutagenic body weight) kg	15	15
BW_{6-16} (mutagenic body weight) kg	80	80
BW_{16-26} (mutagenic body weight) kg	80	80
BW_{res-a} (body weight - adult) kg	80	80
BW_{res-c} (body weight - child) kg	15	15
$DFW_{res-adj}$ (age-adjusted dermal factor) cm^2-event/kg	2610650	2610650
$DFWM_{res-adj}$ (mutagenic age-adjusted dermal factor) cm^2-event/kg	8191633	8191633
ED_{res} (exposure duration - resident) years	26	26
ED_{0-2} (mutagenic exposure duration first phase) years	2	2
ED_{2-6} (mutagenic exposure duration second phase) years	4	4
ED_{6-16} (mutagenic exposure duration third phase) years	10	10
ED_{16-26} (mutagenic exposure duration fourth phase) years	10	10
ED_{res-a} (exposure duration - adult) years	20	20
ED_{res-c} (exposure duration - child) years	6	6
EF_{res} (exposure frequency) days/year	350	350
EF_{0-2} (mutagenic exposure frequency first phase) days/year	350	350
EF_{2-6} (mutagenic exposure frequency second phase) days/year	350	350
EF_{6-16} (mutagenic exposure frequency third phase) days/year	350	350
EF_{16-26} (mutagenic exposure frequency fourth phase) days/year	350	350
EF_{res-a} (exposure frequency - adult) days/year	350	350
EF_{res-c} (exposure frequency - child) days/year	350	350
ET_{res} (exposure time) hours/day	24	24
$ET_{event-res-adj}$ (age-adjusted exposure time) hours/event	0.67077	0.67077
$ET_{event-res-madj}$ (mutagenic age-adjusted exposure time) hours/event	0.67077	0.67077
ET_{0-2} (mutagenic dermal exposure time first phase) hours/event	0.54	0.54
ET_{2-6} (mutagenic dermal exposure time second phase) hours/event	0.54	0.54
ET_{6-16} (mutagenic dermal exposure time third phase) hours/event	0.71	0.71
ET_{16-26} (mutagenic dermal exposure time fourth phase) hours/event	0.71	0.71
ET_{res-a} (dermal exposure time - adult) hours/event	0.71	0.71
ET_{res-c} (dermal exposure time - child) hours/event	0.54	0.54
ET_{0-2} (mutagenic inhalation exposure time first phase) hours/day	24	24
ET_{2-6} (mutagenic inhalation exposure time second phase) hours/day	24	24
ET_{6-16} (mutagenic inhalation exposure time third phase) hours/day	24	24
ET_{16-26} (mutagenic inhalation exposure time fourth phase) hours/day	24	24
ET_{res-a} (inhalation exposure time - adult) hours/day	24	24
ET_{res-c} (inhalation exposure time - child) hours/day	24	24
EV_{0-2} (mutagenic events) per day	1	1
EV_{2-6} (mutagenic events) per day	1	1
EV_{6-16} (mutagenic events) per day	1	1
EV_{16-26} (mutagenic events) per day	1	1
EV_{res-a} (events - adult) per day	1	1
EV_{res-c} (events - child) per day	1	1

Table A-3
USEPA RSL Calculator - Groundwater Input - Hypothetical Future Resident
Former Oil Service Pit - RSA-262
Redstone Arsenal, Madison County, Alabama

Variable	Resident Tap Water Default Value	Site-Specific Value
THQ (target hazard quotient) unitless	0.1	0.1
$IFW_{res\text{-}adj}$ (adjusted intake factor) L/kg	327.95	327.95
$IFWM_{res\text{-}adj}$ (mutagenic adjusted intake factor) L/kg	1019.9	1019.9
$IRW_{0\text{-}2}$ (mutagenic water intake rate) L/day	0.78	0.78
$IRW_{2\text{-}6}$ (mutagenic water intake rate) L/day	0.78	0.78
$IRW_{6\text{-}16}$ (mutagenic water intake rate) L/day	2.5	2.5
$IRW_{16\text{-}26}$ (mutagenic water intake rate) L/day	2.5	2.5
$IRW_{res\text{-}a}$ (water intake rate - adult) L/day	2.5	2.5
$IRW_{res\text{-}c}$ (water intake rate - child) L/day	0.78	0.78
K (volatilization factor of Andelman) L/m^3	0.5	0.5
LT (lifetime) years	70	70
$SA_{0\text{-}2}$ (mutagenic skin surface area) cm^2	6365	6365
$SA_{2\text{-}6}$ (mutagenic skin surface area) cm^2	6365	6365
$SA_{6\text{-}16}$ (mutagenic skin surface area) cm^2	19652	19652
$SA_{16\text{-}26}$ (mutagenic skin surface area) cm^2	19652	19652
$SA_{res\text{-}a}$ (skin surface area - adult) cm^2	19652	19652
$SA_{res\text{-}c}$ (skin surface area - child) cm^2	6365	6365
l_{sc} (apparent thickness of stratum corneum) cm	0.001	0.001
TR (target risk) unitless	0.000001	0.000001

Table A-4
USEPA RSL Calculator - Groundwater Output - Hypothetical Future Resident
Former Oil Service Pit - RSA-262
Redstone Arsenal, Madison County, Alabama

Chemical	Sfo (mg/kg-day)$^{-1}$	SF_o Ref	IUR (ug/m^3)$^{-1}$	IUR Ref	RfD (mg/kg-day)	RfD Ref	RfC (mg/m^3)	RfC Ref	GIABS	MCL (ug/L)	Concentration (ug/L)	Ingestion Risk	Dermal Risk	Inhalation Risk
Benz[a]anthracene	1.00E-01	E	6.00E-05	E	-		-		1.00E+00	-	5.05E-02	2.02E-07	-	1.49E-06
Carbon Tetrachloride	7.00E-02	I	6.00E-06	I	4.00E-03	I	1.00E-01	I	1.00E+00	5.00E+00	6.35E+01	5.71E-05	1.47E-05	6.78E-05
Chloroform	3.10E-02	C	2.30E-05	I	1.00E-02	I	9.77E-02	A	1.00E+00	8.00E+01	2.16E+00	8.59E-07	7.41E-08	8.85E-06
Dibenz[a,h]anthracene	1.00E+00	E	6.00E-04	E	-		-		1.00E+00	-	4.98E-02	1.99E-06	-	-
1,2-Dichloroethane	9.10E-02	I	2.60E-05	I	6.00E-03	X	7.00E-03	P	1.00E+00	5.00E+00	2.85E-01	3.33E-07	1.55E-08	1.32E-06
cis-1,2-Dichloroethylene	-		-		2.00E-03	I	4.00E-02	X	1.00E+00	7.00E+01	1.70E+01	-	-	-
1,3-Dinitrobenzene	-		-		1.00E-04	I	-		1.00E+00	-	2.88E-01	-	-	-
Methylene Chloride	2.00E-03	I	1.00E-08	I	6.00E-03	I	6.00E-01	I	1.00E+00	5.00E+00	1.10E+00	8.78E-08	3.17E-09	5.42E-09
Nitrobenzene	-		4.00E-05	I	2.00E-03	I	9.00E-03	I	1.00E+00	-	1.85E+00	-	-	1.32E-05
3-Nitrotoluene	-		-		1.00E-04	X	-		1.00E+00	-	1.85E+00	-	-	-
2-Nitrotoluene	2.20E-01	P	-		9.00E-04	P	-		1.00E+00	-	1.82E-01	5.14E-07	6.54E-08	-
1,1,2,2-Tetrachloroethane	2.00E-01	I	5.80E-05	C	2.00E-02	I	-		1.00E+00	-	8.20E-01	2.11E-06	2.52E-07	8.47E-06
Tetrachloroethylene	2.10E-03	I	2.60E-07	I	6.00E-03	I	4.00E-02	I	1.00E+00	5.00E+00	5.00E+01	1.35E-06	7.66E-07	2.32E-06
Toluene	-		-		8.00E-02	I	5.00E+00	I	1.00E+00	1.00E+03	8.31E-01	-	-	-
1,1,2-Trichloroethane	5.70E-02	I	1.60E-05	I	4.00E-03	I	2.00E-04	X	1.00E+00	5.00E+00	8.91E+00	6.52E-06	4.54E-07	2.54E-05
Trichloroethylene	4.60E-02	I	4.10E-06	I	5.00E-04	I	2.00E-03	I	1.00E+00	5.00E+00	2.32E+04	1.94E-02	3.11E-03	2.40E-02
Vinyl Chloride	7.20E-01	I	4.40E-06	I	3.00E-03	I	8.00E-02	A	1.00E+00	2.00E+00	7.37E-01	3.44E-05	2.66E-06	2.20E-06
**Total Risk/HI*	-		-		-		-		-	-	-	*1.95E-02*	*3.13E-03*	*2.41E-02*

Table A-4
USEPA RSL Calculator - Groundwater Output - Hypothetical Future Resident
Former Oil Service Pit - RSA-262
Redstone Arsenal, Madison County, Alabama

Chemical	Carcinogenic Risk	Ingestion Child HQ	Dermal Child HQ	Inhalation Child HQ	Noncarcinogenic Child HI	Ingestion Adult HQ	Dermal Adult HQ	Inhalation Adult HQ	Noncarcinogenic Adult HI
Benz[a]anthracene	1.70E-06	-	-	-	-	-	-	-	-
Carbon Tetrachloride	1.40E-04	7.92E-01	1.87E-01	3.04E-01	1.28E+00	4.76E-01	1.24E-01	3.04E-01	9.04E-01
Chloroform	9.78E-06	1.08E-02	8.54E-04	1.06E-02	2.22E-02	6.47E-03	5.67E-04	1.06E-02	1.76E-02
Dibenz[a,h]anthracene	1.99E-06	-	-	-	-	-	-	-	-
1,2-Dichloroethane	1.67E-06	2.37E-03	1.01E-04	1.95E-02	2.20E-02	1.42E-03	6.72E-05	1.95E-02	2.10E-02
cis-1,2-Dichloroethylene	-	4.24E-01	4.68E-02	2.04E-01	6.74E-01	2.55E-01	3.11E-02	2.04E-01	4.90E-01
1,3-Dinitrobenzene	-	1.44E-01	3.97E-03	-	1.48E-01	8.63E-02	2.64E-03	-	8.89E-02
Methylene Chloride	9.64E-08	9.14E-03	3.01E-04	8.79E-04	1.03E-02	5.49E-03	2.00E-04	8.79E-04	6.57E-03
Nitrobenzene	1.32E-05	4.61E-02	2.97E-03	9.86E-02	1.48E-01	2.77E-02	1.97E-03	9.86E-02	1.28E-01
3-Nitrotoluene	-	9.22E-01	1.36E-01	-	1.06E+00	5.54E-01	9.00E-02	-	6.44E-01
2-Nitrotoluene	5.79E-07	1.01E-02	1.18E-03	-	1.13E-02	6.06E-03	7.83E-04	-	6.84E-03
1,1,2,2-Tetrachloroethane	1.08E-05	2.04E-03	2.25E-04	-	2.27E-03	1.23E-03	1.49E-04	-	1.38E-03
Tetrachloroethylene	4.43E-06	4.16E-01	2.17E-01	5.99E-01	1.23E+00	2.50E-01	1.44E-01	5.99E-01	9.93E-01
Toluene	-	5.18E-04	1.57E-04	7.97E-05	7.54E-04	3.11E-04	1.04E-04	7.97E-05	4.95E-04
1,1,2-Trichloroethane	3.24E-05	1.11E-01	7.11E-03	2.14E+01	2.15E+01	6.67E-02	4.72E-03	2.14E+01	2.14E+01
Trichloroethylene	4.59E-02	2.31E+03	3.37E+02	5.56E+03	8.21E+03	1.39E+03	2.23E+02	5.56E+03	7.18E+03
Vinyl Chloride	3.93E-05	1.22E-02	8.26E-04	4.42E-03	1.75E-02	7.36E-03	5.70E-04	4.42E-03	1.23E-02
*Total Risk/HI	4.62E-02	2.31E+03	3.38E+02	5.58E+03	8.24E+03	1.39E+03	2.23E+02	5.58E+03	7.20E+03

Table A-5
USEPA VISL Calculator Input - Commercial Worker
Former Oil Service Pit - RSA-262
Redstone Arsenal, Madison County, Alabama

Variable	Commercial Air Default Value	Site-Specific Value
AF_{gw} (Attenuation Factor Groundwater) unitless	0.001	0.001
AF_{ss} (Attenuation Factor Sub-Slab) unitless	0.03	0.03
AT_w (averaging time - composite worker)	365	365
ED_w (exposure duration - composite worker) yr	25	25
EF_w (exposure frequency - composite worker) day/yr	250	250
ET_w (exposure time - composite worker) hr	8	8
THQ (target hazard quotient) unitless	0.1	1
LT (lifetime) yr	70	70
TR (target risk) unitless	0.000001	0.000001

This page intentionally left blank.

Table A-6
USEPA VISL Calculator Output - Commercial Worker
Former Oil Service Pit - RSA-262

Chemical	CAS Number	Site Sub-Slab and Exterior Soil Gas Concentration C_{sg} ($\mu g/m^3$)	Site Indoor Air Concentration $C_{i,a}$ ($\mu g/m^3$)	VI Carcinogenic Risk CDI ($\mu g/m^3$)	VI Carcinogenic Risk CR	VI Hazard CDI (mg/m^3)	VI Hazard HQ	IUR ($ug/m^3)^{-1}$	IUR Ref	Chronic RfC (mg/m^3)	RfC Ref	Temperature (°C) for Groundwater Vapor Concentration	Mutagen?
Chloroform	67-66-3	5.37E+01	1.61E+00	1.31E-01	3.02E-06	3.68E-04	3.77E-03	2.30E-05	I	9.77E-02	ATSDR	2.50E+01	No
*Sum		-	-	-	*3.02E-06*	-	*3.77E-03*	-		-		-	

This page intentionally left blank.

Table A-7
USEPA VISL Calculator Input - Hypothetical Future Resident
Former Oil Service Pit - RSA-262
Redstone Arsenal, Madison County, Alabama

Variable	Resident Air Default Value	Site-Specific Value
AF_{gw} (Attenuation Factor Groundwater) unitless	0.001	0.001
AF_{ss} (Attenuation Factor Sub-Slab) unitless	0.03	0.03
ED_{res} (exposure duration) years	26	26
ED_{0-2} (mutagenic exposure duration first phase) years	2	2
ED_{2-6} (mutagenic exposure duration second phase) years	4	4
ED_{6-16} (mutagenic exposure duration third phase) years	10	10
ED_{16-26} (mutagenic exposure duration fourth phase) years	10	10
EF_{res} (exposure frequency) days/year	350	350
EF_{0-2} (mutagenic exposure frequency first phase) days/year	350	350
EF_{2-6} (mutagenic exposure frequency second phase) days/year	350	350
EF_{6-16} (mutagenic exposure frequency third phase) days/year	350	350
EF_{16-26} (mutagenic exposure frequency fourth phase) days/year	350	350
ET_{res} (exposure time) hours/day	24	24
ET_{0-2} (mutagenic exposure time first phase) hours/day	24	24
ET_{2-6} (mutagenic exposure time second phase) hours/day	24	24
ET_{6-16} (mutagenic exposure time third phase) hours/day	24	24
ET_{16-26} (mutagenic exposure time fourth phase) hours/day	24	24
THQ (target hazard quotient) unitless	0.1	1
LT (lifetime) years	70	70
TR (target risk) unitless	0.000001	0.000001

This page intentionally left blank.

Table A-8
USEPA VISL Calculator Output - Hypothetical Future Resident
Former Oil Service Pit - RSA-262
Redstone Arsenal, Madison County, Alabama

Chemical	CAS Number	Site Sub-Slab and Exterior Soil Gas Concentration C_{sg} ($\mu g/m^3$)	Site Indoor Air Concentration $C_{i,a}$ ($\mu g/m^3$)	VI Carcinogenic Risk CDI ($\mu g/m^3$)	VI Carcinogenic Risk CR	VI Hazard CDI (mg/m^3)	VI Hazard HQ	IUR $(ug/m^3)^{-1}$	IUR Ref	Chronic RfC (mg/m^3)	RfC Ref	Temperature (°C) for Groundwater Vapor Concentration	Mutagen?
Acrolein	107-02-8	1.47E+00	4.41E-02	1.57E-02	-	4.23E-05	2.11E+00	-		2.00E-05	IRIS	2.50E+01	No
Bromodichloromethane	75-27-4	5.36E+00	1.61E-01	5.73E-02	2.12E-06	1.54E-04	-	3.70E-05	C	-		2.50E+01	No
Chloroform	67-66-3	5.37E+01	1.61E+00	5.74E-01	1.32E-05	1.54E-03	1.58E-02	2.30E-05	I	9.77E-02	ATSDR	2.50E+01	No
*Sum		-	-	-	*1.53E-05*	-	*2.13E+00*	-		-		-	

Table A-8
USEPA VISL Calculator Output - Hypothetical Future Resident
Former Oil Service Pit - RSA-262
Redstone Arsenal, Madison County, Alabama

Chemical	CAS Number	Site Sub-Slab and Exterior Soil Gas Concentration C_{sg} ($\mu g/m^3$)	Site Indoor Air Concentration $C_{i,a}$ ($\mu g/m^3$)	VI Carcinogenic Risk CDI ($\mu g/m^3$)	VI Carcinogenic Risk CR	VI Hazard CDI (mg/m^3)	VI Hazard HQ	IUR $(ug/m^3)^{-1}$	IUR Ref	Chronic RfC (mg/m^3)	RfC Ref	Temperature (°C) for Groundwater Vapor Concentration	Mutagen?
Acrolein	107-02-8	1.47E+00	4.41E-02	1.57E-02	-	4.23E-05	2.11E+00	-		2.00E-05	IRIS	2.50E+01	No
Bromodichloromethane	75-27-4	5.36E+00	1.61E-01	5.73E-02	2.12E-06	1.54E-04	-	3.70E-05	C	-		2.50E+01	No
Chloroform	67-66-3	5.37E+01	1.61E+00	5.74E-01	1.32E-05	1.54E-03	1.58E-02	2.30E-05	I	9.77E-02	ATSDR	2.50E+01	No
*Sum		-	-	-	*1.53E-05*	-	*2.13E+00*	-		-		-	

APPENDIX B

REGULATORY CONCURRENCE LETTERS

This page intentionally left blank.

LANCE R. LEFLEUR
DIRECTOR

KAY IVEY
GOVERNOR

Alabama Department of Environmental Management
adem.alabama.gov
1400 Coliseum Blvd. 36110-2400 ▪ Post Office Box 301463
Montgomery, Alabama 36130-1463
(334) 271-7700 ▪ FAX (334) 271-7950

August 2, 2018

CERTIFIED MAIL # 91 7199 9991 7038 0565 7560

Ms. Terry de la Paz, Chief
Environmental Management Division
DEPARTMENT OF THE ARMY
Installation Management Command
Directorate of Environmental Management
Installation Restoration Division
(IMRE-PWE-IR) – Bldg. 4488
Redstone Arsenal, AL 35898

RE: **ADEM Review and Concurrence:**
Revision 2 RCRA Facility Investigation Report, RSA-262, CWS Warehouse Area, (Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027) Operable Unit 08, dated May 9, 2018
Redstone Arsenal (RSA) DSMOA Environmental Restoration Program
US EPA I.D. Number AL7 210 020 742

Dear Ms. Terry de la Paz:

The Alabama Department of Environmental Management (ADEM or the Department) has reviewed the *Revision 2 RCRA Facility Investigation (RFI) Report RSA-262*, received on May 9, 2018.

Based on its review, the Department has no comments on this RFI Report for RSA-262 and concurs with the recommendation of Corrective Measures Implementation (CMI) for soil/surface media and groundwater. As stated in this RFI Report, CMI is needed at this site because of the polynuclear aromatic hydrocarbon contamination associated with the former oil service pit area and groundwater trichloroethylene detections associated with the north-northeast and south central portions of the site.

In accordance with Permit Condition VI.E.2., CMI plans must be completed within 120 calendar days following notification from the Department that a CMI Plan is required. Therefore, RSA should submit a CMI Plan for RSA-262 within 120 calendar days of receipt of this letter.

ADEM will move RSA-262 to Table VI.6 (Sites requiring a corrective measures implementation work plan) in the facility's Alabama Hazardous Wastes Management and Minimization Act (AHWMMA) permit as part of the next permit modification.

Birmingham Branch
110 Vulcan Road
Birmingham, AL 35209-4702
(205) 942-6168
(205) 941-1603 (FAX)

Decatur Branch
2715 Sandlin Road, S.W.
Decatur, AL 35603-1333
(256) 353-1713
(256) 340-9359 (FAX)

Mobile Branch
2204 Perimeter Road
Mobile, AL 36615-1131
(251) 450-3400
(251) 479-2593 (FAX)

Mobile-Coastal
3664 Dauphin Street, Suite B
Mobile, AL 36608
(251) 304-1176
(251) 304-1189 (FAX)

If you have any questions on this matter, please contact Mr. Keith West of the Remediation Engineering Section at (334) 271-7925 or at knw@adem.alabama.gov.

Sincerely,

Jason Wilson, Chief
Governmental Hazardous Waste Branch
Land Division

JJW/ATM/KNW/tlp

cc: Clint Howard, RSA
Michelle Thornton, US EPA Region IV
Brian Roberson, NASA MSFC
Daniel Arthur, ADEM
Ashley T. Mastin, ADEM
Robert Morris US EPA Region IV (via email)
Bob Barnwell, ADEM (via email)

APPENDIX C

REDSTONE ARSENAL RCRA PERMIT MODIFICATION REQUEST

This page intentionally left blank.

REQUEST FOR PERMIT MODIFICATION
RSA-262, CWS WAREHOUSE AREA
(BUILDINGS 8021, 8022, 8023, 8024, 8025, 8026, AND 8027)
OPERABLE UNIT 08
U.S. ARMY GARRISON – REDSTONE MADISON COUNTY, ALABAMA
April 2023

1.0 INTRODUCTION

As specified in Section VI.E.3 of the United States Army Garrison–Redstone's (hereinafter referred to as the Army) Alabama Hazardous Wastes Management and Minimization Act (AHWMMA) Hazardous Waste Storage Facility/Thermal Treatment/Solid Waste Management Unit (SWMU) Corrective Action Permit, Modification No. 1 (hereafter referred to as the Permit) (dated 12 August 2022) (Alabama Department of Environmental Management [ADEM], 2022), a request for permit modification is to be submitted along with a Corrective Measures Implementation (CMI) Work Plan. Therefore, the Army has prepared this request for modification to the Permit for RSA-262, CWS Warehouse Area (Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027), located within Operable Unit (OU) 08, at Redstone Arsenal (RSA) in Madison County, Alabama.

A Resource Conservation and Recovery Act (RCRA) Facility Investigation (RFI) (Aptim Federal Services, LLC [APTIM], 2018) was prepared for RSA-262 to determine the nature and extent of contamination. The RFI report received concurrence from ADEM on 2 August 2018. The Army has prepared the CMI Work Plan and intends to implement the corrective measures (soil excavation to residential cleanup goals [CGs], in-situ enhanced bioremediation [ISEB], Monitored Natural Attenuation [MNA], and implementation of groundwater land-use controls [LUCs]).

ADEM has listed RSA-262 in Table VI.6 in the Permit as requiring corrective measures for soil and groundwater. As specified in Section VI.E.3 of the Permit, this modification will serve to incorporate the proposed remedy, including all procedures necessary to implement and monitor the final corrective measure for RSA-262, into the Permit in accordance with Alabama Administrative Code (AAC) R. 335-14-8-.04(2).

2.0 FACILITY AND SITE DESCRIPTION

RSA is located in the southwestern portion of Madison County, which is in the northern portion of Alabama. RSA is an Army facility that encompasses approximately 38,300 acres and is approximately 10 miles long from north to south and six miles wide from east to west. The Army controls 36,459 acres of the total acreage, of which approximately 15,500 acres are woodlands, 5,360 acres are leased for agricultural use, and approximately 12,000 acres are managed as military test areas/ranges. Development within RSA has largely centered on the historical production (and later disposal) of conventional and chemical munitions and, more recently, development and testing of missiles and rockets. These processes have produced chemical wastes since operations began in the early-1940s.

RSA-262 occupies approximately 50 acres in the south-central portion of RSA, in the former Gulf Chemical Warfare Depot (GCWD) area. This site falls within OU 08 and is located within the RSA-154 groundwater unit (Figure 1 of the CMI Work Plan). Approximately 15.2 acres of the site are covered by buildings or former building slabs. The Open Storage Area comprises 8.7 acres and contained former Building 8010 (open-ended Quonset hut for equipment storage and metal cutting). A small area of the site is paved with asphalt roadway, and the remainder of the site is vegetated with maintained grass. Five of the eight buildings (Buildings 8021, 8022, 8023, 8024, and 8026) remain and are used primarily for general storage and administrative purposes. Buildings 8025 and 8027 were demolished in 2004. The foundation slab for former Building 8027 has been removed; however, the foundation slabs for former Buildings 8010 and 8025 are used for storage purposes. Each of the warehouse buildings occupy/occupied an area of approximately 110,370 square feet. Figure 2 of the CMI Work Plan illustrates the location of roads, buildings, and other features at RSA-262. Eight other surface media sites listed in the Permit lie within 0.5 miles of RSA-262 (Figure 3 of the CMI Work Plan).

The GCWD warehouses were constructed in October 1942 and used for storage of inert materials, such as spare parts and shipping crates, and for rehabilitation of unserviceable munitions and equipment. Rehabilitation of unserviceable items involved the inspection, classification, and repackaging of materials received from other facilities, including those overseas. A railroad spur ran between the two rows of warehouses to facilitate materials loading and unloading **(**Figure 2 of the CMI Work Plan). By 1960, the warehouses became general purpose warehouses.

3.0 INVESTIGATIVE HISTORY AND INTERIM REMEDIAL ACTIONS

Environmental investigations have been conducted in the vicinity of RSA-262 since 2006. This chapter describes the data collection efforts and results that contributed to the RFI at RSA-262. The following environmental investigations were previously completed at RSA-262 in support of the RFI:

Environmental investigations conducted at RSA-262 include the following:

- RSA-154 potential source area investigation (Shaw Environmental [Shaw], 2006)
- RSA RCRA facility assessment (ADEM, 2008)
- RSA-154 and RSA-152 RFIs (Shaw, 2013 and CB&I Federal Services LLC [CB&I], 2016)
- RSA-262 RFI (APTIM, 2018)

A summary of the above investigations is provided below in **Section 6.0**.

4.0 SCOPE OF THE CORRECTIVE MEASURES FOR RSA-262

The overall strategy for cleanup at RSA has been presented to the regulators in two cleanup strategy documents, the *Installation-Wide Groundwater (IWGW) Cleanup Strategy* (Shaw, 2009) and the *Installation-Wide Strategy for Cleanup of Impacted Wetlands* (Shaw, 2010). The overall RSA cleanup strategy includes the following elements:

1. Expedite evaluation and release of surface media sites to allow for efficient, mission-related property reuse.
2. Expedite cleanup of sources area at surface media sites and secondary sources of ongoing groundwater contamination, including dense nonaqueous-phase liquid (DNAPL).
3. At SWMUs without approved decision documents, exposures to surface media will be managed through the use of the Army's Site Access Control (SAC) program, and exposure to groundwater that may result in unacceptable risks will be prevented or managed as required by RSA's IWGW Interim Record of Decision (IROD).
4. Coordinate the evaluation of groundwater units and their associated surface sites so that approval of groundwater RFIs is not delayed by unresolved surface media site issues.
5. Design and implement an IWGW monitoring network to monitor remedial progress and ensure that the selected remedies are protective of human health and the environment on a long-term basis.

Based on identified soil and groundwater contaminants of concern (COCs), corrective measures are needed at RSA-262 to 1) reduce or prevent exposure of future residents to soil in the Former Oil Service Pit Area contaminated with polycyclic aromatic hydrocarbons (PAHs) (benzo[a] anthracene, benzo[a]pyrene, benzo[b]fluoranthene, and dibenz[a,h]anthracene) such that no unacceptable hazard or risk is present and 2) reduce or prevent human exposure to groundwater used for potable purposes that is contaminated with 2-nitrotoluene, dibenz(a,h)anthracene, 1,1,2,2-tetrachloroethane (TeCA), 1,1,2-trichloroethane (TCA), carbon tetrachloride (CT), tetrachloroethene (PCE), and trichloroethene (TCE) such that applicable or relevant and appropriate requirements are met and no unacceptable hazard or risk is present and 3) reduce or prevent human exposure to indoor air that is contaminated with chloroform through the vapor intrusion pathway such that no unacceptable hazard or risk is present.

The Army has elected to perform the following corrective measures to address remaining soil and groundwater contamination:

- Soil Excavation to Unrestricted Use (Residential) CGs and Offsite Disposal
- ISEB, MNA, and LUCs

5.0 SITE CHARACTERISTICS

The RSA-262 site lies north of Buxton Road and east of Shields Road. The site is primarily vegetated with maintained lawn and unmaintained fields. The site borders an area of pine trees and brush where deer, small mammals, snakes, and birds likely visit periodically. No permanent surface water/aquatic habitat features exist within the boundary of RSA-262. However, wetlands border the site on all sides except for the west-southwest portion. The Tennessee River is approximately one mile southwest of the site.

RSA-262 is located approximately 1.0 mile northeast of the Tennessee River and is surrounded by low-lying, flood-prone areas adjacent to the river. The buildings associated with the former GCWD are located on a topographic high bordered by forested areas, wetlands, and a small pond (Cribbs Pond) located to the northwest of the site. Drainage is radial off of the main portion of the property.

Surface runoff is collected by a series of small ditches and directed to the pond or lower-lying areas bounding the site. No surface water bodies are within the site boundary. Approximately 0.26 acres in the northwestern corner of the site lie within the 100-year floodplain.

The following summarizes the RSA-262 site characteristics, including the Conceptual Site Model (CSM):

- The potential release locations and potential contaminants for soil and groundwater include 1) on/off-loading areas associated with warehouse loading docks and the Former Rail Spur Area may have provided a pathway for metals, volatile organic compounds (VOCs) and semivolatile organic compounds (SVOCs) to impact surface and subsurface soil and groundwater; 2) the Former Oil Service Area may have provided a pathway for metals, VOCs, and SVOCs to impact surface and subsurface soil and groundwater; and 3) the concrete vehicle/oil service pit associated with Building 8024 may have provided a pathway for metals, VOCs, and SVOCs to impact surface and subsurface soil and groundwater.
- Potential receptors could be exposed to contaminated groundwater. Current human receptors are limited to commercial and construction workers. Future potential receptors include all current receptors plus, under a land reuse scenario, hypothetical child and adult residents.

6.0 INVESTIGATIVE RESULTS

A complete discussion of the previous site investigations is available in the RSA-262 RFI report (APTIM, 2018) and Section 2.1 of the CMI Work Plan. The RFI report was completed in May 2018, and the report was approved by ADEM on 2 August 2018. The RFI evaluated available data for their usability and defined an appropriate data set for evaluating nature and extent for RSA-262, which consisted of analytical results from the following:

- 56 surface soil samples;
- 190 subsurface soil samples;
- Two soil vapor samples;
- 49 groundwater samples (33 overburden and 16 interface/bedrock) from permanent monitoring wells; and
- 36 groundwater samples collected from piezometers.

The site was divided into three areas of investigation (Former Railroad Spur, Former Oil Service Pit, and Remainder of Site) to evaluate the potential differences in the level of soil contamination arising from difference sources, as shown on Figure 2 of the CMI Work Plan. The RFI concluded that although the vertical and horizontal delineation of contamination at RSA-262 has been achieved, there is the potential for exposure to soils within the Former Oil Service Pit Area of RSA-262 to pose unacceptable risks to human health under residential future use. Additionally, groundwater developed as a potable source would pose an unacceptable risk to all receptors.

The following sections present a summary of the nature and extent of contamination for PAHs in soil (Former Oil Service Pit Area only) and explosives, SVOCs, and VOCs in site-wide groundwater as documented in the RSA-262 RFI report (APTIM, 2018).

Preliminary Screening Value (PSV) exceedances within the Former Oil Service Pit Area soil and site-wide groundwater from the 2018 RFI are presented on Figures 6 through 9 of the CMI Work Plan. Data summaries and PSV exceedances are summarized in Tables 1 and 2 of the CMI Work Plan for COCs within Former Oil Service Pit Area soil and site-wide groundwater, respectively. Note that in accordance with ADEM policy, groundwater COCs have been identified and evaluated further in the risk evaluation even if the established Maximum Contaminant Level (MCL) is not exceeded. The following summarizes the 2018 RFI nature and extent of contamination at RSA-262:

- A total of six PAHs (benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, dibenz (a,h)anthracene, indeno(1,2,3-cd)pyrene, and naphthalene) were detected at concentrations greater than their respective PSV in at least one soil sample within the Former Oil Service Pit Area, driven by surface (0-1 feet below ground surface [ft bgs]) and shallow subsurface (1-10 ft bgs) samples collected from 15403A-HP13 (Figure 6 and Table 1 of the CMI Work Plan).
- Four explosives (2-nitrotoluene, 1,3-dinitrobenzene, 3-nitrotoluene, and nitrobenzene) have also been detected in groundwater samples at concentrations exceeding PSVs at RSA-262 (Figure 7 and Table 2 of the CMI Work Plan). These exceedances are sporadic in nature and do not form plumes. 2-Nitrotoluene was detected in one well (262-RS1699), 1,3-dinitrobenzene and 3-nitrotoluene were detected in one well (262-RS2771), and nitrobenzene was detected in two wells (262-RS2771 and 262-RS2772). However, as discussed further in the RFI, the nitrobenzene detection at 262-RS2772 was not confirmed using the United States Environmental Protection Agency (USEPA) Method 8270D method.
- Two SVOCs, benzo(a)anthracene and dibenz(a,h)anthracene were detected in groundwater at concentrations exceeding PSVs (Table 2 of the CMI Work Plan). Although frequency of detection is low for both benzo(a)anthracene and dibenz(a,h)anthracene, these SVOCs were retained as COCs based on PSV exceedances at monitoring well 262-RS2770 and 262-RS2857.
- Five VOCs (1,1,2-TCA, 1,1,2,2-TeCA, CT, PCE, and TCE) exceeded their respective PSVs in groundwater at RSA-262 (Table 2 of the CMI Work Plan). As shown in Figures 8 and 9 of the CMI Work Plan, two separate groundwater VOC plumes are present beneath the site. A small, well-defined plume exists in the northern portion of the warehouse area (between Buildings 8021 and 8023), and a larger, more concentrated plume exists within the former rail spur area (just southeast of Building 8025).
- The TCE concentrations from within 262-RS1699 (concentrated plume southeast of Building 8025) have been reported at 23,000 micrograms per liter (µg/L) (2011), 36,000 µg/L (2012), and 23,200 µg/L (2016). DNAPL (i.e., free-phase TCE) may be present in this area of the site because the TCE concentrations in 262-RS1699 exceed 1 percent (%) of the solubility of TCE in water.

6.1 Fate and Transport

Potential release mechanisms and migration routes for contaminants were identified and evaluated at RSA-262 in a fate and transport evaluation in the RFI report (APTIM, 2018). Groundwater quality data for RSA-262 indicate that intrinsic biodegradation is likely not a significant driver of natural attenuation of COCs in groundwater. The decreasing concentrations of COCs downgradient of the peak COC concentrations are most likely due to a combination of the physical attenuation processes of dilution, dispersion, and adsorption. MNA processes will likely contribute to long-term aquifer restoration but is not appropriate as a stand-alone remedial alternative RSA-262.

7.0 CURRENT AND POTENTIAL FUTURE LAND AND RESOURCES USE

RSA-262 is located in an area designated as an Industrial Use Zone in the RSA Master Plan. Where practical, the Army has restricted entry into SWMUs by fencing them and/or placing warning signs at key entry points. RSA-262 is not fenced but lies within the secure RSA facility.

7.1 Land Use

The current use of RSA-262 is industrial. Given the designated land use zone for RSA-262, it is unlikely to be residential in the future. The residential scenario was included in the Alabama Risk-Based Corrective Action (ARBCA) evaluation in order to evaluate this potential future use and determine if this site is eligible for unrestricted reuse in accordance with ADEM requirements. In RSA's Permit, issued under the AHWMMA, ADEM has specified that investigations must comply with Alabama Environmental Investigation and Remediation Guidance (AEIRG) and ARBCA guidance. In order to determine if this site is eligible for unrestricted reuse as defined in AAC 335-5 (ADEM, 2013), risks to a residential site user were assessed.

7.2 Current Groundwater Use

There is no current potable use of groundwater at RSA-262. An IWGW IROD was instituted and implemented by the Army's SAC program to prevent potable use and provide management control over non-potable uses of all groundwater beneath RSA (Shaw, 2007).

7.3 Future Groundwater Use

Future use of groundwater beneath RSA-262 is possible. Currently, under the provisions of the IWGW IROD (Shaw, 2007) and the Army's SAC program (Army, 2012), groundwater resources beneath RSA-262 and elsewhere on RSA may not be developed for potable purposes without a final remedy, and groundwater withdrawals for non-potable uses are subject to Army review and approval. The IWGW IROD is interim in nature and is not a final remedy. RSA's SAC program was designed to be used at sites that have not implemented a final remedy. This interim remedy will remain in place for groundwater under RSA-262 until a final remedy has been selected in a decision document for the RSA-146 groundwater unit.

As part of the Permit, ADEM has required that the Army perform ongoing annual and semiannual monitoring of wells located within the RSA perimeter (ADEM, 2022). This annual and semi-annual monitoring will allow the Army and ADEM to assess the rate of long-term groundwater recovery and also to ensure protection for residents living outside of the boundary of RSA (CB&I, 2016). Following regulatory approval of the CMI Work Plan, the Army will begin groundwater monitoring for RSA-262 (as detailed in Appendix G to the CMI Work Plan) to evaluate the effectiveness and permanence of the proposed groundwater corrective actions to protect human health and the environment.

8.0 SITE RISKS

An ARBCA Human Health Risk Assessment (HHRA) which includes a vapor intrusion evaluation, as well as a Screening-Level Ecological Risk Assessment (SLERA) was performed for RSA-262 (APTIM, 2018). The complete ARBCA evaluation for human health and the ecological risk evaluation is provided in the RFI report. The site risks are summarized below.

8.1 Human Health Risk Assessment

The HHRA for RSA-262 was prepared and presented in the RSA-262 RFI (APTIM, 2018) in accordance with the ARBCA guidance and consisted of a three-tiered process: the Preliminary Screening Level (PSL) evaluation (Tier 1), the Risk Management (RM) -1 evaluation (Tier 2), and the RM-2 evaluation (Tier 3) (ADEM, 2008). In the case of RSA-262, the RM-1 evaluation was not performed; instead, the evaluation proceeded directly from the PSL evaluation to the cumulative risk assessment in the RM-2 evaluation. The PSL evaluation consists of a simple comparison of site concentrations with PSVs, which generally were the, then current, USEPA 2017 Regional Screening Levels (RSLs) (USEPA, 2017), based on the lower of an Individual Excess Lifetime Cancer Risk (IELCR) of 1E-06 and a noncancer Hazard Index (HI) of 0.1. In the case of groundwater, MCLs were used as the PSVs, if available. Otherwise, tap water RSLs were used. Note that Table 1 of the CMI Work Plan was updated to reflect the most recent USEPA Tapwater RSLs from October 2022 (USEPA, 2022a). Residential PSVs were selected for the evaluation of this site in order to consider alternatives to attain unrestricted land use.

The PSL evaluation is conducted for all chemicals that are determined to be site-related. Inorganics with maximum detected concentrations that did not exceed their Background Screening Values (BSVs) or shown in a site-to-background evaluation to be naturally occurring were judged not to be site related and therefore not evaluated further. All other detected chemicals were initially identified as Contaminants of Potential Concern (COPCs), and site concentrations were compared to PSVs in the PSL evaluation. A COPC was identified as a COC if the maximum detected concentration was greater than a PSV.

A screening-level vapor intrusion evaluation was also conducted for this site as discussed further below.

The soil and groundwater COCs identified in the PSL evaluation were brought forward for evaluation in the cumulative risk assessment (RM-2 evaluation). As discussed previously, an

updated PSL evaluation was performed using the most recent USEPA RSLs (USEPA, 2022a). Results of the 2022 RSL comparison are consistent with those presented in the RFI Report (APTIM, 2018). Receptor scenarios evaluated in the cumulative risk assessment included a commercial worker, a construction worker, and a hypothetical residential receptor. A hypothetical future residential receptor was evaluated as required by ADEM to evaluate future use without restrictions and determine whether or not remedial measures and/or LUCs are warranted to achieve No Further Action (NFA) status (ADEM, 2008).

Groundwater was evaluated as if developed as a source of potable water in the future. Risks from exposure to groundwater were assessed even though groundwater use at this site is currently precluded by the terms of the IROD (Shaw, 2007) and non-potable uses are managed by RSA's SAC program (Army, 2012). The ARBCA guidance considers an IELCR of 1E-05 to be the target cumulative risk. The target cumulative noncancer hazard is an HI of 1.0. Estimated cumulative risks/hazards at or below these targets do not require additional action.

Cumulative Former Oil Service Area and Site groundwater IELCR and HI estimates from the 2018 RFI Report (APTIM, 2018) for all receptor scenarios for RSA-262 are summarized in Table 4 of the CMI Workplan. The IELCR estimates for exposure to Former Oil Service Area soil alone are less than the ADEM trigger level of 1E-05 for the commercial worker and the construction worker but are above for the hypothetical lifetime resident due to the presence of PAHs (benzo[a]anthracene, benzo(a)pyrene, benzo[b]fluoranthene, and dibenz[a,h]anthracene). The total HI values based on exposure to Former Oil Service Area soil alone are less than the trigger level of 1.0 for all receptors. The groundwater IELCR and total HI estimates for all receptors are greater than 1E-05 and 1.0, respectively. Relevant COCs identified in groundwater for the hypothetical resident were 2-nitrotoluene, dibenz(a,h)anthracene, 1,1,2,2-TeCA, 1,1,2-TCA, carbon tetrachloride, PCE, and TCE. In addition, the Maximum Detected Concentrations (MDCs) for 1,1,2-TCA, CT, PCE, and TCE exceed their MCLs.

As the ARBCA RM-2 Evaluation was performed for inclusion in the 2018 RFI Report (APTIM, 2018), an updated risk evaluation was performed based on the most recent toxicity criteria presented in the USEPA RSL Table (USEPA, 2022a). As the hypothetical lifetime resident previously exceeded carcinogenic (soil and groundwater) and noncarcinogenic (groundwater) risk criteria, hypothetical lifetime residents were conservatively evaluated using updated toxicity criteria presented in the November 2022 USEPA RSLs through the USEPA RSL Calculator (USEPA, 2022a). Similar to the RFI findings, both the IELCR (soil and groundwater) and total HI (groundwater) based on hypothetical residential exposure exceeded their respective risk thresholds (Table 4 of the CMI Work Plan).

A screening-level vapor intrusion evaluation was also performed at RSA-262 as part of the ARBCA evaluation in the 2018 RFI (APTIM, 2018). Two soil gas samples were taken at RSA-262, one in close proximity to the highest TCE concentrations in groundwater, thereby providing a more representative basis for evaluating the potential for indoor air than groundwater. VOCs detected in soil gas were compared with their target soil gas screening levels (Table 5 of the CMI Work Plan). The vapor intrusion evaluation was evaluated based on updated toxicity criteria provided in the USEPA Vapor Intrusion Screening Level (VISL) Calculator (USEPA, 2022b). As

presented in Table 5 of the CMI Work Plan, soil gas concentrations exceeded their respective VISLs for acrolein, bromodichloromethane, and chloroform. As acrolein and bromodichloromethane were previously evaluated and unlikely to pose an unacceptable health threat by the vapor intrusion pathway, only chloroform was further evaluated. The USEPA VISL Calculator was used to estimate the indoor air concentration for chloroform based on the soil gas MDC, as well as the hypothetical future residential IELCR and Total HI. As presented in Table 6 of the CMI Work Plan, although the residential IELCR slightly exceeded a target risk of 1E-05, the noncancer total HI was below 1. Both the commercial IELCR and total HI were both below their respective risk thresholds. Chloroform is therefore unlikely to pose an unacceptable health threat by the vapor intrusion pathway to current and/or future commercial workers. However, chloroform could potentially result in an unacceptable health threat to hypothetical future residents through the vapor intrusion pathway. Chloroform has therefore been identified as a COC requiring further evaluation at RSA-262.

8.2 Screening-Level Ecological Risk Assessment

A SLERA was completed for RSA-262 as part of the RFI report (APTIM, 2018). The surface soil data for RSA-262 for each of the three areas were compared to their respective BSVs and Ecological Screening Values (ESVs). A weight-of-evidence evaluation was completed to further evaluate the constituents identified in the initial screening. The weight-of-evidence evaluation examined a number of lines of evidence in order to draw conclusions as to whether site-related constituents at RSA-262 have the potential to pose hazards to ecological receptors.

An initial comparison of the detected constituent concentrations in surface soil within the Former Oil Service Pit Area to ESVs and BSVs identified total high molecular weight (HMW) PAHs, carbazole, and dibenzofuran that exceeded their respective ESVs and/or BSVs and required further evaluation. The weight-of-evidence evaluation concluded that total HMW PAHs warranted further evaluation for potential effects on community-level receptors and food chain receptors. Carbazole and dibenzofuran warranted further evaluation for potential effects on community-level receptors but not food chain receptors because carbazole and dibenzofuran are not important bio-accumulative compounds.

Based on the results of the community-level and food chain assessments, it was concluded that Chemicals of Potential Ecological Concern (COPECs) in surface soil at the Former Oil Service Pit Area are unlikely to pose hazards to ecological receptor communities and/or populations and further evaluation of ecological hazards in this area is not warranted. In summary, the results of the screening-level ecological risk assessment indicate that further evaluation of ecological hazards at RSA-262 is not warranted. Chemicals present in surface soil are unlikely to pose a threat to communities or populations of ecological receptors.

9.0 CORRECTIVE MEASURE OBJECTIVES

Based on the results of the RFI (APTIM, 2018), Corrective Measure Objectives (CMOs) for RSA-262 are as follows:

- Reduce or prevent exposure of future residents to soil in the Former Oil Service Pit Area contaminated with PAHs (benzo[a]anthracene, benzo[a]pyrene, benzo[b]fluoranthene, and dibenz[a,h]anthracene) such that no unacceptable hazard or risk is present.
- Reduce or prevent human exposure to groundwater used for potable purposes that is contaminated with 2-nitrotoluene, dibenz(a,h)anthracene, 1,1,2,2-TeCA, 1,1,2-TCA, CT, PCE, and TCE such that applicable or relevant and appropriate requirements are met and no unacceptable hazard or risk is present.
- Reduce or prevent human exposure to indoor air that is contaminated with chloroform through the vapor intrusion pathway such that no unacceptable hazard or risk is present.

While the above is the overarching goal, the Army has additional objectives that will be considered in the selection of corrective measures, in particular, because it is recognized that the achievement of the above goals may require an extended period of time. These additional objectives are oriented towards the selection of corrective measures that will reduce, to the extent feasible, the time to achieve the above objective. The additional objectives that will be considered in the development and selection of corrective measures are as follows:

- Reduce contaminant mass (through source reduction)
- Minimize the footprint of contamination (plumes)
- Minimize life-cycle costs associated with Long-Term Monitoring (LTM) and maintaining institutional controls (e.g., SAC program)

The CMOs for RSA-262 groundwater will be accomplished by 1) soil excavation to unrestricted use (residential) and offsite disposal and 2) ISEB, MNA, and maintenance of existing groundwater LUCs. Following groundwater treatment activities, MNA of groundwater and ongoing implementation of existing administrative controls will be performed to protect potential receptors until CGs are attained for the COCs in groundwater.

The Army intends to achieve site closure for soil and groundwater and protect human health through implementation of corrective measures that are needed to reduce the concentrations of COCs requiring action to the CGs. For relevant COCs in groundwater with MCLs (1,1,2-TeCA, CT, chloroform, PCE, and TCE), the MCL is selected as the CG. The CGs for the remaining COCs is based on risk, with the objective of achieving a cumulative cancer risk of 1E-05 and a cumulative HI of 1.0 or less.

10.0 DESCRIPTION AND COMPARISON OF ALTERNATIVES

The following information summarizes the analysis of technologies and alternatives and the selection of the corrective measures for RSA-262:

Soil

- **Alternative S1** - No Action
- **Alternative S2** – Soil Excavation to Unrestricted Use (Residential) CGs and Off-Site Disposal

- **Alternative S3** – Closure in Place, LUCs, and Erosion and Storm Water Controls
- **Alternative S4** – LUCs

Groundwater

- **Alternative GW1** – No Action
- **Alternative GW2** – MNA and Groundwater LUCs
- **Alternative GW3** – ISEB, MNA, and LUCs

10.1 Soil Alternatives

10.1.1 Alternative S1 – No Action

Evaluation of the no action alternative will serve as a baseline for evaluating other corrective measures.

10.1.2 Alternative S2 – Soil Excavation to Unrestricted Use (Residential) CGs and Off-Site Disposal

Under Alternative S2, soils containing COCs at concentrations exceeding residential CGs would be excavated. Excavated soils would be transported for disposal at a properly licensed Subtitle D landfill. Following confirmation sampling to demonstrate the CGs were achieved, the excavation would then be backfilled with clean soil to complete site restoration.

10.1.3 Alternative S3 – Closure in Place, LUCs, and Erosion and Storm Water Controls

Alternative S3 includes an impermeable barrier such as a geosynthetic-based cover over the PAH-contaminated soil. LUCs would be required to prevent or reduce future human exposure to contaminants remaining in place. Installation of appropriate erosion and storm water management controls would help ensure the long-term integrity of the engineered cover system.

10.1.4 Alternative S4 – LUCs

Under Alternative S4, LUCs would be implemented to restrict access to contaminated soils at the site. The land use would be restricted to industrial, and this restriction would be entered in RSA's Master Plan. Signs would be installed to warn of potential hazards and the prohibition of intrusive activities without Army permission. Routine inspections and sign repair/replacement would be required along with a soils management plan to provide procedures required for all intrusive activities performed within the area of the LUC.

10.2 Groundwater Alternatives

10.2.1 Alternative GW1 – No Action

Evaluation of the no action alternative will serve as a baseline for evaluating other corrective measures.

10.3 Alternative GW2 – MNA and Groundwater LUCs

This alternative involves the passive reduction in the concentrations of COCs via MNA. Sampling would be conducted to ensure that the concentrations of COCs requiring action meet the CGs over time. Additionally, monitoring will be conducted for nitrobenzene until the concentrations meet the Monitoring Acceptance Goal (MAG). LUCs prohibiting groundwater use are already in place installation-wide under the Installation-Wide Groundwater (IWGW) IROD (Shaw, 2007) and the site access control program (Army, 2012). The IROD is interim in nature and would be enforced through the corrective measures at RSA-262. A Notice of Environmental Use Restriction (NEUR) would also be required to ensure that risks to human health and/or the environment are properly managed through activity and use restrictions on the applicable portions. The NEUR would be included in the CMI report once all corrective measures are completed.

10.4 Alternative GW3 – ISEB, MNA, and Groundwater LUCs

Alternative 3 involves direct injection of emulsified vegetable oil or equivalent carbon substrates and other necessary amendments (bacterial cultures, pH amendments, vitamins, etc.) to promote bioremediation of the COCs in groundwater. Groundwater sampling would be conducted for performance monitoring of the ISEB treatment and MNA portions of the plume until the CGs for the COCs requiring action are reached over time. Additionally, monitoring will be conducted for nitrobenzene until the concentrations meet the MAG. LUCs prohibiting groundwater use are already in place under the IWGW IROD (Shaw, 2007) and the SAC program (Army, 2012). The IROD is interim in nature and would be enforced through the corrective measures at RSA-262. However, the decision to implement permanent LUCs will occur with the RSA-152/154 groundwater units corrective measures.

11.0 SELECTED CORRECTIVE MEASURE

Alternative S2 (Soil Excavation and Off-Site Disposal) was selected as the corrective measure for soil. Full removal of the PAH-contaminated soil is likely with this alternative, resulting in clean site closure without the financial liability of LUCs in Alternative S4 or maintaining a cap over the PAH contamination and LUCs in Alternative S3. Alternative S2 is expected to allow full future use of the site.

Alternative GW3 (ISEB, MNA and LUCs) was selected as the corrective measure to fully address the site CGs within a reasonable time frame. The use of ISEB as active treatment for the VOC contamination is expected to reduce the time required to reach the CGs by more than 50% over use of only a passive technology such as MNA in Alternative GW2.

The major components of the selected corrective measures for soil in Alternative S2 include:

- Preparation of a CMI Work Plan
- Site preparation, including site clearing and placement of storm water controls
- Benching, shoring, or other means of worker protection for the excavation

- Removal of contaminated soils with COC (PAHs) concentrations above the residential CG. Forty-one bank cubic yards around boring 15403-HP13 will be excavated to 11 ft bgs (Figure 11 of the CMI Work Plan).
- Collection and analysis of post-excavation confirmation and waste characterization samples.
- Transportation of excavated material for final disposal at an approved off-site nonhazardous waste disposal facility.
- Backfilling and grading of the excavated area.
- Site restoration, including revegetation of the disturbed area.

Alternative S2 meets the four ADEM general standards for corrective measures (overall protection of human health and the environment, attainment of media cleanup standards, control of the source of release, and compliance with standards for management of wastes). The selected corrective measures in Alternative S2 were chosen over the other alternatives because they best protect human health and the environment.

The major components of the selected corrective measures for groundwater in Alternative GW3 include the following:

- Prepare an Underground Injection Control (UIC) permit application for ADEM approval
- Baseline sampling of 16 existing monitoring wells in Year 0 for the COCs (and degradation products of 1,1,2-TCA, TCE and CT) and MNA parameters (dissolved oxygen [DO], oxidation-reduction potential [ORP], alkalinity, dissolved gases ethane/ethene/methane, total organic carbon [TOC], and pH). Additionally, monitoring will be conducted for nitrobenzene until the concentrations meet the MAG.
- CENSUS or equivalent will performed on select monitoring wells (262-RS1699, 262-RS2007, and 262-RS2008) during the baseline sampling event to establish existing conditions.
- In compliance with the UIC permit, total dissolved solids (TDS), pH, and nitrates will be monitored quarterly at 262-RS1699, 262-RS2007, and 262-RS2008 to monitor site conditions post-injection. The first samples will be taken within 30 days of the injection's completion.
- Initial full-scale implementation of ISEB within the target treatment zone inside the 1,000-µg/L TCE isoconcentration contour of the southern TCE plume (approximately 55,000 square foot area) (Figure 13 of the CMI Work Plan). If liquid carbon sources like emulsified vegetable oil (EVO) are used as the ISEB amendment, it would be injected into an estimated 79 points arranged in a grid pattern with a spacing of 25 feet based on a 15-foot radius of injection. If a combination of liquid and solid carbon sources like feather meal are used, the liquid carbon sources would be injected at approximately 39 points covering the concrete pad, arranged in a grid pattern with a spacing of 25 feet. The solid carbon sources would be injected at approximately 78 points in the grassy area, arranged in a grid pattern with a spacing of 12.5 feet (Figure 14 of the CMI Work Plan).
- CMI construction report.

- Semiannual MNA sampling of 16 existing monitoring wells in Years 1 through 3 for the COCs (and degradation products for performance monitoring) and MNA parameters starting at the year of initial full-scale implementation of ISEB. Additionally, monitoring will be conducted for nitrobenzene until the concentrations meet the MAG.
- Annual monitoring report through attainment of the CGs (Years 1 through 35 or until CGs are achieved and confirmed).
- Annual groundwater MNA sampling of 12 monitoring wells in Years 4 through 35 for the COCs (and degradation products for performance monitoring) and MNA parameters or until CGs are achieved and confirmed.
- Closure of 20 overburden monitoring wells and 1 bedrock well after the CGs are attained.

At the end of Year 35, it is assumed that the CGs will be achieved, and site monitoring wells would be decommissioned. All groundwater monitoring for MNA will be discontinued if CGs are attained for all COCs in each of the monitoring wells for three consecutive years.

12.0 PUBLIC PARTICIPATION

Public participation requirements specified under AAC 335-14-8-.08(6) will be met during the permit modification process for the RSA-262 corrective measures.

13.0 REFERENCES

Alabama Department of Environmental Management (ADEM). 2008. *Alabama Risk-Based Corrective Action Guidance Manual, Revision 2*. April.

ADEM. 2013. *Administrative Code r.335-5, Land Division – Uniform Environmental Covenants Program*. March

ADEM. 2022. PERMIT *Redstone Arsenal's Alabama Hazardous Wastes Management and Minimization Act Hazardous Waste Storage Facility, Thermal Treatment, Solid Waste Management Unit Corrective Action Permit, Modification No. 1*. 12 August.

Aptim Federal Services, LLC (APTIM). 2018. *Revision 2, RCRA Facility Investigation Report RSA-262, CWS Warehouse Area (Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027) Operable Unit 08.* U.S. Army Garrison-Redstone Madison County, Alabama. 9 May.

CB&I (CB&I Federal Services LLC). 2016. *Revision 1 RCRA Facility Investigation Report, RSA-152 Groundwater Site, Groundwater Unit GW-08, Operable Unit 19,* U.S. Army Garrison-Redstone, Madison County, Alabama. Prepared for the U.S. Army Mission & Installation Contracting Command, Fort Sam Houston, Texas. January.

Shaw Environmental, Inc. (Shaw). 2006. *RSA-150/153/154/155 Potential Source Area Investigation*, Redstone Arsenal, Madison County, Alabama. Draft. April.

Shaw. 2007. *Final Interim Record of Decision, Interim Remedial Action for Installation-Wide Groundwater, Redstone Arsenal, Madison County, Alabama*, prepared for the U.S. Army Corps of Engineers, Savannah District. September.

Shaw. 2009. *Final Installation-Wide Groundwater Cleanup Strategy*, *Redstone Army Garrison, Madison County, Alabama, prepared for U.S. Army Environmental Command*. December.

Shaw. 2010. *Final Installation-Wide Strategy for Cleanup of Impacted Wetlands*, Redstone Army-Garrison, Madison County, Alabama, Rev. 1. May.

Shaw. 2013. *RCRA Facility Investigation Report, RSA-154 and RSA-155 Groundwater Sites, Groundwater Units GW-10/GW-11, Operable Unit 19.* Prepared for the Mission and Installation Contracting Command. August.

U.S. Army Garrison-Redstone (Army). 2012. *Redstone Arsenal Environmental Site Access Control Program, Redstone Arsenal Regulation 200-7*. September.

United States Environmental Protection Agency (USEPA). 2017. *Regional Screening Table.* June.

USEPA. 2022a. *Regional Screening Levels for Chemical Contaminants at Superfund Sites.* October.

USEPA. 2022b. *Vapor Intrusion Screening Level Calculator.* December.

This page intentionally left blank.

APPENDIX D

CORRECTIVE MEASURES IMPLEMENTATION SCHEDULE

This page intentionally left blank.

ID	Task Name	Duration	Start	Finish
1	**Environmental Remediation Multiple Award Indefinite Delivery Indefinite Quantity (IDIQ) Contract Redstone Arsenal, AL**	**2292 days**	**Fri 1/15/21**	**Fri 3/2/29**
861	**CLIN 0016 - Achieve Corrective Measures Implementation – Construction (CMI-C) and Corrective Measures Implementation Report (CMIR) for Site RSA-262 - OPTION (24 Months)**	**727 days**	**Sat 8/10/24**	**Sat 5/8/27**
862	**RSA-262**	**727 days**	**Sat 8/10/24**	**Sat 5/8/27**
863	Notice to Proceed	0 days	Sat 8/10/24	Sat 8/10/24
864	**Corrective Measures Implementation – Construction (CMI-C) - Field Work**	**150 days**	**Mon 11/11/24**	**Fri 6/6/25**
865	Subcontractor Procurement	31 days	Mon 11/11/24	Mon 12/23/24
866	Obtain Job Order Request/RER Approval	31 days	Mon 11/11/24	Mon 12/23/24
867	UIC Permit	90 days	Mon 11/11/24	Fri 3/14/25
868	Utility Markout/Land Clearing	10 days	Tue 12/24/24	Mon 1/6/25
869	Mobilization	2 days	Tue 1/7/25	Wed 1/8/25
870	Site Survey	1 day	Thu 1/9/25	Thu 1/9/25
871	Install Erosion Control Measures	3 days	Fri 1/10/25	Tue 1/14/25
872	Soil Excavation	5 days	Wed 1/15/25	Tue 1/21/25
873	Confirmatory Soil Sampling	2 days	Wed 1/22/25	Thu 1/23/25
874	Waste Characterization Sampling	1 day	Fri 1/24/25	Fri 1/24/25
875	Laboratory Analysis	30 days	Mon 1/27/25	Fri 3/7/25
876	Data Validation	15 days	Mon 3/10/25	Fri 3/28/25
877	Transportation & Disposal	3 days	Mon 4/14/25	Wed 4/16/25
878	Submit T&D Documentation/Weight Slips	0 days	Wed 4/16/25	Wed 4/16/25
879	Site Restoration	2 days	Thu 4/17/25	Fri 4/18/25
880	Baseline Groundwater Sampling	10 days	Mon 4/21/25	Fri 5/2/25
881	Laboratory Analysis	10 days	Mon 5/5/25	Fri 5/16/25
882	Data Validation	15 days	Mon 5/19/25	Fri 6/6/25
883	ISEB Injections	14 days	Mon 5/5/25	Thu 5/22/25
884	Demobilization	1 day	Fri 5/23/25	Fri 5/23/25
885	**Corrective Measures Implementation Report (CMIR)**	**238 days**	**Fri 6/26/26**	**Sat 5/8/27**
886	Prepare and Develop Draft CMIR	90 days	Fri 6/26/26	Thu 10/29/26
887	Army Review of Draft CMIR	21 days	Fri 10/30/26	Fri 11/27/26
888	OPSEC Review of Draft CMIR	21 days	Fri 10/30/26	Fri 11/27/26
889	Respond to Army Comments on Draft CMIR	10 days	Mon 11/30/26	Fri 12/11/26
890	Army approve of Draft CMIR	0 days	Fri 12/11/26	Fri 12/11/26
891	Submit Draft Final CMIR to ADEM / EPA	1 day	Mon 12/14/26	Mon 12/14/26
892	ADEM / EPA Review of Draft Final CMIR	85 days	Tue 12/15/26	Wed 4/7/27
893	Develop response to ADEM / EPA Comments on Draft Final CMIR	10 days	Thu 4/8/27	Sat 4/17/27
894	Army Review of RTCs	10 days	Sun 4/18/27	Tue 4/27/27
895	Submit Final (Revision 1) CMIR	1 day	Wed 4/28/27	Wed 4/28/27
896	ADEM / EPA Approval of Final (Revision 1) CMIR	0 days	Sat 5/8/27	Sat 5/8/27

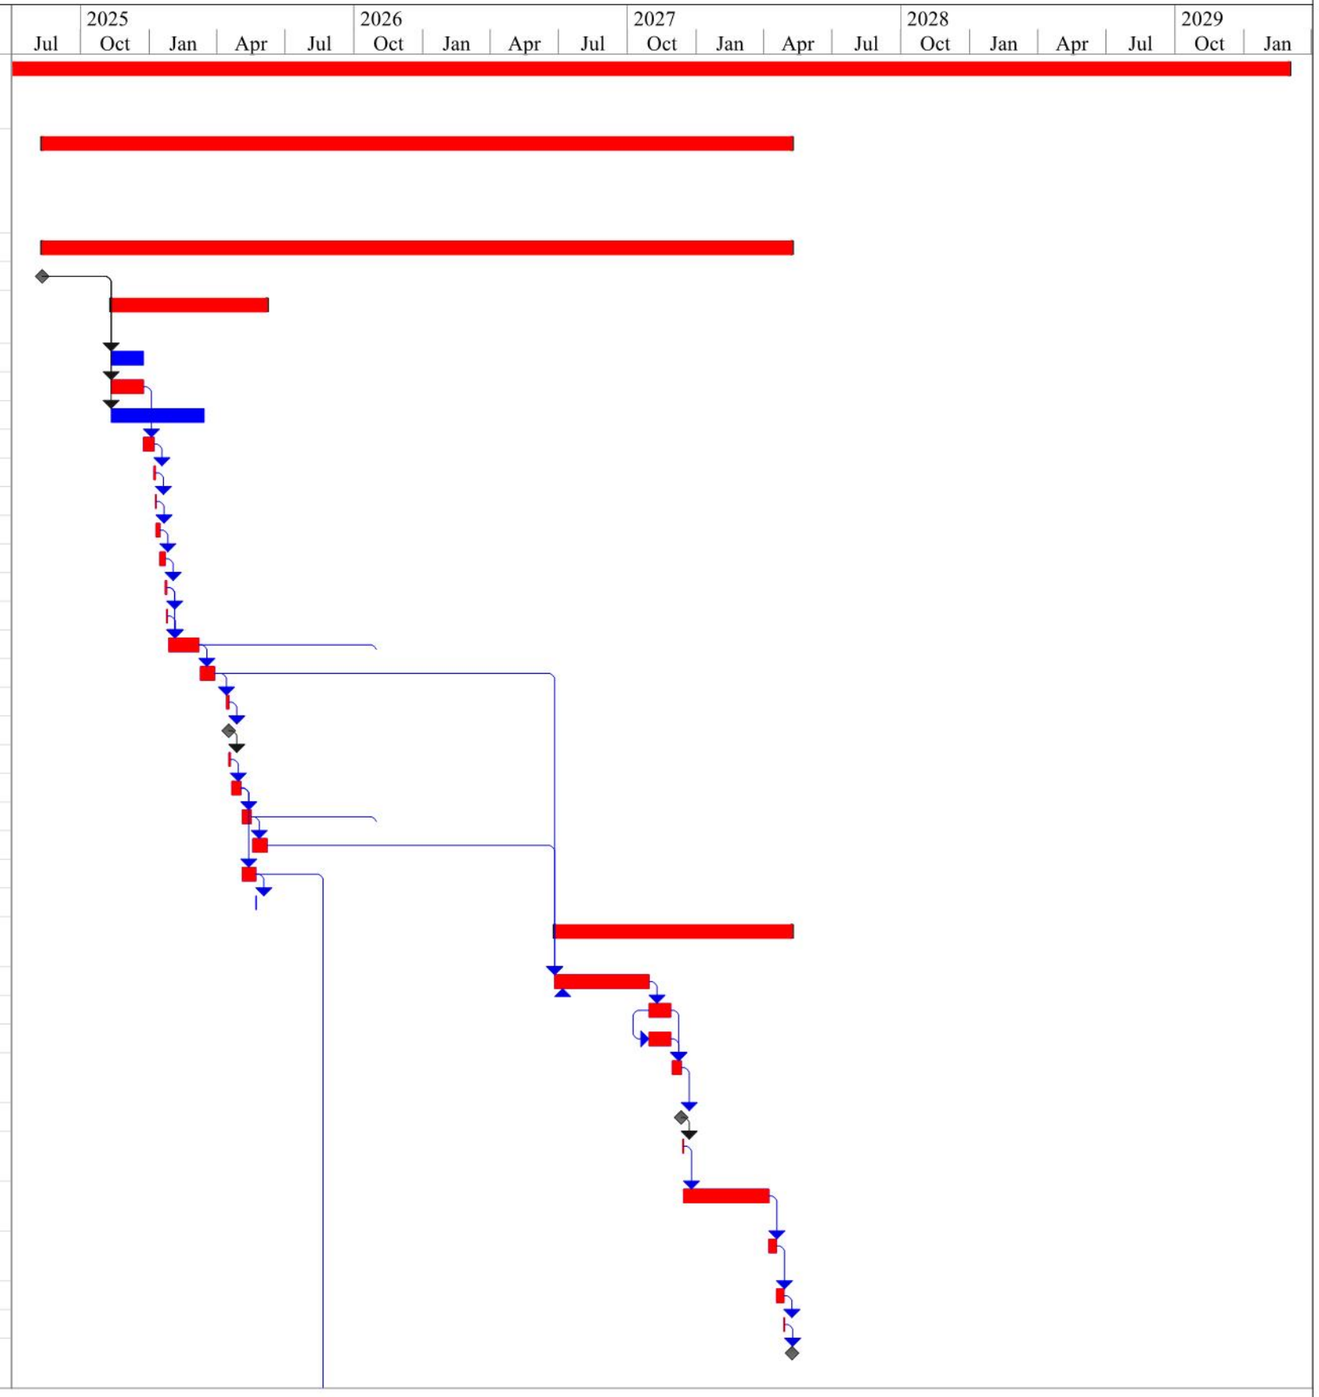

Project duration is displayed in working days
Critical path activities are displayed as red bars

ID	Task Name	Duration	Start	Finish
1086	**Quarterly UIC Permit Monitoring and Reporting (Outside of Contract POP)**	**231 days**	**Thu 8/21/25**	**Thu 7/9/26**
1087	**Quarterly Groundwater Sampling Event 1**	**29 days**	**Thu 8/21/25**	**Tue 9/30/25**
1088	**Field Work**	**29 days**	**Thu 8/21/25**	**Tue 9/30/25**
1089	Mobilization	1 day	Thu 8/21/25	Thu 8/21/25
1090	Groundwater Monitoring	3 days	Fri 8/22/25	Tue 8/26/25
1091	Demobilization	1 day	Tue 8/26/25	Tue 8/26/25
1092	Laboratory Analysis	10 days	Wed 8/27/25	Tue 9/9/25
1093	Data Validation	15 days	Wed 9/10/25	Tue 9/30/25
1094	**Letter Report Submittal**	**15 days**	**Wed 10/1/25**	**Tue 10/21/25**
1095	**Quarterly Sampling Event 2**	**29 days**	**Wed 11/19/25**	**Mon 12/29/25**
1096	**Field Work**	**29 days**	**Wed 11/19/25**	**Mon 12/29/25**
1097	Mobilization	1 day	Wed 11/19/25	Wed 11/19/25
1098	Groundwater Monitoring	3 days	Thu 11/20/25	Mon 11/24/25
1099	Demobilization	1 day	Mon 11/24/25	Mon 11/24/25
1100	Laboratory Analysis	10 days	Tue 11/25/25	Mon 12/8/25
1101	Data Validation	15 days	Tue 12/9/25	Mon 12/29/25
1102	**Letter Report Submittal**	**15 days**	**Tue 12/30/25**	**Mon 1/19/26**
1103	**Quarterly Sampling Event 3**	**29 days**	**Tue 2/17/26**	**Fri 3/27/26**
1104	**Field Work**	**29 days**	**Tue 2/17/26**	**Fri 3/27/26**
1105	Mobilization	1 day	Tue 2/17/26	Tue 2/17/26
1106	Groundwater Monitoring	3 days	Wed 2/18/26	Fri 2/20/26
1107	Demobilization	1 day	Fri 2/20/26	Fri 2/20/26
1108	Laboratory Analysis	10 days	Mon 2/23/26	Fri 3/6/26
1109	Data Validation	15 days	Mon 3/9/26	Fri 3/27/26
1110	**Letter Report Submittal**	**15 days**	**Mon 3/30/26**	**Fri 4/17/26**
1111	**Quarterly Sampling Event 4**	**29 days**	**Mon 5/18/26**	**Thu 6/25/26**
1112	**Field Work**	**29 days**	**Mon 5/18/26**	**Thu 6/25/26**
1113	Mobilization	1 day	Mon 5/18/26	Mon 5/18/26
1114	Groundwater Monitoring	3 days	Tue 5/19/26	Thu 5/21/26
1115	Demobilization	1 day	Thu 5/21/26	Thu 5/21/26
1116	Laboratory Analysis	10 days	Fri 5/22/26	Thu 6/4/26
1117	Data Validation	15 days	Fri 6/5/26	Thu 6/25/26
1118	**Letter Report Submittal**	**10 days**	**Fri 6/26/26**	**Thu 7/9/26**
1119	**Achieve Corrective Measures Implementation – Operations (CMI-O) Option Year 1 for site RSA-262 (Outside of Contract POP)**	**272 days**	**Fri 10/31/25**	**Mon 11/16/26**
1120	**RSA-262**	**272 days**	**Fri 10/31/25**	**Mon 11/16/26**
1121	Notice to Proceed	1 day	Fri 10/31/25	Fri 10/31/25
1122	**CMI-O Field Work**	**271 days**	**Mon 11/3/25**	**Mon 11/16/26**
1123	**Semi-Annual Sampling and Reporting**	**122 days**	**Mon 11/3/25**	**Tue 4/21/26**
1124	**Semi-Annual Groundwater Sampling Event 1**	**29 days**	**Mon 11/3/25**	**Thu 12/11/25**
1125	**Field Work**	**29 days**	**Mon 11/3/25**	**Thu 12/11/25**
1126	Mobilization	1 day	Mon 11/3/25	Mon 11/3/25
1127	Groundwater Monitoring	3 days	Tue 11/4/25	Thu 11/6/25
1128	Demobilization	1 day	Thu 11/6/25	Thu 11/6/25
1129	Laboratory Analysis	10 days	Fri 11/7/25	Thu 11/20/25

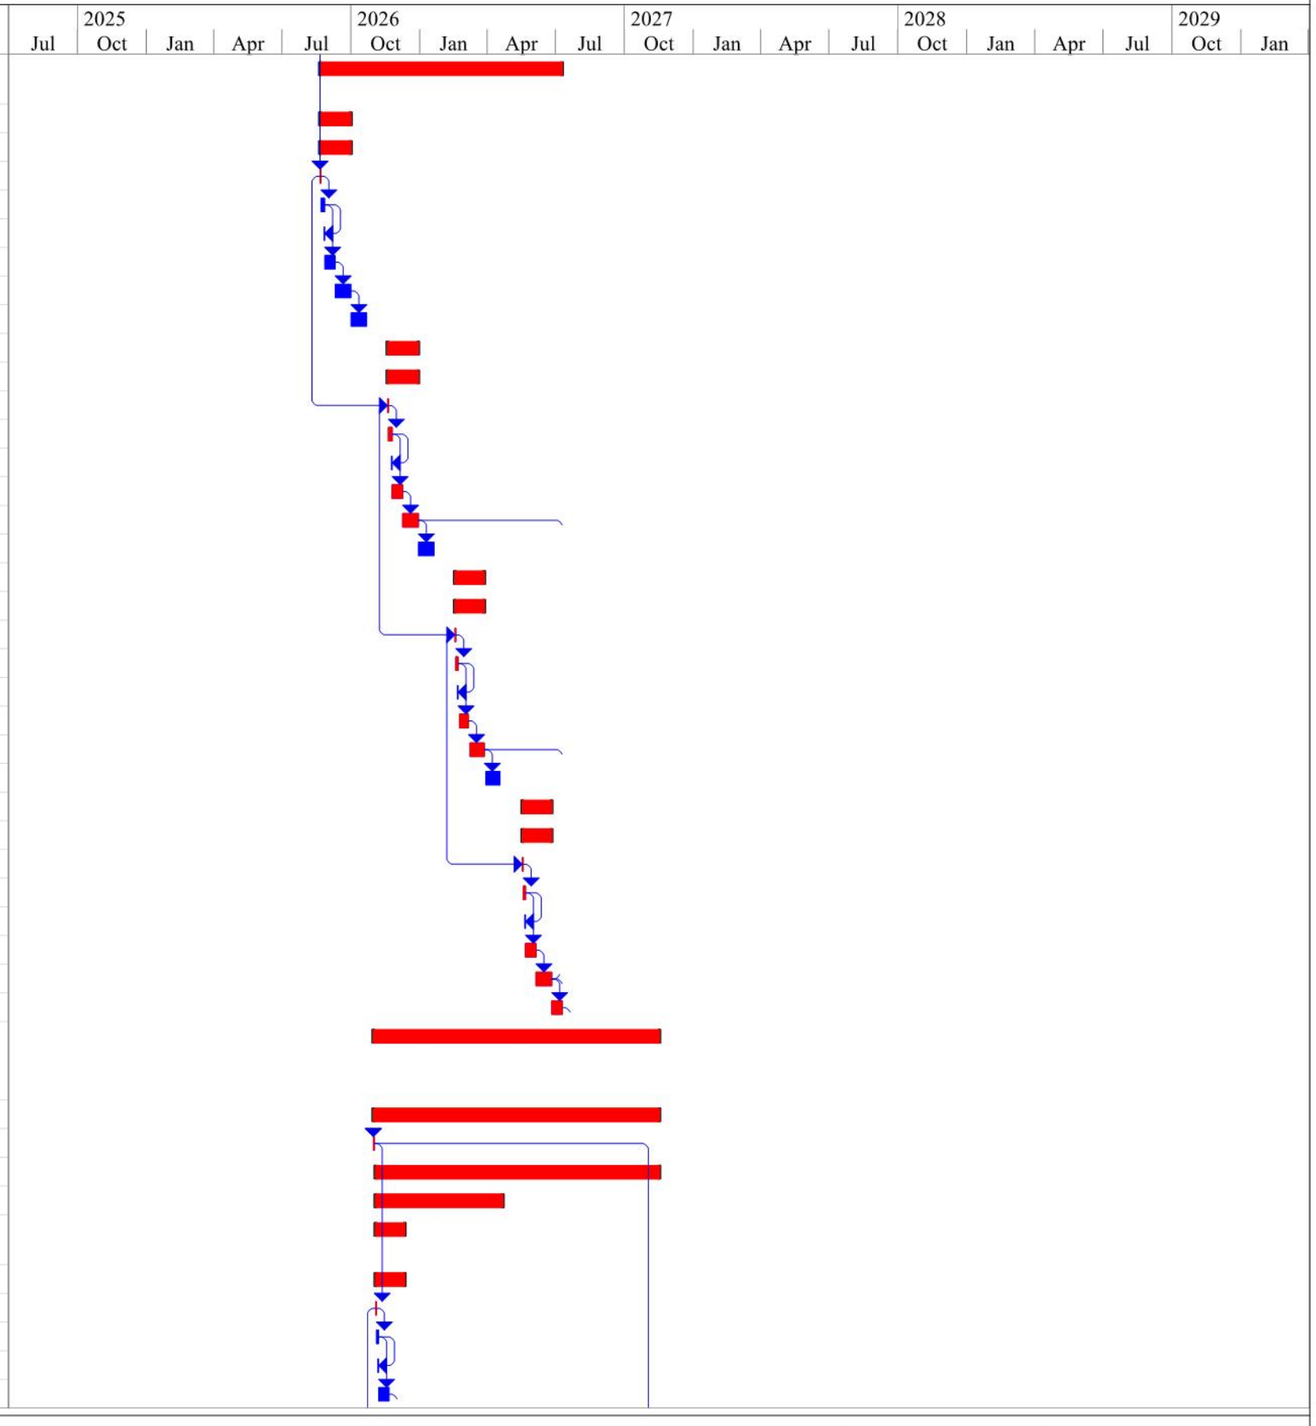

Project duration is displayed in working days
Critical path activities are displayed as red bars

ID	Task Name	Duration	Start	Finish
1130	Data Validation	15 days	Fri 11/21/25	Thu 12/11/25
1131	**Semi-Annual Sampling Event 2**	**29 days**	**Thu 3/12/26**	**Tue 4/21/26**
1132	**Field Work**	**29 days**	**Thu 3/12/26**	**Tue 4/21/26**
1133	Mobilization	1 day	Thu 3/12/26	Thu 3/12/26
1134	Groundwater Monitoring	3 days	Fri 3/13/26	Tue 3/17/26
1135	Demobilization	1 day	Tue 3/17/26	Tue 3/17/26
1136	Laboratory Analysis	10 days	Wed 3/18/26	Tue 3/31/26
1137	Data Validation	15 days	Wed 4/1/26	Tue 4/21/26
1138	**Annual Corrective Measures Implementation Operations (CMI-O) Report**	**92 days**	**Fri 7/10/26**	**Mon 11/16/26**
1139	Prepare and Develop Draft Annual CMI-O Report	10 days	Fri 7/10/26	Thu 7/23/26
1140	Army Review of Draft Annual CMI-O Report	21 days	Fri 7/24/26	Fri 8/21/26
1141	OPSEC Review of Draft Annual CMI-O Report	21 days	Fri 7/24/26	Fri 8/21/26
1142	Respond to Army Comments on Draft Annual CMI-O Report	10 days	Mon 8/24/26	Fri 9/4/26
1143	Army approval of Draft CMI-O Report	0 days	Fri 9/4/26	Fri 9/4/26
1144	Submit Draft Final Annual CMI-O Report to ADEM / EPA	1 day	Mon 9/7/26	Mon 9/7/26
1145	ADEM Review of Draft Final CMI-O Report	30 days	Tue 9/8/26	Mon 10/19/26
1146	Prepare Responses to ADEM comments	14 days	Tue 10/20/26	Fri 11/6/26
1147	Army review of RTCs	5 days	Mon 11/9/26	Fri 11/13/26
1148	Submit Final CMI-O Report	1 day	Mon 11/16/26	Mon 11/16/26
1149	ADEM approval of Final annual Report	0 days	Mon 11/16/26	Mon 11/16/26
1150	**Achieve Corrective Measures Implementation – Operations (CMI-O) Option Year 2 for site RSA-262 (Outside of Contract POP)**	**123 days**	**Mon 11/2/26**	**Wed 4/14/27**
1151	**RSA-262**	**123 days**	**Mon 11/2/26**	**Wed 4/14/27**
1152	Notice to Proceed	1 day	Mon 11/2/26	Mon 11/2/26
1153	**CMI-O Field Work**	**122 days**	**Tue 11/3/26**	**Wed 4/14/27**
1154	**Semi-Annual Sampling and Reporting**	**122 days**	**Tue 11/3/26**	**Wed 4/14/27**
1155	**Semi-Annual Groundwater Sampling Event 1**	**29 days**	**Tue 11/3/26**	**Fri 12/11/26**
1156	**Field Work**	**29 days**	**Tue 11/3/26**	**Fri 12/11/26**
1157	Mobilization	1 day	Tue 11/3/26	Tue 11/3/26
1158	Groundwater Monitoring	3 days	Wed 11/4/26	Fri 11/6/26
1159	Demobilization	1 day	Fri 11/6/26	Fri 11/6/26
1160	Laboratory Analysis	10 days	Mon 11/9/26	Fri 11/20/26
1161	Data Validation	15 days	Mon 11/23/26	Fri 12/11/26
1162	**Semi-Annual Sampling Event 2**	**29 days**	**Fri 3/12/27**	**Wed 4/14/27**
1163	**Field Work**	**29 days**	**Fri 3/12/27**	**Wed 4/14/27**
1164	Mobilization	1 day	Fri 3/12/27	Fri 3/12/27
1165	Groundwater Monitoring	3 days	Mon 3/15/27	Wed 3/17/27
1166	Demobilization	1 day	Wed 3/17/27	Wed 3/17/27
1167	Laboratory Analysis	10 days	Thu 3/18/27	Tue 3/30/27
1168	Data Validation	15 days	Wed 3/31/27	Wed 4/14/27

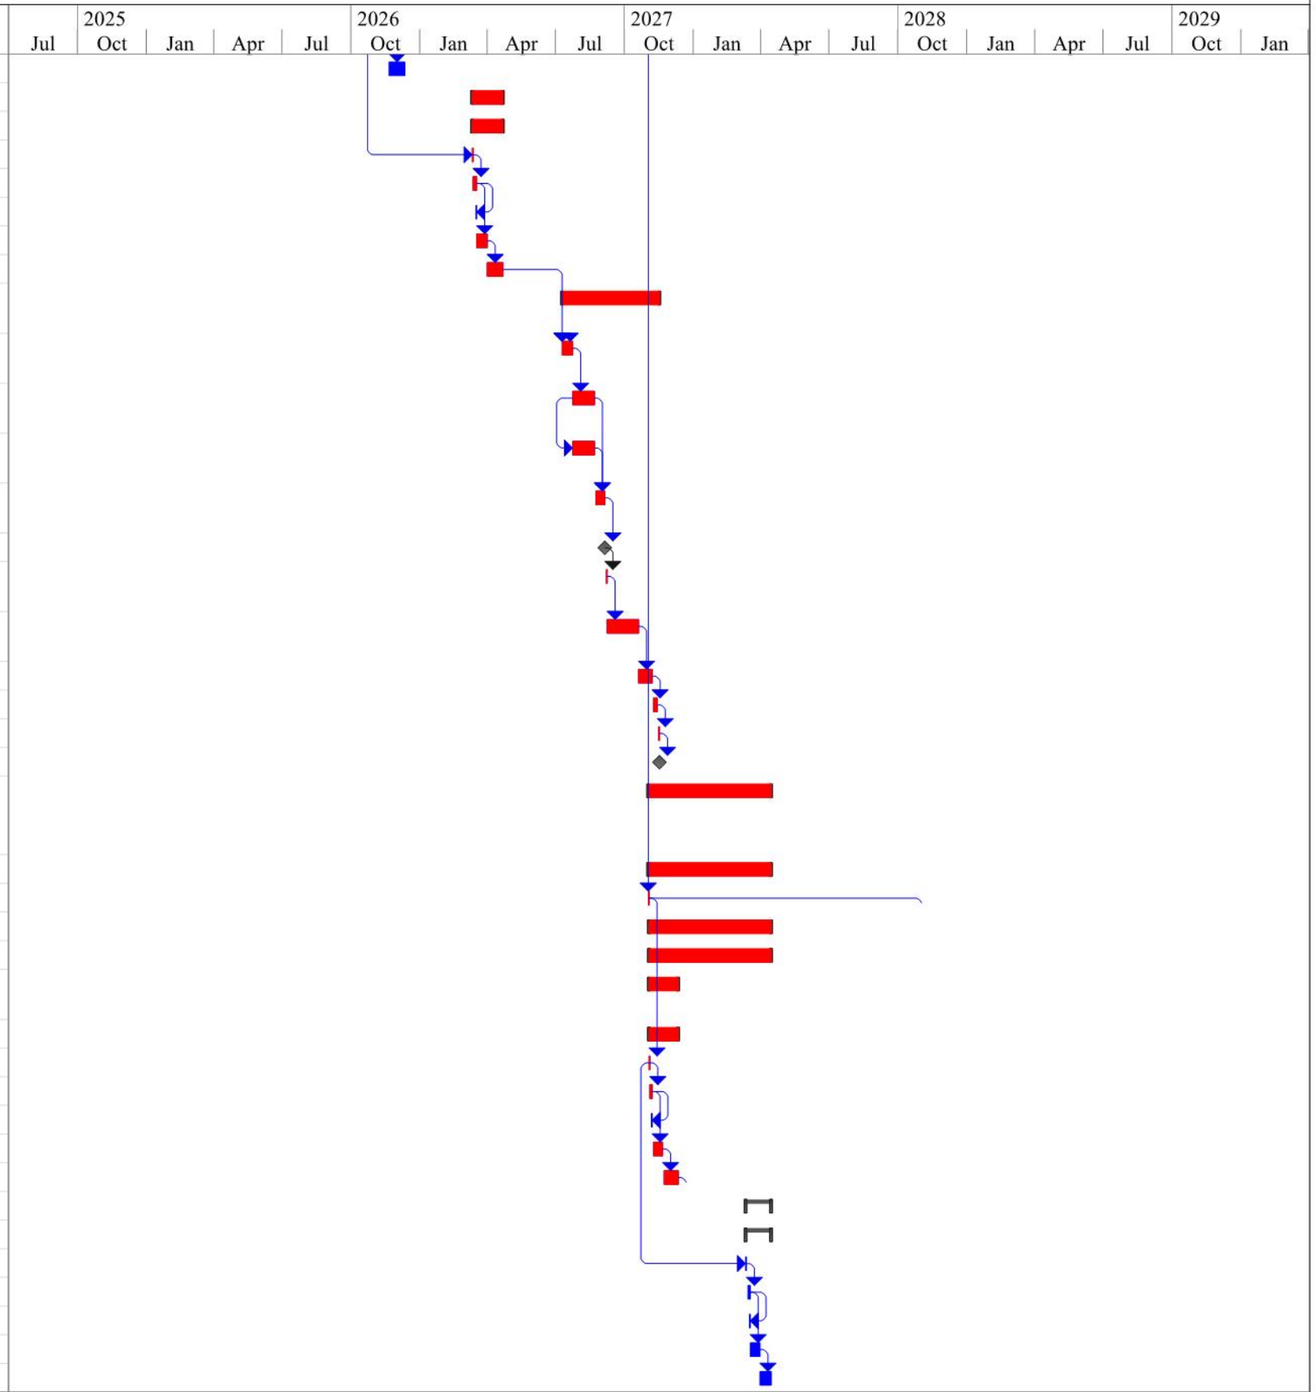

Project duration is displayed in working days
Critical path activities are displayed as red bars

ID	Task Name	Duration	Start	Finish
1169	**Annual Corrective Measures Implementation Operations (CMI-O) Report**	**92 days**	**Mon 12/14/26**	**Tue 4/13/27**
1170	Prepare and Develop Draft Annual CMI-O Report	10 days	Mon 12/14/26	Fri 12/25/26
1171	Army Review of Draft Annual CMI-O Report	21 days	Mon 12/28/26	Mon 1/25/27
1172	OPSEC Review of Draft Annual CMI-O Report	21 days	Mon 12/28/26	Mon 1/25/27
1173	Respond to Army Comments on Draft Annual CMI-O Report	10 days	Tue 1/26/27	Mon 2/8/27
1174	Army approval of Draft CMI-O Report	0 days	Mon 2/8/27	Mon 2/8/27
1175	Submit Draft Final Annual CMI-O Report to ADEM / EPA	1 day	Tue 2/9/27	Tue 2/9/27
1176	ADEM Review of Draft Final CMI-O Report	30 days	Wed 2/10/27	Tue 3/23/27
1177	Prepare Responses to ADEM comments	14 days	Wed 3/24/27	Wed 4/7/27
1178	Army review of RTCs	5 days	Thu 4/8/27	Mon 4/12/27
1179	Submit Final CMI-O Report	1 day	Tue 4/13/27	Tue 4/13/27
1180	ADEM approval of Final annual Report	0 days	Tue 4/13/27	Tue 4/13/27
1181	**Achieve Corrective Measures Implementation – Operations (CMI-O) Option Year 3 for site RSA-262 (Outside of Contract POP)**	**123 days**	**Tue 11/2/27**	**Fri 3/3/28**
1182	**RSA-262**	**123 days**	**Tue 11/2/27**	**Fri 3/3/28**
1183	Notice to Proceed	1 day	Tue 11/2/27	Tue 11/2/27
1184	**CMI-O Field Work**	**122 days**	**Wed 11/3/27**	**Fri 3/3/28**
1185	**Semi-Annual Sampling and Reporting**	**122 days**	**Wed 11/3/27**	**Fri 3/3/28**
1186	**Semi-Annual Groundwater Sampling Event 1**	**29 days**	**Wed 11/3/27**	**Wed 12/1/27**
1187	**Field Work**	**29 days**	**Wed 11/3/27**	**Wed 12/1/27**
1188	Mobilization	1 day	Wed 11/3/27	Wed 11/3/27
1189	Groundwater Monitoring	3 days	Thu 11/4/27	Sat 11/6/27
1190	Demobilization	1 day	Sat 11/6/27	Sat 11/6/27
1191	Laboratory Analysis	10 days	Sun 11/7/27	Tue 11/16/27
1192	Data Validation	15 days	Wed 11/17/27	Wed 12/1/27
1193	**Semi-Annual Sampling Event 2**	**29 days**	**Fri 2/4/28**	**Fri 3/3/28**
1194	**Field Work**	**29 days**	**Fri 2/4/28**	**Fri 3/3/28**
1195	Mobilization	1 day	Fri 2/4/28	Fri 2/4/28
1196	Groundwater Monitoring	3 days	Sat 2/5/28	Mon 2/7/28
1197	Demobilization	1 day	Mon 2/7/28	Mon 2/7/28
1198	Laboratory Analysis	10 days	Tue 2/8/28	Thu 2/17/28
1199	Data Validation	15 days	Fri 2/18/28	Fri 3/3/28
1200	**Annual Corrective Measures Implementation Operations (CMI-O) Report**	**92 days**	**Thu 12/2/27**	**Thu 3/2/28**
1201	Prepare and Develop Draft Annual CMI-O Report	10 days	Thu 12/2/27	Sat 12/11/27
1202	Army Review of Draft Annual CMI-O Report	21 days	Sun 12/12/27	Sat 1/1/28
1203	OPSEC Review of Draft Annual CMI-O Report	21 days	Sun 12/12/27	Sat 1/1/28
1204	Respond to Army Comments on Draft Annual CMI-O Report	10 days	Sun 1/2/28	Tue 1/11/28

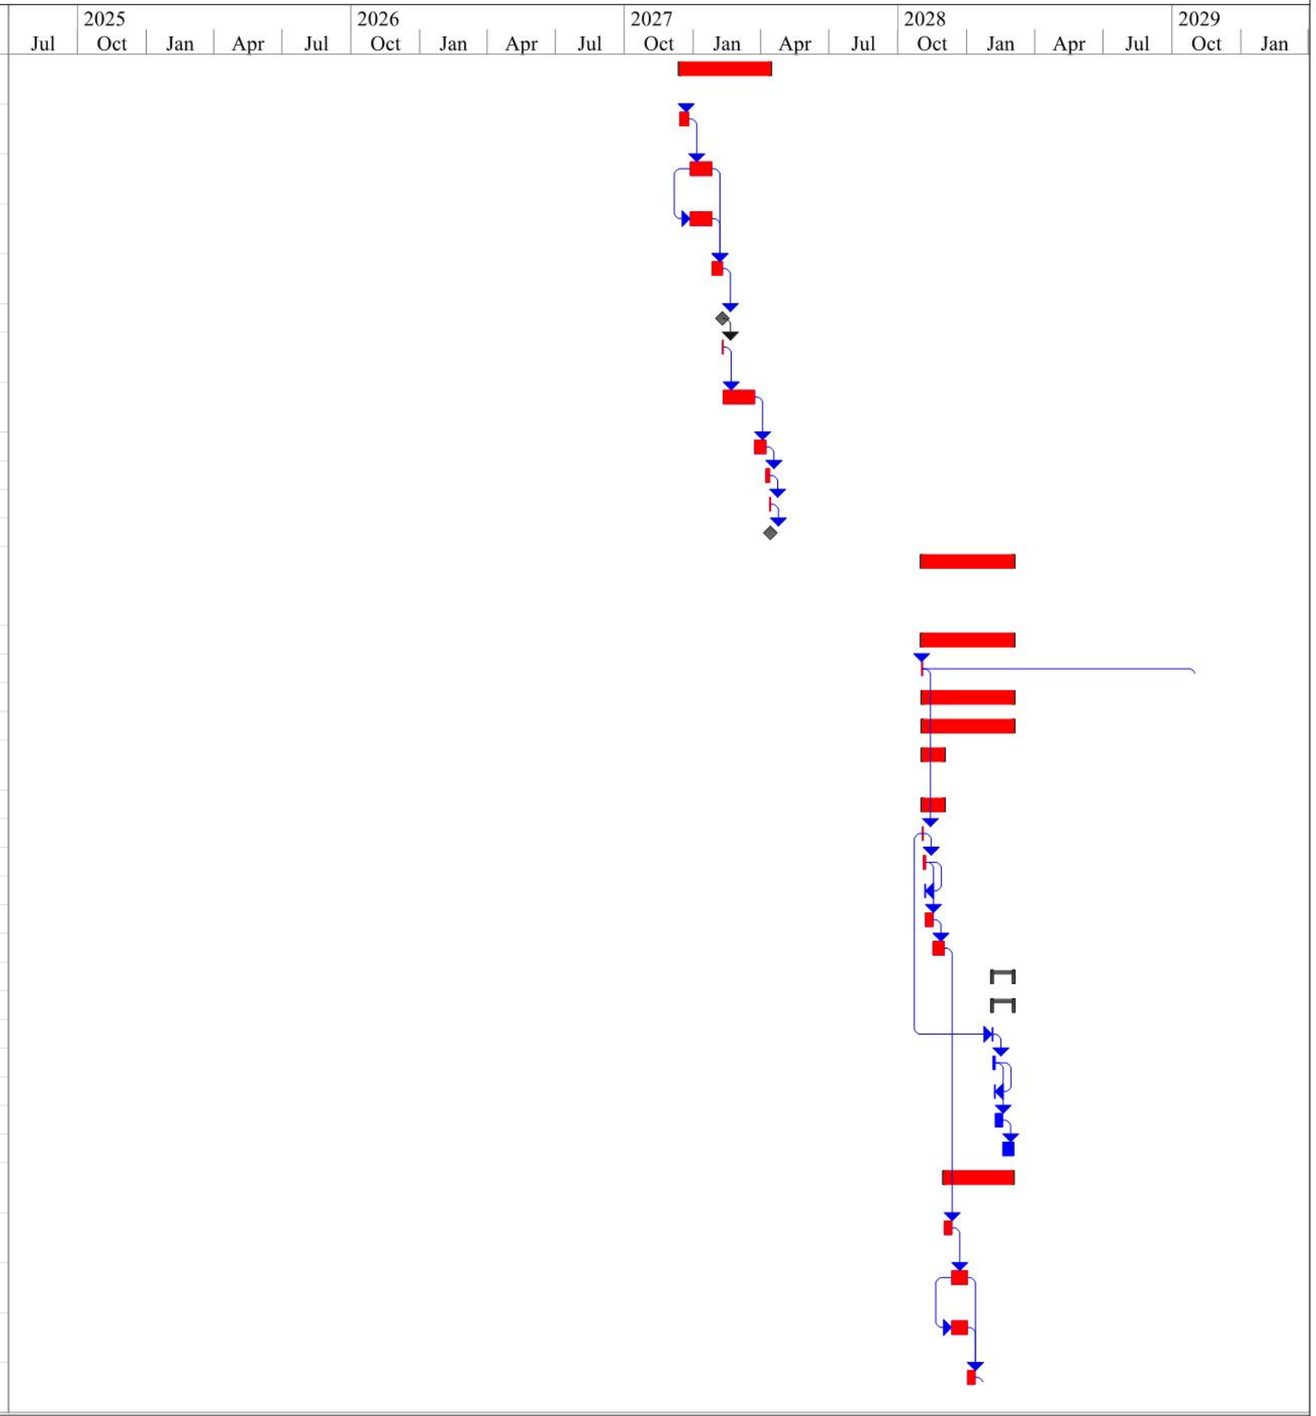

Project duration is displayed in working days
Critical path activities are displayed as red bars

ID	Task Name	Duration	Start	Finish
1205	Army approval of Draft CMI-O Report	0 days	Tue 1/11/28	Tue 1/11/28
1206	Submit Draft Final Annual CMI-O Report to ADEM / EPA	1 day	Wed 1/12/28	Wed 1/12/28
1207	ADEM Review of Draft Final CMI-O Report	30 days	Thu 1/13/28	Fri 2/11/28
1208	Prepare Responses to ADEM comments	14 days	Sat 2/12/28	Fri 2/25/28
1209	Army review of RTCs	5 days	Sat 2/26/28	Wed 3/1/28
1210	Submit Final CMI-O Report	1 day	Thu 3/2/28	Thu 3/2/28
1211	ADEM approval of Final annual Report	0 days	Thu 3/2/28	Thu 3/2/28
1212	**Achieve Corrective Measures Implementation – Operations (CMI-O) Option Years 4-35 for site RSA-262 (Outside of Contract POP) (only dates for year 4, subsequent years will have same durations)**	**122 days**	**Wed 11/1/28**	**Fri 3/2/29**
1213	**RSA-262**	**122 days**	**Wed 11/1/28**	**Fri 3/2/29**
1214	Notice to Proceed	1 day	Wed 11/1/28	Wed 11/1/28
1215	**CMI-O Field Work**	**121 days**	**Thu 11/2/28**	**Fri 3/2/29**
1216	**Annual Sampling and Reporting**	**29 days**	**Thu 11/2/28**	**Thu 11/30/28**
1217	**Annual Groundwater Sampling Event**	**29 days**	**Thu 11/2/28**	**Thu 11/30/28**
1218	**Field Work**	**29 days**	**Thu 11/2/28**	**Thu 11/30/28**
1219	Mobilization	1 day	Thu 11/2/28	Thu 11/2/28
1220	Groundwater Monitoring	3 days	Fri 11/3/28	Sun 11/5/28
1221	Demobilization	1 day	Sun 11/5/28	Sun 11/5/28
1222	Laboratory Analysis	10 days	Mon 11/6/28	Wed 11/15/28
1223	Data Validation	15 days	Thu 11/16/28	Thu 11/30/28
1224	**Annual Corrective Measures Implementation Operations (CMI-O) Report**	**92 days**	**Fri 12/1/28**	**Fri 3/2/29**
1225	Prepare and Develop Draft Annual CMI-O Report	10 days	Fri 12/1/28	Sun 12/10/28
1226	Army Review of Draft Annual CMI-O Report	21 days	Mon 12/11/28	Sun 12/31/28
1227	OPSEC Review of Draft Annual CMI-O Report	21 days	Mon 12/11/28	Sun 12/31/28
1228	Respond to Army Comments on Draft Annual CMI-O Report	10 days	Mon 1/1/29	Wed 1/10/29
1229	Army approval of Draft CMI-O Report	0 days	Wed 1/10/29	Wed 1/10/29
1230	Submit Draft Final Annual CMI-O Report to ADEM / EPA	1 day	Thu 1/11/29	Thu 1/11/29
1231	ADEM Review of Draft Final CMI-O Report	30 days	Fri 1/12/29	Sat 2/10/29
1232	Prepare Responses to ADEM comments	14 days	Sun 2/11/29	Sat 2/24/29
1233	Army review of RTCs	5 days	Sun 2/25/29	Thu 3/1/29
1234	Submit Final CMI-O Report	1 day	Fri 3/2/29	Fri 3/2/29
1235	ADEM approval of Final annual Report	0 days	Fri 3/2/29	Fri 3/2/29

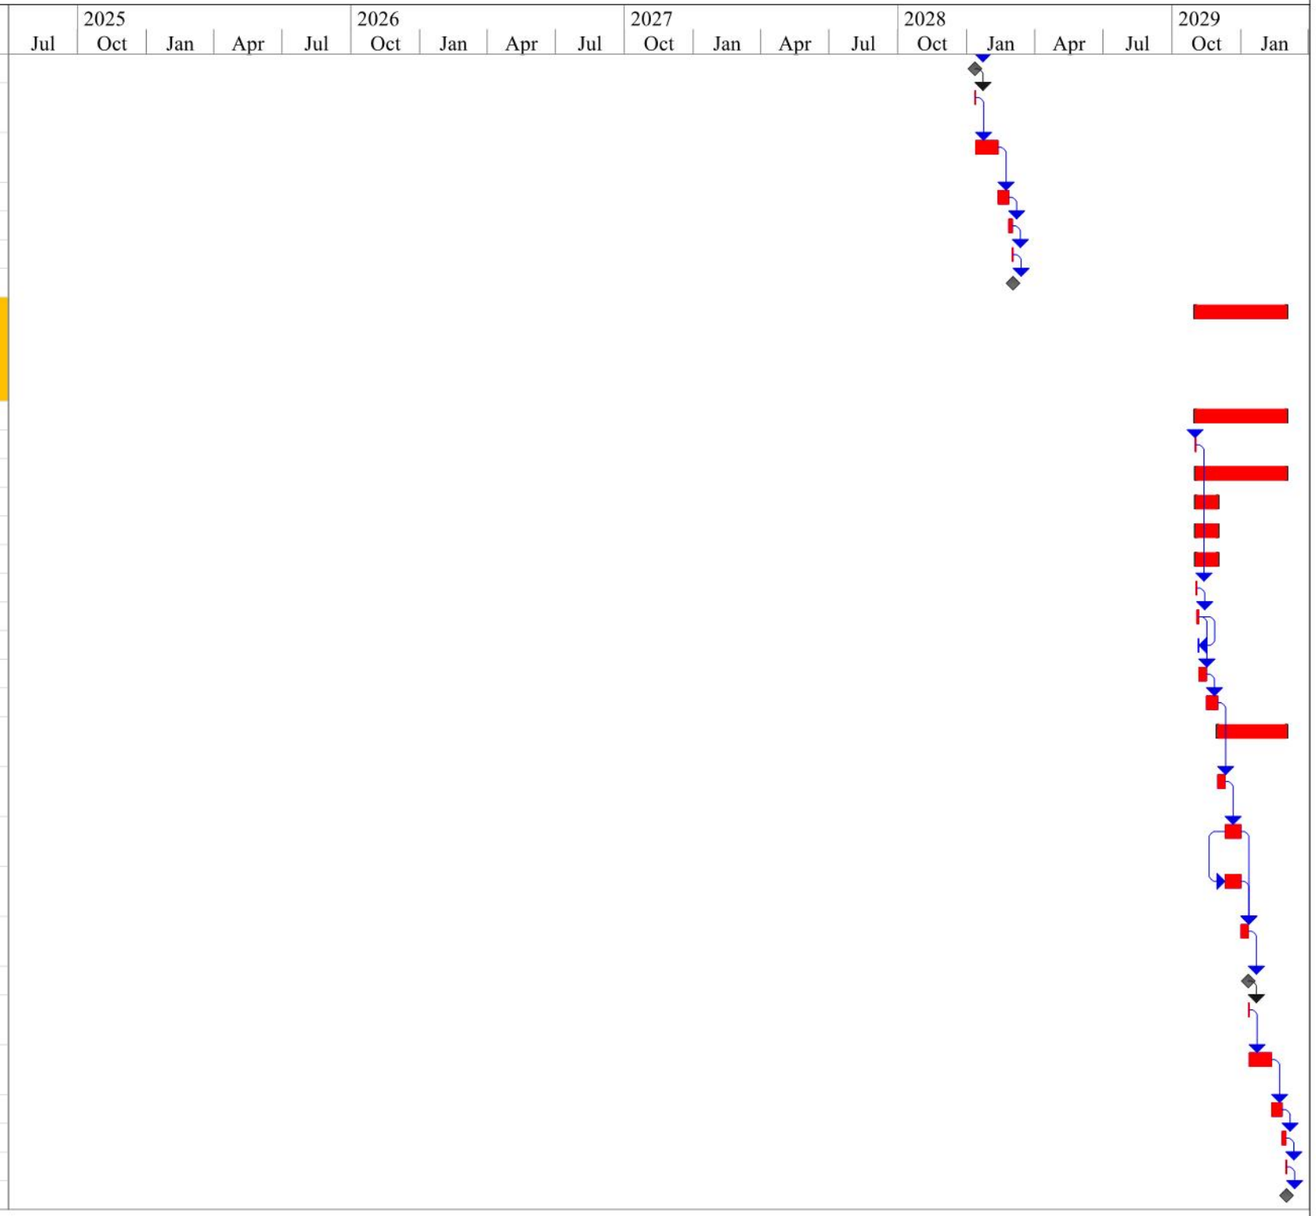

Project duration is displayed in working days
Critical path activities are displayed as red bars

Project duration is displayed in working days
Critical path activities are displayed as red bars

APPENDIX E

QUALITY CONTROL PLAN

This page intentionally left blank.

RSA-262 PROJECT QUALITY CONTROL PLAN

ENVIRONMENTAL REMEDIATION SERVICES

REDSTONE ARSENAL

December 2022

Prepared for:

U.S. ARMY ENVIRONMENTAL COMMAND
Southeast-Environmental Service and Support Division
2450 Connell Road, Building 2264
Fort Sam Houston, TX 78234-7664

Contract No.: W9124J-18-D-0004, Delivery Order W9124J21F0020

This page intentionally left blank.

RSA-262 PROJECT QUALITY CONTROL PLAN

ENVIRONMENTAL REMEDIATION SERVICES REDSTONE ARSENAL

December 2022

Prepared for:

U.S. ARMY ENVIRONMENTAL COMMAND
Southeast-Environmental Service and Support Division
2450 Connell Road, Building 2264
Fort Sam Houston, TX 78234-7664

Prepared by:

ECC
9200 Church St
Suite 305
Manassas, VA 20110

Contract No.: W9124J-18-D-0004, Delivery Order W9124J21F0020

This page intentionally left blank.

QUALITY CONTROL PLAN

ENVIRONMENTAL REMEDIATION SERVICES AT REDSTONE ARSENAL

W9124J-18-D-0004

I hereby certify that the enclosed Quality Control Plan (QCP) is in compliance with contract specifications and is submitted for Army approval. Once approved, the QCP will be implemented during the project W9124J-18-D-0004 execution of Environmental Remediation Services at Redstone Arsenal, Alabama

Approvals

Pamela Foti

Date: December 15, 2022

Deputy Program Manager,
Pam Foti, Certified Hazardous Materials Manager (CHMM), Project Management Professional (PMP)

Date: December 15, 2022

Quality Assurance/ Quality Control
Manger.
Leili Arjomand, Professional Engineer (PE), Certified Quality Manager (CQM), PMP

This page intentionally left blank.

TABLE OF CONTENTS

LIST OF ABBREVIATIONS AND ACRONYMS iii

1.0 INTRODUCTION 1-1

1.1 Quality Control Objectives 1-1

2.0 QUALITY CONTROL ORGANIZATION 2-1

2.1 Program Manager 2-1
2.2 Project Manger 2-2
2.3 Program Quality Assurance/Quality Control Manager 2-2
2.4 Quality Control Manager 2-2
2.5 Site Superintendent 2-2
2.6 Field Personnel and Subcontractor 2-2

3.0 MEETINGS 3-1

3.1 Coordination and Mutual Understanding Meeting 3-1
3.2 On-site Meetings 3-1
3.3 Meeting Minutes 3-1

4.0 QUALITY CONTROL REQUIREMENTS 4-1

4.1 Definable Features of Work 4-1
4.2 Three-Phase Control System 4-1

4.2.1 Preparatory Phase 4-1
4.2.2 Initial Phase 4-2
4.2.3 Follow-up Phase 4-2

4.3 Additional Preparatory and Initial Phases 4-2
4.4 Control for Off-Post Work 4-3
4.5 Deficiency Management 4-3

4.5.1 Preventive Measures 4-3

5.0 TESTING AND INSPECTION 5-1

5.1 Analytical Testing 5-1
5.2 Inspection 5-1

5.2.1 Punch-Out Inspection 5-1
5.2.2 Pre-Final Inspection 5-1
5.2.3 Final Acceptance Inspection 5-1

5.3 Instrumentation/Equipment Testing, Inspection, and Maintenance 5-2

6.0 QUALITY CONTROL DOCUMENTATION 6-1

6.1 Reporting Requirements 6-1

6.1.1 Daily Reports 6-1
6.1.2 Monthly Summary Report 6-1
6.1.3 Quality Control Meeting Minutes 6-1
6.1.4 Safety and Health Deficiency Tracking 6-1
6.1.5 Field Logbook 6-1

6.2 Records Management 6-2

7.0 SUBMITTALS 7-1

7.1 Transmittal Form 7-1
7.2 Comment Response Matrix 7-1

TABLE OF CONTENTS

8.0 NONCONFORMANCE REPORTING 8-1

8.1 Nonconformance Definition 8-1
8.2 Deficiency Identification 8-1
8.3 Nonconformance Determination 8-1
8.4 Planning and Implementing the Corrective Action 8-1
8.5 Accepting Corrective Action 8-1
8.6 Verifying Corrective Action 8-1

9.0 AUDITS AND ASSESSMENTS 9-1

9.1 Management System Reviews 9-1
9.2 Project Audits 9-1
9.3 Project Self-Assessments 9-1

LIST OF FIGURES

Figure 2-1 Project Quality Control Plan Organizational Structure

LIST OF APPENDICES

Appendix A Quality Control Plan Forms

Appendix B ECC Causal Analysis System

ACRONYMS AND ABBREVIATIONS

AHA	Activity Hazard Analysis
APP	Accident Prevention Plan
CHHM	Certified Hazardous Materials Manager
COC	Chain of Custody
COR	Contracting Officer's Representative
CMI	Corrective Measures Implementation
CQM	Certified Quality Manager
DoD	Department of Defense
DFW	Definable Feature of Work
DQCR	Daily Quality Control Report
ECC	Environmental Chemical Corporation
ERMA	Environmental Remediation Multiple Award
IDW	Investigative Derived Waste
LNAPL	Light Non-Aqueous Phase Liquid
LSP	Licensed Site Professional
LUC	Land Use Control
MEC	Munitions and Explosives of Concern
NCR	Nonconformance Report
PE	Professional Engineer
PG	Professional Geologist
PGM	Program Manager
PM	Project Manager
PMP	Project Management Professional
POD	Plan of the Day
QA	Quality Assurance
QAPP	Quality Assurance Project Plan
QC	Quality Control
QCM	Quality Control Manager
QCP	Quality Control Plan
QMS	Quality Management System
RSA	Redstone Arsenal
SSHP	Site Safety and Health Plan
SSHO	Site Safety and Health Officer
USAEC	United States Army Environmental Command
USEPA	United States Environmental Protection Agency

This page intentionally left blank.

1.0 INTRODUCTION

Environmental Chemical Corporation (ECC) will implement a Quality Management System (QMS) to ensure all activities, products, information, data, and decisions resulting from quality-affecting activities are technically sound and defensible. The quality system and implementing procedures form the basis of ECC's QMS. The System was developed and is maintained per applicable State and Federal laws, rules, standards, guidance, contractual requirements and sound risk management practices.

The project consists of environmental services at Redstone Arsenal (RSA). The following are the definable features of work (DFWs) identified for RSA-262:

- Procurement and Subcontracting
- Mobilization/Demobilization
- Utility Marking / Dig Permits
- Vegetation Clearing
- In-Situ Enhanced Bioremediation (ISEB) Injections
- Groundwater Treatment Activities
- Groundwater Monitoring
- Record Keeping
- Decontamination
- Implementation of Land Use Controls (LUCs)
- Corrective Measures Implementation (CMI) Reporting

1.1 Quality Control Objectives

ECC's QMS consist of plans, procedures, and an organization that will produce an end product that complies with the requirements of the contract. The QMS covers all environmental operations, both on-site and off-site.

This Quality Control Plan (QCP) defines the procedures to manage and control activities of ECC personnel, subcontractors, and suppliers and to ensure that the completed project complies with all contract documents.

ECC will maintain responsibility for its work and the work of its subcontractors. To ensure compliance with contract requirements and maintain responsibility of all work performed under this deliverable, ECC will provide a continuous Three Phase Control inspection program to examine the quality of work, maintain standards of workmanship, ensure environmental quality standards of excellence, evaluate performances, identify and correct deficiencies, and provide finished work products which meet or exceed the requirements, while maintaining qualified personnel and equipment, and facilities which are necessary for the completion of the project.

The objective of this QCP is to ensure that the project activities are conducted and documented in an organized, efficient, and safe manner. This plan will define the management structure, organization, responsibilities, and authorities necessary for successful completion of the project. Performing quality work, implementing an effective quality control (QC) system and to ensure project compliance is the responsibility of all ECC staff members and subcontractors and can be achieved through a cooperative effort and commitment to quality by all program personnel.

All QC and quality assurance (QA) procedures related to sampling and analytical methods are included in the *Revision 4 Installation-Wide Quality Assurance Program Plan* , *U.S. Army Garrison Redstone, Madison County, Alabama*, completed by HydroGeoLogic, Inc. in 2019, and the site-specific work plans being prepared by ECC, as needed.

2.0 QUALITY CONTROL ORGANIZATION

The functions of the QC staff are to describe, integrate, monitor, evaluate, and document all QC practices of ECC and its subcontractors, and to ensure safety and contract compliance. The quality staff has the full support of management and has independent and delegated authority to accomplish assigned tasks, including stop work authority. The ECC quality control organizational structure, functional responsibilities, level of authority, lines of communication, and interfaces for activities affecting quality are identified and documented for assigned work tasks in the following sections.

Changes to ECC's QC staff organization requires the Army's Contracting Officer acceptance. Changes will be submitted in writing prior to the proposed change. Requests will include the names, qualifications, duties, and responsibilities of each proposed replacement.

Figure 2-1 shows the project organization chart identifying key personnel, responsibilities, and lines of authority for the QC personnel.

Figure 2-1: Quality Control Plan Organization Structure

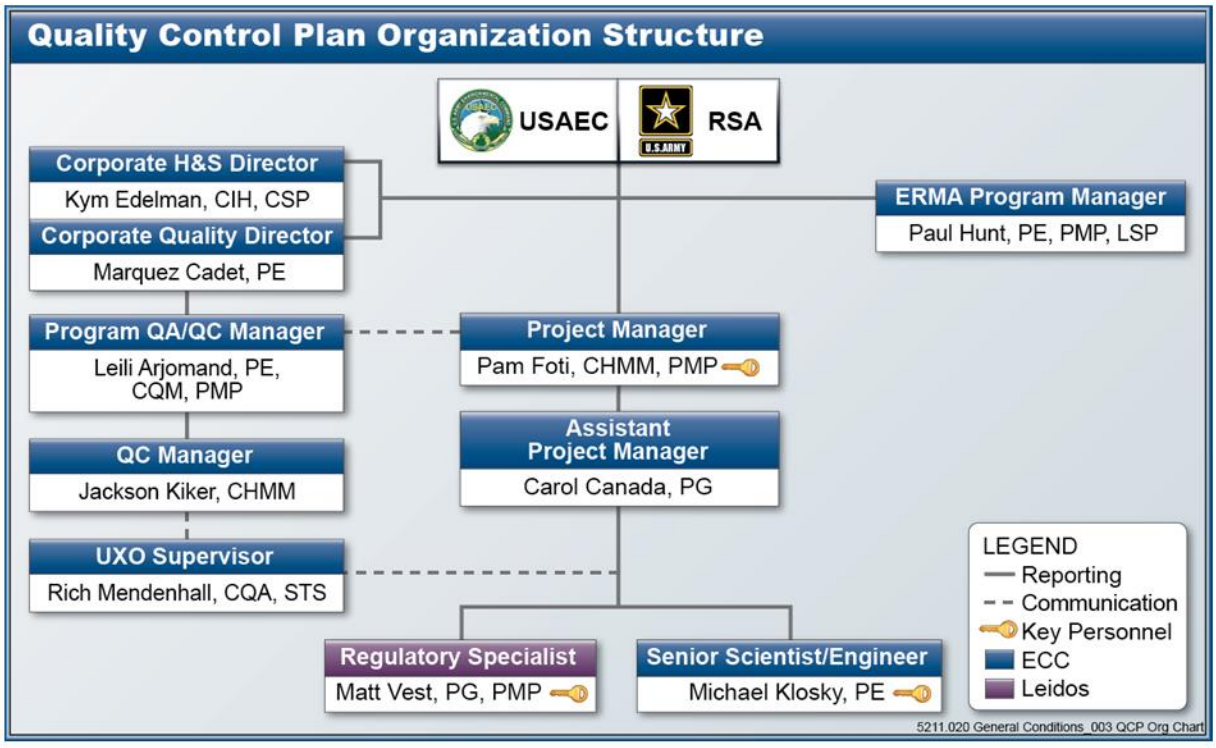

2.1 Program Manager

The Environmental Remediation Multiple Award (ERMA) Program Manager (PGM), Mr. Paul Hunt, Professional Engineer (PE), Project Management Professional (PMP), Licensed Site Professional (LSP), is responsible for the quality of work performed by the assigned project staff. He is responsible for all operations associated with the implementation of the project and will ensure quality and schedule compliance. He will also be responsible for addressing all customer complaints and/or feedback.

2.2 Project Manger

The Project Manager (PM), Ms. Pam Foti, Certified Hazardous Materials Manager (CHMM), PMP, controls the budget and schedule with the concurrence of the PGM, ensuring the contract requirements are met. The PM is responsible for all environmental services related to the requirements of the contract and specifications, including subcontractors. The PM reports directly to the PGM and is responsible for ensuring that all project activities conform to requirements and specifications. The PM's duties also include the assignment of responsibilities for the preparation of various reports and the review of each form/report for accuracy and content. In addition to monitoring and appraising performance of staff and subcontractors, the PM has the primary responsibility of tracking any proposed changes to the contract and for the overall project and will report any proposed changes to the PGM.

2.3 Program Quality Assurance/Quality Control Manager

The Program QA/QC Manager, Ms. Leili Arjomand, Professional Engineer (PE), Certified Quality Manager (CQM), PMP, will have overall responsibility for the control and implementation of the approved QC program. She will be responsible for the management, training, and performance of all QC personnel and will serve as a technical resource to the QC officer and QC staff. All project QC records and activities are subject to review by the QA/QC Manger.

2.4 Quality Control Manager

The QC Manager (QCM), Mr. Jackson Kiker, is responsible for supervising all QC aspects of the project to ensure compliance with contract plans and specifications. The QCM has indirect reporting responsibilities to the PM so that the required authority and organizational freedom is provided, including sufficient independence from cost and schedule implications. The QCM has the authority to act in all QC matters for ECC. The QCM has overall responsibility and authority for the administration of all QC Program-related activities. The QCM will conduct QC project surveillances throughout the life of the project and ensure that the reporting requirements as defined in this QCP are implemented.

2.5 Site Superintendent

The Site Superintendent, Mr. Aaron Glad, reports to the PM. He will manage field operations and monitor and oversee field personnel, subcontractors, QC, and safety activities to ensure compliant work. He will host the plan of the day (POD) meetings and participate in preconstruction meetings, preparatory meetings, initial inspections, final acceptance inspections, and ensure that substandard work is corrected as soon as possible.

2.6 Field Personnel and Subcontractor

All field personnel and subcontractors will be required to adhere to the procedures set forth in this QCP. The Site Superintendent will be responsible for overall management and coordination of field personnel and subcontractors and ensuring they perform all aspects of the work in accordance with the Work Plans, the Site Safety and Health Plan (SSHP), and this QCP. The QCM will be responsible for ensuring the field personnel and subcontractors perform all aspects of the work in accordance with this QCP. The Site Safety and Health Officer (SSHO) will be responsible for ensuring the field personnel and subcontractors perform all aspects of the work in compliance with the SSHP.

3.0 MEETINGS

While performing work, ECC will take part in various meetings during which they will update the client, and when applicable, other stakeholders, on the progress, results, deviations or modifications, and recommendations for the fulfillment of the scope of work.

3.1 Coordination and Mutual Understanding Meeting

If needed, and in addition to the meetings specified in the Project Management Plan, the QCM shall meet with the Contracting Officer's Representative (COR) and/or RSA Army Environmental Coordinator or designated representative prior to the start of the site work to discuss the QC Project Plan required by this project.

During the meeting, a mutual understanding of the system details will be developed, including the forms for recording the QC operations, administration of the system for both on-site and off-site work, coordination of ECC's management, and the interrelationship of ECC's management and control with the Army's QA, production, and the QCM's duties with the COR.

As a minimum, ECC's personnel required to attend will include the PM, Site Manager, and QCM.

3.2 On-site Meetings

When field activities are being performed, meetings may take place, whether planned or unplanned, at the site to discuss specific issues or concerns. The QCM or her designated representative will be responsible for documenting discussions and decisions made at the meeting on the Daily Quality Control Report (DQCR).

3.3 Meeting Minutes

Minutes of all meetings will be prepared describing the general discussion, decisions, changes in approach, and action items. If requested, ECC will submit the meeting minutes to participants.

This page intentionally left blank.

4.0 QUALITY CONTROL REQUIREMENTS

4.1 Definable Features of Work

To ensure quality, ECC will implement the QC program, including the Three Phase Control Process for each DFW. A DFW is any task, which is separate and distinct from other tasks, has separate control requirements, or is identified by different disciplines. There may be more than one DFW in each activity. The Three Phase Control Process is used to ensure that all project activities comply with the approved plans and procedures. The DFWs for this project are included in **Section 1**.

4.2 Three-Phase Control System

The Three Phases of Control process assures control of work at every stage of an activity, from planning through execution and completion. The process includes the preparatory, initial, and follow-up phases. Work will only begin on a DFW when successful preparatory and initial phases are completed.

Additional preparatory and/or initial phases may be conducted on the same DFW if new crews or subcontractors are added to a DFW, when acceptable levels of quality are not being met, if there are changes in the applicable QC organization, if work on a DFW is resumed after a substantial period of inactivity, or if other problems develop.

4.2.1 Preparatory Phase

The preparatory phase will be performed prior to the beginning of work on each DFW after all required submittals have been approved and is typically conducted by the SSHO with other applicable site personnel in attendance (e.g., field personnel, subcontractors, etc.). The United States Army Environmental Command (USAEC) COR and Army Environmental Coordinator will also be invited to attend the meeting. Any subcontractors involved in the DFW will participate in this review as well. The QCM or designated representative will give the Army 48-hours' notice prior to the preparatory phase meeting. The results of the preparatory phase actions will be documented in the DQCR.

During this phase, it is imperative to review the specifications and drawings to ensure all preparatory steps have been taken, to verify that submittals have been prepared and reviewed, qualified manpower is assigned, and safety issues have been identified and addressed. Specifically, this phase will include, if applicable:

- Review each paragraph of applicable specifications and drawings
- Review of the applicable work plans, etc. including discussion of procedures for controlling quality of the work and how deficiencies are corrected
- Review provisions that have been made to provide required control testing and inspection
- Concurrence that required project training and qualifications are complete (QC, health and safety, technical, etc.)
- Review to ensure that all materials and/or equipment have been tested, submitted, and approved
- Review of applicable permit status and requirements
- Examine the work area to ensure that all required preliminary work has been completed and is in compliance with the contract
- Review the appropriate activity hazard analysis (AHA) to ensure safety requirements are met
- Discuss sampling methods, applicable standard operating procedures, and the testing facility

- Check to ensure the portion of the plan for the work to be performed has been accepted by the client
- Discuss the initial control phase

4.2.2 Initial Phase

This phase of inspection will document the completeness and acceptability of the particular items at the beginning of the work activity after a representative portion of the items has been completed is typically conducted by the SSHO or Site Superintendent.

This is the time to ensure that ECC's and our subcontractor's personnel/workers understand, through immediate inspection, the contract standards, and the standards of workmanship desired. If there is a difference of opinion in the interpretation of contract requirements, this is the time to settle the issue. The initial inspection phase is a practical method of performing preventive inspection and resolving conflicts. The following will be accomplished during this phase, if applicable:

- Review minutes of the preparatory meeting for open items
- Check the work to ensure it is in full compliance with the project requirements
- Establish level of workmanship and verify it meets the desired acceptable workmanship standards.
- Resolve all differences between personnel and subcontractors
- Check safety to include compliance with and upgrading (if necessary) of the Accident Prevention Plan (APP)/SSHP and AHA. Review the AHA with each worker, if deemed necessary.
- Prepare documentation of the initial phase inspection, including a narrative description of detailed inspection procedures, minutes of meetings, inspection results, corrective measures, etc., using forms presented in **Appendix A** of this QCP or included in field book.
- The initial phase will be repeated for each new crew member arriving to work on-site or any time acceptable specified quality standards are not being met.

4.2.3 Follow-up Phase

Follow-up inspection is geared toward a level of effort to verify the continuation of project compliance and standards of workmanship established during the previous two phases. This inspection is typically conducted periodically by the SSHO, or Site Superintendent to ensure a continuation of satisfactory quality standards. Follow-up inspections will be made a matter of record in the DQCR. The QCM will verify proper procedure technique, sample handling, and Chain of Custody (COC), if required. The SSHO or Site Superintendent will monitor testing results and compare them with the project requirements, and if acceptable, document the results and provide a timely authorization to proceed with subsequent work. If the QCM determines the work is otherwise, not acceptable, he will notify the PM for stopping work and initiating a conformance action. Final follow-up checks will be conducted, and all deficiencies will be corrected before the start of additional DFWs.

4.3 Additional Preparatory and Initial Phases

Additional preparatory and initial phases will be conducted on the same DFW if the quality of ongoing work is unacceptable; if there are changes in the applicable QC staff, on-site supervision, or work crew; if work on a DFW is resumed after a substantial period of inactivity; or if other problems develop.

4.4 Control for Off-Post Work

When necessary to complete the objectives required in the PWS and as acknowledged in Table 1-1 of the Project Management Plan, work may take place off-post (laboratory analysis). To the extent practicable, ECC will monitor the quality and workmanship of products developed off-site by implementing the same control measures as work that takes place at a project site to ensure the products and/or materials meet the overall quality and technical standards (i.e., Work Plans or equivalent documents with Quality Assurance Project Plan [QAPP]-like requirements). Should any off-Post work be of a complexity that would warrant an effort beyond these measures (and those referenced in **Section 5.1** below), it would be discussed and agreed to by the ECC PM and the Army COR.

4.5 Deficiency Management

The ECC quality program evaluates the effectiveness of our QC program and ensures continuous improvement in the quality of our work. The primary goals of our quality program are to prevent non-conformances and to facilitate continual process improvement. If the first goal is not achieved, the identified deficiencies or non-conformances will be corrected in a timely and cost-effective manner in order to prevent their recurrence. This QCP includes provisions for preventing quality issues, facilitating process improvements, as well as identifying, documenting, and tracking deficiencies until corrective actions have been verified.

4.5.1 Preventive Measures

While the entire QC program is directed toward problem prevention, certain elements of the program have greater potential to be pro-active. The primary tools for preventing problems include:

- Employee qualification and training
- Preparatory, initial, and follow-up inspections
- Equipment calibration and maintenance.

This page intentionally left blank.

5.0 TESTING AND INSPECTION

5.1 Analytical Testing

ECC will procure the services of an independent analytical laboratory with DoD Environmental Laboratory Accreditation Program certification to perform analytical testing required by this project. The testing laboratory will have an established and documented quality system in compliance with the DoD Quality Systems Manual for Environmental Laboratories.

Laboratories must possess any required state or host nation certification and/or be accredited for each applicable method by a nationally recognized laboratory accreditation body.

Changes to the Laboratory Accreditation Status will be notified in writing to the Army within 30 calendar days of the change.

Chemical analysis will be performed using current USEPA procedures and in conformance with DoD Quality Systems Manual for Environmental Laboratories and State agency requirements unless otherwise specified in the project Performance Work Statement.

ECC will provide the analytical results citing applicable contract requirements or test procedures used. Analytical results will also provide a statement indicated if the analysis performed "conforms" or "does not conform" to the requirements.

5.2 Inspection

Inspection activities involve the evaluation of a characteristic as it relates to a specific requirement. ECC may perform the following inspections below, as appropriate to the DFW.

5.2.1 Punch-Out Inspection

A "punch list" of items that do not conform to the approved work plan, specifications, etc. will be prepared and included in the QC documentation. The list of deficiencies will include the estimated date by which the deficiencies will be corrected. The QCM or staff will make a second inspection to ascertain that all deficiencies have been corrected. Once this is accomplished, ECC will notify the Army that the item(s) is ready for their pre-final inspection.

5.2.2 Pre-Final Inspection

ECC will notify the Army when all of the items from the Punch-Out Inspection have been corrected and a Pre-Final Inspection will be scheduled. The Army will conduct the Pre-Final Inspection and a Pre-Final punch list may be developed if deficiencies are noted. The punch list will include estimated dates of completion that will ensure the deficiencies are completed timely and within the contract dates. When the punch list items are completed and verified by the QCM (or designee), the Army will be notified that a final inspection can be scheduled.

5.2.3 Final Acceptance Inspection

ECC will notify the Army 14 days prior to the Final Acceptance Inspection and the Army will formally schedule this inspection. The notification will include assurance that all items previously identified as being unacceptable along with all remaining work performed under the project will be complete and acceptable by the date scheduled for the final acceptance inspection. The QCM, Site Manager, or other primary

management person will represent ECC at the final acceptance inspection. Army personnel will be present as required.

5.3 Instrumentation/Equipment Testing, Inspection, and Maintenance

All equipment used at a project site shall be manufacturer-calibrated to national standards. Each time the instrument is about to be used, the calibration shall be verified and tested for functionality in accordance with *Final Revision 1 Installation-Wide QAPP* completed by Shaw Environmental, Inc. in 2013. Equipment found to be damaged, inoperable, or out of calibration shall not be used until the discrepancy is corrected and verified by the QCM (or designated representative). As necessary, a detector sensitivity or test grid may be used to test the functionality prior to daily use and results documented in the field logbook. Once equipment has been used, it shall be maintained following manufacturer's recommendations. The QCM, SSHO or Site Manager will make periodic verification/audits of the logs and procedures and report the findings in the DQCR.

6.0 QUALITY CONTROL DOCUMENTATION

The QCM serves a critical role in documenting, reporting, and storing data in support of the QC process and its effectiveness in attaining a high-quality work product.

6.1 Reporting Requirements

The QCM will complete and maintain the QC records to provide factual evidence of compliance with project requirements and to document all QC activities, including maintaining a record of all tests and inspections performed. These records include all work performed by subcontractors and suppliers. The QCM will sign each report and provide copies to the PM and USAEC, if requested. The primary QC reports are listed below.

6.1.1 Daily Reports

During field operations, DQCRs will be prepared describing QC and operations activities performed each day as well as the resources on-site and activities performed, including work performed by subcontractors. The reports will present an accurate and complete picture of QC and operations activities and site management. The report will include both conforming and deficient conditions in a precise, factual, legible, and objective manner. Copies of supporting documentation such as checklists and test reports will be attached as required, if requested. Work will be reported by terminology consistent with the work schedule.

The DQCR will be prepared, signed, and dated by the QCM (or her designated representative) and maintained on ECC's project SharePoint site. A copy of the DQCR will be submitted to RSA and the COR on a daily basis.

6.1.2 Monthly Summary Report

When field activities are being performed, the PM will submit a monthly summary report electronically to the client.

6.1.3 Quality Control Meeting Minutes

The QCM shall submit one copy of the meeting minutes within seven calendar days of the meeting.

6.1.4 Safety and Health Deficiency Tracking

6.1.5 Field Logbook

The QCM (or designee) shall be assigned a QC logbook for documenting details of field activities during QC monitoring activities. The logbook will be a bound manuscript with pre-printed page numbers. The QCM (or designated representative) will document his/her daily duties, summarize field activities, including arrival and departure time, note QC tests and results, depict the site layout, and other data. The information in the QC logbook will serve as a detailed description of events to aid in the preparation of the DQCR and in addressing follow-up questions that may arise.

All entries made in the QC logbook shall be made in ink. Any changes shall be made by a single strike through the error and initials. At the beginning of each day, notes will begin on the following page in the logbook. Descriptions shall be made in coherent English and in a manner, that would allow others to

recreate the daily events in the absence of the QCM. At the end of each day, the QCM (or designee) will mark the remainder of the page with a single line and sign across or under it.

6.2 Records Management

Records are considered completed documents, validated data, and other materials that provide objective evidence of the quality of items or activities. A document that contains objective information can become a record once it is complete and identified as a record. Records include, but are not limited to:

- Work plans, technical proposals, and other work assignment planning documents
- Field plans and procedures
- Training records
- Project reports, including letter reports
- Field logbooks and project notebooks
- Three phase inspection records
- DQCR and Production Reports
- COC records
- Audit, surveillance, and independent project self-assessment reports
- Field change notices
- Laboratory data

The PM will define work assignment documents that are expected to become records.

Records will be maintained in the project office in a manner that prevents deterioration and provides for the safeguarding of the records. A record indexing system that allows for easy retrieval and provides sufficient information to permit the correlation of records with the items or activities to which they apply will be used. Inactive records will be stored for the mutually agreed upon time after which they are either archived or properly disposed

Disposition of records is controlled and documented. Records are destroyed only after the proper notification to USAEC and the approval of the ERMA PGM.

7.0 SUBMITTALS

Preparation of submittals is the responsibility of the PM at the project level using project staff resources. For preparation of technical submittals, the appropriate staff will be chosen; those who have the background and knowledge required for assuring the technical submittal is complete and accurate. Additionally, the PM will perform a separate technical peer review for highly technical submittals.

The QCM will review submittals for acceptance with QC requirements before transmitting to the client or other required approval authorities. Submittals requiring modifications or changes will be returned to the originator, subcontractor, or vendor for correction and resubmission. Submittals from subcontractors and vendors will be reviewed for technical content and accepted as a part of this submittal preparation procedure.

7.1 Transmittal Form

Transmittals by ECC to the Army will be documented via email correspondence and/or Project Portal upload (with corresponding email to notify the parties of document availability). The transmittal and distribution of documents to Regulators will be managed directly by RSA and supported by ECC as discussed in Section 3.4.2.3 of the Project Management Plan.

7.2 Comment Response Matrix

Upon receiving comments from Army, regulatory, or other outside reviewers, ECC will prepare a comment response matrix to document each reviewer's comment along with a response describing how the comment will be resolved, incorporated, or addressed. To expedite reviews of the comment responses, ECC may request that the Army schedule a conference call or meeting with reviewers to discuss their comments. The completed comment response matrix will then be submitted to the client for review and approval prior to submitting elsewhere, as appropriate and applicable. At such a time when all responses are accepted, ECC will incorporate changes into the document.

This page intentionally left blank.

8.0 NONCONFORMANCE REPORTING

8.1 Nonconformance Definition

The definition of a nonconforming condition can be a deviation from product, process, procedure or compliance specifications. All items determined to be nonconforming must be corrected through systematic corrective actions. Any time a condition exists not in compliance with drawings, specifications, codes, workmanship standards, facility requirements, or Army requirements, the nonconformity must be documented, corrected, and closed-out through the following means. All personnel are responsible for identifying deficiencies and the QCM is responsible for ensuring the proper tracking and documentation of deficiencies, including those identified by the Army. ECC will implement the ECC Causal Analysis System (see **Appendix B**) to determine the root causes of quality related incidents and non-conformances. We will perform trend analyses at least annually by reviewing all incidents and identifying common basic causes that need to be addressed to prevent similar occurrences.

8.2 Deficiency Identification

The QCM (or designee) will be responsible for managing the nonconformance process. All nonconforming items must be reported to the QA/QC Manager. Anyone finding a deficient item is responsible for reporting it to the appropriate management staff.

8.3 Nonconformance Determination

During routine site activities, the majority of corrective actions can be implemented immediately (within 48 hours) by the field personnel and documented in field logbook. If the condition is not quickly corrected, the individual initiates a Nonconformance Report (NCR) as shown in **Appendix A** and submits it to the QCM (or designee). The QCM (or designee will notify the PM and identify the person responsible for implementing corrective action (often the Site Superintendent), sets a date on which the response is due, and distributes the NCR.

8.4 Planning and Implementing the Corrective Action

The responsible person to initiate corrective actions should identify the cause of the problem, if known or suspected, on the NCR. The responsible person will develop a Corrective Action Plan, identify the date the corrective action has been or will be accomplished, describe the action taken on the form, and return the form to QCM (or designee) by the response due date. If possible, objective evidence that the corrective action has been completed should be included with the NCR response. If this is not possible, the responsible person should return the NCR by the due date and provide the evidence as soon as possible.

8.5 Accepting Corrective Action

The QCM (or designee) will review the NCR response to determine the adequacy of the corrective action. If the stated corrective action is unacceptable, the NCR will be returned to the responsible person for further discussion and corrective action.

8.6 Verifying Corrective Action

If the evidence provided to the QCM (or designee) concerning completed corrective action is acceptable, the NCR will be signed and dated. If evidence is obtained through an audit, surveillance, or follow-up

review, the individual conducting the follow-up will sign and date the form once the corrective action has been verified.

A distribution list for NCRs will be determined at the initial project-planning meeting. At a minimum, distribution will include the USAEC Representative, QCM, PGM, QA/QC Manager, PM, Site Superintendent, and any other applicable client-related individuals.

9.0 AUDITS AND ASSESSMENTS

Assessments are a learning process intended to increase the user's understanding of the program or system being assessed and to provide a basis for improving such programs or systems. The purpose of assessments is to improve the quality of work by comparing the system or element to the specified requirements. Assessments are conducted at all levels: corporate, contract, project, and activity. Response refers to the actions taken by the assessed organization as a result of the assessment. Typically, responses involve corrective actions to rectify the deficiencies identified in the assessment.

Project assignments will be monitored and assessed as deemed appropriate by the QCM (or designee) and QA/QC Manager. The following sections identify and describe many assessment types. Not all types may be applicable for this project. The requirement to conduct applicable assessment types may be further defined in the work plans and field plans. The ERMA PGM, PM, or the QA/QC Manager may specify additional assessments, as necessary, to ensure that the quality of work meets the Army and ECC's expectations. Assessment reports generated under this project will be made available to the Army, upon request.

9.1 Management System Reviews

Management systems reviews are self-assessments conducted annually, or as determined appropriate by the QA/QC Manager, to establish whether the quality management structure, policies, and procedures are adequate to ensure quality data. Management systems reviews may cover multiple contracts and quality plans. The primary focus of the management systems review is performance improvement through:

- Fostering individual ownership of the quality program by increasing employee involvement in quality
- Encouraging employees to routinely identify opportunities for quality improvement
- Meeting with management, technical, and QA staff to solicit specific suggestions to improve quality, such as more practical implementation methods, procedural modifications, etc.
- Training the management, technical, and QC staff on quality plan requirements
- Communicating lessons learned from other management systems reviews
- Checking on implementation and effectiveness of the quality program within the office.

9.2 Project Audits

Project audits may be conducted on ECC and subcontractor work activities by QC staff independent of the work activities or the appropriate staff appointed by RSA or the USAEC. The implementation and use of appropriate quality measures identified in this QCP, work plans, field plans, specifications, procedures, and any other applicable document specifying requirements can be used for checking during the audit. The auditor will also ensure that obsolete documentation has been removed from project work areas and check briefly on preparation of required deliverables and the condition of project files.

Project auditors will be trained in auditing procedures and authorized by the QA/QC Manager.

9.3 Project Self-Assessments

Project self-assessments are evaluations of work activities conducted by project personnel who are knowledgeable in the project requirements to determine if the technical requirements are being met. They are intended to provide rapid feedback to the project staff to facilitate timely corrective action.

The ERMA PGM makes the selection of project assignments or activities for project self-assessment and the personnel to conduct them with the assistance of the QA/QC Manger or QCM. Project self-assessments are conducted using a standardized or customized checklist.

Appendix A

QCP Forms

This page intentionally left blank.

DAILY SITE REPORT

Project Title: Redstone Arsenal
Date: _____
Activity Name: _____
Location: _____
Contract No.: W9124J-18-D-0004, DO W9124J21F0020

Weather	Sunny	Clear	Overcast	Rain	Snow
Temperature	< 32	32 – 50	50 – 70	70-85	> 85
Wind	Still	Moderate	High		
Humidity	Dry	Moderate	Humid		

Personnel On Site:

Name	Hrs.	Affiliation	Location/ Description of Work

Field Changes: YES _____ NO _____

If yes, filed Nonconformance and Corrective Action Report number (NCR No.):_____

Work Performed:	
Equipment Used:	
Health & Safety (Briefing held, PPE, injuries, near misses, etc.):	
Samples Collected/ Shipped:	
IDW Generated and Disposition:	
Verbal Instructions Received/Given:	
Changed Conditions/ Delays/ Conflicts Encountered or Resolved:	
Other Comments or Additional Information:	
Next Day's Planned Activities:	

Contractor Verification: On behalf of the contractor, ECC, I certify this report is complete and correct, and all materials and equipment used and work performed during this reporting period are in compliance with the contract plans and specifications, to the best of my knowledge, except as may be noted above.

_____ _____ _____ _____
Signature Date Reviewer Signature Date

INSTRUMENT CALIBRATION LOG

Project: Redstone Arsenal **Site:** **Date**

Calibrated By Instrument Serial Number

Weather:

Parameters	Calibration	Calibration Temp	Post Calibration	Comments
Conductivity (mS/cm^c)				
pH (7)				
pH (4)				
pH (10)				
ORP (mV)				
Dissolved Oxygen (%)				
Barometric Pressure (mmHg)				
Turbidity	**<0.10 NTU**	**15.0 NTU**	**100 NTU**	**750 NTU**
PID		**Isobutylene / 100ppm**		

	Environmental Chemical Corporation	EQUIPMENT DAILY CHECK LIST

Equipment Name /Number _____ **Date** _____

Engine Hrs/Mileage _____ **Project Name** _____

BRAKES	COOLING WATER
AIR SYSTEM	OPERATING CONTROLS
TIRES/TRACKS	LIGHTS/REFLECTORS
HORN	WINDSHIELD WIPERS
SAFETY DEVICES	FIRE EXTINGUISHER
GLASS	BACKUP ALARM
MIRRORS	ENGINE OIL Add/Check
DEFROSTER	EXHAUST SYSTEM
STEERING SYSTEM	FLUID LEVELS
WIRE ROPE	ELECTRICAL SYSTEM
APPEARANCE	BREATHING AIR BOTTLES

These items are to be checked each shift before operating this piece of equipment.
Report ALL items requiring repair to supervisor prior to operation of equipment.

Note:

_____

_____

_____

_____

_____

_____

_____

_____

_____

OPERATOR'S NAME	
	(Please Print Name)

	Environmental Chemical Corporation	**FIELD WORK VARIANCE**

Project Name _____ Variance No _____

Project No _____ Page ___ of ___

Contract No. _____ CTO No. _____ Date: _____

Variance (include justification and present requirements) Requested by: _____

Proposed Change

Technical Justification

Cost/Schedule Impact

Reason for Change ☐ Addition ☐ Deletion

Change Order Required ☐ No ☐ Yes Change Order No. _____

Applicable Document

Approved By		
	Project Manager	**Date**
Approved By		
	CQC Manager	**Date**
Approved By		
	Contracting Officer	**Date**

	Environmental Chemical Corporation	MATERIALS DELIVERIES STORAGE CHECKLIST

Project Name:	Date:	Serial No.	
Building Name:		Control #	
Specified Location:		Reference #	
Drawing Reference:			

Description of Activities	Disposition			Inspection Date (Initials)
	ACCEPT	REJECT	HOLD	
1 Material: _____				
2 Date of Delivery _____				
3 Handling method _____				
4 Storage method _____				
5 Protection _____				

Remarks:

Checked By:	Inspected By:	Witnessed By:
Contractor Representative	Q.C. Inspector, Contractor	Prime Contractor Representative
Date:	Date:	Date:

	Environmental Chemical Corporation	NON-CONFORMANCE REPORT TRACKING

Contract _____ **Project No** _____

CTO No _____ **NCR Number** _____

Nonconformance Description (include specific requirement violated):	
Identified By	**Date**

Root Cause of Nonconforming Action:	

Corrective Action(s) to be Taken (include date when action(s) will be complete):	
To Be Performed By	**Date**

Action(s) to be Taken to Preclude Recurrence:	
To Be Performed By	**Date**

Acceptance By		
	Project Manager	**Date**
	CQC Manager	**Date**

Corrective Action(s) Completed by and Date:	Verification Completed by and Date:

	Environmental Chemical Corporation	NON-CONFORMANCE REPORT TRACKING LOG

Contract _____ Project Name _____

CTO No _____ Page ____ Of ____

NCR No.	Orig. Date	Initiated By	Nonconformance Description			Status	
Project No.	Close Date	Close By		Resp. Party	C/A Due	C/A Recommended And Approved	Re-inspection Results

	Environmental Chemical Corporation	RECORD OF TESTING ON -OR- OFF SITE

To: _____

Testing To Be Carried Out By: _____

Contract Number: _____ Contractor: _____

Item or Work for Test: _____

_____

Location of Test: _____

Proposed Date & Time of Test: _____

Specified Testing Requirements: _____

_____

Notified By: _____ Date: _____

To Be Inspected By: _____ ☐ _____ ☐ _____ ☐

_____ ☐ _____ ☐ _____ ☐

Test Record

Date of Test: _____ Location or Grid Ref. _____

Type of Test: _____

Test Conditions Maintained: Start ☐ Finish ☐

Accepted ☐ Rejected ☐

Test Result

Comments/Observations: _____

_____

_____

_____

Test Witnessed By:

_____ _____

QC Inspector (Signature) Supplier (Signature)

_____ _____

Contractor Repr (Signature) Prime Contractor Repr (Signature)

	Environmental Chemical Corporation	REWORK ITEMS LIST

Contract _____ **Project No** _____

CTO No _____

Item	Date Identified	Date Corrected
1.		
2.		
3.		
4.		
5.		
6.		
7.		
8.		
9.		
10.		
11.		
12.		
13.		
14.		
15.		
16.		
17.		
18.		
20. 21.		
22.		
23.		
24.		

	Environmental Chemical Corporation	STATUS SUMMARY ON NON-CONFORMANCE NOTICES

PROJECT: _____ DATE: _____

SEQUENTIAL SERIAL NO.	DATE OF ISSUE	DESCRIPTION	DATE RECEIVED BY CONTRACTOR	DATE RETURNED BY CONTRACTOR	Q.C. ENGINEER		COMMENTS
					ACCEPTED DATE	REJECTED DATE	

	Environmental Chemical Corporation	STOP WORK ORDER

Project Name		**Date**	
SWO No.		**Page**	
Contract No.		**CTO Number**	

1. Written Notice			
Issued to:		P.O. # or Activity:	
Name:		Location:	
Title:		Issued by (name):	
Origination:		Issued by (title):	
2. Verbal Notice			
Issued to:		Date:	
Title:		Time	

3. Associated NCR No.	**4. Associated CAR No.**

5. Stop Work Order Condition Description

6. Remedial Action Required:			
By Whom		By When	

7. Required Remedial Action Determined by:	
Project Manager	Date
CQC Manager	Date

8. Follow-up of Remedial Action Taken:

Verbal Notice to Resume Operations Given to:

Name	Title	Date	Time

Stop Work Order Cancellation Authorized by:

Program CQC Manager:	Date

This page intentionally left blank.

Appendix B

ECC Causal Analysis System

This page intentionally left blank.

ECC CAUSAL ANALYSIS SYSTEM

Step 1. Incident Description

Type of incident:

- Quality
- Vehicle/property loss >$500
- Environmental release or permit exceedance
- Injury or illness
- UXO-related
- Security
- High loss potential (HiPo)

Describe what happened:

_____

Evaluation of future risk if not controlled:

	Severity of Loss Potential		
Probability of Recurrence	*Minor*	*Serious*	*Major*
Will probably occur soon	Medium	High	High
Reasonable likelihood in future	Low	Medium	High
Unlikely	Low	Low	Medium

Step 2. Select Event Type

- Fall from elevation
- Fall on same level
- Struck by vehicle, equipment, load or moving object
- Struck against or bump into
- Caught in, between or under
- Caught on, snagged or hung
- Contact with harmful agent (chemical, biological, radiological, noise, temperature extreme, vibration)
- Ergonomic, overexertion, stress, strain, sprain
- Overpressurization, excessive temperature
- Equipment failure
- Environmental release
- Permit exceedence
- Product or process non-conformity
- Customer/stakeholder complaint, poor project performance rating
- Cost/schedule overrun

ECC Core Values

Service

Prosperity

People

Friendship

Safety

Step 3. Identify the Immediate Cause(s)

Identify those behaviors or conditions that directly resulted in the event or loss.

Substandard Acts or Behaviors

- Failure to follow established procedure
- Operating equipment without authority
- Exceeding the boundaries of the task envelope
- Operating at improper speed
- Failure to warn or secure
- Failure to control hazardous energy (de-energize, secure, lockout)
- Making safety devices inoperable (including jumpering interlocks)
- Using wrong or defective tools or equipment
- Poor lifting, pulling, turning technique
- Poor body positioning
- Using tools or equipment improperly
- Substance abuse or working under influence of prescription medication
- Inappropriate behavior
- Failure to check/monitor
- Failure to coordinate work activity
- Failure to identify customer/stakeholder expectations
- Failure to identify and reject non-conforming parts, materials or workmanship

Substandard Conditions

- Exposure to chemical, physical or biological agents
- Inadequate engineering controls
- Inadequate administrative controls
- Inadequate PPE
- Inadequate warning system or barricade
- Inadequate site layout or design
- Defective tools or equipment
- Congestion/restricted action
- Housekeeping/disorder
- Fire or explosion hazard
- Hazardous weather conditions
- Improper maintenance of infrastructure or plant facilities
- Failure to comply with designs, stakeholder expectations
- Inadequate resources on project
- Inadequate identification of regulations, codes, standards, specifications, permits to operate
- Inadequate communications equipment, software or process controls

Step 4. Identification of Root Cause(s)

Identify the system or personal factors that caused or permitted the immediate causes to be present.

System Factors

1. Leadership and Management

- Management commitment
  - to processes, policies and procedures
  - lead by example
- Management involvement
  - in ESQ activities (meetings, inspections, audits)
  - visible leadership
- Supervision
  - employee tasking, direction, follow-up
  - subcontractor oversight
- Line management accountability
- Adequate budgeting
- Assessment of risks and hazards
- Qualifications of supervisors and managers
- Performance evaluations and feedback
- Reporting relationships
- Employee involvement/inclusion in hazard evaluation and decision making

2. Communications and Training

- Training
  - Formal
  - OJT
- Evaluation of training effectiveness
  - Testing
  - Demonstration
  - OJE
- Competency determination
- Communications with client
- Communications with stakeholders
- Communications with employees
- Communications between organizations
- Communications between work groups or shifts
- Communications between individuals
- Communications with subcontractors

3. Project Development and Planning *(Plan)*

- Project Development
  - Understand SOW
  - Understand contract
  - Understand client and stakeholder relationships
  - Understand client and stakeholder expectations
- Risk analysis and management plan
  - PIP
  - Bid analysis
  - Process Safety Reviews
- Identification of codes, standards, specifications, SOPs
- Engineering and task planning
  - Multi-disciplinary, SME involvement
  - Review procedures
  - Value engineering
  - Site layout
  - Work task planning
- Project plans
- AHAs/JSAs
- Submittal process
- Hazardous work permits
- Regulatory permits
- Procurement
  - Subcontractor evaluation and selection
  - Requirements in RFP/SOW
  - Material specifications

4. Project or Work Task Execution *(Do)*

- Implementation of plan/procedure
- Schedule/work sequence
- Tools/equipment/PPE
  - Tools
  - Construction equipment
  - Infrastructure
  - Facilities
  - Process equipment
- Qualified personnel
- Compliance with codes/standards
- Documentation
- Document control
- Incident identification, notification, investigation and reporting

5. Measuring and Monitoring of Work Activities and Products *(Check)*

- Document reviews
- Design reviews
- Readiness reviews
- Four phase process
- Subcontractor oversight
- Exposure monitoring procedures
- Testing
  - Materials
  - Process equipment
  - Alarms and interlocks
  - Commissioning
  - Pilot and bench scale
  - Weights and measures
  - Calibration
- Inspections
  - Tools
  - Equipment
  - PPE
  - Competent person
  - Hazardous work activities
  - Materials receipt
  - Workmanship
  - Superintendent weekly safety
  - PM monthly safety
- Audits
- Customer feedback solicitation
- Employee feedback solicitation
- Internal Project Management Reviews
- Change identification, notification and impact assessment

6. Follow Through and Improvement *(Act/React)*

- Corrective action follow up
- Lessons learned
  - Develop
  - Communicate
  - Consult
  - Implement
- Response to client, user and employee feedback
- Emergency response
- Change management/risk management

Personal Factors

7. Capabilities

- Size, strength, reach
- Pre-existing physical limitations or medical conditions
- Sensory deficiency
- Intelligence
- Aptitude
- Memory
- Emotional disturbance
- Mental illness
- Fears/phobias

8. Stress

- Fatigue due to task load, duration or repetition
- Fatigue due to extended work schedule/ lack of rest
- Boredom
- Sensory overload
- Emotional overload
- Conflicting demands/confusion
- Frustration

9. Knowledge or Skills

- Experience
- Training
- Orientation
- Infrequent activity/lack of practice
- Coaching, evaluation and feedback

10. Motivation

- Convenience – save time or effort
- Improper behavior is approved, allowed, condoned or rewarded
- Proper behavior is ignored or punished by intended or unintended consequences
- Inadequate reinforcement of proper behavior
- Peer pressure
- Inadequate discipline
- Resistance to change

11. Abuse or Misuse

- Intended
- Unintended

Step 5. Corrective Action Plan

Development of an Action Plan to correct the root cause(s). Consider various systems, and whether or not 1) we have a process [P]; 2) our process consists of adequate standards [S]; and 3) whether we have sufficient compliance with our standards [C].

Improvement Action Guide

1. Leadership (P S C)

Core values
Mission
Policies
Balanced score card
Client alignment
Business processes
Visible leadership
Lead by example

2. Management, Supervision, and Employee Involvement (P S C)

Operations management responsibilities and accountability
Project management procedures
Qualified supervision
Adequate resources
Involvement of SMEs
Employee involvement activities
Standard operating procedures

3. Risk Evaluation (P S C)

PIP
Incorporation of PIP/RMP into project plans
Hazard identification and evaluation
Environmental impact assessment
Customers and stakeholders expectations and change probability
Process risk or hazard analysis
Activity hazard analysis

4. Project Development (P S C)

Understanding requirements
Understanding the contract
Estimating procedures
Bid/proposal review procedures
Inclusion of SMEs

5. Planning (P S C)

Understanding requirements
Understanding the contract
Handoff and tasking
Integration of risk management plans
Identification of requirements
Project plans and plan reviews
Client alignment meetings
Kickoff, MUM, pre-construction meetings
Schedule procedures
Engineering design and review procedures
Submittal development and review
Site layout, facility arrangement and task design
Means and methods
Communication of plans and procedures

6. Procurement and Subcontractor Management (P S C)

Subcontractor pre-qualification
RFP/SOW
Materials and equipment specifications
Selection
Integration
Oversight
Evaluation

7. Risk Controls (P S C)

Risk management plans
Standard operating procedures
Quality control system
Engineering controls
Administrative controls
PPE procedures
Permit procedures
Environmental policies, procedures and controls
Process controls
Accident prevention signs, tags and barricades
Hazardous work permits
Preventive maintenance
Rules
Security controls

8. Human Resources (P S C)

Hiring
Placement/assignment
Training
Competency
Evaluation and feedback
Incentive plans
Level of effort requirements and resource allocation

9. Emergency Procedures (P S C)

Analysis
Plans
Communication and training
Drills and tests
Critique and follow-up
Dedicated supplies
Warnings and alarm systems

10. Communications and Promotions (P S C)

ECCONET postings
Meetings
Tailgates
Orientation, new employee and site-specific
Postings
Promotion campaigns

11. Monitoring and Measuring (P S C)

Progress meetings and reporting
Four-phase process
Inspections
Audits and surveillances
Testing
Exposure monitoring
BSC progress reporting
Client feedback solicitation
Employee perception surveys
Hotline and reporting mechanisms
ECCOSLIPS
PMRs

12. Continuous Improvement (P S C)

Incident reporting
Lessons learned
Action item tracking
Client and stakeholder feedback and follow-through
Employee feedback system
Consultation of LL and incident databases
Change management procedures

13. Management Reviews (P S C)

PMR process
Audit tracking
BSC progress monitoring
Client reporting

Never Compromising Safety

Never Compromising Quality

This page intentionally left blank.

APPENDIX F

ACCIDENT PREVENTION PLAN

This page intentionally left blank.

ACCIDENT PREVENTION PLAN

ENVIRONMENTAL REMEDIATION SERVICES
U.S. ARMY GARRISON-REDSTONE ARSENAL

June 2021

Prepared for:

U.S. ARMY ENVIRONMENTAL COMMAND
Southeast-Environmental Service and Support Division
2450 Connell Road, Building 2264
Fort Sam Houston, TX 78234-7664

Contract No.: W9124J-18-D-0004, Delivery Order W9124J21F0020

This page intentionally left blank.

ACCIDENT PREVENTION PLAN

ENVIRONMENTAL REMEDIATION SERVICES
U.S. ARMY GARRISON- REDSTONE ARSENAL, REDSTONE ARSENAL, ALABAMA

June 2021

Prepared for:

U.S. ARMY ENVIRONMENTAL COMMAND
Southeast-Environmental Service and Support Division
2450 Connell Road, Building 2264
Fort Sam Houston, TX 78234-7664

Prepared by:

ECC
9300 West Courthouse Rd
Ste 303
Manassas. VA 20110

Contract No.: W9124J-18-D-0004, Delivery Order W9124J21F0020

This page intentionally left blank.

TABLE OF CONTENTS

1.0 INTRODUCTION AND SIGNATURES 1-1

2.0 BACKGROUND INFORMATION 2-1
2.1 RSA History and Description 2-1
2.2 Site Descriptions and Scope of Work 2-1
2.2.1 Anticipated High Risk Activities 2-4
2.3 Major Phases of Work Anticipated 2-5
2.4 Contractor Accident Experience 2-5
2.5 Key Field Personnel 2-6

3.0 STATEMENT OF SAFETY AND HEALTH POLICY 3-1

4.0 ORGANIZATION, RESPONSIBILITIES, AND LINES OF AUTHORITY 4-1
4.1 Health and Safety Responsibilities 4-1
4.1.1 ECC Project Manager 4-2
4.1.2 ECC Safety and Health manager 4-2
4.1.3 Site Safety and Health Officer 4-2
4.1.4 Site Superintendent 4-3
4.1.5 Field Personnel 4-4
4.1.6 Subcontractors 4-4
4.1.7 Site Visitors 4-5
4.2 Lines of Authority 4-5
4.3 Competent Persons 4-5
4.4 Disciplinary Procedures 4-5
4.5 Manager and Supervisor Accountability 4-5

5.0 SUBCONTRACTORS AND SUPPLIERS 5-1
5.1 Identification of Subcontractors and Suppliers 5-1
5.2 Managing Subcontractors 5-1
5.3 Supplier Control 5-1

6.0 MEETINGS AND TRAINING REQUIREMENTS 6-3
6.1 Project Meetings and Training Requirements 6-3
6.2 Safety Indoctrination Training for New Employees 6-5
6.3 Periodic Safety and Health Training for Supervisors and Employees 6-4
6.4 Visitor Indoctrination Policy 6-4
6.5 Site Orientation 6-4
6.6 Emergency Response Training 6-4
6.7 Personal Protective Equipment and Safety Equipment Training 6-4

7.0 SAFETY AND HEALTH INSPECTIONS 7-1
7.1 General Inspection Procedures 7-1
7.2 External Inspections and Certifications 7-2
7.3 Follow-up Procedures for Inspection Deficiencies 7-2

8.0 MISHAP REPORTING AND INVESTIGATION 8-1
8.1 Mishap Investigation, Reports, Logs 8-1
8.2 Immediate Notification of Major Mishaps 8-2

9.0 PLANS, PROGRAMS, AND PROCEDURES 9-1

10.0 RISK MANAGEMENT PROCESSES 10-1
10.1 Activity Hazard Analyses – Policy and Procedure 10-1

LIST OF TABLES

Table 2-1	Hazardous Activities Anticipated in the Scope of Work
Table 2-2	ECC OSHA Recordable Injuries and Illnesses through Quarter 2 2020
Table 2-3	Key Personnel
Table 5-1	Subcontractors
Table 6-1	Project Meetings and Training Requirements
Table 7-1	General Inspection Requirements
Table 9-1	Plans, Programs, and Procedures

LIST OF FIGURES

Figure 2-1	Installation Location Map
Figure 3-1	ECC Corporate Environment, Safety, and Quality Statement
Figure 4-1	Safety Organization

LIST OF APPENDICES

Appendix A	Activity Hazard Analyses
Appendix B	Resumes of Key Safety and Health Personnel and Competent Persons
Appendix C	ECC COVID-19 Prevention Program
Appendix D	ECC Corporate Environment, Safety, and Quality Standard Operating Procedures (Table of Contents)

LIST OF ATTACHMENTS (Supplemental Plans)

Attachment 1	Emergency Action Plan
Attachment 2	Fire Prevention and Protection Plan
Attachment 3	Medical Support Plan
Attachment 4	Drug and Alcohol Abuse Prevention
Attachment 5	Site Sanitation Plan
Attachment 6	Bloodborne Pathogens Program and Exposure Control Plan
Attachment 7	Site Layout Plans
Attachment 8	Access and Haul Road Plan
Attachment 9	Hearing Conservation Program
Attachment 10	Health Hazard Control Plan
Attachment 11	Hazard Communication Program
Attachment 12A and 12B	Heat and Cold Stress Monitoring Plan
Attachment 13	Crystalline Silica Assessment
Attachment 14	Hazardous Energy Control Plan
Attachment 15	Excavation and Trenching Plan
Attachment 16	Site Safety and Health Plan (Hazardous, Toxic, and Radioactive Waste [HRTW]

ACRONYMS AND ABBREVIATIONS

°F	degrees Fahrenheit
°C	degrees Celsius
<	less than
>	greater than
%	percent
µg/L	micrograms per liter
µg/m^3	micrograms per cubic meter
Abs	skin absorption
ACGIH	American Conference of Governmental Industrial Hygienists
ADEM	Alabama Department of Environmental Management
AED	Automated External Defibrillator
Ag	Silver
AHA	Activity Hazard Analysis
ANSI	American National Standards Institute
APP	Accident Prevention Plan
ASTM	American Society for Testing Materials
BBP	Bloodborne Pathogen
Beta-BHC	Beta-hexachlorocyclohexane
BLS	Bureau of Labor Statistics
bpm	beats per minute
C	Ceiling limit value which should not be exceeded at any time
Ca	carcinogen
Cd	Cadmium
CFR	Code of Federal Regulations
CHHM	Certified Hazardous Materials Manager
CIH	Certified Industrial Hygienist
CMDS	Corrective Measures Design Study
CMI-O	Corrective Measures Implementation - Operations
CMIP	Corrective Measures Implementation Plan
CMIR	Corrective Measures Implementation Report
CMS	Corrective Measures Study
Co	cobalt
CO	carbon monoxide
Con	skin and/or eye contact
COC	contaminant of concern
COR	Contracting Officer's Representative
CP	Competent Person
CPR	Cardiopulmonary Resuscitation
CSP	Certified Safety Professional
CWM	chemical warfare materiel
Cr	Chromium
CRC	Contamination Reduction Corridor
CRZ	Contamination Reduction Zone
DA	Department of the Army
DART	Days Away, Restricted, or Transferred
dB	decibel
dBA	decibels adjusted
DCE	Dichloroethene
DD	Decision Document
DDT	Dichlorodiphenyltrichloroethane
DFOW	Definable Feature of Work

ACRONYMS AND ABBREVIATIONS

DIA	Defense Intelligence Agency
DNT	dinitrotoluene
DoD	Department of Defense
DPT	Direct Push Technology
ECC	Environmental Chemical Corporation
EDGN	ethylene glycol dinitrate
EMR	Experience Modification Rate
ESQ	Environment, Safety, and Quality
EU	European Union
EZ	Exclusion Zone
GCWD	Gulf Chemical Warfare Depot
GDA	Government Designated Authority
HAZWOPER	Hazardous Waste Operations and Emergency Response
HBV	Hepatitis B Virus
HEPA	high-efficiency particulate air
Hg	mercury
HIV	Human Immunodeficiency Virus
HAS	Hollow Stem Auger
HTRW	Hazardous, Toxic and Radioactive Waste
Hz	Hertz
I/C	Impact/Compression
IDLH	Immediately Dangerous to Life and Health
IDW	Investigation Derived Waste
Inh	inhalation
Ing	ingestion
ISEA	Industrial Safety Equipment Association
ISEB	In-Situ Enhanced Bioremediation
LEL	lower explosive limit
LUC	Land Use Control
MEC	munitions and explosives of concern
mg/kg	milligrams per kilogram
mg/m^3	milligrams per cubic meter
MIP	Membrane-Interface Probe
Mn	manganese
MNA	Monitored Natural Attenuation
NA	Not applicable
NAICS	North American Industrial Classification System
ND	Not determined
NFPA	National Fire Protection Association
NIOSH	National Institute for Occupational Safety and Health
O&M	Operations and Maintenance
OEL	Occupational Exposure Limit
OSHA	Occupational Safety and Health Administration
OWS	oil/water separator
PAH	polycyclic aromatic hydrocarbon
Pb	Lead
PCE	tetrachloroethene
PEL	Permissible Exposure Limit
PG	Professional Geologist
PID	Photoionization detector
PM	Program/Project Manager

PMP	Project Management Professional
PPE	Personal Protective Equipment
ppm	parts per million
PWS	Performance Work Statement
QC	Quality Control
QCM	Quality Control Manager
QCP	Quality Control Plan
QP	Qualified Person
RAC	Risk Assessment Code
RDX	1,3,5-trinitro-1,3,5-triazine
REL	NIOSH Recommended Exposure Limit
RIR	Recordable Injury Rate
RSA	Redstone Arsenal
SAMHSA	Substance Abuse and Mental Health Services Administration
SDS	Safety Data Sheet
SHM	Safety and Health Manager
SOH	Safety and Occupational Health
SOP	Standard Operating Procedure
SOW	Scope of Work
SSHO	Site Safety and Health Officer
SSHP	Site Safety and Health Plan
STEL	Short term exposure limit
SVOC	semivolatile organic compounds
SZ	Support Zone
TBD	To Be Determined
TCE	Trichloroethene
TCRA	time-critical removal action
TLV	Threshold Limit Value
TSCA	Toxic Substances Control Act
TWA	Time-weighted Average
UL	Underwriters Laboratories
USACE	United States Army Corps of Engineers
USAEC	United States Army Environmental Command
UST	underground storage tank
UXO	unexploded ordnance
VC	vinyl chloride
VOC	volatile organic compound
WBGT	Wet Bulb – Globe Temperature
WWII	World War II

This page intentionally left blank.

WORKER ACKNOWLEDGEMENT OF THE ACCIDENT PREVENTION PLAN/SITE SAFETY AND HEALTH PLAN AND SITE ORIENTATION

I have read or been trained to the contents of this Accident Prevention Plan (APP). I understand the contents, and I agree to abide by its requirements. I understand that failure to comply with the provisions of this plan can lead to disciplinary action and possible termination from the project. Documentation of worker acknowledgment will be placed in the Project Records.

APP/Site Safety and Health Plan (SSHP)/Site Orientation Acknowledgment Form

Printed Name	Signature	Date

This page intentionally left blank.

1.0 INTRODUCTION AND SIGNATURES

This Accident Prevention Plan (APP) has been prepared by Environmental Chemical Corporation (ECC) to describe how ECC's Safety and Occupational Health (SOH) Program is tailored to the processes, hazards and requirements for environmental remediation services at Redstone Arsenal (RSA), Alabama. Work conducted under this contract will be performed in accordance with applicable Federal, State, and local SOH laws and regulations including: Occupational Safety and Health Administration (OSHA) standards (including 29 Code of Federal Regulations [CFR] 1910 and 29 CFR 1926) and the United States Army Corps of Engineers (USACE) Safety and Health Requirements Manual (EM 385-1-1, 15 November 2014). The contents of the APP are subject to review and revision as new information becomes available.

Plan Preparer:

Lauren Sparkman Digitally signed by Lauren Sparkman DN: cn=Lauren Sparkman, o=ECC, ou, email=lsparkman@ecc.net, c=US Date: 2021.06.08 16:06:58 -05'00'

	8 June 2021	(808) 479-0668
Lauren Sparkman Environmental Engineer	Date	Phone Number

Plan Concurrence:

Kym Edelman

	8 June 2021	(757) 435-5384
Kym Edelman, Certified Industrial Hygienist (CIH), Certified Safety Professional (CSP) Safety and Health Manager (SHM)	Date	Phone Number

Plan Approval:

Pamela Foti

	8 June 2021	(508) 274-3084
Pam Foti, Certified Hazardous Material Manager (CHMM), Project Management Professional (PMP) Project Manager (PM)	Date	Phone Number

This page intentionally left blank.

2.0 BACKGROUND INFORMATION

This section presents a brief description of the project including site descriptions, Scope Of Work (SOW), and key personnel.

Contractor:	ECC
Contract number:	W9124J-18-D-0004
Delivery Order:	W9124J-21F0020
Project Name:	Environmental Remediation Services, RSA, Alabama

2.1 RSA History and Description

The RSA occupies approximately 38,300 acres in Madison County, Alabama (**Figure 2-1**). The RSA is bounded on the north and east by the city of Huntsville, on the west by the city of Madison, on the west and southwest by Wheeler National Wildlife Refuge, and on the south by the Tennessee River. Huntsville has a population of nearly 165,000; Madison County population is about 320,000. Approximately 330 military families reside in government quarters on RSA and approximately 40,000 government employees and contractors work at the facility. The primary mission of RSA is the development, acquisition, testing, fielding, and sustainment of aviation and missile weapon systems. Most of the installation tenants support this effort; however, RSA is also home to such diverse activities as training for handling explosives and ordnance devices, Defense Intelligence Agency (DIA) activities, and the production of iron carbonyl. The RSA is home to over 70 different tenant organizations.

2.2 Site Descriptions and Scope of Work

The SOW under Contract W9124J-18-D-0004 is to perform environmental remediation services at RSA. Site descriptions and their associated SOWs are discussed below.

RSA-156 Groundwater Site, Groundwater Unit #13 and RSA-157 Groundwater Site, Groundwater Unit #14

RSA-156 is a 1,400-acre groundwater unit that includes the RSA-116 surface media site and hundreds of igloo-style magazines used for storage of explosives, conventional munitions, and chemical munitions (historically), as well as various small-scale testing and conditioning facilities. The SOW includes the following:

- Respond to Alabama Department of Environmental Management (ADEM) comments and finalize Corrective Measures Study (CMS).
- Prepare Corrective Measures Implementation Plan (CMIP) and Decision Document (DD)/Statement of Basis and permit modification for the implementation of the groundwater corrective measures.
- Implementation of Corrective Measures (Monitored Natural Attenuation [MNA] and Land Use Controls [LUCs]) including installation up to three bedrock wells, installation of LUC signs, and preform groundwater and spring sampling.
- Prepare Corrective Measures Implementation Report (CMIR).

RSA-262, CSW Warehouse Area

RSA-262 is the former Gulf Chemical Warfare Depot (GCWD) area. Five of seven warehouses originally located at RSA-262 remain and are used for storage/administrative purposes. Two buildings were demolished in 2004. The warehouses were constructed in October 1942 and historically used for storage

of inert materials, such as spare parts and shipping crates, and for rehabilitation of unserviceable munitions/equipment. The SOW includes the following:

- Respond to United States Army Environmental Command (USAEC)/RSA comments and finalize CMS.
- Develop CMIP with a permit modification.
- Finalize DD/Statement of Basis.
- Implement CMIP including excavation and transport and disposal of polycyclic aromatic hydrocarbon (PAH)-impacted soil, confirmation sampling, and site restoration. Additionally, install monitoring wells, perform groundwater sampling, and perform groundwater injection event.
- Prepare CMIR.

RSA-263 CWS Depot Motor Pool (Building 8017)/Change House (Building 8020)

RSA-263 is a 3.3-acre site located within the RSA-154 groundwater site. Building 8017 was used as a motor repair shop to support chemical warfare materiel (CWM) operations until 1957, when it was converted to storage, repair shop, and dry boat storage. Building 8020 was originally used as a change house for CWM Services personnel and later converted to a laboratory/equipment testing mission. Buildings 8015 and 8016 existed on the same foundation and were comprised of a gasoline pump station and a motor greasing and wash stall. A gasoline UST was located at the east side of the building and was removed in the 1980s. The four former buildings B-8015, B-8016, B-8020, and B-8017 have been demolished. The SOW includes the following:

- Prepare CMIP, DD/Statement of Basis and permit for modification for the implementation of groundwater corrective measures (MNA).
- Implement MNA including sampling monitoring wells.

CCSWMU-306, Steam Heating Plant, Building 7291

RSA-306 is comprised of Building 07291. The facility is an active steam heating plant which includes an oil/water separator (OWS) and concrete sump to the northwest, two former underground storage tanks (USTs) to the northeast, and a water conditioning vault with steam pipelines to the southwest. The SOW includes the following:

- Prepare Corrective Measures Design Study (CMDS) including Membrane-Interface Probe (MIP) survey and groundwater sampling.
- Prepare CMIP.
- Prepare DD/Statement of Basis.
- Implement remedy, which is unknown as this time.
- Prepare CMIR.
- Perform one year of quarterly Corrective Measures Implementation- Operations (CMI-O) sampling with reporting.

RSA-308, Exterior Sump at Building 7120

RSA-308 is a 0.01-acre site located in the southeastern portion of RSA. The exterior sump and drainage channel associated with Building 7120 collected propellant wastes from floor drains located within the test bays. The SOW includes the following:

- Prepare CMIP, permit modification, and DD.
- Install interface wells and perform sampling motoring wells.

- Prepare CMIR
- Perform one year of semiannual groundwater sampling and reporting

MSFC-033A, Surface Soils East of Building 4816; RSA-056, Closed Arsenic Waste Ponds (South) Area U; RSA-139, Closed Arsenic Waste Ponds (North) Area U; RSA-282/ RSA-072-R-01, Former Mortar Test Site

MSFC-033A was the result of the inadvertent placement of PAH-contaminated surface soil to the east side of Building 4816. The contaminated soils were partially covered with a new foundation for building expansion and a concrete pad for an electrical generator. RSA-056 and RSA-139 are located adjacent to each other and both were unlined surface impoundments that received arsenic-contaminated sludge/wastewater in the early-1940s. The sites are fenced and overlain by a compacted clay cap. RSA-282 was part of the RSA-072 mortar-tube proofing range. Munitions and explosives of concern (MEC) were found and removed prior to and during a time-critical removal action (TCRA) in 2008 and 2009. The probability of encountering unexploded ordnance (UXO) has been determined to be low; however, since the site was once part of an active range and MEC was historically detected, the site is not eligible for unrestricted use as defined in Alabama Administrative Code r. 335-5. The SOW includes the following:

- Implement corrective measures at all sites including a version of LUCs with fencing and groundwater monitoring at RSA-056/RSA-139.
- Prepare CMIRs.

RSA-009, Inactive Sewage Treatment Plan #3 and RSA-140, Inactive Disposal Area Near T/S Tower

RSA-009 is an inactive sewage treatment plant located on 3.4 acres that was constructed in 1942. It is not in use but is fully operational. The site includes both Toxic Substances Control Act (TSCA)-regulated and non-hazardous solid waste streams. RSA-140 is an inactive disposal area located on three acres that consists of two disposal mound areas comprised of construction materials that cover an area of 320 square feet. The SOW includes the following:

- Perform excavation, confirmations sampling, site restoration, groundwater sampling (RSA-009 only), and well abandonment (RSA-009 only).
- Prepare CMIRs.

RSA-058, Inactive Rubble Fill/Waste Pile Area W

RSA-058 is a historical rubble fill area. It was reportedly used for disposal of ash from ordnance demolition in the 1940s/1950s and for rubble and other fill during the 1960s/1970s. The SOW includes the following:

- Perform geophysical survey, delineation sampling, excavation, confirmation sampling, and site restoration.
- Update wetlands delineation.
- Prepare Construction Best Management Practices Plan, Well Closure Plan, CMIR, and Survey Plat.

RSA-083 Inactive Spray Booth Sump

RSA-083 occupies approximately 5.9 acres within Test Area 10, along Eagle Road. Building 7344 was used for large rocket motor preparation/assembly and painting of missile casings. Trichloroethene (TCE), the primary contaminant of concern (COC), has been steadily decreasing in groundwater, accompanied by increases in TCE degradation products (cis-1,2-dichloroethene [DCE]/vinyl chloride [VC]), suggesting that natural attenuation is reducing COCs in site groundwater. The SOW includes the following:

- Perform well inspection, groundwater sampling, and reporting

CCSWMU-003 (RSA-003), In-Ground Oil/Water Separator, Building 3617

Building 3617 was constructed during World War II (WWII) as a warehouse/shipping facility. During the 1960s, it became the Auto Skills Center, where military personnel performed maintenance on personal vehicles. RSA-003 is the location of a former in-ground OWS. The former OWS (removed in 2000) received waste lubricant oils, grease, solvents, and detergents until 1997 and when it was replaced by a new in-ground OWS. Historical spills/leaks resulted in groundwater contamination. The SOW includes the following:

- Perform dye tracer study.
- Prepare Design Optimization Summary Report
- Perform In-Situ Enhanced Bioremediation (ISEB) injections.
- Perform two years of quarterly performance monitoring and reporting.

RSA-048, Inactive Closed sanitary Landfill and RSA-059 Inactive Construction Rubble Fill

Sites RSA-048 and RSA-059 are surface disposal areas/landfills. RSA-048 is a 5.5-acre site that was active from 1947 through the early 1950s and received construction rubble. Limited previous sampling indicates the presence of industrial waste constituents such as metals, semivolatile organic compounds (SVOCs) (including PAHs), and volatile organic compounds (VOCs) in soil, sediment and groundwater. The nature/extent of these waste materials is unknown. The disposal area was not formally capped but has a thin layer of soil covering the waste piles/trenches. Environmental concerns are driven by the potential of contaminant release to the wetland. Current land usage is for non-intrusive surface use only.

RSA-059 is an approximately 11.8-acre site located in the central portion of RSA that is bounded on the north, east, and south sides by wetlands and the southern and eastern portions of the site are within the 100-year flood zone. A major sewage lift station is located in the western portion of this site. The site was active from the late-1940s to the mid-1970s and was used for disposal of rubble, construction debris (primarily railroad ties), sanitary and industrial waste. The SOW includes the following:

- Finalize CMIPs.
- Perform geophysical survey, test pits and sampling of all media.
- Prepare CMS, CMIP, and DD/Statement of Basis for each site.

RSA-255 Former Manganese Ore Storage Area

RSA-255 is an 8.3-acre site located within the former GCWD Area in the south-central portion of RSA; was used for the stockpiling of strategic minerals (i.e., manganese ore). The SOW includes the following:

- Perform mechanically disc plow and rake the soil to remove and collect visible manganese ore, transportation and disposal, and site restoration.
- Perform soil sampling if necessary.

2.2.1 Anticipated High Risk Activities

Anticipated high risk activities for this project include excavation and trenching. Competent persons (CPs) will be designated on the Activity Hazard Analysis (AHA) for this respective activity, and will be present on site, as required by USACE EM 385 1-1 during the activity.

2.3 Major Phases of Work Anticipated

To achieve the aforementioned SOWs, this project will include the following anticipated definable features of work (DFOW) listed in **Table 2-1** below.

Table 2-1: Hazardous Activities Anticipated in the Scope of Work

Hazardous Activities (Require Activity Hazard Analyses)
Mobilization, Site Inspection and Site Preparation[(a)]
Environmental Sampling[(a)]
Well Installation, Maintenance, and Abandonment[(a)]
Landfill Repair and Maintenance[(a)]
Land Use Control (LUC) Inspections and Geophysical Survey[(a)]
Direct Push Technology (DPT)/ Hollow Stem Auger (HSA)/Air Rotary/ Interface Probe (MIP) Survey[(a)]
Excavation, Transportation, and Disposal[(a)]
In-Situ Enhanced Bioremediation (ISEB) injection
Disc and Raking Contaminated Soil[(a)]
Equipment Decontamination, Demobilization and Site Restoration[(a)]

Notes:
(a) Activity Hazard Analyses is included as **Appendix A**.

The APP was prepared to address the complete range of activities to be conducted per the Performance Work Statement (PWS). Hazards associated with the work that will be addressed in the AHAs, some of which have been completed and are included in **Appendix A**. Other AHAs will be developed during the course of the project prior to the preparatory meeting associated with each DFOW as the work develops.

Work conducted under this contract will be performed in accordance with USACE Health and Safety Requirements Manual, EM 385-1-1 (30 November 2014), National Fire Protection Association (NFPA) 101 Life Safety Code (2006) and ECC Standard Operating Procedures (SOPs) addressing safety work practices.

2.4 Contractor Accident Experience

As shown in **Table 2-2**, ECC has an excellent safety record. ECC's Experience Modification Rate (EMR) is less than 1.0, indicative of fewer injuries and claims compared to other construction companies. The OSHA Recordable Injury Rate (RIR) is also less than the industry averages 2014 Bureau of Labor Statistics (BLS) data in North American Industrial Classification System (NAICS) Code 236, Building Construction.

Table 2-2: ECC OSHA Recordable Injuries and Illnesses through Quarter 2 2020

	2015	2016	2017	2018	2019	2020	National Avg Remediation 56291 (2018)	Nat Av Non-Res Bldg 2362 (2018)
Work Hours	783,714	650,615	533,274	523,449	772,677	399,171		
Total Recordable Cases	5	2	2	0	1	1		
Total Recordable Rate	1.27	0.61	0.75	0.0	0.28	0.5	2.9	2.5
DART Cases	2	2	2	0	0	0		
DART Rate	0.51	0.61	0.75	0.00	0.0	0.5	1.7	1.4

	2015	2016	2017	2018	2019	2020	National Avg Remediation 56291 (2018)	Nat Av Non-Res Bldg 2362 (2018)
Days Away Cases	2	2	2	0	0	0		
Days Away Rate	0.51	0.61	0.75	0.00	0.0	0.0	0.9	0.8
Interstate EMR	0.63	0.65	0.70	0.74	0.7	0.73		

Notes:
DART = Days Away, Restricted, or Transferred
EMR – Experience Modification Rate

Copies of ECC's OSHA Form 300 for the above-referenced years are available on request.

2.5 Key Field Personnel

Table 2-3 lists key field personnel for this project. Resumes of the Site Safety and Health Officer (SSHO) and SHM are included in **Appendix B**.

Table 2-3: Key Personnel

Name	Organization	Role	Contact (phone)
Veronica Reese	USAEC	COR	Office: (210) 466-1406
George Xanthos	USAEC	Environmental Support Manager, Southeast Division	Office: (210) 466-1266
Clint Howard	U.S. Army – RSA	Branch Chief – Environmental Restoration	Office: (256) 842-3702
Pam Foti, CHMM, PMP	ECC	PM	Mobile (508) 274-3084
Carol Canada, PG	ECC	Assistant PM	Mobile: (615) 693-9915
Kym Edelman, CIH, CSP	ECC	SHM	Mobile: (757) 496-5622
Brian Kateley	ECC	SSHO	Mobile: (410) 671-2970
Aaron Glad	ECC	Site Superintendent	Mobile: (508) 229-2270

Notes:
CHMM – Certified Hazardous Materials Manager
CIH – Certified Industrial Hygienist
COR – Contracting Officer's Representative
CSP – Certified Safety Professional
ECC – Environmental Chemical Corporation
PG – Professional Geologist
PM – Project Manager
PMP – Project Management Professional
SHM – Safety and Health Manager
SSHO – Site Safety and Health Officer
USAEC – United States Army Environmental Command

3.0 STATEMENT OF SAFETY AND HEALTH POLICY

The ECC Corporate Environment, Safety and Quality (ESQ) statement is presented in **Figure 3-1**. The statement will be posted at the job site on the safety and health bulletin board and in other applicable locations.

The safety goal for this project is zero loss incidents, and zero incidents with a high potential for loss. ECC will strive to complete the project without any injuries, significant property damage incidents, reportable environmental releases, or quality defects requiring re-work.

Objectives to meet this goal include:

- Conduct client kickoff meeting before the start of the project
- Hold subcontractor pre-construction meetings before work begins
- Implement the three-phase quality control (QC) system
- Conduct site orientation, including review of this APP with all project participants
- Use only trained and qualified workers
- Generate AHAs for all major DFOWs and train workers in AHA content
- Perform daily work-site inspections
- Conduct daily Plan-of-the-Day and Safety Tailgate Meetings
- Hold workers accountable for following hazard controls listed in the AHA
- Hold monthly project ECC and Subcontractor management safety meetings
- Conduct inspections by qualified Safety and Health personnel
- Employee participation activities such as milestone recognition and establishing a safety committee by the on-site team.

Figure 3-1: ECC Corporate Environment, Safety, and Quality Statement

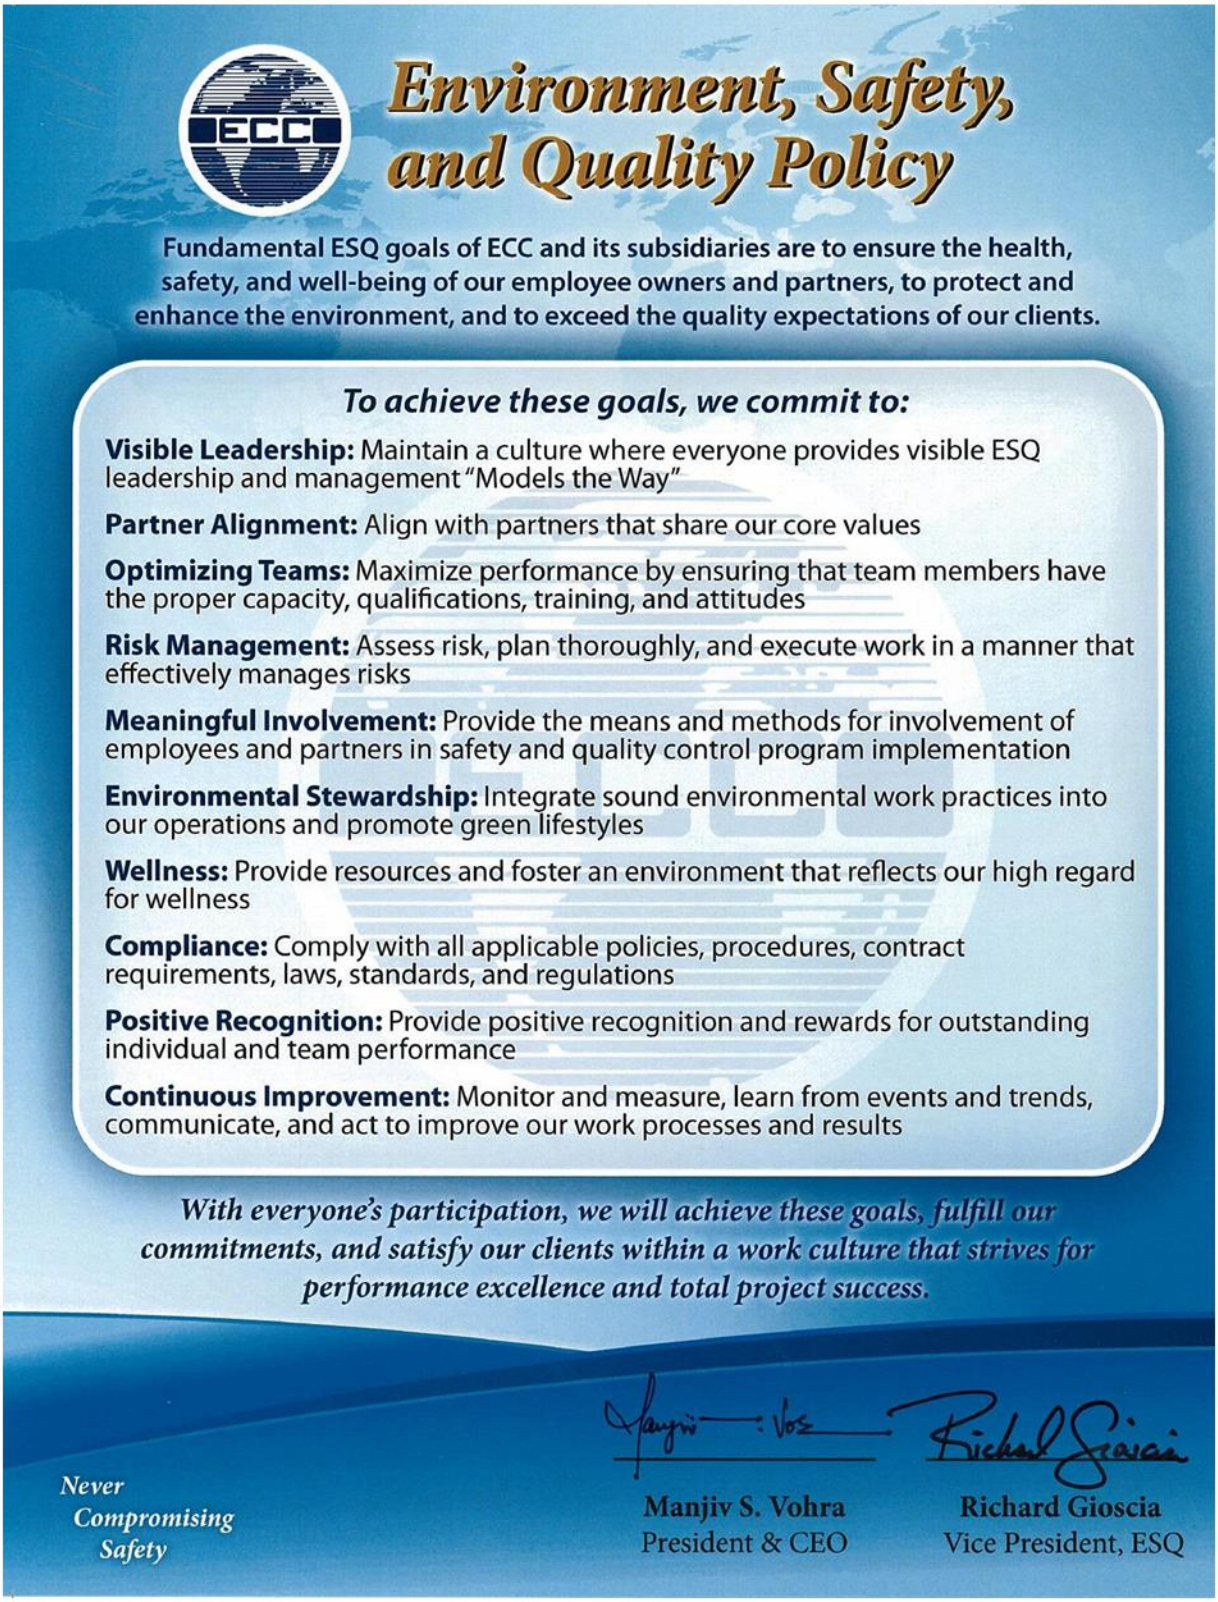

4.0 ORGANIZATION, RESPONSIBILITIES, AND LINES OF AUTHORITY

ECC and its subcontractors are responsible for implementing this APP. Personnel responsibilities for project safety and the lines of authority of these safety personnel are described below. Refer to **Figure 4-1** for the project safety organization. Resumes of the SHM and SSHO are provided in **Appendix B.**

ECC, as the prime contractor, is the "controlling authority" for all work site safety and health of the subcontractors. ECC is responsible for informing their subcontractors of the safety provisions under the terms of the contract and the penalties for noncompliance, coordinating the work to prevent one craft from interfering with or creating hazardous working conditions for other crafts, and inspecting subcontractor operations to ensure that accident prevention responsibilities are being carried out.

Figure 4-1: Safety Organization

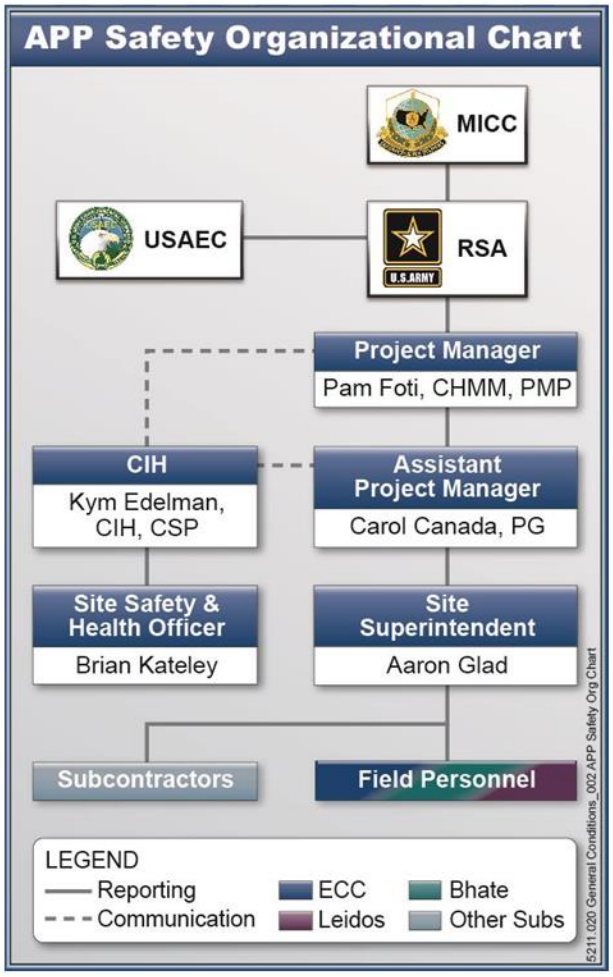

4.1 Health and Safety Responsibilities

The following sections describe the key personnel involved in this project and their responsibilities. To achieve the goals of the APP, each individual must fulfill their responsibilities and comply with the health and safety requirements. Failure to do so could result in removal from the site.

No work will be conducted on the site without the presence of the Site Safety and Health Officer (SSHO) or designated CP. Pre-task analysis (AHA, daily tailgate, Job Safety Analysis) will be conducted prior to doing work.

4.1.1 ECC Project Manager

Reports through Program Director to the Chief Operating Officer.

The PM, Ms. Pam Foti, CHMM, PMP, represents ECC in all aspects of work under the contract and is responsible for the following:

- Providing leadership by setting an example for all site personnel through actions and words regarding the importance of proper health and safety practices and holding project staff accountable for safety performance.
- Ensuring adequate resources are available to implement the APP.
- Ensuring that subcontractor Statements of Work include appropriate safety provisions and expectations.
- Ensuring that mishaps are properly reported to the Army and ECC's ESQ reporting network.
- Notifying the SHM of any changes in the SOW or site conditions.
- Ensuring that the APP is updated to address new hazards.

4.1.2 ECC Safety and Health manager

Reports to the Vice President of ESQ.

The SHM, Ms. Kym Edelman, CIH, CSP will oversee the overall project health and safety structure and implementation.

The SHM is responsible for the following:

- Reviewing and signing the APP prior to submittal and approving any modifications.
- Developing and/or reviewing AHAs prepared for the project.
- Approving the appointment of the SSHO and ensuring that the SSHO has the appropriate training and competencies to perform all expected duties.
- Being available on a 24-hour basis for consultation with the SSHO during on-site emergencies or as needed.
- Providing on-site consultation as needed to ensure the APP is fully implemented.
- Conducting general safety inspections during site visits and at least once per quarter.
- Participating in the investigation of mishaps.
- Evaluating air monitoring data and recommending changes to engineering controls, work practices, and personal protective equipment (PPE).
- Assisting in development of on-site training, which will be provided by the SSHO.

4.1.3 Site Safety and Health Officer

Reports to the PM and SHM.

The SSHO, Mr. Brian Kateley, implements the task-specific APP. In accordance with USACE EM 385-1-1, the SSHO must have completed the 30-hour OSHA Construction Safety course, the 30-hour General Industry Safety course, or an equivalent course meeting the 30-hour training objectives; eight hours of safety and health coursework every year; and at least five years' experience in construction or general industry safety or four years' experience plus a third party, nationally accredited SOH certification.

The SSHO will be responsible for:

- Serving as the general site CP for safety and health (EM 385-1-1 01.A.17 and 29 CFR 1926.20(b)(2)). No work will be done unless the SSHO or a suitable CP is on site.
- Overseeing compliance with the APP procedures and OSHA regulations through informal daily inspections.
- Developing (or assisting subcontractors with the development of) project-specific AHAs before work begins.
- Reporting to the site on a full-time basis for the duration of field activities.
- Serving as a member of the QC staff on matters relating to safety and health.
- Stopping work if unacceptable safety and health conditions exist and taking necessary action to re-establish and maintain safe working conditions.
- Consulting and coordinating modifications to the APP with the SHM, ECC PM, and designated U.S. Army representative.
- Ensuring all site personnel and visitors are properly trained in site hazards.
- Ensuring all employees and subcontractors are properly trained on the APP/AHAs and implement the APP.
- Conducting air monitoring and preparing air monitoring reports.
- Conducting site safety surveys and maintaining deficiency logs.
- Ensuring accidents are reported, investigated, and corrective actions are implemented.
- Monitoring decontamination methods to determine effectiveness.
- Ensuring proper training on PPE usage and monitoring the effectiveness of the PPE program.
- Maintaining all required safety and health records (e.g., OSHA 300 Logs, incident/accident reports, training certificates and qualifications, equipment checklists, safety plans, air monitoring data and reports) throughout the life of the project.

4.1.4 Site Superintendent

Reports to the PM.

The Site Superintendent, Mr. Aaron Glad, is responsible for:

- Setting an example for all site personnel through actions and words regarding the importance of proper health and safety practices on the job.
- Assisting in the development of AHAs before beginning work.
- Communicating daily work plans and schedules with the SSHO.
- Monitoring overall safety performance of field personnel.
- Conducting a weekly general safety inspection of the site, when needed.
- Enforcing safety rules and correcting work practices or conditions that may result in injury or hazard exposure.

- Immediately stopping site operations in emergencies or serious hazard exposure.
- Participating in mishap investigations.
- Ensuring proper equipment is provided, utilized, and maintained in accordance with manufacturer recommendations.

4.1.5 Field Personnel

Report to the SSHO, Site Superintendent, or CP.

Field personnel are responsible for understanding and abiding by the APP and performing work in a safe and responsible manner. Specific responsibilities include the following:

- Acting in a responsible manner at all times in order to prevent incidents, injury, and exposure to themselves and co-workers.
- Reporting all incidents, including near misses, and hazards to the SSHO.
- Attending and participating in all health and safety tailgate meetings.
- Following the instructions and directions of the SSHO, Site Superintendent, and/or CP.
- Utilizing the PPE provided.
- Following all field safety procedures for safe work practices.
- Performing tasks as instructed (unless the individual feels unqualified to perform the tasks safely).
- Conducting work in a manner compliant with the APP and AHAs.
- Reporting any personal condition that could affect their safety and/or the safety of coworkers (e.g., fatigue, drowsiness, illness, impairment by medications, influence by drugs or alcohol, emotional stress).

4.1.6 Subcontractors

Report to the SSHO or CP.

Subcontractors who perform work for ECC under this APP are responsible for the health and safety of their employees. The presence of an SSHO and the implementation of the APP do not relieve subcontractors of their responsibilities as employers. Specific responsibilities of subcontractors include:

- Complying with the requirements of their SOW.
- Development of AHAs for their work activities.
- Maintaining a safe and healthy work environment.
- Complying with contract requirements, laws, regulations, and EM 385-1-1.
- Reviewing the APP to ensure that the health and safety requirements of their specific tasks are satisfied.
- Performing all work in accordance with the APP requirements.
- Providing trained and experienced workers for the specific work activities.
- Participating in the Safety Tailgate Meetings.
- Identifying additional training needs for unique tasks.
- Reporting all incidents and participating in the investigations.
- Participating in routine site inspection activities.

- Ensuring all equipment brought to the site is in a "new or like new" condition, routinely inspected, and maintained in safe working order.
- Setting a positive safety example for all project staff.

4.1.7 Site Visitors

Site visitors will be responsible for the following:

- Participating in a site briefing before leaving the administrative office or site entry point.
- Following all site rules and instructions.
- Being escorted at all times unless otherwise approved by the SSHO.
- Wearing appropriate PPE.

4.2 Lines of Authority

ECC as the prime contractor is responsible for the implementation of the SOH Program as described in this APP and attachments. ECC will enforce compliance with the program requirements among our own employees, subcontractors and all others on the worksite.

The SSHO has a technical and administrative reporting relationship to the SHM who reports directly to ECC's President and Chief and Executive Officer. The reporting relationship provides for access to safety and health expertise as well as an independent reporting and line of communication. The SSHO has a functional reporting relationship to the PM, providing the PM and team with a resource for safety and health support for the project.

During field event, an SSHO or CP will perform daily and weekly health and safety inspections and provide general support to the PM for health and safety issues.

4.3 Competent Persons

The SSHO serves as the general CP, per EM 385-1-1 01.A.17 and 29 CFR 1926.20(b)(2). The qualifications of the SSHOs are included in **Appendix B**.

CPs for specific activities will be designated in the AHAs for those activities, and their qualifications will be submitted and accepted with the AHA at the Preparatory Meeting.

No work will be performed unless a designated CP/SSHO is present at the job site.

4.4 Disciplinary Procedures

All employees are required to comply with APP policies and procedures. Discipline will be in accordance with the Disciplinary Procedure described in the ECC Employee Handbook, which allows for immediate termination for serious infractions. ECC expects that all subcontractors will exercise proper discipline or terminate its employees at its sole discretion when justified. ECC retains the right to deny access to the site to any individual not compliant with safety requirements, in accordance with our subcontract agreement.

4.5 Manager and Supervisor Accountability

ECC managers and supervisors are accountable for providing a safe work environment through proper staffing, training, equipment availability, and by setting a leadership example for safety. Annual

performance reviews for managers and supervisors include assessments of project safety performance as well as the individual's demonstrated attitude toward safety.

5.0 SUBCONTRACTORS AND SUPPLIERS

ECC will use the subcontractors listed in **Table 5-1** for the execution of this Task Order. As stated in **Section 4.1.6**, subcontractors that perform work for ECC under this APP are responsible for the health and safety of their employees. The presence of an SSHO and the implementation of the APP do not relieve subcontractors of their responsibilities as employers. However, ECC is ultimately responsible for the safety performance during project execution including any work being performed by ECC subcontractors.

5.1 Identification of Subcontractors and Suppliers

Subcontractors expected to participate in this project are described in **Table 5-1**.

Table 5-1: Subcontractors

Subcontractor	Scope of Services
TBD	MIP Survey
TBD	Geophysical survey
TBD	ISEB injections - sub
TBD	Soil discing
TBD	Analytical Chemistry Support
TBD	Excavation and Drilling
TBD	Monitoring well installation/abandonment

Notes:
ISEB – In-situ enhanced bioremediation
MIP – Membrane-Interface Probe
TBD – to be determined

5.2 Managing Subcontractors

Subcontractor safety is critical to successful project performance. Subcontractors are expected to comply with the provisions of this APP and the AHAs. Subcontractor safety performance on the job will be monitored and substandard practices and conditions will be addressed immediately. Furthermore, subcontractor safety performance will be evaluated in the ECC procurement system where the information can be used for future subcontracting decisions.

Subcontractors will provide lists of hazardous materials and copies of Safety Data Sheets (SDS) to the SSHO prior to bringing the materials on-site. The SSHO will submit the SDS to the Contracting Officer's Representative (COR), if requested, and will maintain an active file in the project office.

5.3 Supplier Control

All suppliers of safety-related items are required to provide approved and appropriate safety and health materials for the project. The material supplied must meet the specifications, testing criteria or third-party certifications. These criteria are identified in the SOW, Quality Control Plan (QCP), or APP or as recommended by the SSHO. For safety-critical items, specifications will be identified, and receipt inspections will be conducted and documented. Health and safety related supplies will be obtained from recognized safety supply vendors and will meet specified OSHA, European Union (EU) or consensus standards. These items will be inspected upon receipt by the SSHO or the project Quality Control Manager (QCM).

All SDSs for materials brought on-site will be maintained by the SSHO. The QCM may request SDSs as part of the product information submittal process. Each subcontractor is responsible for maintaining their

own SDSs. Refer to **Attachment 9** of the APP for further detail on the project Hazard Communication Program.

6.0 MEETINGS AND TRAINING REQUIREMENTS

All ECC and subcontractor project personnel will have the training and certifications required to complete environmental remediation at RSA.

6.1 Project Meetings and Training Requirements

The training listed in **Table 6-1** will be provided to project personnel as noted. In addition to the topics listed below, the SSHO (in cooperation with the assistant SSHO), may identify additional topics and work tasks to be included in the training requirements. These special requirements may be noted on Project AHAs requiring additional training. All required training will be documented, and this documentation will be maintained on site.

Table 6-1: Project Meetings and Training Requirements

Topic	Description	Trainer	When Conducted	Personnel
General Training				
New Employee Indoctrination	Responsibilities for accident prevention; general SOH policies and procedures; reporting of mishaps; medical facilities and emergency response procedures; reporting of unsafe conditions and practices; job hazards and controls; other specific training as required.	SHM, SSHO, or other authorized by SHM	Before beginning field work	All new hires, and employees new to the project site.
APP	Review of APP requirements during site orientation.	SSHO	Before beginning field work	All project personnel
AHAs	Activity-specific hazards, controls, and training requirements for a specific phase or activity.	SSHO or designated CP	Before beginning specific tasks	Workers, supervisors, and oversight personnel engaged in the activity
HAZWOPER – General Training	40-Hour OSHA HAZWOPER initial training for general site employees, and three days of supervised on-the-job training for site workers.	HAZWOPER sites	Before beginning field work	Workers, supervisors, and oversight personnel working on-site who must enter the exclusion zone or whose work exposes them to health or safety hazards related to hazardous waste or contaminated media.
HAZWOPER Supervisor Training	8-Hours of training for supervising activities on hazardous waste sites.	HAZWOPER sites	Before beginning field work	Supervisors at HAZWOPER sites
Respiratory Protection	In accordance with 29 CFR 1910.134	SHM, SSHO, or other authorized by SHM; by Subcontractor CP	Before use of respiratory protection	Employees engaged in operations requiring use of respirators

Topic	Description	Trainer	When Conducted	Personnel
HAZWOPER Refresher	Eight-Hours of annual refresher training for workers on hazardous waste sites.	HAZWOPER sites or SHM	Before beginning field work	Workers, supervisors, and oversight personnel working on-site who must enter the exclusion zone or whose work exposes them to health or safety hazards related to hazardous waste or contaminated media.
Emergency Action Plan	Roles, responsibilities, recognition of emergency conditions, reporting and notification, evacuation, and other procedures.	SSHO	Before beginning field work	All project personnel, with detailed information on procedures for workers with special responsibilities
Hazard Communication	Requirements for SDSs and labels; hazards of site materials and controls; signs and symptoms of exposure; location of and access to Hazardous Materials and their SDSs.	SSHO	Before beginning field work	All project personnel potentially exposed to hazardous materials
Fire Protection and Prevention	Requirements of the Fire Protection and Prevention Plan, general education on selection, distribution, and proper use of fire extinguishers.	SSHO	Before beginning field work; as necessary to document extinguisher training	All project personnel. Fire extinguisher use for personnel designated as Fire Watch (other personnel as deemed necessary)
OSHA 30-hour construction or equivalent	Common hazards, controls, and OSHA requirements for construction activities.	Authorized OSHA Trainer	Prior to beginning field work	SSHO
Daily Safety Briefing	Review of Plan-of-the-Day and daily hazards; presentation of a specific topic; refresher training on various issues; and changes in hazards, controls, or procedures.	SSHO, Site Superintendent, CP	Daily, prior to work	All field workers, and field oversight personnel
Weekly safety Meeting	Incidents, modification to APP, upcoming work, new hazards, etc.	SSHO, CP	Weekly	All field personnel and field oversight personnel
Special Training				
Topic	**Description**	**Trainer**	**When Conducted**	**Personnel**
First Aid/CPR	Principles and techniques for First Aid and CPR.	Red Cross, American Heart Association, or other authorized provider	Prior to beginning field work	At least two project personnel (SSHO, and other field personnel)
Fall protection	Fall (from elevation) hazards, fall protection techniques, proper use of personal fall arrest systems and rescue procedures.	SSHO, other qualified instructors	Prior to work at elevation	Task-specific, workers exposed to fall hazards

Topic	Description	Trainer	When Conducted	Personnel
Lockout/tagout	Site-specific energy control and verification procedures.	SSHO, other qualified instructors	Prior to utilization of Lockout/tag out procedures	Authorized personnel engaged in lockout/ tagout, and affected employees whose work may be impacted by a lockout/tagout situation
Forklifts	Hazards and operation procedures, including machine-specific safe operating procedures.	SSHO	Prior to operation of forklift; every three years	Forklift/powered industrial truck operators
Other heavy equipment operations	Qualified by SSHO, Site Superintendent or Equipment Supervisor as documented on ECC Equipment Operator Qualifications Form.	SSHO, Equipment Supervisor	Prior to heavy equipment operations on site	Equipment operators
Power tools (e.g., chain saws, chippers, powder-actuated tools, compressed air systems)	Hazards; proper use and maintenance of tools as described in operations manual. Powder-operated tool users certified by manufacturer.	SSHO, or a trainer authorized by the manufacturer (explosive-actuated tools)	As part of general site orientation; prior to use of specific tools	Project personnel using power tools
UXO Awareness Training	Recognition of munitions and explosives of concern that may be encountered during site activities	UXO Qualified Personnel	Prior to beginning site operations	All site personnel

Notes:
AHA – Activity Hazard Analysis
APP – Accident Prevention Plan
CFR – Code of Federal Regulations
CP – Competent Person
CPR – Cardiopulmonary Resuscitation
HAZWOPER – Hazardous Waste Operations and Emergency Response
OSHA – Occupational Safety and Health Administration
SDS – Safety Data Sheet
SHM – Safety and Health Manager
SOH – Safety and Occupational Health
SSHO – Site Safety and Health Officer
UXO- Unexploded Ordnance

6.2 Safety Indoctrination Training for New Employees

New employees to ECC receive indoctrination training before they are allowed to participate in field work. The indoctrination training consists of the following:

- ECC COVID-19 Prevention Program (**Appendix C**)
- Review requirements and responsibilities for accident prevention and maintaining a safe and healthy workplace.
- Review ECC's general safety and health policies and procedures.
- Review ECC's incident reporting system and procedures.
- Identify employees' responsibilities for reporting incidents (safety, health and quality).
- Review medical treatment facilities of the employee's assigned office.
- Review safety, emergency, and evacuation procedures for the employee's assigned office.

6.3 Periodic Safety and Health Training for Supervisors and Employees

All project personnel will participate in training/refresher topics throughout the project. These topics may be presented as part of the daily tailgate meetings, or as separate classes established for specific project work activities and procedures. All supervisors, managers, and employees are encouraged to participate in other seminars or courses provided by outside vendors as necessary to increase knowledge and to maintain currency with construction topics, hazards, and controls.

6.4 Visitor Indoctrination Policy

All site visitors will be required to review the daily tailgate safety issues and sign the visitor's log. At a minimum, all visitors must be informed of the anticipated hazards, PPE requirements, designated work zones, escort procedures, and emergency procedures.

6.5 Site Orientation

All site personnel will be required to attend an initial site orientation prior to the start of field work. This training will be specific to the project and will include a detailed review of this APP, any AHAs applicable to mobilization and site setup, and key general safety requirements as outlined in **Table 6-1** above.

6.6 Emergency Response Training

As part of the initial orientation and ongoing refresher meetings, all employees shall be trained in the project-specific emergency response procedures detailed in **Attachments 1** through **3** of this APP. Retraining will occur whenever a drill or actual event identifies deficiencies in performance or when emergency plans change.

6.7 Personal Protective Equipment and Safety Equipment Training

Workers will be trained in the proper use of and be able to demonstrate their understanding of proper PPE regarding the selection, donning, doffing and adjustment, limitations and useful life, inspection and testing, proper care including maintenance, storage and disposal.

Retraining of workers shall be conducted whenever it is believed that the worker does not have the understanding or skill required for the use of the PPE.

7.0 SAFETY AND HEALTH INSPECTIONS

ECC and its subcontractors will perform periodic health and safety inspections in accordance with **Table 7-1** throughout the duration of the environmental remediation field activities at RSA. Results of all health and safety compliance review audits or inspections will become part of the project file.

7.1 General Inspection Procedures

Table 7-1 lists the general inspection requirements for this project.

Daily site-wide inspections will be conducted by the SSHO. Other CPs identified in specific AHAs will also conduct daily inspections of the work activities within their responsibility, as deemed necessary. Findings that represent deficiencies in the implementation of the APP or EM 385-1-1 will be added to the Tracking Log. Actions, timetable, and responsibility for correcting the deficiencies shall be recorded in the Deficiency Tracking Log. Follow-up inspections to ensure correction of any identified deficiencies will also be conducted and documented in the Deficiency Tracking Log. The Deficiency Tracking Log will be posted in the administrative area and updated on a daily basis. A monthly evaluation of the data should be discussed in the QC or SOH meeting with everyone on the project.

Table 7-1: General Inspection Requirements

What	Who	When	Documentation
General site conditions	SSHO	Daily	Logbook
	SSHO	Weekly or as needed	Site Health and Safety Inspection Checklist and Action Item Report, cc: SSHO, PM, Program/SHM
	PM	As needed	
	Program SHM	As needed	
Mobile construction equipment	Operators	Initial and Daily	Inspection checklist, cc: Construction/Equipment Supervisor (Note: Notify Army before initial to coordinate joint inspection)
Construction tools and equipment	Users	Daily	None. Tag defective items "out of service"
Lock out/Tag Out	SSHO	Prior to working on machinery, equipment, or process units where employees may be exposed to hazardous energy sources.	Lockout/Tagout Permit
Rigging	CP	Daily	None. Rigging items must be tagged with load capacities.
Ladders	SSHO	Weekly	Logbook, tag or inspection log form
Emergency supplies and equipment (fire extinguishers, spill response, PPE, First Aid, etc.)	SSHO	Weekly	Logbook, tag or inspection log form
PPE	SSHO	Initial, Periodic	None
	Users	Daily	None

What	Who	When	Documentation
Hazardous energy sources and processes (electrical systems, pneumatic equipment, etc.)	CP or QP	Initial	Per operating instructions, QCP, O&M procedures
	User/Operator	Daily	TBD

Notes:
CP – Competent Person
O&M – Operations and Maintenance
PPE – Personal Protective Equipment
PM –Project Manager
QCP – Quality Control Plan
QP – Qualified Person
SHM – Safety and Health Manager
SSHO – Site Safety and Health Officer
TBD – To be Determined

7.2 External Inspections and Certifications

If regulatory agency personnel arrive on site to conduct an inspection, the ECC PM and the following individuals will be contacted immediately:

- COR
- Subcontractor's site representative
- ECC SHM
- ECC General Counsel

If a citation is issued to ECC or its subcontractors, a copy of the citation will be submitted to the COR along with a Corrective Action Plan.

7.3 Follow-up Procedures for Inspection Deficiencies

All deficiencies identified during project or equipment inspections are noted and tracked through closure. Deficiencies identified by operators during equipment inspections are noted on the equipment inspection form. Any deficiency noted must be reviewed by the SSHO or site supervisor/foreman prior to the equipment being allowed to operate. Any deficiency that affects safe work performance must be corrected before the equipment is put back into operation. Minor deficiencies that do not affect safe performance will be corrected as soon as practical. Following correction of the deficiency, the noted item is initialed by the SSHO on the inspection form as corrected.

Deficiencies identified during the weekly formal site inspections are noted on the inspection form (with a due date and responsible individual) as well as on the SOH Deficiency Tracking Log posted on the project Safety and Health Bulletin Board. These deficiencies are also tracked to closure and verified upon completion. Deficiencies corrected immediately will be noted on the weekly inspection form.

8.0 MISHAP REPORTING AND INVESTIGATION

This section describes the project mishap reporting and investigation procedures. Other Army procedures may be utilized if there is a significant safety issue that occurs during this project.

8.1 Mishap Investigation, Reports, Logs

A mishap is any unplanned, undesired event that occurs during the course of work being performed. The term "mishap" includes accidents, incidents and near misses.

Project personnel are required to report all mishaps to their immediate supervisor. The SSHO will immediately arrange appropriate medical care as required. Once immediate medical care for the injured personnel or other critical emergency procedures has been accomplished, the SSHO will follow the Incident Notification, Reporting, and Management Procedure. In the event that an accident results in an employee being sent to a doctor, the Return-to-Work Examination Form will be completed by the attending physician on the date of treatment and will state one of the following conditions:

- Employee may return to full duty.
- Employee may return to limited duty (with type of limitations).
- Employee is unable to return to work.

A copy of this release will accompany the accident report.

For injuries and vehicle accidents, the scene will be secured to prevent additional injury/incident and to administer on-site First Aid Emergency assistance will be arranged prior to making any other notifications. After immediate emergency attention has been given, all incidents will be reported to the PM and SHM.

All recordable mishaps will be reported to the COR by the PM or SSHO as soon as possible, but no later than 24 hours after the incident. These include:

- OSHA Recordable injuries
- Property damage (exceeding $5,000)
- Days Away Injuries
- Days Away Illnesses
- Restricted/Transfer Injuries

Corrective actions will be determined and implemented to prevent the recurrence of the accident; responsibility for implementation of corrective actions will be assigned. Investigation findings and corrective actions will be reported within five days following an accident. A log of OSHA-recordable injuries/illnesses will be maintained.

A project-specific OSHA 300 Log (Log of Work-Related Injuries and Illnesses) will be kept at the job site or maintained by the SSHO. Minor injuries requiring only First Aid will be recorded on a project-specific First Aid log. A copy of the First Aid log will be submitted upon request to the COR. From 1 February through 30 April of each year, OSHA Form 300A (Summary of Work-Related Injuries and Illnesses) will be posted on the project safety and health bulletin board, if available; if not, the SSHO will have a copy available.

8.2 Immediate Notification of Major Mishaps

The COR will be verbally notified immediately by the PM or SSHO of any incidents that involve, or appear to involve:

- A fatal injury/illness (Report to OSHA within eight hours)
- Amputation, Loss of an Eye (report to OSHA within 24 hours)
- A permanent total disabling injury/illness
- A permanent partial disabling injury/illness
- In-patient hospitalization (Report to OSHA within 24 hours)
- Property damage of $500,000 or more
- Three or more illnesses suspected of being related to a site condition, or a hazardous or toxic agent on the site
- USACE aircraft destroyed or missing
- An electrical incident including arc-flash, shock, etc.
- Uncontrolled Release of Hazardous Energy (includes electrical and non-electrical)
- A load-handling equipment or rigging mishap
- Fall-from-Height (any level other than same surface)
- Underwater diving mishap

The PM will contact Ms. Kym Edelman immediately if a major incident occurs, as it may require immediate reporting to OSHA or State agencies.

At the time of any major incident, project site conditions will be preserved until released by the Government Investigation Team.

The written report will be submitted to the COR on the appropriate form no later than five working days after the accident. Corrective actions will be implemented as soon as possible. The COR will be notified when the corrective actions are completed.

9.0 PLANS, PROGRAMS, AND PROCEDURES

Table 9-1 lists the plans, programs, and procedures required by EM 385-1-1.

Table 9-1: Plans, Programs, and Procedures

Plans (Programs, Procedures) required by the Safety and Health Manual)	EM 385 Reference	Applicable to this Project? Y	N	If Required, Location or Reference
Fatigue Management Plan	01.A.20		X	Work hour criteria will not be exceeded.
Emergency Plans:	01.E			
Procedures and Test	01.E.01	X		**Attachment 1**
Spill Plans	01.E.01, 06.A.02	X		**Attachment 1**
Fire Fighting Plan	01.E.01, 19.A	X		**Attachment 2**
Posting Emergency Telephone Numbers	01.E.05	X		**Attachment 1**
Man overboard/abandon ship	19.A.04		X	No boating.
Medical Support	03.A, 03.D	X		**Attachment 3**
Alcohol and Drug Abuse Prevention Plan	01.C.02	X		**Attachment 4**
Site Sanitation/Housekeeping Plan	02.B	X		**Attachment 5**
Medical Support Agreement	03.A.01, 03.A.03	X		**Attachment 3**
Bloodborne Pathogen Plan	03.A.05	X		**Attachment 6**
Exposure Control Plan	03.A.05	X		**Attachment 6**
Automatic External Defibrillator (AED) Program	03.B.04		X	No AEDs on this project
Site Layout Plans	04.A		X	Will be included in the future in in applicable Work Plans **Attachment 7**
Access and Haul Road Plan	4.B	X	X	If/when subsurface activities are required, this plan will be provided. **Attachment 8**
Hearing Conservation Program	05.C	X		**Attachment 9**
Respiratory Protection Plan	05.G		X	Respiratory protection is not anticipated.
Health Hazard Control Plan	06.A	X		**Attachment 10**
Hazard Communication Program	06.B.01	X		**Attachment 11**
Process Safety Management Plan	06.B.04		X	No process meeting criteria
Lead Compliance Plan	06.C and specs		X	No lead abatement
Asbestos Abatement Plan	06.C and specs		X	No asbestos abatement
Radiation Safety Program	06.F		X	No radiological hazards
Abrasive Blasting Plan	06.I		X	No abrasive blasting
Heat Stress Monitoring Plan	06.J.02	X		**Attachment 12A**
Cold Stress Monitoring Plan	06.J.04	X		**Attachment 12B**
Indoor Air Quality Management Plan	06.L		X	No Indoor Air Quality issues expected
Mold Remediation Plan	06.L.04		X	No mold remediation
Chromium VI Exposure Evaluation	06.M		X	No exposures to Chromium VI
Crystalline Silica Assessment	06.N.02	X		**Attachment 13**
Lighting Plan for Night Operations	07.A.06		X	Daylight hour work
Traffic Control Plan	08.C.05		X	No work on or near roadways
Fire Prevention Plan	09.A.01	X		**Attachment 3**
Wild Land Fire Management Plan	09.L		X	No wildland work

Plans (Programs, Procedures) required by the Safety and Health Manual)	EM 385 Reference	Applicable to this Project? Y	N	If Required, Location or Reference
Arc Flash Hazard Analysis	11.B		X	No live electrical work
Assured Equipment Grounding Control Program	11.D.05, App E		X	Ground fault circuit interrupters used.
Hazardous Energy Control Program and Procedures	12.A.01	X		**Attachment 14**
Standard Pre-Lift Plan - LHE	16.A.03		X	No crane activity
Critical Lift Plan - LHE	16.H		X	No crane activity
Naval Architectural Analysis	16.L		X	No marine activities
Floating Plant Inspection and Certification	19.A.01		X	No marine activities
Severe Weather Plan for Marine Activities	19.A.03		X	No marine activities
Emergency Plan for Marine Activities	19.A.04		X	No marine activities
Man Overboard/Abandon Ship Procedures	19.A.04		X	No marine activities
Float Plan for Launches, Motorboats, Skiffs	19.F.04		X	No marine activities
Fall Protection and Prevention Plan	21.D		X	No activities that require fall protection
Demolition/Renovation Plan (to include engineering survey)	23.A		X	No demolition
Rope Access Plan	24.H		X	No rope access
Excavation/Trenching Plan	25.A.01	X		**Attachment 15**
Underground construction fire prevention and protection Plan	26.D.01		X	No underground work
Compressed Air Work Plan for Underground Construction	26.I.01		X	No underground work
Formwork and Shoring Erection and Removal Plan	27.C		X	No formwork and shoring erection
Precast Concrete Plan	27.D		X	No precast operations
Lift Slab Plans	27.E		X	No lift slab operations
Masonry Bracing Plan	27.F.01		X	No masonry wall construction
Steel Erection Plan	28.B		X	No Steel Erection
Explosives Safety Site Plan	29.A		X	No explosives work
Blasting Plan	29.A, 26.J		X	No blasting operations
Underwater Dive Operations Plan	30.A.14, 16		X	Do dive operations
Safe Practices Manual for Diving Activities	30.A.15		X	Do dive operations
Emergency Management Plan for Diving	30.A.18		X	Do dive operations
Tree Felling/Maintenance Program	31.A.01		X	No tree felling
Aircraft/Airfield Construction Safety & Phasing Plan	32.A.02		X	No airfield construction
Aircraft/Airfield Safety Plan Compliance Document	32.A.02		X	No airfield construction
Site Safety and Health Plan (Hazardous, Toxic, and Radioactive Waste [HTRW])	33.B	X		**Attachment 16**
Confined Space Entry Procedures	34.A.05		X	No confined space activities
Confined Space Entry Program	34.A.06		X	No confined space activities

10.0 RISK MANAGEMENT PROCESSES

ECC's Corporate ESQ SOPs will be utilized to assist in the identification and implementation of appropriate hazard control measures. The Table of Contents for these SOPs is presented in **Appendix D**. SOPs may be referenced throughout the APP and its attachments, appendices and supplemental plans.

10.1 Activity Hazard Analyses – Policy and Procedure

Activities, tasks and each DFOW to be performed will be covered in an AHA. Craft labor involvement in AHA development will be encouraged. All personnel involved in a task will review the AHA before performing the task. This review will be appropriately documented. Upon commencement and throughout the activity, the AHA will be used to verify compliance with the prescribed hazard controls and to note any potential changes in process and, therefore, potential hazards. An initial list of AHAs anticipated for this project includes:

- Mobilization, Site Inspection and Site Preparation
- Environmental Sampling
- Well Installation, Maintenance, and Abandonment
- Landfill Repair and Maintenance
- LUC Inspections and Geophysical Survey
- Direct Push Technology (DPT)/ Hollow Stem Auger (HSA)/Air Rotary/ Interface Probe (MIP) Survey
- Excavation, Transportation, and Disposal
- ISEB injection
- Disc and Raking Contaminated Soil
- Equipment Decontamination, Demobilization and Site Restoration

Some initial AHAs are included in **Appendix A**. Additional AHAs will be submitted for review and acceptance by the COR prior to the preparatory phase meeting for the subject activity.

Work shall not begin until the AHA with Risk Assessment Code (RAC) for the work activity has been accepted by the COR and discussed with all engaged in the activity, including the ECC personnel, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.

The AHA shall be reviewed and modified as necessary to address changing site conditions, operations, or change of CP(s)/Qualified Persons (QP[s]).

If a new CP/QP (not on the original list) is added, the list shall be updated (an administrative action not requiring an updated AHA). The new CP/QP shall acknowledge in writing that they have reviewed the AHA and is familiar with current site safety issues.

If the initial RAC increases due to a change made to the AHA by the workers, the AHA shall be resubmitted to Government Designated Authority (GDA) for acceptance prior to work proceeding.

Changes to or updates to an AHA that do not increase the RAC are not required to be resubmitted for acceptance by the GDA.

Workers/crews shall have in their possession the current AHA that reflects current site conditions, personnel, equipment, control measures, etc. while the work is being performed.

The AHA shall be used to assure work is being performed consistent with the AHA. In the event that the work is not being conducted in a safe manner, ECC and/or the client representative shall immediately stop the unsafe work being conducted until it is in compliance with this manual, APP and the AHA or the APP/ AHA is revised and accepted by the GDA, if necessary.

AHAs for completed work for the same contract or project work shall be readily available and maintained by the SSHO and accessible on-site by all workers, for a period of 12 months or, for contract work, the length of the contract.

Unless otherwise noted on the AHA, the minimum work clothing and PPE for this project includes:

- Shirts with sleeves
- Long pants
- American National Standards Institute (ANSI)-approved hard hat
- ANSI Z87+ safety glasses with side protection
- ANSI approved safety toe footwear, meeting American Society for Testing Materials (ASTM) Impact/Compression (I/C) 75 standards
- ANSI/Industrial Safety Equipment Association (ISEA) Class 2 High visibility garment while working around vehicles or mobile construction equipment
- Work gloves suitable to the task and hazards

Other PPE specific to the hazards of the tasks or DFOW are listed in the appropriate AHA. Workers will be trained in the proper selection, use, care and maintenance of all PPE and will be responsible for proper use, fit, cleaning and daily inspections. Damaged or worn PPE shall not be used. Employees noting problems with PPE will report immediately to their supervisor for replacement or refitting.

FIGURES

Redstone Arsenal
Madison
Huntsville
Alabama A&M University
Oakwood University
Links at Redstone Golf Course
Brahan Spring Park
Monte Sano State Park
1584 ft
1644 ft
MONTE SANO MOUNTAIN
Chase Creek
Aldridge Creek
Big Cove Creek
HUNTSVILLE MOUNTAIN
Valley Hill Country Club
BIG
GREEN MOUNTAIN
WALLACE MOUNTAIN
Huntsville Int'l Airport
Redstone Arsenal
Barren Fork Creek
Indian Creek
Triana
MORGAN
Wheeler National Wildlife Refuge
Cotaco Creek
Laceys Spring
Valhermoso Springs
Dry Creek
1321 ft
Woodland Mills Creek
Somerville
Town Creek
Guyer Branch
Bradford Creek
Mill Creek
Knox Creek
Coppercun Branch
Indian Creek

LEGEND

- Redstone Arsenal
- Roads

NOTES
1. Coordinate System: NAD83 State Plane Alabama East, US Feet (FIPS 0101)
2. Basemap data from IGI&S Office at Redstone Arsenal
3. Map Size: B-size (17" x11")
4. Revision Date: 2/8/2021

Figure 2-1

Installation Location Map
Redstone Arsenal
Madison County, Alabama

0 4,800 9,600 Feet
1 inch = 10,000 feet

Mission & Installation Contracting Command (MICC)
U.S. Army Garrison-Redstone

DISCLAIMER- The data represent the results of data collection/processing for a specific Redstone Arsenal activity and indicates the general existing conditions. As such, it is only valid for its intended use, content, time, and accuracy specifications. The user is responsible for the results of any application of the data for other than its intended purpose.

ECC GIS Server: E:\Projects\Redstone\MapDocument\APP\Fig2-1_RSA_APP_BaseMap.mxd

APPENDICES

APPENDIX A
Activity Hazard Analyses

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Mobilization, Site Inspection, and Site Preparation Activities**	Overall Risk Assessment Code (RAC) (Use highest code): **L**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**	
Date Prepared / Revised: **4 February 2021**	
Prepared by (Name/Title): **Lauren Sparkman, Environmental Engineer**	
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**	
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**	
Notes: (Field Notes, Review Comments, etc.)	

Risk Assessment Code (RAC) Matrix

Severity	Probability				
	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	E	E	H	H	M
Critical	E	H	H	M	L
Marginal	H	M	M	L	L
Negligible	M	L	L	L	L

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS Consider People, Equipment, Materials and Environment *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHO in accordance with WE SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Underground utility survey Identify all overhead utilities	Contact with Overhead Utility Lines – Electrocution, Fires/underground utilities	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures, operational aspects & heavy equipment use, and change(s) in site work conditions. Daily housekeeping will be implemented during and at the ends of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines. • If work must be conducted closer to utilities than guidelines allow, the utility company must be contacted. • An observer/spotter shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means. This shall be the ONLY job the observer is performing when an observer is required.	L

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Underground utility survey Identify all overhead utilities (Continued)	Contact with Overhead Utility Lines – Electrocution, Fires/underground utilities (Continued)	• Keep all personnel well away from the equipment whenever it is close to power lines. • If intrusive activities, Louisiana 811 shall be notified prior to with sufficient time allowed for white-lining and utility marking. — Excavation Permit Procedure: Mark the area for the requested clearance and then submit an excavation permit with RSA. Alabama 811 is contacted 48 hours prior to activity start. • ECC personnel will "white-line" or otherwise mark the area where the wells are to be installed, prior to utility marking. • Intrusive soil activities conducted within a five foot "Buffer Zone" (horizontal or vertical, as measured from the outside edge of the utility) of any utility (electric, gas, high pressure, chemical storage tanks, pipelines, sewers, etc.) may require the use of non-aggressive excavation methods such as hand excavation using non-conductive hand tools, use of an air spade, hydro-excavation, or similar means (some jurisdictions require more stringent buffer zones). Spotter will assist the operator/workers to identify unknown conditions during drilling. • If a previously unknown utility line is identified, uncovered, or disturbed during intrusive activities, stop immediately and project management notified. Intrusive operations shall not recommence until the line has been evaluated, identified, and the appropriate utility notified. • Most utilities and marking services utilize the American Public Works Association Uniform Color Code for marking out utilities. All personnel involved in excavation projects will be familiar with this code.	**L**
	Back Strain or Sprain	• Use proper lifting techniques, move heavy objects with wheelbarrow/carts, seek assistance if items weigh over 50 pounds.	**L**
Receipt and placement of equipment vehicle: Spotting of equipment vehicle	Struck-by moving truck	• Always ensure a spotter for delivery truck stays in line-of-sight of driver at all times.	**L**
	Caught in or under equipment vehicle	• Use a spotter to coordinate activities of driver and person setting cribbing, tie-downs, chains. • Keep hands out of pinch points. • Wear leather work gloves.	**L**
	Contact with Overhead Utility Lines – Electrocution, Fires	• Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines. An observer/spotter shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means. This shall be the ONLY job the observer is performing when an observer is required. • Keep all personnel well away from the equipment whenever it is close to power lines.	**L**
Installation of temporary work zones construction fencing	Struck-by hand tools	• Wear leather gloves, safety-glasses, hard hats, safety-toe footwear. Keep hands out of pinch points. • Use post driver, not sledgehammer, for placing fence posts. Tape top of fence post or install mushroom caps to reduce potential for scrapes.	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Installation of erosion controls	Sprains/strains Struck-By (hand tools)	• Use two people to carry heavy loads of fencing/posts. Do not lift and carry more than comfortable weight for individual; 50 lbs. maximum.	L
Establishment of work zones, decontamination stations for personnel and equipment	Slips/trips/falls	• Wear high traction safety-toe footwear. • Keep loads manageable to not obstruct vision.	L
	Scrapes and cuts	• Wear safety glasses, gloves and long sleeves.	L
	Contact with poisonous plants (e.g. poison ivy)	• Inspect area before starting. • Wear long sleeve shirts, tuck sleeves and pant legs. If there is heavy growth, wear disposable coveralls and use barrier cream (e.g. Ivy Block). • Have Tecnu or other poison ivy cleanser on-hand, and wash immediately after contact.	L
	Stung by bees/hornets, bit by ticks or snakes	• Inspect areas for hives. • Ensure allergic individuals have emergency medical kit and are committed to using it. • Use insect repellant containing DEET on exposed skin and Permethrin on clothing. • Do not approach snakes. If bitten, seek medical attention.	L
	Struck by moving equipment	• Personnel will stay out of equipment swing areas and pinch-points.	L
	Fire/explosion of gasoline	• Allow equipment to cool before refueling and eliminate other sources of ignition. • Use only approved NFPA safety cans for gasoline. • Cleanup spills immediately.	L
	Heat Stress/Cold Stress (applies to all job steps)	• Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur and when instructed by SSHO. • Report all signs and symptoms of heat strain immediately to SSHO.	L
	Severe Weather (applies to all job steps)	• Shut down operations during severe electrical storms, heavy rain, high wind and evacuate site/take cover. • Train personnel on Emergencies Response. • Monitor weather systems.	L
	Eye injuries	• Safety glasses with side shields (impact resistant).	L

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	*Stop work and notify the Team Leader if you are not sure how to perform your task safely!*	*Stop work and notify the Team Leader if you are not sure how to perform your task safely!*
Equipment to be Used	**Training Requirements**	**Inspection Requirements**
1. Support Vehicles 2. Skid steer/forklift <u>Support Zone</u> • Cell phone or Radio communication • Eyewash station • Fire extinguishers • First aid kit • Drinking water • 911 Air horn • Spill containment supplies • Air Monitoring equipment, if needed • Emergency decontamination supplies **PPE: Level D (hardhat, steel toe boots, work gloves, orange safety vest, safety glasses, and hearing protection, as needed)**	• Only qualified operators permitted to operate mobile equipment • Operators of forklifts will have recent certification / training in safe forklift operation (20 CFR 1910, Subpart N – Powered Industrial Trucks) • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan/Procedures • Fire extinguishers. **Competent Person: Site Superintendent and/or SSHO**	• SSHO daily site inspection • Equipment - Receipt and inspected by SSHO • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Complete ECC daily equipment inspection form • Weekly inspection of first aid kits • Monthly inspection of fire extinguishers • GFCIs (at least monthly).

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Environmental Sampling**	Overall Risk Assessment Code (RAC) (Use highest code)	**L**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	**Risk Assessment Code (RAC) Matrix**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**	**Severity** / **Probability**	
Date Prepared / Revised: **4 February 2021**		
Prepared by (Name/Title): **Lauren Sparkman, Environmental Engineer**		
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**		
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**		
Notes: (Field Notes, Review Comments, etc.)		

Severity	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	E	E	H	H	M
Critical	E	H	H	M	L
Marginal	H	M	M	L	L
Negligible	M	L	L	L	L

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS **Consider People, Equipment, Materials and Environment** *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHS in accordance with ECC SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Labeling sample containers Handling sample containers w/ preservation / adding preservation to containers Purging monitoring wells Filling sample containers from soil borings or well sample pump Cleaning outer surface of sample containers	• Personal injury • Slips & Trips • Lifting Strains & Sprains • Heat Stress/Cold Stress • Splash hazard • Handling Materials Containing Hazardous Materials • Proper Material Handling • Biohazard and Controls	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Tailgate meeting. Review JSA to familiarize themselves to hazards, emergency procedures and equipment, operational aspects & heavy equipment use, and change(s) in site/work conditions. Daily housekeeping will be implemented at the end of each workday. Equipment/vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit w/ eye wash. Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". **Stay on established pathways and ensure tools, cords, other objects are removed from walk areas to prevent trips and falls.** **Be cautious of muddy, wet, icy, or other slippery surfaces. Ensure surfaces are cleared and proper footwear is utilized to prevent slips/falls.**	L

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Labeling sample containers Handling sample containers w/ preservation / adding preservation to containers Purging monitoring wells Filling sample containers from soil borings or well sample pump Cleaning outer surface of sample containers (CONTINUED)	• Personal injury • Slips & Trips • Lifting Strains & Sprains • Heat Stress/Cold Stress • Splash hazard • Handling Materials Containing Hazardous Materials • Proper Material Handling • Biohazard and Controls (CONTINUED)	**Hand & Power Tool Use:** Prior to use all tools must be inspected. Any damaged or defective tools will be tagged and removed from service for repair and/or discarded. Ensure all guards are in place on tools. Wear protective gloves based on hazard associated with tool. Cutting devices must have blade protection. Fixed blade utility knives that cannot be retracted are prohibited. Ensure electrical tools are double insulated or properly grounded. Extension cords shall be connected to a GFCI. **Working with Hazardous Materials:** Employees will be provided with an overview of the hazards associated with the chemicals that will be used. A copy of the SDS will be available for review and proper PPE will be provided.	L
		Heat Stress/Cold Stress: • Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur and when instructed by SSHO. • Report all signs and symptoms of heat strain immediately to SSHO. **PPE:** Modified Level-D PPE will be worn inside posted areas. Any PPE upgrade will be in accordance with the SSHP action level guidelines. A face shield or goggles shall be used during activities where a splash hazard exists. Use of chemical resistant gloves shall be worn when there is potential skin contact with contaminated fluids. Hearing protection shall be worn if noise survey results above TWA of 85dBA. Wear Permethrin treated gaiters. **Material Handling & Storage:** No individual employee is permitted to lift any object that weights over 50-pounds. Proper lifting techniques shall be used. Multiple employees or the use of mechanical lifting are for lifting objects over the 50-pounds limit. Know the weight of the load and ensure loads are stable and secure before transporting. Ensure stages materials are properly stacked and secured to prevent sliding/falling. **Biohazard Controls:** • Inspect area before starting. • Wear long sleeve shirts, tuck sleeves and pant legs. If there is heavy growth, wear disposable coveralls and use barrier cream (e.g. Ivy Block). Wear Permethrin treated gaiters. • Have Tecnu or other poison ivy cleanser on-hand and wash immediately after contact. • Do not approach any wild animals. If bitten seek medical attention.	L

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Use of Generator	• Lift and carrying generator • Fire hazard while refueling	**Back Injury:** • Do not lift awkward sized items use proper lifting techniques • Do not use equipment to lift and move drums, equipment and supplies. Lift with your legs not with your back. • Additional personnel will be used to lift items weighing over 60 pounds. If possible, use mechanical movement aids (i.e., hand truck or wheelbarrow). • A fire extinguisher and spill containment supplies should be readily available. Ensure generator is on the ground while refueling. • Fuel generator only after engine has been shut down and cooled	**L**

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***
Equipment to be Used	**Training Requirements**	**Inspection Requirements**
• Hand Sampling Tools • Generator <u>Support Zone</u> • Cell phone or Radio communication • Eyewash station • Fire extinguishers • First aid kit • Drinking water • 911 Air horn • Spill containment supplies • Air Monitoring equipment, if needed • Emergency decontamination supplies **PPE: Modified Level D (hardhat, steel toe boots, nitrile gloves when sampling/leather gloves when cutting plastic tubes, gaiters, orange safety vest, safety glasses, and hearing protection, as needed). A face shield or goggles shall be used during activities where a splash hazard exists. Wear Permethrin treated gaiters.**	• Only qualified operators permitted to operate First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan/Procedures • Fire extinguishers **Competent Person: Site Superintendent and/or SSHO**	• Daily inspection of hand and power tools with replacement of damaged items. • Annual and monthly inspection of fire extinguishers • Weekly inspection of first aid kits/eyewash

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Well Installation, Maintenance and Abandonment**	Overall Risk Assessment Code (RAC) (Use highest code) **L**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**	
Date Prepared / Revised: **4 February 2021**	
Prepared by (Name/Title): **Lauren Sparkman/ Environmental Engineer**	
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**	
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**	
Notes: (Field Notes, Review Comments, etc.)	

Risk Assessment Code (RAC) Matrix

Severity	Probability				
	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	E	E	H	H	M
Critical	E	H	H	M	L
Marginal	H	M	M	L	L
Negligible	M	L	L	L	L

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS **Consider People, Equipment, Materials and Environment** *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHS in accordance with ECC SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Mobilization		General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures, operational aspects & heavy equipment use, and change(s) in site work conditions. Daily housekeeping will be implemented during and at the ends of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Level D PPE will be worn inside the designated EZ. Any PPE upgrade will be in accordance with APP guidelines. Hearing protection shall be worn if noise survey results above TWA of 85 dBA	L

Direct Push Technology (DPT), Hollow Stem Auger (HSA), Air Rotary Activities	Contact with Underground and Overhead Utility Lines – Electrocutions, Fires/underground utilities	• Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines. • If work must be conducted closer to utilities than guidelines allow, the utility company must be contacted. • An observer/spotter shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means. This shall be the ONLY job the observer is performing when an observer is required. • Keep all personnel well away from the equipment whenever it is close to power lines. • If intrusive activities, Alabama 811 shall be notified prior to with sufficient time allowed for white-lining and utility marking. — Excavation Permit Procedure: Mark the area for the requested clearance and then submit an excavation permit with RSA DPW. Alabama 811 is contacted 48 hours prior to activity start. • ECC personnel will "white-line" or otherwise mark the area where the wells are to be installed, prior to utility marking. • Intrusive soil activities conducted within a five foot "Buffer Zone" (horizontal or vertical, as measured from the outside edge of the utility) of any utility (electric, gas, high pressure, chemical storage tanks, pipelines, sewers, etc.) may require the use of non-aggressive excavation methods such as hand excavation using non-conductive hand tools, use of an air spade, hydro-excavation, or similar means (some jurisdictions require more stringent buffer zones). Spotter will assist the operator/workers to identify unknown conditions during drilling. • If a previously unknown utility line is identified, uncovered, or disturbed during intrusive activities, stop immediately and project management notified. Intrusive operations shall not recommence until the line has been evaluated, identified, and the appropriate utility notified. Most utilities and marking services utilize the American Public Works Association Uniform Color Code for marking out utilities. All personnel involved in excavation projects will be familiar with this code. Before derrick is raised a thorough walkthrough of surrounding area is required to ensure there are no overhead utilities within 100 feet horizontally. If overhead utilities are within 100 ft horizontally of the derrick, consult local utility company and refer to EM 385-1-1 Table 11-1 before commencing operations.	L
	Equipment Malfunction	• Rig operators must be qualified and designated. • All operations must be conducted in accordance with manufacturer's operations manual. Ensure equipment manual is on site at all times and contents of the manual, specifically related to safe operations, have been reviewed will all employees engaged in activities. Ensure this review is documented. • Complete inspections and maintenance of the rig in accordance with the manufacturer's operations manual.	L

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

DPT, HSA, Air Rotary Activities (CONTINUED)	Cuts/Lacerations	• A cutting device designed for cutting acetate liners (procured through Geoprobe) shall be used. If a safety utility knife is used, snubbed nose blades are required and the user must wear Kevlar gloves under leather gloves. Non-retractable utility knives are prohibited. Blades must be secured when not in use. • Utilize proper cutting technique and ensure cuts are made away from the body, keep hands clear. • Utilize leather work gloves or other cut resistant work gloves at all times when handling equipment. Ensure gloves are appropriate for potential laceration hazard if sharp edges are encountered.	L
	Lifting Strains/Sprains	• No individual employee is permitted to lift any object that weighs over 50 pounds. Proper lifting techniques shall be used. Multiple employees or the use of mechanical lifting are for lifting objects over the 50-pound limit. Materials shall be inspected for sharp edges prior to being handled and avoid pinch point hazards. • While handling direct push rods and filled acetate liners, make sure proper lifting techniques are used.	L

	Struck by or caught in drill rig equipment	• Only qualified personnel shall be permitted to operate equipment. The equipment shall be inspected daily using an ECC inspection form specific for the equipment in use. Equipment must have functioning safety devices as installed by the manufacturer. Deficiencies in equipment shall be corrected prior to operating. Equipment found to be unsafe shall not be used. Fire extinguishers of the appropriate size will be available on the equipment. All equipment shall have back up enunciators.
		• Only personnel essential to drill rig operation will be permitted in area directly surrounding drill rig. All personnel not directly contributing to drill rig operations will be required to stay a minimum of 25' away.
		• Check all safety devices, emergency shut-down switches daily or at the start of drilling shift. Drilling will not be permitted until all emergency shut-down switches and warning systems are working properly.
		• Drill rig operator is required to do a daily equipment checklist to ensure equipment is in safe working condition.
		  ○ Personnel need to be cognizant of surroundings and keep clear of cuttings discharge point. Eye protection will be worn at all times.
		  ○ Personnel need to remain away from air compressor and air hose unless a specific task requires work in close proximity.
		  ○ Do not operate compressed air system with broken or inoperable safety controls.
		  ○ Inspect airline safety cables to verify they are in good working condition.
		• If augers are used during drilling operations, auger guards will be required.
		• All work areas on and around the drill rig operation will be required to be kept clear of unnecessary equipment and materials. Ongoing housekeeping throughout the day will keep work areas free of slip, trip and fall hazards.
			L

	Struck by Traffic	When working adjacent to or on active roadways adequate traffic control devices must be installed to establish a safe work zone. Adequate signage must be established to identify the work zone. All personnel entering and working in an established work zone must wear the classification of reflective vests (appropriate based on speed of vehicles).	L

DPT, HSA, Air Rotary Activities (CONTINUED)	Struck-By / Pinch Points	• All personnel will wear ANSI Type 2 high-visibility traffic safety vests. Operators shall maintain a constant awareness of personnel and equipment in the work areas. • Moving heavy equipment must have properly functioning back-up alarms. • Spotters on the ground will assist operators in manipulating vehicles and equipment into tight or confined spaces. • Getting off or on any equipment while it is in motion is prohibited. • Three points of contact shall be maintained when getting on or off equipment. • Seats will be provided for each occupant of the equipment. • The operator shall use safety belts while equipment is in use. • All original manufacturer-installed safety equipment such as lights, guards, brakes, horn, etc. must be functional at all times. • Whenever equipment is parked, the parking brake shall be set, and wheels chocked when on an incline • Heavy equipment operators shall inform their Supervisor(s) of any prescribed medication that they are taking that would impair their judgment and/or vision • Never walk or work directly in back of or to the side of heavy equipment without the operator's knowledge and approval.	L
		• Personnel will stay out of equipment swing areas and pinch-points. When dumping a load from a bed equipped with a tailgate, a spotter must be positioned a safe distance from the vehicle, such that they can observe the bed to notify the operator if an obstruction occurs	L
	Excessive Noise Exposure	• Wear hearing protective devices (Ear muffs/plugs) when working, when using or near high noise producing equipment, or when directed by ECC SSHO in response to noise monitoring. • Ensure adequate maintenance on equipment. • Conduct periodic sound level surveys.	L
	Inhalation of materials containing crystalline silica	• Review SDS for grout/concrete and other materials utilized to install wells to determine silica content. If silica is present, adhere to controls in APP. Work upwind, avoid dust clouds, keep materials wet, avoid dry sweeping	L
	Heat/Cold Stress (applies to all steps in this AHA)	• Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur and when instructed by SSHO. — Report all signs and symptoms of heat strain immediately to SSHO.	L
	Severe weather (applies to all steps in this AHA)	• Shut down operations during severe storms, heavy rain, high wind, and lightning episodes. Evacuate the project site and take shelter at the designated shelter location. • All personnel shall be trained on the project Emergencies Response procedures.	L

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Welding/Cutting	Fire	• Personnel that weld or cut will be required to wear proper PPE including flame resistant gloves, aprons, safety shoes, welding helmets, goggles, and shaded glasses. • Fire extinguisher must be present. • Hot work permit must be obtained before any welding or cutting begins. • Verify that no combustible materials are within work area. • Fire watch must continue for 30 minutes after any welding or cutting concludes. • Protective caps must be used when moving cylinders. • Cylinders must be stored properly.	L
Equipment Decontamination	Chemical Contamination Exposure	• All personnel assigned to drilling operations will operate inside a designated EZ. • All PPE will be removed properly prior to exiting the CRZ. • Air monitoring will be performed. All equipment and hand tools will be decontaminated in accordance with the established procedure. • Air monitoring will be conducted for combustible gas, oxygen levels, and toxic gas exposure during drilling and well abandonment.	L

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***
Equipment to be Used	**Training Requirements**	**Inspection Requirements**
1. Support Vehicles 2. Drill Rig 3. Hand Tools 4. Air Monitoring Equipment (Multi-RAE Plus or equivalent) <u>Support Zone</u> • Cell phone or radio communication • Eyewash station • Fire extinguishers • First aid kit • Drinking water • 911 air horn • Spill containment supplies • Air monitoring equipment, if needed • Emergency decontamination supplies • GFCI • Hand and power tools. **PPE: Level D (hardhat, steel toe boots, work gloves, Class 2 hi-viz safety garment, safety glasses, and hearing protection as needed), unless noted otherwise in this AHA**	• Only qualified operators permitted to operate mobile equipment • Operators of DPT and HSA rig will be a licensed driller. • Operators of forklifts will have recent certification / training in safe forklift operation (20 CFR 1910, Subpart N – Powered Industrial Trucks) • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan/Procedures • Fire extinguishers. **Competent Person: Site Superintendent and/or SSHO** **Designated Drill Rig Operator:**	• SSHO daily site inspection • Equipment – Receipt and inspected by SSHO • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Complete daily equipment inspection form will be completed by the operator • Weekly inspection of first aid kits • Monthly inspection of fire extinguishers • GFCIs (at least monthly) • Air monitoring equipment will be calibrated at least monthly and bump tested daily before each shift and as often as necessary. Equipment that cannot pass bump test criteria will be recalibrated or replaced. • Drill rig and associated equipment in accordance with manufacturer's requirements.

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Landfill Repair & Maintenance**	Overall Risk Assessment Code (RAC) (Use highest code)	**M**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	**Risk Assessment Code (RAC) Matrix**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**		
Date Prepared / Revised: **4 February 2021**		
Prepared by (Name/Title): **Lauren Sparkman/ Environmental Engineer**		
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**		
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**		
Notes: (Field Notes, Review Comments, etc.)		

Severity	Probability				
	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	E	E	H	H	M
Critical	E	H	H	M	L
Marginal	H	M	M	L	L
Negligible	M	L	L	L	L

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS **Consider People, Equipment, Materials and Environment** *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHS in accordance with ECC SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Landfill Repair and Maintenance	Contact with Overhead Utility Lines – Electrocution, Fires / Underground utilities	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures and equipment, operational aspects & heavy equipment use, and change(s) in site/work conditions. Daily housekeeping will be implemented at the end of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines. • If work must be conducted closer to utilities than guidelines allow, the utility company must be contacted. • An observer/spotter shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means. This shall be the ONLY job the observer is performing when an observer is required. • Keep all personnel well away from the equipment whenever it is close to power lines.	L

Landfill Repair and Maintenance (CONTINUED)	Contact with Overhead Utility Lines – Electrocution, Fires / Underground utilities (CONTINUED)	• If intrusive activities, Louisiana 811 shall be notified prior to with sufficient time allowed for white-lining and utility marking. — Excavation Permit Procedure: Mark the area for the requested clearance and then submit an excavation permit with RSA. Alabama 811 is contacted 48 hours prior to activity start. • ECC personnel will "white-line" or otherwise mark the area where the wells are to be installed, prior to utility marking. • Intrusive soil activities conducted within a five foot "Buffer Zone" (horizontal or vertical, as measured from the outside edge of the utility) of any utility (electric, gas, high pressure, chemical storage tanks, pipelines, sewers, etc.) may require the use of non-aggressive excavation methods such as hand excavation using non-conductive hand tools, use of an air spade, hydro-excavation, or similar means (some jurisdictions require more stringent buffer zones). Spotter will assist the operator/workers to identify unknown conditions during drilling. • If a previously unknown utility line is identified, uncovered, or disturbed during intrusive activities, stop immediately and project management notified. Intrusive operations shall not recommence until the line has been evaluated, identified, and the appropriate utility notified. • Most utilities and marking services utilize the American Public Works Association Uniform Color Code for marking out utilities. All personnel involved in excavation projects will be familiar with this code.	**L**
	Struck-By (heavy equipment)	• All personnel will wear ANSI Type 2 high-visibility traffic safety vests. Operators shall maintain a constant awareness of personnel and equipment in the work areas. • Equipment operators must be qualified and designated • Moving heavy equipment must have properly functioning back-up alarms. • Spotters on the ground will assist operators in manipulating vehicles and equipment into tight or confined spaces. • Moving heavy equipment must have properly functioning back-up alarms. • Getting off or on any equipment while it is in motion is prohibited. • Three points of contact shall be maintained when getting on or off equipment. • Seats will be provided for each occupant of the equipment. • The operator shall use safety belts while equipment is in use. • All original manufacturer-installed safety equipment such as lights, guards, brakes, horn, etc. must be functional at all times. • Whenever equipment is parked, the parking brake shall be set, and wheels chocked when on an incline. • Heavy equipment operators shall inform their Supervisor(s) of any prescribed medication that they are taking that would impair their judgment and/or vision. • Never walk or work directly behind or to the side of heavy equipment without the operator's knowledge and approval. • Personnel will stay out of equipment swing areas and pinch-points. • When dumping a load from a bed equipped with a tailgate, a spotter must be positioned a safe distance from the vehicle, such that they can observe the bed to notify the operator if an obstruction occurs.	**M**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Landfill Repair and Maintenance (CONTINUED)	Heat/Cold Stress (applies to all steps in this AHA)	• Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur and when instructed by SSHO. • Report all signs and symptoms of heat strain immediately to SSHO.	L
	Severe weather (applies to all steps in this AHA)	• Shut down operations during severe storms, heavy rain, high wind, and lightning episodes. Evacuate the project site and take shelter at the designated shelter location. • All personnel shall be trained on the project Emergencies Response procedures.	L

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***
Equipment to be Used	**Training Requirements/Competent or Qualified Personnel name(s)**	**Inspection Requirements**
Earth moving equipment (i.e., excavators, articulated dump trucks, bulldozer) <u>Support Zone</u> • Cell phone or Radio communication • Eyewash station • Fire extinguishers • First aid kit • drinking water • 911 Air horn • Spill containment supplies • PDR and PID air monitors • Emergency decontamination supplies • Hand tools **PPE: Level D (hardhat, steel toe boots, work gloves, orange safety vest, safety glasses and hearing protection, as needed)**	• HEAVY EXCAVATING, EARTHMOVING, AND TRANSPORT EQUIPMENT OPERATIONS: Equipment to be operated and inspected only by qualified, trained operators who have had a practical competency evaluation performed by a qualified supervisor. • UNDERGROUND UTILITIES: Utility color coding; excavation procedures within buffer zones; emergency procedures in the event of utility contact. • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) **Competent Person: Site Superintendent and/or SSHO** **Designated Equipment Operators:**	• Documented daily equipment inspections by operator are to be conducted and recorded on ECC inspection checklist form. • Daily inspections of excavation to be documented by Competent Person. • Equipment - Receipt and inspected by SSHO • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Weekly inspection of first aid kits • Annual and Monthly inspection of fire extinguishers

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Land Use Control (LUC) Inspection and Geophysical Survey**	Overall Risk Assessment Code (RAC) (Use highest code) **L**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**	
Date Prepared: **4 February 2021**	
Prepared by (Name/Title): **Lauren Sparkman/ Environmental Engineer**	
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**	
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**	
Notes: (Field Notes, Review Comments, etc.)	

Risk Assessment Code (RAC) Matrix

Severity	Probability				
	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	E	E	H	H	M
Critical	E	H	H	M	L
Marginal	H	M	M	L	L
Negligible	M	L	L	L	L

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS **Consider People, Equipment, Materials and Environment** *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHS in accordance with ECC SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
LUC Inspection	Slips & Trips	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures and equipment, operational aspects & heavy equipment use, and change(s) in site/work conditions. Daily housekeeping will be implemented at the end of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Wear high traction safety-toe footwear. • Keep loads manageable to not obstruct vision.	L

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

LUC Inspection (CONTINUED)	Lifting Strains & Sprains	• No individual employee is permitted to lift any object that weighs over 50 pounds. Proper lifting techniques shall be used. Multiple employees or the use of mechanical lifting are for lifting objects over the 50-pound limit. Materials shall be inspected for sharp edges prior to being handled, and avoid pinch point hazards.	L
	Exposure to excessive Noise levels	• Hearing protection shall be worn around heavy equipment of other noise generating equipment or when noise levels exceed TWA of 85 dBA.	L
	Using damaged / malfunctioning power tools	• Prior to use all tools must be inspected. Any damaged or defective tools will tagged and removed from service for repair and/or discarded. • Proper PPE shall be worn when operating power tools. At a minimum, Level "D" will be required.	L
	Caught in or between equipment	• Only qualified personnel shall be permitted to operate equipment. Operators will have constant communication with ground support crews and will be aware of activities around their piece of equipment during operation. • Mobile equipment shall be inspected daily. Deficiencies in equipment shall be noted on the inspection form. Equipment found to be unsafe shall not be used. • Fire extinguishers of the appropriate size will be available in the operators of all heavy equipment. • All equipment shall have backing alarms. • All equipment will be properly secured / rigged prior to transportation off site. All rigging equipment shall be inspected prior to use.	L
	Contact with stinging or biting insects	• Personnel shall wear light colored clothing and apply insect repellent (i.e., DEET) to outer pants legs; Body checks should be performed at the end of the workday. • Any individual who has a known or has a potential for allergic reaction to insect stings shall notify the SSHS and an Epi-Pen shall be readily available.	L
	Contact with poisonous plants (e.g. poison ivy)	• Inspect area for known plants before starting field activities • Wear long sleeve shirts, tuck sleeves and pant legs. If there is heavy growth, wear disposable coveralls and use barrier cream, e.g. Ivy Block. • Have TecNu or other poison ivy cleanser on hand and wash immediately after contact.	L
	Scrapes and cuts	• Wear safety glasses, gloves and long sleeves.	L

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

LUC Inspection (CONTINUED)	Heat/Cold Stress (applies to all steps in this AHA)	• Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur and when instructed by SSHO. • Report all signs and symptoms of heat strain immediately to SSHO.	L
	Severe weather (applies to all steps in this AHA)	• Shut down operations during severe storms, heavy rain, high wind, and lightning episodes. Evacuate the project site and take shelter at the designated shelter location. • All personnel shall be trained on the project Emergencies Response procedures.	L
Stop work and notify your supervisor if you are not sure how to perform your task safely!	***Stop work and notify your supervisor if you are not sure how to perform your task safely!***	***Stop work and notify your supervisor if you are not sure how to perform your task safely!***	

Equipment to be Used	Training Requirements/Competent or Qualified Personnel name(s)	Inspection Requirements
• Hand and Portable power tools <u>Support Zone</u> • Cell phone or Radio communication • Eyewash station • Fire extinguishers • First aid kit • drinking water • 911 Air horn • Spill containment supplies • PDR and PID air monitors • Emergency decontamination supplies • Hand tools **PPE: Level D (hardhat, steel toe boots, work gloves, orange safety vest, safety glasses, and hearing protection as needed)**	• Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) **Competent Person: Site Superintendent and/or SSHO**	• Documented daily equipment inspections by operator are to be conducted and recorded on ECC inspection checklist form. • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Weekly inspection of first aid kits • Monthly inspection of fire extinguishers

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Drilling: Direct Push Technology (DPT)/ Hollow Stem Auger (HAS)/ Air Rotary/ Membrane Interface Probe (MIP)**	Overall Risk Assessment Code (RAC) (Use highest code)	**M**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	**Risk Assessment Code (RAC) Matrix**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**	**Severity** / **Probability**	
Date Prepared / Revised: **4 February 2021**	Frequent / Likely / Occasional / Seldom / Unlikely	
Prepared by (Name/Title): **Lauren Sparkman/ Environmental Engineer**	Catastrophic: E / E / H / H / M	
	Critical: E / H / H / M / L	
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**	Marginal: H / M / M / L / L	
	Negligible: M / L / L / L / L	
Competent Person (Name/Title): **Master Driller**	Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)	
	"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.	**RAC Chart**
	"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible	**E = Extremely High Risk**
Notes: (Field Notes, Review Comments, etc.)		**H = High Risk**
	Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.	**M = Moderate Risk**
		L = Low Risk

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS **Consider People, Equipment, Materials and Environment** *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHS in accordance with ECC SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Location of Underground and Above ground Utilities	Hitting Utilities	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures, operational aspects & heavy equipment use, and change(s) in site work conditions. Daily housekeeping will be implemented during and at the ends of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines. • If work must be conducted closer to utilities than guidelines allow, the utility company must be contacted.	L

Location of Underground Utilities (CONTINUED)	Hitting Utilities (CONTINUED)	• An observer/spotter shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means. This shall be the ONLY job the observer is performing when an observer is required. • Keep all personnel well away from the equipment whenever it is close to power lines. • If intrusive activities, Alabama 811 shall be notified prior to with sufficient time allowed for white-lining and utility marking. Additionally, private locating services will be contacted for locations on base. — Excavation Permit Procedure: Mark the area for the requested clearance and then submit an excavation permit with RSA. Alabama 811 is contacted 48 hours prior to activity start. • ECC personnel will "white-line" or otherwise mark the area where the wells are to be installed, prior to utility marking. • Intrusive soil activities conducted within a five foot "Buffer Zone" (horizontal or vertical, as measured from the outside edge of the utility) of any utility (electric, gas, high pressure, chemical storage tanks, pipelines, sewers, etc.) may require the use of non-aggressive excavation methods such as hand excavation using non-conductive hand tools, use of an air spade, hydro-excavation, or similar means (some jurisdictions require more stringent buffer zones). Spotter will assist the operator/workers to identify unknown conditions during drilling. • If a previously unknown utility line is identified, uncovered, or disturbed during intrusive activities, stop immediately and project management notified. Intrusive operations shall not recommence until the line has been evaluated, identified, and the appropriate utility notified. • Most utilities and marking services utilize the American Public Works Association Uniform Color Code for marking out utilities. All personnel involved in excavation projects will be familiar with this code	L
Drill Rig Operations	Cuts/Lacerations	• A cutting device designed for cutting acetate liners (procured through Geoprobe) shall be used. If a safety utility knife is used, snubbed nose blades are required, and the user must wear Kevlar gloves under leather gloves.	L
	Lifting Strains/Sprains	• No individual employee is permitted to lift any object that weighs over 50 pounds. Proper lifting techniques shall be used. Multiple employees or the use of mechanical lifting are for lifting objects over the 50-pound limit. Materials shall be inspected for sharp edges prior to being handled, and avoid pinch point hazards. • While handling direct push rods and filled acetate liners, make sure proper lifting techniques are used.	L
	Struck by or caught in drill rig equipment	Only qualified and designated personnel shall be permitted to operate equipment. The equipment shall be inspected daily using an ECC inspection form specific for the equipment in use. Equipment must have functioning safety devices as installed by the manufacturer. Deficiencies in equipment shall be corrected prior to operating. Equipment found to be unsafe shall not be used. Fire extinguishers of the appropriate size will be available on the equipment. All equipment shall have back up enunciators. • Only personnel essential to drill rig operation will be permitted in area directly surrounding drill rig. All personnel not directly contributing to drill rig operations will be required to stay a minimum of 25' away.	L

Drill Rig Operations (CONTINUED)	Struck by or caught in drill rig equipment (CONTINUED)	• Check all safety devices, emergency shut-down switches daily or at the start of drilling shift. Drilling will not be permitted until all emergency shut-down switches and warning systems are working properly. • Drill rig operator is required to do a daily equipment checklist to ensure equipment is in safe working condition. • If augers are used during drilling operations, auger guards will be required. • All work areas on and around the drill rig operation will be required to be kept clear of unnecessary equipment and materials. Ongoing housekeeping throughout the day will keep work areas free of slip, trip and fall hazards.	L
	Struck by Traffic	• When working adjacent to or on active roadways adequate traffic control devices must be installed to establish a safe work zone. Adequate signage must be established to identify the work zone. All personnel entering and working in an established work zone must wear the classification of reflective vests (appropriate based on speed of vehicles).	L
	Struck-By / Pinch Points	• All personnel will wear ANSI Type 2 high-visibility traffic safety vests. Operators shall maintain a constant awareness of personnel and equipment in the work areas. • Moving heavy equipment must have properly functioning back-up alarms. • Spotters on the ground will assist operators in manipulating vehicles and equipment into tight or confined spaces. • Getting off or on any equipment while it is in motion is prohibited. • Three points of contact shall be maintained when getting on or off equipment. • Seats will be provided for each occupant of the equipment. • The operator shall use safety belts while equipment is in use. • All original manufacturer-installed safety equipment such as lights, guards, brakes, horn, etc. must be functional at all times. • Whenever equipment is parked, the parking brake shall be set, and wheels chocked when on an incline • Heavy equipment operators shall inform their Supervisor(s) of any prescribed medication that they are taking that would impair their judgment and/or vision • Never walk or work directly in back of or to the side of heavy equipment without the operator's knowledge and approval.	L
	Severe weather (applies to all job steps)	• Shut down operations during severe storms, heavy rain, high wind, and lightning episodes. Evacuate the project site and take shelter at the designated shelter location. • All personnel shall be trained on the project Emergencies Response procedures.	L
	Excessive Noise Exposure	• Wear hearing protective devices (Ear muffs/plugs) when working, when using or near high noise producing equipment, or when directed by ECC SSHO in response to noise monitoring. • Ensure adequate maintenance on equipment. • Conduct periodic sound level surveys	L

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Drill Rig Operations (CONTINUED)	Exposure to dust	• Dust control measures will be implemented, as needed, and include some or all of the following: — Visual monitoring for fugitive dust. — Covering soil stockpiles with plastic sheeting or tarps. — Covering loaded dump truck beds with tarps. — Applying magnesium chloride, or similar dust-suppressing agent, for stockpiles and roads to reduce dust emissions. — Spraying potable water on dirt roadways outside the work zone and along dirt access roads. — Spraying the surface of the area to be excavated with water or a dust-suppressing agent, if required. — Work stoppage during wind speed in excess of 25 miles per hour. • Proper PPE	L

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***
Equipment to be Used	**Training Requirements**	**Inspection Requirements**
1. Heavy equipment 2. Dust suppressant <u>Support Zone</u> • Cell phone or radio communication • Eyewash station • Fire extinguishers • First aid kit • Drinking water • 911 air horn • Spill containment supplies • Air monitoring equipment • Emergency decontamination supplies • GFCI • Hand and power tools **PPE: Modified Level D (hardhat, steel toe boots, work gloves, Class 2 high-visibility garment, hearing protection, and safety glasses). If direct contact with soils, boot covers/over boots and Tyvek may be required (SSHO will determine when boot covers and Tyvek are needed).**	• Only qualified operators permitted to operate mobile equipment • Review of Excavation Plan • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan/Procedures • Fire extinguishers **Competent Person: Site Superintendent and/or SSHO** Designated Equipment Operators:	• SSHO daily site inspection • Equipment – Receipt and inspected by SSHO • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Complete ECC daily equipment inspection form • Weekly inspection of first aid kits • Monthly and annual inspection of fire extinguishers • GFCIs (at least monthly).

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Excavation, Transportation, and Disposal**	Overall Risk Assessment Code (RAC) (Use highest code) **M**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**	
Date Prepared / Revised: **4 February 2021**	
Prepared by (Name/Title): **Lauren Sparkman/ Environmental Engineer**	
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**	
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**	
Notes: (Field Notes, Review Comments, etc.)	

Risk Assessment Code (RAC) Matrix

Severity	Probability				
	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	E	E	H	H	M
Critical	E	H	H	M	L
Marginal	H	M	M	L	L
Negligible	M	L	L	L	L

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- E = Extremely High Risk
- H = High Risk
- M = Moderate Risk
- L = Low Risk

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS Consider People, Equipment, Materials and Environment *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHS in accordance with ECC SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Location of Underground and Above ground Utilities	Hitting Utilities	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures, operational aspects & heavy equipment use, and change(s) in site work conditions. Daily housekeeping will be implemented during and at the ends of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines. • If work must be conducted closer to utilities than guidelines allow, the utility company must be contacted.	L

Location of Underground Utilities (CONTINUED)	Hitting Utilities (CONTINUED)	• An observer/spotter shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means. This shall be the ONLY job the observer is performing when an observer is required. • Keep all personnel well away from the equipment whenever it is close to power lines. • If intrusive activities, Alabama 811 shall be notified prior to with sufficient time allowed for white-lining and utility marking. Additionally, private locating services will be contacted for locations on base. — Excavation Permit Procedure: Mark the area for the requested clearance and then submit an excavation permit with RSA. Alabama 811 is contacted 48 hours prior to activity start. • ECC personnel will "white-line" or otherwise mark the area where the wells are to be installed, prior to utility marking. • Intrusive soil activities conducted within a five foot "Buffer Zone" (horizontal or vertical, as measured from the outside edge of the utility) of any utility (electric, gas, high pressure, chemical storage tanks, pipelines, sewers, etc.) may require the use of non-aggressive excavation methods such as hand excavation using non-conductive hand tools, use of an air spade, hydro-excavation, or similar means (some jurisdictions require more stringent buffer zones). Spotter will assist the operator/workers to identify unknown conditions during drilling. • If a previously unknown utility line is identified, uncovered, or disturbed during intrusive activities, stop immediately and project management notified. Intrusive operations shall not recommence until the line has been evaluated, identified, and the appropriate utility notified. • Most utilities and marking services utilize the American Public Works Association Uniform Color Code for marking out utilities. All personnel involved in excavation projects will be familiar with this code	**L**
Heavy Equipment Activities (trenching, moving earthwork, T&D)	Struck by equipment and loads	• Only qualified and designated operators will be authorized to operate mobile construction equipment. • Inspect equipment daily before use. • All mobile equipment will have working back up alarms, tested each day. • Stay outside the working radius of the machine. If you need to speak to operator, make eye contact first, use hand signal, and wait until operator stops the machine, grounds the bucket, and takes hands off controls before approaching cab. • Operators will not lift buckets, booms or loads over people. • Operator will immediately stop whenever ground personnel encroach on the working radius.	**L**
	Roll over into excavation	• There will be no vehicles in the vicinity of the excavations. The only equipment in the area will the equipment directly involved in excavation activities including an excavator and either a front end loader or a dump truck to move the excavated materials from the excavation to the staging area. Areas where the transfer equipment enters or approaches the excavation will be sloped to avoid sharp edges/drops. • Excavators will be positioned at one end of the trench with tracks parallel to the trench and the operator will not undermine the machine.	**L**

Heavy Equipment Activities (trenching, moving earthwork, T&D) (CONTINUED)	Exposure to Noise	• Operators and workers in the vicinity shall wear hearing protection or when instructed by the SSHO. • Reference USACE EM 385-1-1 Section 5.	**L**
	Fire and hydraulic fuel spill from heavy equipment	• Daily inspection of all heavy equipment. A fire extinguisher will be located in each piece of equipment. • Spill containment supplies will be readily available at the fueling area. NO SMOKING allowed in the operating equipment or fueling area. • See Fire Protection Plan and Emergency Response Plan in APP.	**L**
	Heat/Cold Stress (applies to all job steps)	• Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur and when instructed by SSHO. • Report all signs and symptoms of heat strain immediately to SSHO	**L**
	Severe weather (applies to all job steps)	• Shut down operations during severe storms, heavy rain, high wind, and lightning episodes. Evacuate the project site and take shelter at the designated shelter location. • All personnel shall be trained on the project Emergencies Response procedures.	**L**
Entering/ exiting excavation	Excavation collapse Unauthorized personnel Excavated soils near the excavation	• Entry into excavations only after inspection by a competent person determines there are no cave-in hazards to employees. • Excavation faces will be sloped as determined by competent person. A restricted access zone will established. • Appropriate fencing and warning signs will be implemented on site. • Excavated soil shall be a minimum of 2 ft from the excavation. • Reference Excavation Plan in the APP and SOP ESQ 7.7	**M**
General Earthwork	Exposure to dust	• Dust control measures will be implemented, as needed, and include some or all of the following: — Visual monitoring for fugitive dust. — Covering soil stockpiles with plastic sheeting or tarps. — Covering loaded dump truck beds with tarps. — Applying magnesium chloride, or similar dust-suppressing agent, for stockpiles and roads to reduce dust emissions. — Spraying potable water on dirt roadways outside the work zone and along dirt access roads. — Spraying the surface of the area to be excavated with water or a dust-suppressing agent, if required. — Work stoppage during wind speed in excess of 25 miles per hour. — Proper PPE	**L**

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	*Stop work and notify the Team Leader if you are not sure how to perform your task safely!*	*Stop work and notify the Team Leader if you are not sure how to perform your task safely!*
Equipment to be Used	**Training Requirements**	**Inspection Requirements**
1. Heavy equipment 2. Dust suppressant <u>Support Zone</u> • Cell phone or radio communication • Eyewash station • Fire extinguishers • First aid kit • Drinking water • 911 air horn • Spill containment supplies • Air monitoring equipment • Emergency decontamination supplies • GFCI • Hand and power tools **PPE: Modified Level D (hardhat, steel toe boots, work gloves, Class 2 high-visibility garment, hearing protection, and safety glasses). If direct contact with soils, boot covers/over boots and Tyvek may be required (SSHO will determine when boot covers and Tyvek are needed).**	• Only qualified operators permitted to operate mobile equipment • Review of Excavation Plan • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan/Procedures • Fire extinguishers **Competent Person: Site Superintendent and/or SSHO** Designated Equipment Operators:	• SSHO daily site inspection • Equipment – Receipt and inspected by SSHO • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Complete ECC daily equipment inspection form • Weekly inspection of first aid kits • Monthly and annual inspection of fire extinguishers • GFCIs (at least monthly).

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Equipment Decontamination, Demobilization, and Site Restoration**	Overall Risk Assessment Code (RAC) (Use highest code)	**L**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	**Risk Assessment Code (RAC) Matrix**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**		
Date Prepared / Revised: **4 February 2021**		
Prepared by (Name/Title): **Brian Kateley, SSHO**		
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**		
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**		
Notes: (Field Notes, Review Comments, etc.)		

Severity	Probability				
	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	E	E	H	H	M
Critical	E	H	H	M	L
Marginal	H	M	M	L	L
Negligible	M	L	L	L	L

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- **E = Extremely High Risk**
- **H = High Risk**
- **M = Moderate Risk**
- **L = Low Risk**

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS Consider People, Equipment, Materials and Environment *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHO in accordance with WE SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Decontamination of equipment Dry Decontamination with hand tools • Use hand tools to remove excess soil or debris from equipment Site Restoration/Demob	Slip and Trip Hazards	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures and equipment, operational aspects & equipment use, and change(s) in site/work conditions. Daily housekeeping will be implemented at the end of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit w/ eye wash). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Practice good housekeeping. • Use care when walking on surface tarp, especially when wet. • Clean all spills immediately. • Proper PPE to include shoes which allow for good footing. • Be aware of physical hazards – watch for uneven ground, rocks, dirt clods, etc.	L
	Overhead Hazards	• Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines.	L

Decontamination of equipment Dry Decontamination with hand tools • Use hand tools to remove excess soil or debris from equipment Site Restoration/Demob (CONTINUED)	Manual Lifting/Backs/Ergonomic	• Train/Utilize correct lift techniques. • Personnel will not lift more than 50 lb. • Use Buddy System. • Position equipment as to eliminate over stretching/ergonomic concerns.	L
	Splash hazards (skin/eyes / face)	• Avoid direct exposure to potential eye hazards. • Wear ANSI approved safety glasses at all times. • Utilize face shield/goggles if potential for flying debris/splash hazards. • Wear rain suit or poly coated Tyvek, waterproof boots or boot covers	L
	Severe Weather	• Shut down operations during severe electrical storms, heavy rain, high wind and evacuate site/take cover. • Train employees on Emergencies Response. • Monitor weather systems.	L
	Noise	• Wear hearing protective devices (earmuffs/plugs) inside the exclusion zone, when using or near high noise producing equipment, or when directed by ECC's SSHS in response to noise monitoring. • Ensure adequate maintenance on thermal/heavy equipment.	L
	Struck By/Against Heavy Equipment	• Maintain radio/verbal communication. • Eye contact with operators will be made before approaching trucks. • Equipment will not be approached on blind sides. • Personnel will understand and review hand signals. • All machines will be equipped with backup alarms and lighting. • Always set emergency brake on equipment. • Equipment will properly Locked Out prior to decontamination (i.e., key removed from ignition) • Engage all equipment-supplied safety equipment (i.e., locking arms, chocks) on equipment parts that are suspended. DO NOT place yourself between unprotected/unsecured parts of the equipment.	L
	Chemical Exposure	• Protective clothing/PPE (steel toe boots, ANSI approved safety glasses, chemical gloves). • Decontaminate equipment away from intrusive activities and upwind.	L
	Scrapes and cuts	• Wear safety glasses, gloves and long sleeves.	L
	Heat/Cold Stress	• Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur, when instructed by SSHO. • Report all signs and symptoms of heat strain immediately to SSHO.	L
Wet Decontamination with use of water • Use hose or pressure washer to remove soil or debris from equipment	High pressure washer operation	• The lance must always be pointed at the work area and away from other site personnel. Non-operators must remain a safe distance from the operator. The distance must be a minimum of 25 feet in every direction • Only trained authorized personnel will be allowed to use the equipment. • The operating pressure should never exceed what is necessary to complete the job. • **The trigger should never be tied down.**	L

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Wet Decontamination with use of water • Use hose or pressure washer to remove soil or debris from equipment (CONTINUED)	Equipment malfunction	• No unauthorized attachment may be connected to the unit. • Equipment should be cleaned after every use to avoid oil or dirt build-up especially around the trigger and guard area. • **Do not modify the lance.** The lance barrel, from trigger block to the tip, should not be less than 48 inches as recommended by manufacturers of hydroblasting equipment. • All users and assistants must be trained in emergency shut down procedures and general equipment maintenance.	L
	Slips, trips, and falls	• Proper PPE to include shoes which allow for good footing.	L

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***	***Stop work and notify the Team Leader if you are not sure how to perform your task safely!***
Equipment to be Used	**Training Requirements/Competent or Qualified Personnel name(s)**	**Inspection Requirements**
1. Hand Tools 2. Skid Steer 3. Pressure washer unit and hoses 4. Support Vehicles <u>Support Zone</u> • Cell phone or Radio communication • Eyewash station • Fire extinguishers • First aid kit • Drinking water • 911 Air horn • Spill containment supplies • Air Monitoring equipment, if needed • Emergency decontamination supplies • GFCI • Hand and Power Tools **PPE: Modified Level D (Face shield, hardhat, steel toe boots, chemical gloves, orange safety vest, safety glasses (face shield if needed) and hearing protection, as needed)**	• Only qualified operators permitted to operate mobile equipment • Operators of forklifts will have recent certification / training in safe forklift operation (20 CFR 1910, Subpart N – Powered Industrial Trucks) • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan/Procedures • Fire extinguishers. **Competent Person: Site Superintendent and/or SSHO**	• SSHO daily site inspection • Equipment – Receipt and inspected by SSHO • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Complete daily equipment inspection form will be completed by the operator • Weekly inspection of first aid kits • Monthly and annual inspection of fire extinguishers • GFCIs (at least monthly).

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Activity/Work Task: **Disc and Raking Contaminated Soil**	Overall Risk Assessment Code (RAC) (Use highest code) **L**
Project Location: **Redstone Arsenal (RSA), Alabama (AL)**	
Contract Number: **W9124J-18-D-0004/ W9124J-20-F-0020**	
Date Prepared / Revised: **4 February 2021**	
Prepared by (Name/Title): **Lauren Sparkman/ Environmental Engineer**	
Reviewed by (Name/Title): **Kym Edelman, CIH, CSP / Site and Health Manager**	
Competent Person (Name/Title): **Aaron Glad, Site Superintendent**	
Notes: (Field Notes, Review Comments, etc.)	

Risk Assessment Code (RAC) Matrix

Severity	Probability				
	Frequent	Likely	Occasional	Seldom	Unlikely
Catastrophic	E	E	H	H	M
Critical	E	H	H	M	L
Marginal	H	M	M	L	L
Negligible	M	L	L	L	L

Step 1: Review each **"Hazard"** with identified safety **"Controls"** and determine RAC (See above)

"Probability" is the likelihood to cause an incident, near miss, or accident and identified as: Frequent, Likely, Occasional, Seldom or Unlikely.

"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible

Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.

RAC Chart

- E = Extremely High Risk
- H = High Risk
- M = Moderate Risk
- L = Low Risk

JOB STEPS	POTENTIAL SAFETY / HEALTH HAZARDS	RECOMMENDED CONTROLS Consider People, Equipment, Materials and Environment *(Note: Standard PPE required for this activity includes Hard Hat, Safety glasses with side protection, and safety-toe footwear. Additional PPE requirements are listed in this column depending on the hazard. This constitutes the Workplace Hazard Assessment per 29 CFR 1910.132. Additional assessments and PPE selection when needed will be documented on a daily briefing sign-in form and signed by the SSHS in accordance with ECC SOP ESQ 6.1. Hazard assessment and respirator selection for inhalation hazards are documented in the site Respiratory Protection Plan if respirators are part of PPE.)*	RAC
Location of Underground Utilities	Hitting Utilities	General Safety - To minimize potential hazards all personnel shall attend site orientation prior to start of work activities in addition to daily Safety Tailgate meetings to familiarize themselves to hazards, emergency procedures, operational aspects & heavy equipment use, and change(s) in site work conditions. Daily housekeeping will be implemented during and at the ends of each workday. Equipment vehicles must be set up with a fire extinguisher (min 10:BC & a FA Kit). Drinking water must be stored in a cooler clearly marked "Food & Drink Only – No Samples". • Before work begins, survey the site for overhead power lines. LOOK UP! Equipment will not be used that is able to reach overhead power lines. • If work must be conducted closer to utilities than guidelines allow, the utility company must be contacted.	L

Location of Underground Utilities (CONTINUED)	Hitting Utilities (CONTINUED)	• An observer/spotter shall be designated to observe clearance of the equipment and give timely warning for all operations where it is difficult for the operator to maintain the desired clearance by visual means. This shall be the ONLY job the observer is performing when an observer is required. • Keep all personnel well away from the equipment whenever it is close to power lines. • If intrusive activities, Louisiana 811 shall be notified prior to with sufficient time allowed for white-lining and utility marking. — Excavation Permit Procedure: Mark the area for the requested clearance and then submit an excavation permit with RSA. Alabama 811 is contacted 48 hours prior to activity start. • ECC personnel will "white-line" or otherwise mark the area where the wells are to be installed, prior to utility marking. • Intrusive soil activities conducted within a five foot "Buffer Zone" (horizontal or vertical, as measured from the outside edge of the utility) of any utility (electric, gas, high pressure, chemical storage tanks, pipelines, sewers, etc.) may require the use of non-aggressive excavation methods such as hand excavation using non-conductive hand tools, use of an air spade, hydro-excavation, or similar means (some jurisdictions require more stringent buffer zones). Spotter will assist the operator/workers to identify unknown conditions during drilling. • If a previously unknown utility line is identified, uncovered, or disturbed during intrusive activities, stop immediately and project management notified. Intrusive operations shall not recommence until the line has been evaluated, identified, and the appropriate utility notified. • Most utilities and marking services utilize the American Public Works Association Uniform Color Code for marking out utilities. All personnel involved in excavation projects will be familiar with this code	L
Disc and Raking soil	Struck by equipment	• Operators will be qualified and designated. • All personnel will wear ANSI Type 2 high-visibility traffic safety vests. Operators shall maintain a constant awareness of personnel and equipment in the work areas. • Spotters on the ground will assist operators in manipulating vehicles and equipment into tight or confined spaces. • Getting off or on any equipment while it is in motion is prohibited. • Three points of contact shall be maintained when getting on or off equipment. • Seats will be provided for each occupant of the equipment. • The operator shall use safety belts while equipment is in use. • All original manufacturer-installed safety equipment such as lights, guards, brakes, horn, etc. must be functional at all times. • Whenever equipment is parked, the parking brake shall be set, and wheels chocked when on an incline • Mobile equipment operators shall inform their Supervisor(s) of any prescribed medication that they are taking that would impair their judgment and/or vision • Never walk or work directly in back of or to the side of mobile equipment without the operator's knowledge and approval.	L

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Disc and Raking soil (CONTINUED)	Excessive Noise Exposure	• Wear hearing protective devices (Ear muffs/plugs) when working, when using or near high noise producing equipment, or when directed by ECC SSHO in response to noise monitoring. • Ensure adequate maintenance on equipment. • Conduct periodic sound level surveys.	L
	Fire and hydraulic fuel spill from tractor	• Daily inspection of all heavy equipment. A fire extinguisher will be located in each piece of equipment. • Spill containment supplies will be readily available at the fueling area. NO SMOKING allowed in the operating equipment or fueling area. • See Fire Protection Plan and Emergency Response Plan in APP.	L
	Heat/Cold Stress (applies to all job steps)	• Monitor weather conditions and implement controls in accordance with Heat/Cold Stress Prevention Plan in APP. • Stay hydrated. • Stop and rest in cool shaded area if heat strain symptoms occur and when instructed by SSHO. • Report all signs and symptoms of heat strain immediately to SSHO	L
	Severe weather (applies to all job steps)	• Shut down operations during severe storms, heavy rain, high wind, and lightning episodes. Evacuate the project site and take shelter at the designated shelter location. • All personnel shall be trained on the project Emergencies Response procedures.	L
General Earthwork	Exposure to dust	• Dust control measures will be implemented, as needed, and include some or all of the following: — Visual monitoring for fugitive dust. — Covering soil stockpiles with plastic sheeting or tarps. — Covering loaded dump truck beds with tarps. — Applying magnesium chloride, or similar dust-suppressing agent, for stockpiles and roads to reduce dust emissions. — Spraying potable water on dirt roadways outside the work zone and along dirt access roads. — Spraying the surface of the area to be excavated with water or a dust-suppressing agent, if required. — Work stoppage during wind speed in excess of 25 miles per hour. — Proper PPE	L

Environmental Chemical Corporation
Activity Hazard Analysis (AHA)

Stop work and notify the Team Leader if you are not sure how to perform your task safely!	*Stop work and notify the Team Leader if you are not sure how to perform your task safely!*	*Stop work and notify the Team Leader if you are not sure how to perform your task safely!*
Equipment to be Used	**Training Requirements**	**Inspection Requirements**
1. Tractor with disc 2. Dust suppressant <u>Support Zone</u> • Cell phone or radio communication • Eyewash station • Fire extinguishers • First aid kit • Drinking water • 911 air horn • Spill containment supplies • Air monitoring equipment • Emergency decontamination supplies • GFCI • Hand and power tools **PPE: Modified Level D (hardhat, steel toe boots, work gloves, Class 2 high-visibility garment, hearing protection, and safety glasses). If direct contact with soils, boot covers/over boots and Tyvek may be required (SSHO will determine when boot covers and Tyvek are needed).**	• Only qualified operators permitted to operate mobile equipment • Review of Excavation Plan • First Aid/Cardiopulmonary Resuscitation training (at least two individuals onsite) • Initial Safety Orientation • Daily Safety Tailgate Meetings • Emergency Response Plan/Procedures • Fire extinguishers **Competent Person: Site Superintendent and/or SSHO** Designated Operator:	• SSHO daily site inspection • Equipment – Receipt and inspected by SSHO • Competent person will inspect equipment daily prior to each use. No equipment will be placed in service until all deficiencies are corrected • Complete ECC daily equipment inspection form • Weekly inspection of first aid kits • Monthly inspection of fire extinguishers • GFCIs (at least monthly).

APPENDIX B
Resumes of Key Safety and Health Personnel and Competent Persons

Kym Edelman, CIH, CSP *757-435-5384*
EHS Manager

Experience Summary

Highly accomplished Certified Industrial Hygienist and Certified Safety Professional with over 27 years of on-site and project management expertise to provide oversight, review, reporting, training, and control of employee H&S processes on multiple construction/environmental sites.
Comprehensive knowledge of regulatory compliance requirements under OSHA, DOE, CERCLA, RCRA, USACE, EPA, and other federal/state regulatory programs.
Hands-on experience in compliance monitoring, development and implementation of policies and procedures, accident investigation, and worker's compensation issues.
Proven record of retaining minute detail with excellent recall regarding safety regulations and contractual language to make on-the-spot independent decisions.
Well respected with reputation for using excellent interpersonal communication skills to collaborate with staff, all levels of management, and clients.
Consistently commended for outstanding leadership skills, producing quality work product, developing proactive initiatives, and commitment to achieving optimum project safety expectations to ensure client satisfaction while adhering to corporate policy and procedures.

Education

BS (Bachelor of Science), Environmental Health, Industrial Hygiene Concentration, Old Dominion University, Norfolk, VA

Registrations/Certifications

Certified Industrial Hygienist
Certified Safety Professional

Training

40-Hour OSHA Hazardous Waste Health and Safety Training – 1989
40-Hour EM 385 1-1 Awareness Course- 2018
30-Hour OSHA Construction Safety Course- 2004
Shipyard Competent Person- 2019

Experience

Program Health and Safety Manager, April 2020-Present
ECC, Jacksonville, NC

Responsible for assisting in overall management of the safety programs for ECC.

- Monitor overall safety compliance, assistance, and oversight of multiple task orders for Federal as well as commercial client project sites:
- Assist in preparation and review of project work plans in relation to site specific safety program documents.
- Assist in implementation of safety processes on active project sites.
- Provided technical guidance to project and program employees as well as clients.
- Revise and develop programs and procedures

Kym Edelman, CIH, CSP *757-435-5384*
EHS Manager

EHS Manager, September 2018-April 2020
APTIM, Norfolk, VA
Responsible for assisting the EHS Lead in overall management of safety programs for APTIM's Government operations.

- Monitor overall safety compliance, assistance, and oversight of multiple task orders for Federal as well as commercial client project sites:
- Assist in preparation and review of project work plans in relation to site specific safety program documents.
- Assist in implementation of safety processes and manage safety staffing on active project sites.
- Provided technical guidance to project and program employees as well as clients.
- Manage injuries and illnesses, and related worker's compensation claims.
- Assist in safety council, award programs, and employee involvement initiatives.
- Conduct periodic reviews and audits of project sites to determine compliance with applicable regulations, standards, and internal procedures.

Director, EHS June 2018-September 2018
Tetra Tech EC, Inc., Virginia Beach, VA
Responsible for overall management of environmental health and safety programs and employees for Tt EC operations.

- Serves as program Certified Industrial Hygienist for the Atlantic Division Remedial Activities Contract, Naval Facilities Engineering Command.
- Provides technical support for programs and projects, including proposal review and support.
- Manages site safety and health professionals on projects and ensures safety staff assignments to meet project and client needs.
- Injury case management and worker's compensation claim management.
- Writes or reviews and approves site-specific health and safety plans.
- Conduct program reviews and audits for compliance and continual improvement.

EHS Manager of Eastern Operations, September 2015-June 2018
Tetra Tech EC, Inc., Virginia Beach, Virginia
Responsible for assisting the Tetra Tech EC Director in overall management of safety programs for Tt EC's operations.

- Monitor overall safety compliance, assistance, and oversight of multiple task orders for Federal as well as commercial client project sites:
- Assist in preparation and review of project work plans in relation to site specific safety program documents.
- Assist in implementation of safety processes and manage safety staffing on active project sites.
- Provided technical guidance to project and program employees as well as clients.
- Manage injuries and illnesses, and related worker's compensation claims.
- Facilitated implementation of LANT RAC program safety council, award programs, and employee involvement initiatives.
- Conduct periodic reviews and audits of project sites to determine compliance with applicable regulations, standards, and internal procedures.

- Program CIH for LANT RAC VI Navy contract.

ES&H Manager, August 2012 – September 2015
CB&I AREVA MOX Project, DOE, CB&I (formerly Shaw) Project Services Group, Aiken, SC
Manage all safety aspects of the project, including sub-contractors. The project has exceeded 21 million man-hours without a lost work day case.
Responsible for management of the on-site medical clinic, fitness center, production facility safety staff, and all field safety engineers.
Interface between high level construction management, client, and filed construction employees, to ensure clear communication of expectations to continue to promote a positive safety environment that has yielded exemplary employee safety performance.
Technical resource for all project staff, as well as client.

August 2002 – August 2012, SHAW E&I, Norfolk, VA
Ten years of progressive experience and achievement as safety project management/site safety coordinator

Program Safety Manger, May 2008 – August 2011
IHNC, USACE, New Orleans,
Accountable for establishment and initial/continued implementation of project safety programs for this high profile $1.1B project involving design and construction of the New Orleans Hurricane and Storm Damage Risk Reduction System.
Successfully managed the safety program for the largest civil works design-build project ever undertaken by the USACE. The project, during this timeframe, concluded with "no lost work days" for Shaw.
Staffed project, developed project safety initiatives, organized the Accident Prevention and Hurricane Preparedness Plans, coordinated training, conducted subcontractor reviews, and acted as overall technical consultant regarding project safety issues, and compliance monitoring of the safety process.

Program Safety Manager, November 2007 – August 2012
Global Contingency and Construction Contract (GCCC), NAVFAC (Naval Facilities) Worldwide
Serves as Health and Safety Manager for this $335M US Navy contract. Directed safety programs for all construction projects under the GCCC contract. Implemented safety processes, managed staffing, developed H&S and Accident Prevention Plans, managed worker's compensation claims, and provided technical oversight to staff and management on all projects.Developed documents and programs to ensure training, programs, and procedures were translated into local languages and worked with third country nationals to establish safety cultures where previously non-existent.Monitored and ensured the implementation of corporate policies and procedures, conducted incident investigations, and maintained proactive safety programs.Ensured compliance with applicable laws/regulations, and provided safety support/consultation to Shaw management, as well as client companies and governmental entities.

Program Safety Manager, May 2008 – 2012
LANTDIV RAC V Program, NAVFAC Atlantic Division, Norfolk, VA
Directed overall program safety on this $150M Navy contract, including safety program implementation and oversight of multiple task orders under the contract.

- Instrumental in team accomplishing 4,000 days with a record of "no lost work days."
- Implemented safety processes, managed staffing, developed health and safety, and accident prevention plans.
- Provided technical guidance to project and program employees as well as clients.
- Managed injuries and illnesses, and related worker's compensation claims.
- Facilitated program safety council, award programs, and employee involvement initiatives.

Program Safety Manager, December 2002 – August 2012
Served as Program Safety Manager leading a staff of field safety professionals in the development and implementation of safe work practices on multiple individual task orders. Also, functioned as Site Safety Coordinator for several individual projects at multiple locations conducted under the LANTDIV RAC IV program.

These projects included UXO demilling activities, active range clearance activities, "Clean" site closures, installation of treatment systems, storage tank removals, bio-remediation, landfill excavation/repairs/capping, soils excavation and removal of hazardous materials.

- 2000 Day President's Award for no lost work days on one project.
- Target Zero achieved for 2 Project Sites.
- RAC Program achieved Zero Lost Work Days, Recordable Incidents or Chargeable Vehicle Incidents within Fiscal Year 2008.
- Successfully adapted to EHS organizational changes, and positioned to advance within group.

Environmental Health and Safety Manager, October 2000 – April 2002
Flextronics Enclosures, Kingston, PA
Responsible for the development, implementation, and monitoring of Flextronics Enclosures, Inc. Environmental Health and Safety program.

- Conducted initial audits, assessments, and industrial hygiene sampling, to determine environmental, safety, and industrial hygiene compliance issues.
- Developed plans and procedures necessary to attain compliance with water permitting, waste disposal, safety and industrial hygiene issues.
- Developed programs to decrease employee injuries as well as reduce incident rates and worker's compensation costs.
- Worked with local occupational health clinic to better manage accidents and injuries, to keep employees at work, and ensure best care possible.
- Responsible for maintaining OSHA 200 logs.
- Conducted and facilitated training sessions for managers and technicians to ensure understand and compliance with new company safety programs.
- Monitored effectiveness of new EHS Program and continually improved upon programs implemented.
- Developed and implemented an Environmental Management System to be compliant with ISO-14001.

Environmental Scientist, January 1996 – April 1997
Maxim Technologies (formerly Huntingdon Chen-Northern), Denver, CO
Assigned to USEPA Superfund Technical Assistance and Response Team, sub-contracted to the primary USEPA contractor.

- Conducted hazardous waste and emergency response operations, including delineation of contamination, site control, and contamination monitoring and reporting.
- Provided on-site technical support to EPA and oversight of contractors for EPA.
- Provided assistance to EPA regarding sampling, management, and disposal of hazardous and mixed wastes.
- Conducted preliminary site investigations to determine presence and extent of contamination on sites.

- Assisted in development of work plans and provided assistance to EPA for subsequent remediation of contaminated sites and abandoned industrial facilities.
- Conducted hazardous materials training as required by OSHA for hazardous waste site work and emergency response, as well as the hazard communication standard.
- Assisted EPA in conducting public information meetings pertaining to remedial sites.

Health and Safety Manager, August 1994 – January 1996
Maxim Technologies (formerly Huntingdon Chen-Northern), Denver, CO
Responsible for the overall management of Maxim's regional health and safety program.

- Developed and implemented corporate health and safety procedures throughout the Northwest Region.
- Managed accidents and injuries as well as required documentation on OSHA 200 logs.
- Responsible for compliance, documentation, and disposal of hazardous materials generated by the regional offices.
- Assisted environmental groups in conducting Phase I site assessments.
- Conducted training for Hazardous Waste Site Work, Hazard Communication, Asbestos Awareness, Instrumentation, and Air Monitoring.
- Conducted accident investigations and management of workers' compensation claims.
- Developed site specific health and safety plans for hazardous waste site work.
- Provided technical support in the areas of industrial hygiene and health and safety.

Site Safety Supervisor, October 1992 – June 1994
OHM Corporation, Findlay, OH
Responsible for the implementation, and management of site specific environmental, industrial hygiene, health, and safety programs, in accordance with site specific health and safety plans.

- Conducted initial site hazard assessments.
- Assisted in completing and maintaining documentation related to hazardous waste storage and disposal.
- Monitored compliance of site operations with respect to OSHA, EPA, and state regulations, such as, RCRA, TSCA, AHERA, HAZWOPER, and HAZCOM.
- Implemented appropriate means to control hazardous materials exposure.
- Monitored the effectiveness of on-site industrial hygiene and safety programs.
- Initiated safety awareness programs.
- Conducted training as required by 29 CFR 1910.120 and the Hazard Communication Standard.
- Liaison between client representatives and OHM in regard to environmental, industrial hygiene, and health and safety issues.

Division Safety Coordinator, October 1989 – October 1992
MAECORP Inc., Columbus, OH
Responsible for the implementation and compliance monitoring of company safety policies in addition to Federal and State OSHA and EPA regulations, on hazardous waste project sites in USEPA Region V.

- Conducted site safety audits and prepared appropriate reports.
- Conducted air monitoring for personal exposures in addition to environmental air sampling.
- Conducted annual refresher training for hazardous waste site operation.
- Developed site specific health and safety plans in accordance with the requirements 29 CFR 1910.120.

- Conducted building inspections for asbestos.
- Maintained appropriate documentation in regard to medical monitoring requirements, training certificates, and hazard communication.
- Conducted accident investigations.
- Managed work related injuries.

References available upon request

HST

CERTIFICATE OF TRAINING

THIS CERTIFIES THAT

Kym Mohrman

has successfully completed 40 hours of instruction in

WASTE SITE WORKER PROTECTION

Prepared and conducted by
Hygiene, Safety and Training Inc.
to comply with OSHA 1910.120(e)(2)

Jack M. Peterson
CSP, CIH

November 10, 1989
Date of Completion

© GOES 462-1/2

LITHO IN U.S.A.

Scanned with CamScanner

OSHA 000266501

U.S. Department of Labor
Occupational Safety and Health Administration

Kym Edelman

has successfully completed a 10-hour Occupational Safety and Health Training Course in

Construction Safety & Health

John H. DeFrey — 11/30/04
(Trainer) (Date)

OSHA 600047764

U.S. Department of Labor
Occupational Safety and Health Administration

Kym Edelman

has successfully completed a 30-hour Occupational Safety and Health Training Course in

Construction Safety & Health

John H. DeFrey — 11/15/04
(Trainer) (Date)

OSHA Occupational Safety and Health Administration — WK 0007986

This acknowledges that

KYM EDELMAN

has successfully completed

Course # 7600 - Disaster Site Worker (16- Hour)

This course emphasizes awareness of the safety and health hazards that may be encountered at natural or man-made disaster sites, as well as the importance of personal protective equipment, decontamination, and incident command organization.

Dominick R. Cinque — June 29, 2006
Trainer Completion Date

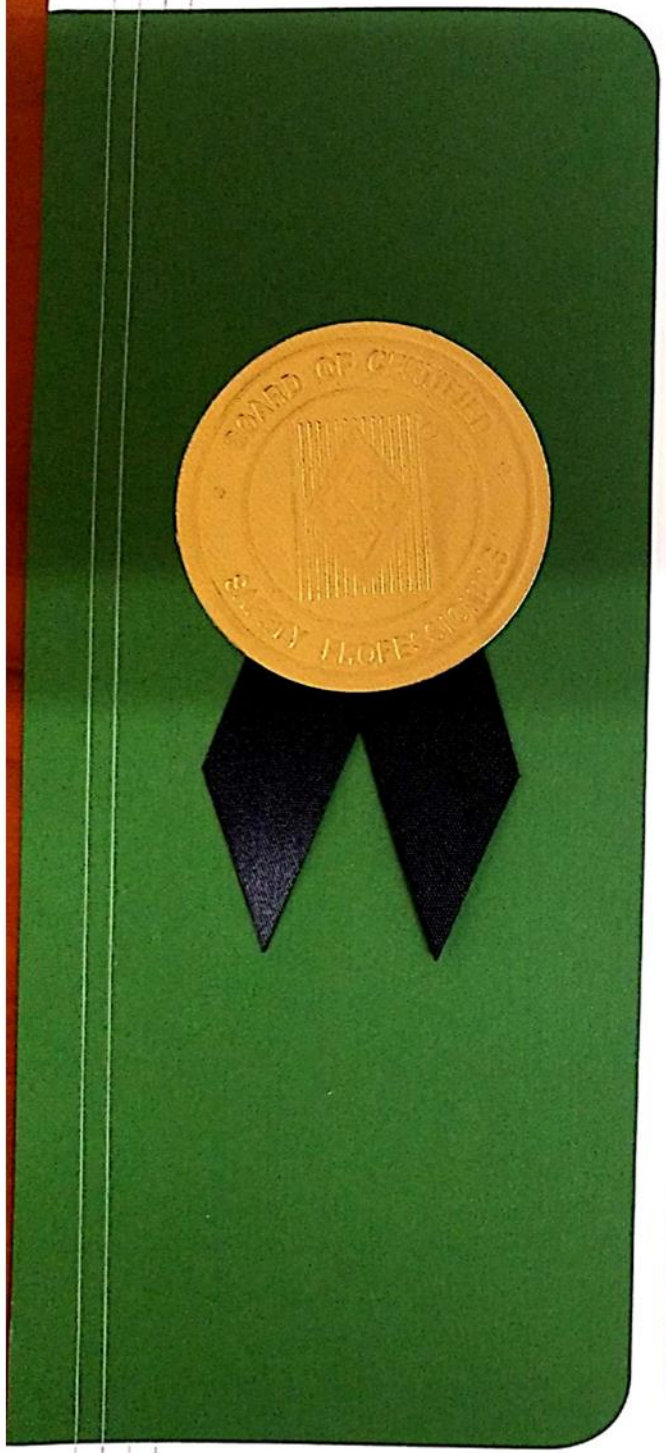

BOARD OF CERTIFIED SAFETY PROFESSIONALS

affirms that

Kym Y Edelman

Has applied for, met qualifications, and passed required examination(s) and is hereby authorized to use the designation

Certified Safety Professional®

in Comprehensive Practice

So long as this certificate is not suspended or revoked and the certificant renews this authorization annually and meets Continuance of Certification requirements.

Board of Examiners in witness whereof we have here unto set our hands and affixed the Seal of the Board this 21st Day of December, 2006

Larry W. Jones — President

Glenn D. Ward — Secretary

19423 — CSP No.

Scanned with CamScanner

ABIH
american board of industrial hygiene®

6015 West St. Joseph, Suite 102 Lansing, Michigan 48917 **P:** (517) 321-2638 **F:** (517) 321-4624 **E:** abih@abih.org

November 02, 2016

Kym Y. Edelman, CIH
4900 Fennell Lane
Suffolk VA 23435

Dear Ms. Edelman,

It is my pleasure to congratulate you. With the combination of education, experience and your performance on the CIH® examination, the American Board of Industrial Hygiene® finds you qualified for professional certification in the Comprehensive Practice of Industrial Hygiene. You may now use the designation "Certified Industrial Hygienist®" and the corresponding "CIH®".

This is a significant career milestone. Many industrial hygienists strive for the CIH® certification but it's attained by only a few. Your certification says a lot about you as a professional. It is a mark of distinction that indicates not only your knowledge and skills but also your personal motivation to successfully undertake the challenge. This is recognized by peers, employers and clients.

We will be publishing your name on the ABIH® website so that everyone may see this great accomplishment.

Now that you've attained the CIH®, you'll want to make every effort to retain it. The best place to start is with the CM Primer which is available in the Documents Library section of the ABIH website. It provides an easy-to-read summary of the basic program along with some useful tips. As you review the CM Primer, note that you are on a 60 month CM Cycle that runs from January 1, 2017 to December 31, 2021.

Please use the ID Number listed below to access the My Account section of the ABIH website where you can update your contact information, pay fees and locate other CIHs in the private roster.

ID Number: **11689**

On behalf of ABIH®, I personally congratulate you on your achievement. Welcome to an elite group of professionals!

Ron Drafta

Ron Drafta, CIH
Certification Program Manager, ABIH
rdrafta@abih.org

Enclosure

Certificate Of Completion

American Safety Council

KYM EDELMAN

Has diligently and with merit completed the

40-Hour EM 385-1-1 on 7/6/2018

Director: **Jeff Pairan**

ABIH®

american board of industrial hygiene®

organized to improve the practice of industrial hygiene
proclaims that

Kym Y. Edelman

having met all requirements of
education, experience and examination,
is hereby certified in the

COMPREHENSIVE PRACTICE
of
INDUSTRIAL HYGIENE

and has the right to use the designations

CERTIFIED INDUSTRIAL HYGIENIST

CIH

Certificate Number	**11090 CP**
Awarded:	**October 26, 2016**
Expiration Date:	**June 1, 2022**

Chair, ABIH

Chief Executive Officer, ABIH

The Compliance Edge Online Institute

Certificate of Completion

Kym Edelman

has met the online course completion requirements for

HAZWOPER 8-Hour Refresher

in accordance with 29 CFR 1910.120 and 1926.65

Certificate ID 1724619-328
Continuing Education Units 0.8
AdvanceOnline Solutions, Inc. offers 0.8 CEUs for this program.

AdvanceOnline, Inc. is authorized to issue the ICSR CEU.

ICSR CEU

Date 7/28/2020 8:09:00 AM
Time Online 08:38:52
AdvanceOnline Solutions, Inc.
1811 Bering Drive, Suite 430
Houston, Texas 77057
www.advanceonline.com
(713) 621-1100

AdvanceOnline SOLUTIONS

BRIAN KATELEY

Years' Experience: 17

With Current Firm: 9.5

Current Professional Registration:

Security Clearance:

Aberdeen Proving Ground

Education:

- BS, Environmental Science & Policy Program, University of Maryland, 2003
- Environmental Technology Certificate, Harford Community College, 1999

Other Professional Qualifications/Training:

- OSHA 40-hour HAZWOPER, 1999 and 2006; 8-hr HAZWOPER Refresher, 2021
- OSHA 8-hour Excavation Safety; 2006
- OSHA 8-hr Supervisor, 2008
- OSHA 30-hour Construction Safety and Health, 2011 – renewal in progress
- First Aid/CPR/AED/BBP, 2017 – renewal in progress

Summary of Experience:

Mr. Kateley is experienced in environmental characterization techniques such as groundwater sampling, soil sampling, lithologic characterization, surface media sampling, direct-push technology, investigations, and monitoring well installation. He is also skilled in groundwater remediation system implementation and operation and maintenance, including monitored natural attenuation, pump and treat systems, in situ bioremediation, and product recovery systems.

Mr. Kateley has been in a Site Supervisor and SSHO role since March of 2014. His responsibilities have included assisting with managing project safety and health programs. Providing safety consultation to the project management team in the planning and execution of project tasks. Providing site orientation for new employees, subcontractors, vendors, and visitors. Performing multi-media sampling to determine appropriate levels of PPE and assigning PPE to team members. Conducting daily safety and workplan tailgate meetings. Conducting daily, weekly, monthly, and annual site inspections. Ensured all employees, including subcontractors, performed daily activities safely and assured compliance with APP/SSHP, AHAs, and workplans while enforcing all site safety and health procedures.

Roles & Responsibilities: Environmental Scientist, Site Supervisor and SSHO since 03/14.

ECC Project Experience

Project Title and Location: Aberdeen Proving Ground Remedial Action (Optimization), Maryland

Dates on Project Start/End: 11/11 to present

Project Start/End Dates: 06/11 to present

Roles & Responsibilities: Environmental Scientist, Site Supervisor and SSHO

Mr. Kateley currently serves as the Site Supervisor and SSHO for the operations, maintenance, and performance monitoring of enhanced in-situ bioremediation systems for the remediation of chlorinated solvents in groundwater at six sites within the Aberdeen Area of APG, Buildings 3327, 525, M600, 361, 507 and Defense Reutilization and Marketing Office Metal Scrap Yard. Systems include active groundwater recirculation systems for the addition of groundwater amendments and passive biobarriers for the treatment of downgradient areas. He is responsible for operations and technical support, including:

tracking weekly groundwater elevation data to determine the status of hydraulic containment; scheduling and overseeing long-term monitoring (LTM) groundwater sampling on a semi-annual schedule; maintaining the project groundwater analytical database; managing and interpreting all of the groundwater elevation and chemical sampling data; and, preparation of quarterly performance and annual operations and performance monitoring technical reports. Mr. Kateley also assists the Project Manager in the oversight of field lab pack technicians and the inventory, tracking, and disposal of solid and liquids wastes generated from the project activities.

Mr. Kateley also supports operations at the Canal Creek and O-Field Groundwater Treatment Facilities under this project and has held an Operator in Training Industrial Wastewater License with the Maryland Department of the Environment (MDE).

Project Title and Location: Site Delineation and Characterization of Phillips Landfill, Western Boundary OU2, Ecological Soil Removal at Fire Training Area, and Achieve Site Closure at CCAPG04031, Aberdeen Proving Ground, Maryland

Dates on Project Start/End: 09/14 to 09/19

Project Start/End Dates: 09/14 to 09/19

Roles & Responsibilities: Environmental Scientist, Site Supervisor and SSHO

Mr. Kateley directed environmental sampling in support of a data-gap investigation at six landfill areas identified within the Phillips Army Airfield Landfill (PAALF) to evaluate potential Feasibility Study response actions for the areas under CERCLA. Specific tasks included the delineation of the presence/absence and horizontal extent of fill material within each landfill area through the use of 171 test pits; existing soil cover thickness assessments of each area, soil and solid waste sampling to characterization of contaminates and waste streams; groundwater sampling of the entire PAALF monitoring well network. Mr. Kateley assisted the Project Manager in the implementation of a non-time-critical removal action (NTCRA) at the Aberdeen Fire Training Area (AFTA), located in the Western Boundary Study Area (WBSA) of the Aberdeen Area of APG involving shallow soil excavation/removal of polycyclic aromatic hydrocarbons (PAHs) and metals-contaminated soil; achieving negotiated cleanup levels. He also supported the implementation of the Closure Plan for the former Aberdeen Area Building 4031 Underground Storage Tank (UST) Site regulated under the State of Maryland's Oil Control Program. Mr. Kateley was responsible for the oversight of well abandonments, decommissioning of the in-active SVE system, construction and operation of an on-site treatment cell for DRO/GRO contaminated soils, excavation and treatment of DRO/GRO contaminated soil from the footprint of the former 4031 Building, liquid phase hydrocarbons (LPH) recovery and groundwater treatment, confirmation sampling and analysis, excavation backfilling, and site restoration. He also supervised lab pack technicians in the performance of post-closure monthly gauging of water levels and removal of free-product from two wells, as well as quarterly groundwater sampling of the well field at the former Building 4031 UST site. Supported preparation of the site project workplans, health safety plans, and closure documentation and coordinated with the DPW Environmental Division Hazardous Waste Branch to provide all documentation necessary to remove waste and IDW from APG. Responsibilities for all project work included oversight of the field sampling teams; inventory and tracking of chemical data and waste generated from investigation and remediation activities; data reporting; and maintaining strict adherence to the health and safety plans and compliance with associated federal, state, local, and APG regulations and guidance governing all CERCLA and RCRA work at APG.

Project Title and Location: Canal Creek Study Area Sites RI/FS PBA, Aberdeen Proving Ground, Maryland

Dates on Project Start/End: 03/14 to 09/17

Project Start/End Dates: 03/14 to 09/19

Role & Responsibilities: Environmental Scientist, Site Supervisor and SSHO

Mr. Kateley supported the environmental sampling tasks associated with the RI work at the Canal Creek Study Area (CCSA) at APG as part of the Installation Restoration Program under CERCLA. This contract covered the completion of the remedial investigations (RIs) (including risk assessments and final RI Reports) for 10 East and 12 West CCSA sites, plus an investigation of the Buried Legacy Chemical Sewer Lines throughout the CCSA. The remedial investigations include site inspections, test digs, and media sampling (i.e., soil, sediment, sludge, and groundwater). Responsibilities included development and production of RI Work Plans, field activity reports, and final RI Reports, overseeing team subcontractors, field sampling events, evaluation of analytical data, inventory and tracking of waste generated from RI activities, and maintaining strict adherence to the health and safety plans and standard operating procedures (SOPs) governing all CERCLA work at APG.

Project Title and Location: Other Miscellaneous DoD and Former DoD Sites in the United States Mid-Atlantic area.

Dates on Project Start/End: 01/12 to present

Role & Responsibilities: Environmental Scientist, Site Supervisor and SSHO

Mr. Kateley has supported other similar projects in the Mid-Atlantic on shorter terms including:

- Joint Base McGuire-Dix-Lakehurst – Burlington County, NJ
- Atlantic City Air National Guard Site – Atlantic County, NJ
- Fort Meade – Anne Arundel County, MD
- Picatinny Arsenal – Morris County, NJ
- Former Griffiss Air Force Base – Oneida County, NY

Work Prior to ECC

Scientist II, EA Engineering, Science, and Technology, Inc. (01/06-10/11).
Project Manager, Aberdeen Proving Ground Edgewood Area Munitions Response Site Remedial Investigation, Aberdeen Proving Ground; Army Environmental Command (2011). Fixed price remedial investigation assessment for munitions and explosives of concern and munitions constituents for 12 Munitions Response Sites at Aberdeen Proving Ground, which total 3,500 acres. Responsible for Technical Project Planning and Restoration Advisory Board support, munitions constituents assessments, providing Unexploded Ordnance Quality Control Officer and Unexploded Ordnance Safety Officer support, Geographic Information System database management, DGM support to include brush clearing, ERIS uploads, and document support. Project includes the re-acquirement and evaluation of over 20 years of Installation Restoration Program data (including geophysics and Installation Restoration Program chemical sampling) to support the Military Munitions Response Site remedial investigation efforts.

Environmental Scientist, Suburban Propane, Reisterstown, Maryland (2010). Responsible for field activities during DPT chemical-oxidation injections including assurance of proper injection depths, volumes, and geochemical sampling from surrounding monitoring wells.

Environmental Scientist, Department of Public Works Parcel B, C, D Remedial Action Plan, National Aquarium of Baltimore, Baltimore, Maryland (2010). Responsible for construction quality assurance and air monitoring of perimeter and work zone at site utilizing dust and mercury vapor meters. Also responsible for the creation of an environmental monitoring plan for environmental hazards during the voluntary cleanup program remedial action plan implementation.

Environmental Scientist, New O-Field Groundwater Remediation; Aberdeen Proving Ground (2009-2010). Performed field activities required to determine contaminant distribution and hydraulic properties for the remedial system design. Responsible for design, installation, and implementation of a bio-barrier injection and monitoring well network to treat chlorinated solvents and metals in groundwater at the site.

Environmental Scientist, Constellation Power Generation Oil Control Program Compliance Support, Perryman and C. P. Crane Generating Stations (2008). Responsible for coordination and performance of field activities including site wide groundwater gauging and sampling events and light non-aqueous phase liquid recovery.

Environmental Scientist, Site 2 Old Dump at Swan Creek Soil, Aberdeen Proving Ground, Aberdeen, Maryland (2009). Conducted site clearing activities and the installation of geotextile for the reestablishment of landfill cap.

Environmental Scientist, Compliance Cleanup of 13 Sites, Aberdeen, Maryland; Aberdeen Proving Ground; Environmental Scientist (2008). Tasks include operation and maintenance of product recovery systems, groundwater monitoring, and reporting.

Environmental Scientist, Enhanced In Situ Bioremediation Systems, Buildings 3327, 525, M600, 361, 507 and Defense Reutilization and Marketing Office Metal Scrap Yard, Aberdeen Proving Ground, Maryland, Aberdeen Proving Ground (2006). Involved in the installation and responsible for the operation, maintenance, and performance monitoring for enhanced bioremediation systems for the remediation of chlorinated solvents in groundwater at six sites in the Aberdeen Area. Systems include active groundwater recirculation systems for the addition of groundwater amendments and passive biobarriers for the treatment of down gradient areas.

Environmental Scientist, Operations and Maintenance Soil Vapor Extraction/Free Product Recovery System, Building 4025, Aberdeen Proving Ground, Maryland (2006-2007). Responsible for operations and maintenance of the Building 4025 soil vapor extraction remediation system, which consists of a soil vapor extraction system that is designed to enhance the recovery of light non-aqueous phase liquids and biodegrade residual hydrocarbons. Also responsible for collection of monthly air sample for submission to laboratory for benzene, toluene, ethylbenzene, and xylene analysis, to ensure that air emissions for the system are in compliance with the Maryland Department of the Environment regulations. Additional responsibilities include preparation of comprehensive monthly progress reports for the system.

Environmental Scientist, Operation and Maintenance Soil Vapor Extraction System, Building 4031, Aberdeen Proving Ground, Maryland (2006-2007). Responsible for operations and maintenance of the Building 4031 soil vapor extraction/free product recovery system. Also responsible for collection of monthly air sample, for submission to laboratory for benzene, toluene, ethylbenzene, and xylene analysis, to ensure that air emissions for the system are in compliance with the Maryland Department of the

Environment regulations. Additional responsibilities include preparation of comprehensive monthly progress reports for the system.

Inspector/Technician, Monitoring and Maintenance 5 Installation Restoration Program Sites; Edgewood Area, Aberdeen Proving Ground, Maryland (2006). Responsible for quarterly inspections and subsequent maintenance of 5 Installation Restoration Program sites; Nike SW landfill, Cluster 5 test area, Old Bush River Road Dump, Graces Quarters, and Carroll Island. Monitoring tasks include sampling of monitoring wells and surface media (soil and sediment), maintenance inspection of landfill sites to ensure site stability and inspection of shoreline stabilization measures with unexploded ordnance sweeps at Grace's Quarters and Carroll Island. Maintenance tasks involve removal of unwanted vegetation, fence repair, and carbon filter replacements.

Environmental Scientist, Millsboro Groundwater Investigation (Trichloroethene); Millsboro, Delaware; Department of Natural Resources and Environmental Control (2006). Collected groundwater samples using direct-push technology in order to delineate the plume size of known trichloroethene contamination. Also collected soil, soil gas vapor, and air samples to define possible volatile organic compound occurrences outside of the groundwater.

Environmental Scientist, Uncle Ted's Trading Post, Millsboro, Delaware, Department of Natural Resources and Environmental Control (2006). Performed operations and maintenance on soil vapor extraction system. Installed upgraded aquifer air sparge and soil vapor extraction system. Sampled monitoring wells and potable wells surrounding the site.

Scientist, Absecon Island Shore Protection Project, Atlantic City, New Jersey; US Army Corps of Engineers (01/04-11/04). Employed on the dune restoration phase of the US Army Corp of Engineers Absecon Island Shore Protection Project. Project focus included sand fence and dune grass installation from Atlantic City to Ventnor City, New Jersey. Responsibilities included fence and planting layout, material storage, equipment maintenance, and communication with contractors. Gained experience in coastal ecology, winter field conditions and operating light machinery. Other projects with this firm included native species reforestation jobs for the Maryland State Highway Administration.

Carpenter's Assistant, Potts & Callahan Inc., Baltimore, Maryland (06/99-09/00). Assisted carpenters in the layout, building, and setting of concrete forms for stormwater management structures. Gained experience in reading blueprints and using instrument levels for grading and excavation. Learned heavy equipment safety procedures and the use of industrial power tools.

Intern/Scientist, Radford Army Ammunition Plant, Radford, Virginia (07/98-04/99). Worked on the environmental remedial investigation. Responsibilities included air, soil, surface water, and sediment sampling along with sampling documentation and transportation. Assisted in the compilation of the collective measures study by processing sampling results, preparing data spreadsheets and producing sampling maps from Global Positioning System data. Team involvement included site management during remediation phases.

ALL AMERICAN ENVIRONMENTAL SERVICES, INC.

This is to certify that

BRIAN D. KATELEY

has successfully completed

"HAZARDOUS WASTE SITE WORKER" 40-HOUR COURSE
SATISFYING OSHA 29 CFR 1910.120 (e) (3) (i)

at

ALL AMERICAN SCHOOL OF OCCUPATIONAL SAFETY AND HEALTH
COLUMBIA, MARYLAND

School Director

January 9-13, 2006
40S-0601A

EA Engineering, Science, And Technology, Inc.

Certificate of Training

PRESENTED TO

Brian Kateley

FOR COMPLETION OF

8-Hour HAZWOPER
Supervisor Training
Per 29 CFR 1910.120

25 April 2008

Peter Garger, CIH

OSHA Occupational Safety and Health Administration

14-600541403

This card acknowledges that the recipient has successfully completed a 30-hour Occupational Safety and Health Training Course in

Construction Safety and Health

Brian Kateley

Peter Garger CIH, CSP (Trainer name – print or type)

5/24/2011 (Course end date)

OSHA recommends Outreach Training Courses as an orientation to occupational safety and health for workers. Participation is voluntary. Workers must receive additional training on specific hazards of their job. This course completion card does not expire.

Use or distribution of this card for fraudulent purposes, including false claims of having received training, may result in prosecution under 18 U.S.C. 1001. Potential penalties include substantial criminal fines, imprisonment up to five years, or both.

For OSHA Outreach Training Program go to "Training" at www.osha.gov

Rev. 12/2009

CLICKSAFETY®

certifies that

BRIAN KATELEY

has successfully completed ClickSafety's web-based training course:

HAZWOPER 2021 Refresher (8-Hour)

In accordance with the requirements of 29 CFR 1910.120(e)

This course was developed and presented by ClickSafety.com, Inc.

I confirm that I personally took the course listed above.

31533408	1/27/2021	8 HOURS	
SERIAL NUMBER	COMPLETION DATE	COURSE DURATION	STUDENT SIGNATURE

APPENDIX C
ECC COVID-19 PREVENTION PROGRAM

ECC COVID-19 Prevention Program (CPP)

December 21, 2020

1.0 INTRODUCTION

ECC's work is considered "essential" in support of the Critical Infrastructure. Prevention of all cases of COVID-19 infections among essential workers during a pandemic, as in general society, may not be possible. The following procedures are intended to minimize the spread and impacts of COVID-19 pandemic to protect workers and support the mission. The procedures are based on various state regulations and guidance provided by the US Centers for Disease Control and Prevention (CDC); USDOL Occupational Safety and Health Administration (OSHA), and NAVADMIN Memorandum 173/20: U.S. NAVY COVID-19 STANDARDIZED OPERATIONAL GUIDANCE VERSION 3.1.

This program applies to all ECC employees and invitees, guests, or visitors to our facility as applicable. Subcontractors are expected to have and follow their own protection program that is compliant with Federal, State and Local workplace regulations and public health guidance.

Each Office and Worksite must enter the following information. Site-specific changes to this program should be made in consultation with Health and Safety and Human Resources.

Office/Project Site Name/Location:

Redstone Arsenal, Alabama

Local Health Department Contact Information:

Alabama Public Health (alabamapublichealth.gov/covid19/). General COVID-19 questions (800) 270-7268 or email covid19info@adph.state.al.us

2.0 AUTHORITY AND RESPONSIBILITY

The Corporate Health and Safety Manager has overall authority and responsibility for implementing the provisions of this CPP. In addition, all managers and supervisors are responsible for implementing and maintaining the CPP in their assigned work areas and for ensuring employees receive answers to questions about the program, in a language they understand.

All employees are responsible for using safe work practices, following all directives, policies and procedures, and assisting in maintaining a safe work environment.

3.0 IDENTIFICATION AND EVALUATION OF COVID-19 HAZARDS

ECC has identified and evaluated the hazards of COVID-19 in our workplace, using **Attachment B: Identification of COVID-19 Hazards** form, attached.

People with COVID-19 have had a wide range of symptoms reported – ranging from mild symptoms to severe illness. Symptoms may appear 2-14 days after exposure to the virus. People with these symptoms may have COVID-19:

1) Fever or chills
2) Cough
3) Shortness of breath or difficulty breathing
4) Fatigue

5) Muscle or body aches
6) Headache
7) New loss of taste or smell
8) Sore throat
9) Congestion or runny nose
10) Nausea or vomiting
11) Diarrhea

In offices and job sites, exposure to the virus may occur due to close contact with others that are currently infected, and through contact with surfaces contaminated with respiratory droplets from infected people.

Because ECC offices and job site operations do not involve contact with the general public, providing health care or work in active health care facilities and/or institutional residential facilities, USDOL OSHA considers the workplace to be in the Lower to Medium Risk Categories.

Workplace protection procedures contained in this SOP will minimize the risk of transmission within the workplace.

4.0 EMPLOYEE PARTICIPATION

Employees are encouraged to participate in the identification and evaluation of COVID-19 hazards by:

1) Identifying specific situations where person-to-person contact cannot be avoided and reporting situations to their Supervisor or Health and Safety representative
2) Conducting or participating in frequent inspections of the workplace
3) Ensuring adequate disinfection and sanitizing materials are available at all times and reporting reordering needs
4) Contacting the Supervisor or Health and Safety representative with questions and suggestions for improvement
5) Coaching and encouraging co-workers regarding safe work practices for COVID-19 prevention

5.0 CORRECTION OF COVID-19 HAZARDS

All supervisors and Health and Safety Representatives are responsible for frequent inspections and observations of the working conditions and practices in the workplace. Unsafe or unhealthy work conditions, practices or procedures may be documented on **Attachment C: COVID-19 Inspections** form, and corrected in a timely manner based on the severity of the hazards, as follows:

1) Failure to maintain proper distancing or face covering use will be addressed with the individuals immediately
2) Cleaning and disinfection procedures will be updated as soon as practical where found to be deficient
3) Failure to follow screening protocols will result in disciplinary action as described in the ECC employee handbook
4) Workplace configuration and ventilation deficiencies will be corrected as soon as practical.

6.0 CONTROL OF COVID-19 HAZARDS

Personnel screening

Self screening:

Employees are encouraged to have a thermometer and to self-monitor their temperature daily before coming to work and determine if they have developed one or more other symptoms of COVID-19. Employees should use the **Self-Checker on the CDC website**. They can also use the Apple CDC Screening app if they have an iPhone or iPad **https://apps.apple.com/us/app/apple-covid-19/id1504132184.**

Employees experiencing a fever or other symptoms of COVID-19 should not come to work, and immediately contact their Supervisor.

Offices:

Office doors remain closed, with signs for visitors to ring bell or call a number for access. Signs will also announce a need for screening. Employees and visitors will be screened daily when they first arrive at an ECC office. An iPad, thermometer and disinfecting wipes are stationed at the Reception area or immediately adjacent to the entry door. Signs are posted with instructions to activate the app on the ipad, complete the symptom and travel questionnaire and take their temperature. Each person should disinfect the thermometer and iPad screen when finished. The screening will indicate whether entry is permitted or denied. A limited number of personnel will receive an email notification for follow up if entry is denied. Screening applies to all personnel requiring entry to an office including employees, clients, subcontractors, building maintenance and custodial services workers.

Job sites:

At the daily tailgate meeting, each person is to certify the that they have no significant risk factors including symptoms, recent close contact with sick individuals, etc. The Screening Questionnaire in Attachment A will be used to question each worker.

Responses can be documented in a variety of methods best suited to the project that help maintain social distancing and infection control. The method implemented will prevent physical sign-offs by individual crew members on a common sheet of paper. Options that may be implemented include:

a) One person checks off a list of workers questioned

b) Tailgate is photographed or video recorded indicating who was present

c) Electronic database input, such as the ECC Screening Mobile App. (Contact Ivan Leung or Olivia Su to set up an account.)

Project sites should have a no-touch medical thermometer. Thermometers designed for industrial use are not acceptable for this application. Temperatures can be taken in either of these situations:

a) For an individual having close contact with sick individual who has not been diagnosed with COVID-19, or

b) As part of the daily general screening of all employees entering the worksite. In this case, check-in station(s) will be established to complete the temperature and questionnaire screening.

Individuals with temperatures that are found to be above 99.5^{o}F will require additional screening or isolation.

Individuals taking temperatures of other employees must be properly protected. Wear the following:

a) Double nitrile gloves, and change the outer glove often, or sanitize hands between readings

b) Face coverings. Face coverings must also be worn by personnel being screened to help protect the screener.

Cloth face covering, surgical mask or N95 are acceptable face coverings. Note: Respirators with exhalation valves are not permitted for this purpose. Also, bandannas should be discouraged, but where allowed should drape down to the chest.

Disinfect thermometer after use.

See Sections 10 through 12 when employees do not pass the temperature and symptoms screening criteria.

6.1 Physical Distancing

Where possible, ECC will ensure at least six feet of physical distancing at all times in our workplace by implementing these procedures:

1) Permit and facilitate employees working remotely where possible
2) Eliminate person-to-person meetings when possible, with site workers and clients. Meet virtually on Microsoft Teams, use social media apps to distribute safety messages, photograph and distribute AHAs on cell phone text, etc. Physical group meetings will be limited to 10 persons and held outdoors in spaces that can accommodate 6 ft. separation of attendees.
3) Do not allow people to congregate in enclosed spaces including job site trailers, tool rooms, shipping containers, buildings under construction/renovation, etc.
4) Hold tailgate meetings outside if e-meetings are not possible. Make sure personnel respect the recommended 6 ft. social distancing rule at a minimum. Use a battery powered megaphone if necessary. Have one person record attendance, or use photographs as your attendance record, so people don't need to sign a common sheet (often with a passed around pen). At large sites, split the meetings up into crew meetings.
5) Trades and technical workers will be assigned in a manner that facilitates social distancing whenever possible. Staggered shifts, multiple shifts and phased construction approaches will be used to avoid congestion.
6) Have vendors drop supplies at the entrance gate or an established outside drop point in the Support Zone.
7) Have fuel vendors wear gloves and avoid close contact with operators.
8) Have fuel and other vendors submit invoices electronically. Avoid signing delivery slips.
9) Stagger breaks and do not permit congregating indoors for breaks.
10) Carpooling should be discouraged. Where it occurs employees should be educated and encouraged to follow the procedures below.
11) If ECC employees must share rides in site vehicles, the following rules will apply:

a) Maintain at least 3 ft. distance in all directions from other passengers and the driver, e.g. only 2 people per seating level (front and back)
b) All drivers and riders must wear face coverings
c) Keep windows open to extant feasible (whenever outdoor temperatures are between 60- and 90-degrees F)
d) Clean and disinfect the vehicle high touch surfaces at least twice per day

6.2 Face Coverings

ECC will provide clean, undamaged face coverings to ECC employees and visitors, when needed, and ensure they are properly worn over the nose and mouth. Subcontractors are responsible for ensuring their

own employees have suitable face coverings.

Face coverings must be worn:

1) when indoors, and
2) when outdoors and less than six feet away from another person, including non-employees, and where required by orders from the California Department of Public Health (CDPH) or other state and local health departments. **(Note: some localities have rules or orders that require mask wearing outdoors at all times regardless of distancing.)**

The following are exceptions to the use of face coverings in our workplace:

1) When an employee is alone in a room.
2) While eating and drinking at the workplace, provided employees are at least six feet apart and outside air supply to the area, if indoors, has been maximized to the extent possible.
3) Employees wearing respiratory protection in accordance with CCR Title 8 section 5144 or other safety orders.
4) Employees who cannot wear face coverings due to a medical or mental health condition or disability, or who are hearing-impaired or communicating with a hearing-impaired person. Alternatives will be considered on a case-by-case basis.
5) Specific tasks that cannot feasibly be performed with a face covering, where employees will be kept at least six feet apart.

Any employee not wearing a face covering, face shield with a drape or other effective alternative, or respiratory protection, for any reason, shall be at least six feet apart from all other persons.

6.3 Engineering controls

Each office is responsible for contacting their building owner, facility manager, HVAC vendor or HVAC service contractor to determine the maximum level of filtration and the maximum level of fresh outside supply air are possible with their current HVAC system. Typically, HEPA filtration is not feasible with systems that have not been designed for special occupancies, such as biomedical laboratories or infectious control health care facilities. MERV 10 have been found to reduce the amount of virus in the supply air by 70% in one study, but further filtration up to MERV 15 did not appear to further reduce the amount of virus passing the through. However an evaluation of system performance will have to be made to see if filters of that efficiency are compatible, especially with older systems.

Outside supply air may be maximized where it does not present other hazards, such as poor air quality due to wildfire smoke or local pollution levels, and where heating/cooling efficiency is not compromised to an unacceptable level.

6.4 Cleaning and disinfecting

At ECC offices adequate cleaning and disinfection supplies will be available and employees will regularly clean and disinfect high touch surfaces such as doorknobs and handles, desks and tabletops, and keyboards. Disinfection supplies will include disinfecting wipes, and solutions containing bleach, hydrogen peroxide or quaternary ammonium will be used. Items with these constituents will usually have an EPA Reg Number as an approved biocide. Solutions can be made by mixing one-third cup of household bleach with 1 gallon of water.

Custodial services will include regular disinfection of high touch services as part of their cleaning contracts.

If an employee becomes a confirmed COVID-19 case in our workplace, cleaning and disinfection will be

done of areas, materials, and equipment used by a COVID-19 case during the high-risk exposure period, using the materials described above, by employees wearing proper PPE including disposable gloves, eye protection and face coverings. If necessary, a specialized disinfection service will be engaged to perform this service.

6.5 Shared tools, equipment and personal protective equipment (PPE)

PPE will not be shared, e.g., gloves, goggles and face shields.

Items that employees regularly physically contact, such as phones, headsets, desks, keyboards, writing materials, instruments and tools will also not be shared, to the extent feasible. Where there must be sharing, the items will be disinfected between uses by the users.

Sharing of vehicles and mobile construction equipment will be minimized to the extent feasible, and high-touch points (for example, steering wheel, control knobs, door handles, seatbelt buckles, armrests, shifter, etc.) will be disinfected between users.

Disinfect shared resources like radios, power tools, etc. daily.

6.6 Hand sanitizing

Supplies of hand soap and water, hand sanitizer, disinfecting wipes and disinfecting solution will be available on site. Encourage all site personnel to use these often and to wash hands for at least 20 seconds each time. Hand sanitizer must be:

1) kept in travel vehicles used for passenger transport,

2) used before entering office or project site or having temperature checked,

3) used after exiting office or project site or having temperature checked.

6.7 Personal protective equipment (PPE) used to control employees' exposure to COVID-19

ECC provides disposable gloves and eye protection for employees to perform cleaning and disinfection activities, and while taking screening temperatures of other employees using non-contact thermometers. Face coverings are provided for general work where 6 ft. distance cannot be maintained. Subcontractors are expected to provide their employees' PPE.

ECC has no operations where aerosolized respiratory droplets and particles are a risk requiring respiratory protection.

Employees providing first aid to others on the job site will follow the precautions in the Bloodborne Pathogens Standard Operating Procedure HS SOP 8.3.

7.0 INVESTIGATING AND RESPONDING TO COVID-19 CASES

Appendix C: Investigating COVID-19 Cases form will be used as a guide in investigating COVID-19 cases in the workplace. Where workplace transmission is a concern, testing may be required and will be provided by ECC for their employees and subcontractors for their employees.

Contact the Health and Safety Manager and Human Resources for assistance in investigating such incidents.

8.0 SYSTEM FOR COMMUNICATING

ECC's goal is to ensure effective two-way communication with our employees, in a form they can readily understand, while minimizing contact and potential spread of COVID-19 by implementing the following or similar methods:

1) ECC all-hands messages will be forwarded to all ECC personnel, ECC subcontractor managers and client contacts using cell phone group texts, email distribution lists and/or social media apps.
2) A central area will be established to display posters and messages related to COVID-19 prevention. Informational posters will also be distributed throughout the workspaces as feasible. Contact the Health and Safety Manager for posters or visit the CDC and state Health Department websites for information and to download postings.
3) OSHA 3990, Guidance on Preparing Workplaces for COVID-19 may be shared with all ECC personnel, ECC subcontractor managers and client contacts.
4) Site orientations and tailgate meetings will be used to provide training on signs, symptoms and protective measures incorporated in this plan
5) Employees should report COVID-19 symptoms and possible hazards to their direct Supervisor and/or Health and Safety representative:
    a) By phone before coming to work when symptoms first develop
    b) Directly if symptom onset occurs during the workday
6) Employees can report symptoms and hazards without fear of reprisal.
7) Employees with medical or other conditions that put them at increased risk of severe COVID-19 illness must make this situation known to their supervisor or HR. ECC will provide accommodation, to the extent possible. by allowing remote work, modifying workstations, providing extra PPE, or other measures as appropriate.
8) Where testing is not required, ECC employees may access testing through our health insurance plan or through public testing stations established by local health departments or health care facilities.
9) In the event we are required to provide testing because of a workplace exposure or outbreak, we will communicate the plan for providing testing and inform affected employees of the reason for the testing and the possible consequences of a positive test. ECC will cooperate with testing orders by state and local health departments. In California, ECC is required to provide testing if a local health department identifies the workplace as the location of a COVID-19 outbreak, or when there are 3 or more cases in an exposed workplace within a 14-day period. In these cases, employees in the workplace will be given one test immediately and a second test a week later. After the first two tests, weekly tests will be provided for as long as the outbreak persists.
10) Information about COVID-19 hazards employees (including other employers and individuals in contact with our workplace) may be exposed to, what is being done to control those hazards, and our COVID-19 policies and procedures, will be provided to employees.

9.0 TRAINING AND INSTRUCTION

Training and instruction will include:

1) Our COVID-19 policies and procedures to protect employees from COVID-19 hazards.
2) Information regarding COVID-19-related benefits to which the employee may be entitled under applicable federal, state, or local laws.
3) The fact that:
    a) COVID-19 is an infectious disease that can be spread through the air.
    b) COVID-19 may be transmitted when a person touches a contaminated object and then touches their eyes, nose, or mouth.

c) An infectious person may have no symptoms.

4) Methods of physical distancing of at least six feet and the importance of combining physical distancing with the wearing of facecoverings.

5) The fact that particles containing the virus can travel more than six feet, especially indoors, so physical distancing must be combined with other controls, including face coverings and hand hygiene, to be effective.

6) The importance of frequent hand washing with soap and water for at least 20 seconds and using hand sanitizer when employees do not have immediate access to a sink or hand washing facility, and that hand sanitizer does not work if the hands are soiled.

7) Proper use of face coverings and the fact that face coverings are not respiratory protective equipment - face coverings are intended to primarily protect other individuals from the wearer of the face covering.

8) COVID-19 symptoms, and the importance of obtaining a COVID-19 test and not coming to work if the employee has COVID-19 symptoms.

9) This training will be provided by a combination of project site orientations, daily tailgates, and all-hands messages for employees.

10.0 EXCLUSION OF COVID-19 CASES

Where we have a COVID-19 case in our workplace, we will limit transmission by:

1) Ensuring that COVID-19 cases are excluded from the workplace until our return-to-work requirements are met.

2) Excluding employees with COVID-19 exposure from the workplace for the time recommended by the CDC for quarantine or required by state or local authorities if more restrictive.

3) California requires continuing and maintaining an employee's earnings, seniority, and all other employee rights and benefits whenever we've demonstrated that the COVID-19 exposure is work related. Human Resources will determine how this will be accomplished.

4) Providing employees at the time of exclusion with information on available benefits.

10.1 COVID-19 Cases

For the purposes of this procedure, a COVID-19 Case is an individual who 1) tests positive or 2) has symptoms consistent with COVID-19 until a physician or public health authority determines that their symptoms were not caused by COVID-19 and documentation of this determination is presented to the Supervisor or Health and Safety Representative. Personnel who meet the Return to Work criteria in Section 12 will no longer be considered a COVID-19 Case.

If an employee reports symptoms of COVID-19 during the daily screening, ECC will ask them to leave the site and to self-isolate at home or their temporary living quarters. ECC will request that they contact their personal medical provider or the state or local public health agency.

If an employee does not self-report symptoms, but symptoms are observed, ECC will ask them to leave the work site until released by a physician or the state or local public health agency.

Immediately notify ECC Human Resources (Tiffany Giglio tgiglio@ecc.net 508-340-9317), ECC local Health and Safety representative, and your Contracting Officer if any of your jobsite personnel test positive or are presumed positive for COVID-19. In accordance with medical privacy requirements, do not

provide the name of the individual to the Contracting Officer; **only disclose the name of a confirmed or presumptively infected employee to ECC Human Resources.** In your notification, please include the following details:

1) Worksite where the employee was working prior to the positive test result;
2) Names of people in the workplace the individual had contact with in the two days preceding the positive test result and/or symptom onset (if known); and,
3) Any known facilities (include description, name of building, building number, or any additional details that may assist us in identifying the facility) the individual visited up to 3-days before the positive test result and/or symptom onset (if known).
    a. Human Resources will contact the local health department regarding non-workplace facilities visited. Jobsite personnel are to notify other personnel contacted by the infected employee as well as all site personnel regarding the infected individual.

If the individual has symptoms or tests positive, they are to follow their physician's and the CDC's guidance on home isolation until they meet the Return to Work criteria in Section 12.0.

10.2 COVID-19 Exposed Personnel

COVID-19 exposure includes close contact with infected individuals, i.e. being within 6 ft. for a total of 15 minutes during a 24-hour period, whether wearing masks or not, or being coughed on, sneezed on, or kissed by a COVID-19 case. Employees who share a household with a COVID-19 case are presumed to be in close contact, and therefore an exposed person.

COVID-19 Exposed Personnel will be excluded from the workplace and advised to quarantine at home.

11.0 REPORTING, RECORDKEEPING, AND ACCESS

It is ECC's policy to:

1) Report information about COVID-19 cases at our workplace to the local health department whenever required by law, and provide any related information requested by the local health department.
2) Report immediately to OSHA any COVID-19-related serious illnesses resulting in hospitalization or death of an employee occurring in a place of employment or in connection with any employment.
3) Maintain records of the steps taken to implement our written COVID-19 Prevention Program.
4) Make our written COVID-19 Prevention Program available at the workplace to employees, authorized employee representatives, and to representatives of OSHA immediately upon request.
5) The manager investigating COVID-19 cases may use the **Attachment D: Investigating COVID-19 Cases** form to keep a record of the investigation. The information will be made available to employees, authorized employee representatives, or as otherwise required by law, with personal identifying information removed.

12.0 RETURN-TO-WORK CRITERIA

COVID-19 cases with COVID-19 symptoms will not return to work until all the following have occurred:

1) At least 24 hours have passed since a fever of 100.4 or higher has resolved without the use of fever-reducing medications, and
2) COVID-19 symptoms have improved, and.
3) At least 10 days have passed since COVID-19 symptoms first appeared.

COVID-19 cases who tested positive but never developed COVID-19 symptoms will not return to work until a minimum of 10 days have passed since the date of specimen collection of their first positive COVID-19 test.

A negative COVID-19 test will not be required for an employee to return to work.

COVID-19 exposed personnel (close contact) may return to work 14 days after the last close contact in California locations. All other locations may follow the latest CDC Guidelines for release from quarantine –

1) 10 days since the last close contact, or

2) 7 days after the last close contact and a negative test no earlier than 5 days after the last close contact

If an order to isolate or quarantine an employee is issued by a local or state health official, the employee will not return to work until the period of isolation or quarantine is completed or the order is lifted. If no period was specified, then the period will be 10 days from the time the order to isolate was effective, or 14 days from the time the order to quarantine was effective.

Program Approved by (Signature): Date

ATTACHMENT A

DAILY TAILGATE QUESTIONNAIRE

Each Site worker must answer the following questions at the tailgate meeting or upon arriving at the site. Responses must be documented by the ECC SSHO or other management representative.

A. Is this your first day on the project?

B. Did you just return from international travel? If yes, leave site, you must quarantine for 14 days.

C. Did you travel here from within the US by airplane, train or bus? Indicate locations traveled from and through.

D. Are you experiencing any of the following symptoms? If yes, leave the site immediately. Isolate and contact your medical provider.

- Fever[1] or chills
- Cough
- Shortness of breath or difficulty breathing
- Fatigue
- Muscle or body aches
- Headache
- New loss of taste or smell
- Sore throat
- Congestion or runny nose
- Nausea or vomiting
- Diarrhea

E. Have you had close personal contact[2] with anyone who has been diagnosed with COVID-19? Tested positive? Or is presumed to have COVID-19? If yes, leave the site immediately. You must quarantine for 14 days.

F. Have you had close personal contact with anyone who has experienced those symptoms (identified in Question D) in the past 14 days?" – If yes, daily temperature monitoring is required along with questionnaire.

If any of the responses are YES, report the case to the ECC Site Safety and Health Officer and Project Manager immediately for follow up. If any of the responses are YES, or thermometer readings exceed the threshold, please conduct any further additional screenings or discussions outside the presence or earshot of other persons not involved in the screening for the privacy of the employee.

[1] Fever for the purposes of this procedure is defined as a temperature greater than 99.5°F confirmed with a second reading at least 30 minutes apart.

[2] Close personal contact means living with, caring for, or had contact with respiratory secretions, being within 6 ft in an enclosed space for more than 10 minutes, or being coughed on or sneezed on by a confirmed COVID-19 patient.

Attachment B: Identification of COVID-19 Hazards

All persons, regardless of symptoms or negative COVID-19 test results, will be considered potentially infectious. Particular attention will be paid to areas where people may congregate or come in contact with one another, regardless of whether employees are performing an assigned work task or not. For example: meetings, entrances, bathrooms, hallways, aisles, walkways, elevators, break or eating areas, cool-down areas, and waiting areas.

Evaluation of potential workplace exposure will be to all persons at the workplace or who may enter the workplace, including coworkers, employees of other entities, members of the public, customers or clients, and independent contractors. We will consider how employees and other persons enter, leave, and travel through the workplace, in addition to addressing fixed work locations.

Person conducting the evaluation: **[enter name(s)]**

Date: **[enter date]**

Name(s) of employee and authorized employee representative that participated: **[enter name(s)]**

Interaction, area, activity, work task, process, equipment and material that potentially exposes employees to COVID-19 hazards	**Places and times**	**Potential for COVID-19 exposures and employees affected, including members of the public and employees of other employers**	**Existing and/or additional COVID-19 prevention controls, including barriers, partitions and ventilation**
General office areas during general office work and cleaning. This applies to fixed facilities and temporary job site offices, including trailers and modular units.	Common areas including: • Reception area/lobby • Hallways – both in-suite and common hallways • Rest rooms • Kitchens • Conference rooms • Open office areas, e.g. bull pens • Copy and production rooms • Storage rooms and storage pods	Potential exposures include working within 6 ft. of others and touching contaminated surfaces. Client and subcontractor interactions Rendering first aid to co-workers	• Work from home policies • Many employees have individual enclosed offices • Entry screening including temperature screening and symptom and travel questionnaire • Video conferencing and IM communications • Travel limitations – must be approved by CEO • Face coverings in common areas and when 6 ft. cannot be maintained • Distancing, e.g. spacing in conference rooms and bull pens • No public access • Limitations on visitors • Traffic flow signs to prevent crossing paths where feasible

Interaction, area, activity, work task, process, equipment and material that potentially exposes employees to COVID-19 hazards	**Places and times**	**Potential for COVID-19 exposures and employees affected, including members of the public and employees of other employers**	**Existing and/or additional COVID-19 prevention controls, including barriers, partitions and ventilation**
			• Limits on # persons to one at a time in rest rooms, kitchen, copy/production rooms and storage rooms and pods • Sanitizer stations • Regular cleaning and disinfection of high touch surfaces (Need to check on ventilation systems with building managers)
Job sites - Various types of construction and environmental work including but not limited to: • Site inspections and assessments • Excavation, grading and utility work • Drilling and environmental sampling • Concrete forming, pouring and finishing • Structural steel and concrete construction • Plumbing, electrical and mechanical system installations • Roofing • Exterior architectural work and finishing • Fencing • Paving • Waste loading • Debris removal • Landscaping and forestry work • Interior finishing, Remodeling and repairs • Water treatment	• Access control points at start and end of shift • Pre-shift tailgate meetings • Working in building interiors • Performing construction work that requires more than one person is required to perform a task	• Screening employee IDs, temperatures and questionnaires • Working indoors with others • Working outdoors with others where 6 ft. cannot be maintained • Sharing tools • Sharing mobile construction equipment • Signing common paperwork and sharing writing tools • Rendering First aid to co-workers	• PPE is individually assigned • Education and information on maintaining distance • Face coverings indoors and when tasks require close contact with others • Minimizing signing of documents • Outdoor meetings – with social distancing • Cleaning and disinfection protocols • Sanitizing solution availability • Bloodborne Pathogens program

Interaction, area, activity, work task, process, equipment and material that potentially exposes employees to COVID-19 hazards	**Places and times**	**Potential for COVID-19 exposures and employees affected, including members of the public and employees of other employers**	**Existing and/or additional COVID-19 prevention controls, including barriers, partitions and ventilation**
Transportation • Air Travel • Job-site vehicles • Van/shuttle and car pools	• Airports • Air planes • Driving or riding in shared vehicles and vehicles with passengers	• Close contact with others within small enclosed spaces • Exposure to contaminated surfaces	• Limit travel to business essential with approval of CEO • Follow rules of terminal and carriers while using public transportation • Minimize ride-sharing • Rules for job-site ride sharing and car pools • Disinfection of shared equipment and vehicles • Ventilation in vehicle • Face coverings in vehicles

Attachment C: COVID-19 Inspections

Date:

Name of person conducting the inspection:

Work location evaluated:

Exposure Controls	Status	Person Assigned to Correct	Date Corrected
Engineering			
Barriers/partitions			
Ventilation (amount of fresh air and filtration maximized)			
Additional room air filtration			
[add any additional controls]			
[add any additional controls]			
Administrative			
Physical distancing			
Surface cleaning and disinfection (frequently enough and adequate supplies)			
Hand washing facilities (adequate numbers and supplies)			
Disinfecting and hand sanitizing solutions being used according to manufacturer instructions			
[add any additional controls your workplace is using]			
[add any additional controls your workplace is using]			
PPE (not shared, available and being worn)			
Face coverings (cleaned sufficiently often)			
Gloves			
Face shields/goggles			
Respiratory protection			
[add any additional controls]			

Attachment D: Investigating COVID-19 Cases

All personal identifying information of COVID-19 cases or symptoms will be kept confidential. All COVID-19 testing or related medical services provided by us will be provided in a manner that ensures the confidentiality of employees, with the exception of unredacted information on COVID-19 cases that will be provided immediately upon request to the state or local health department, OSHA, the National Institute for Occupational Safety and Health (NIOSH), or as otherwise required by law.

All employees' medical records will also be kept confidential and not disclosed or reported without the employee's express written consent to any person within or outside the workplace, with the following exceptions: (1) Unredacted medical records provided to the state or local health department, OSHA, NIOSH, or as otherwise required by law immediately upon request; and (2) Records that do not contain individually identifiable medical information or from which individually identifiable medical information has been removed.

Date: [enter date]

Name of person conducting the investigation: **[enter name(s)]**

Employee (or non-employee*) name:		**Occupation (if non-employee, why they were in the workplace):**	
Location where employee worked (or non-employee was present in the workplace):		**Date investigation was initiated:**	
Was COVID-19 test offered?		**Name(s) of staff involved in the investigation:**	
Date and time the COVID-19 case was last present in the workplace:		**Date of the positive or negative test and/or diagnosis:**	
Date the case first had one or more COVID-19 symptoms:		**Information received regarding COVID-19 test results and onset of symptoms (attach documentation):**	
Results of the evaluation of the COVID-19 case and all locations at the workplace that may have been visited by the COVID-19 case during the high-risk exposure period, and who may have been exposed (attach additional information):			

Notice given (within one business day, in a way that does not reveal any personal identifying information of the COVID-19 case) of the potential COVID-19 exposure to:			
All employees who may have had COVID-19 exposure and their authorized representatives.	**Date:**		
	Names of employees that were notified:		
Independent contractors and other employers present at the workplace during the high-risk exposure period.	**Date:**		
	Names of individuals that were notified:		
What were the workplace conditions that could have contributed to the risk of COVID-19 exposure?		**What could be done to reduce exposure to COVID-19?**	
Was local health department notified?		**Date:**	

*Should an employer be made aware of a non-employee infection source COVID-19 status.

APPENDIX D
ECC Corporate Environment, Safety, and Quality Standard Operating Procedures (Table of Contents)

ECC CORPORATE ENVIRONMENT, SAFETY, AND QUALITY PROGRAM STANDARD OPERATING PROCEDURES TABLE OF CONTENTS

1.0 General Administration

- 1.2 ESQ Organization and Responsibilities
- 1.4 Subcontractor Management
- 1.5 Office Injury and Illness Prevention Plans
- 1.8 Drug Free Workplace
- 1.11 Logbooks

2.0 Continuous Improvement

- 2.1 ESQ Audits and Surveillances
- 2.2 Incident Reporting and Investigation
- 2.3 Lessons Learned
- 2.4 Corrective and Preventive Actions

5.0 General Safety

- 5.1 Site Control
- 5.3 Mobile Construction Equipment
- 5.5 Fall Prevention and Protection
- 5.6 Stairways and Ladders
- 5.7 Electrical Safety
- 5.8 Hand and Power Tools
- 5.9 Fire Protection
- 5.10 Hazard Communication
- 5.13 Back Injury Prevention
- 5.14 Scaffolds

6.0 Personal Protective Equipment

- 6.1 Personal Protective Equipment
- 6.2 Respiratory Protection

7.0 Permit-Required High Loss Potential Activities

- 7.1 Confined Space Entry
- 7.2 Hot Work

7.3 Control of Hazardous Energy (Lockout/Tagout)
7.4 Line Breaking
7.5 Hoisting and Crane Operation
7.6 Underground Utilities
7.7 Excavation
7.10 Diving Management Plan

8.0 Occupational Health

8.2 Medical Surveillance
8.3 Bloodborne Pathogens
8.4 Cold Stress Prevention
8.5 Heat Stress Prevention
8.6 Hearing Conservation
8.7 Air Monitoring
8.8 Biological Hazards
8.9 Asbestos Abatement
8.10 Lead Remediation

9.0 Environmental Protection

9.4 Spill and Discharge Control

ATTACHMENTS

ATTACHMENT 1

EMERGENCY ACTION PLAN

1.0 PROJECT

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

2.0 PRE-EMERGENCY PLANNING

This section includes information needed for pre-planning for emergencies.

2.1 Emergency Contact List

Table A1-1 EMERGENCY CALL LIST AND PROJECT ORGANIZATION

Name or Organization	Title	Phone number(s)
Fire/Ambulance/Police/ Emergency Redstone Arsenal (RSA)		For all emergencies: 911 For non-emergency RSA police/fire: (256) 876-2222
Hospital	Huntsville Hospital	(256) 265-1000
Clinic	Huntsville Hospital Urgent Care	(256) 539-0781
Occupational Medicine	Peter Greaney, MD / WorkCare, or US HealthWorks	(800) 455-6155 (714) 288-8303
Poison Control	Poison Control	(800) 256-9822
Veronica Reese	Contracting Officer's Representative (COR)	Office: (210) 466-1406
Clint Howard	Army – RSA Branch Chief-Environmental Restoration	Office (256) 8423702
Pam Foti, Certified Hazardous Materials Manager (CHMM) Project Management Professional (PMP)	Project Manager (PM)	Mobile: (508) 274-3084
Carol Canada, Professional Geologist (PG)	Assistant PM	Mobile: (615) 693-9915
Kym Edelman, Certified Safety Professional (CSP), Certified Industrial Hygienist (CIH)	Safety and Health Manager (SHM)	Mobile: (757) 496-5622
Brian Kateley	Site Safety and Health Officer (SSHO) (Primary) (first aid/ Cardiopulmonary Resuscitation [CPR] provider)	Mobile: (410) 671-2970
Aaron Glad	Site Superintendent – alternate (first aid/ CPR provider)	Mobile: (508) 229-2270
First Aid/CPR providers	SSHOs	See above
ECC HOTLINE	ECC	650-347-7512 Ext 111

KEY PROJECT PERSONNEL ARE TO HAVE A COPY OF THIS LIST READILY AVAILABLE AT ALL TIMES

2.2 Coordination with local Emergency Agencies

Local authorities and emergency services will be contacted prior to initiation of work. The work objectives and on-site capabilities will be explained, as well as the most likely emergencies. Preferred contact procedures will be established and the response capabilities of local responders will be determined. Environmental Chemical Corporation (ECC) will ensure there is good coordination between our emergency plan and local requirements. The Site Safety and Health Officer (SSHO) will document this meeting in the project files.

3.0 PERSONNEL ROLES AND LINES OF AUTHORITY

During all emergencies, the SSHO will serve as the SSHO. He will work to abate and/or contain the emergency.

4.0 EMERGENCY RECOGNITION AND PREVENTION

Conditions that may lead to an emergency situation during field activities will be addressed in specific Activity Hazard Analyses (AHAs) as tasks are identified or the Accident Protection Plan (APP) attachments. These conditions include:

- Incident involving a serious injury
- Fire
- Environmental release
- Severe weather

Before daily work assignments, regular "tailgate/toolbox" safety meetings should be held. Discussions should include, but not limited to:

- Specific task to be performed (Plan of the Day)
- Weather conditions (if severe weather is anticipated, evacuation routes/rally points will be discussed)
- Time Constraints (e.g. rest breaks, tide restrictions, 24-hour operations)
- Hazards that may be encountered, including their effects, how to recognize symptoms or monitor them, concentration limits, or other danger signals
- Near misses from the previous day's work
- Emergency Procedures

5.0 SAFE DISTANCES AND SAFE ZONES

If severe weather is anticipated, places of refuge and rally points will be discussed at the daily tailgate meeting.

For releases of hazardous material, the SSHO will monitor the rally point to ensure exposure to hazardous materials is not likely to occur. The evacuation routes and rally points during a fire or environmental release may be modified during the response due to wind direction and potential exposure situations. Personnel must remain alert for changes to alternate routes and rally locations.

6.0 SITE SECURITY AND CONTROL

Site control procedures for this project will include the establishment of Work Zones in order to provide site security by avoiding unauthorized access and to secure work locations between shifts. On this project, work zones may be established by using appropriate work area signage in combination with warning or danger tape, barricades, or other measures selected for the sites, if deemed necessary.

The SSHO, as well as employees, will stay alert for any unauthorized entry and take necessary actions to control the work area.

Authorized site visitors may visit the site upon meeting the following conditions:

- Receiving site hazard and safety instructions from the SSHO; to include Emergency Response procedures briefing

- Reviewing and complying with the essential elements of the APP
- Using their own, or provided Personal Protective Equipment (PPE), to enter regulated work areas per the APP
- Reporting any observed unsafe act and/or condition at, or affecting, the work site

Visitors will be evacuated from the incident location, or from the site, during emergency activities.

7.0 EVACUATION ROUTES AND PROCEDURES

Evacuation routes and procedures will be reviewed and discussed regularly during tailgate meetings.

8.0 EMERGENCY MEDICAL TREATMENT (FIRST AID/CPR/AED)

At least two employees certified in both First Aid, Cardiopulmonary Resuscitation (CPR), and Automated External Defibrillator (AED) use be on the project at all times. A First Aid kit must be maintained on site and checked weekly (EM 385-1-1 section 03.B.02). First aid kit will be maintained by the SSHO. A log of First Aid treatment and materials used will also be maintained by SSHO.

If an injury or illness requires more than First Aid, but is not an emergency, the employee will be taken to Huntsville Hospital Urgent Care for examination or observation, after contacting the ECC Corporate Medical Provider, Dr. Greaney, or his alternate at WorkCare (1-800-455-6155). The Huntsville Hospital Urgent Care route can be found in **Figure A3-1**.

If the injury or illness is considered an emergency, call 911 and an installation ambulance service will be contacted to transport the victim to the Huntsville Hospital. The route can be found in **Figure A3-2**.

9.0 RESCUE OPERATIONS

Where employees are engaged in one of the following activities or environments, a rescue plan will be incorporated into the AHA or appropriate site-specific plan:

- Working at elevations – not anticipated
- Using personal fall arrest systems – not anticipated
- Working alone – not anticipated
- Confined spaces, or potentially immediately dangerous to life and health atmospheres – not anticipated

10.0 EMERGENCY ALERTING AND RESPONSE NOTIFICATION

An employee alarm system will consist of the use of verbal instructions, either directly or via radio.

Cellphone of telephones will be used to contact emergency responders. **Table A1-1** of this Plan will be kept in site vehicles. The following information will be communicated:

- Name of the person reporting the emergency
- Telephone number at the location of the person making the call
- Name of the injured person, if known
- Description of the emergency
- Exact location of the emergency
- Actions already taken
- What assistance is needed

Although not anticipated, if an employee is working alone in remote area, he/she will have either two-way radios or cell phones. The employee will be required to check in/check out with the SSHO with an agreed upon frequency before employee leaves for the remote work.

11.0 PERSONAL PROTECTIVE EQUIPMENT AND EMERGENCY EQUIPMENT

Each field team will have quick access to a First Aid kit, cell phone, bloodborne pathogen prevention PPE, and fire extinguisher.

12.0 SITE LAYOUT AND PREVAILING WEATHER CONDITIONS

See **Attachment 3** for hospital and clinic routes; due to the numerous sites for this project, the rally points and procedures will be discussed regularly during the daily tailgate meetings.

13.0 REPORTING PROCEDURES

All emergencies will be immediately communicated to the SSHO who will initiate emergency response procedures and notify the Contracting Officer's Representative (COR) and appropriate response personnel.

After the response, ECC will prepare an Incident Report. It will include such things as a chronological history of the emergency facts, actions taken, personnel present, sample results (if taken), summary of injuries, and possible exposures. For spills and releases it will also include:

- Description of material spilled, including identity, quantity, and a copy of the Safety Data Sheet (SDS) or waste disposal manifest
- Exact time and location of the spill, and the description of the area involved
- Containment procedures utilized
- Description of the cleanup procedure employed at the site, including disposal of spill residue
- Summary of the communications ECC had with other agencies.

This report will be given to the Army within 24 hours of the incident along with immediate verbal notification.

The report will also contain a critique of the response and modifications to this plan will be made if necessary, to adequately address subsequent emergencies.

14.0 TRAINING

The Emergency Response Plan will be discussed during initial site training and discussed regularly during the Daily Tailgate Safety Meetings. Due to the short timeframes of field events drill test will not be necessary.

15.0 PROCEDURES

Emergency Action Procedures - Injury and Medical Emergency

Prevention:

Wear proper PPE at all times. Implement precautions in AHA. Follow standard operating procedures. Avoid pinch points, struck by hazards and exposures to falls from elevation. Report all hazards, injuries and illnesses to your supervisor SSHO immediately. Follow instructions on all prescription medications. Stay hydrated.

Recognition and Reporting:

If an injury, illness or medical condition arises, notify your nearest co-worker immediately. Have them call the SSHO or your supervisor.

All First Aid Providers will be contacted immediately and will report to location of the injured person. See **Table A1-1** contact list.

Actions:

1. First Aid Providers will do an immediate area and victim assessment in accordance with their training.
2. Call 911 or local emergency notification number immediately if any of the following situations exist:
    a. Unconscious
    b. Severe bleeding
    c. Head or spine injury is suspected
    d. Seizures
    e. No pulse
    f. No breathing
    g. Overdose situation possible
    h. Situation requires rescue/medical evacuation (fire, airborne release, workplace violence, trapped)
    i. Any other situation where the condition of the patient is in question. If in doubt contact 911.
3. Establish clear area or have ambulatory patient move to a safe location.
4. Apply Universal Precautions per Bloodborne Pathogens Exposure Control Plan (**Attachment 6** of APP) and training, and don PPE (disposable gloves, CPR mask, etc.).
5. Provide appropriate First Aid/CPR/AED consistent with training and certification.
6. Provide complete information to emergency medical technicians, if necessary.
7. Clean area and contain potentially contaminated materials and articles in labeled bag per Bloodborne Pathogens Exposure Control Plan (**Attachment 6** of APP).
8. Participate in incident investigation, provide for and monitor medical follow up if necessary.

Emergency Action Procedures - Fire

Prevention:

See Fire Prevention and Protection Plan, **Attachment 2** to APP.

Recognition and Reporting:

Call designated base emergency services number upon observation of any uncontrolled fire or smoke.

Actions:

1. Always alert the emergency management system first, regardless of the size of the fire
2. Use fire extinguisher if:
    a. You have been trained
    b. You have an escape route behind you
    c. The fire is small (incipient stage) and can likely be put out with one extinguisher in about 10 seconds.

3. If the fire cannot be controlled with a fire extinguisher:
    a. Notify Site Superintendent or SSHO and initiate evacuation procedure immediately.
    b. The SSHO will notify site personnel and client representatives of evacuation order.
    c. The SSHO will ensure evacuation alarms are sounded, and evacuation proceeds in accordance with Evacuation Plan.
4. If the fire is controlled by a fire extinguisher:
    a. Call for another fire extinguisher for stand by
    b. Remove potential sources of fuel and ignition
    c. Stay at the location until relieved by the SSHO or Fire Department to watch for re-ignition.
5. Participate in incident investigation.

Emergency Action Procedures - Evacuation

Prevention:

Most emergency evacuations can be prevented by following the APP and by practicing safe behaviors. Report all hazards and suspicious activities immediately.

Recognition and Reporting:

Emergency evacuation of the site may be prompted by various situations, including but not limited to the following:

- Fires
- Hazardous material releases
- Sudden severe weather events
- Workplace violence or terrorism
- Utility damage
- Off-site emergency that may impact site operations.

Report potential emergency conditions immediately to your Supervisor or the SSHO. Call 911. See **Table A1-1** contact list.

Actions:

1. In the event of an emergency, the SSHO may initiate evacuation of the site by sounding the evacuation alert - one long blast on the air horn or make verbal contact
2. Call local 911 or emergency notification number
3. The SSHO will notify and coordinate with client representatives, RSA personnel, and emergency responders
4. Upon arrival of emergency response personnel, the SSHO will report to and assist the Incident Commander (lead from local emergency response team)
5. The SSHO will retrieve the daily sign in logs and proceed to the rally point
6. All personnel, upon hearing the evacuation alert, or receiving verbal instructions to evacuate will immediately proceed along the designated route to the rally point which will be discussed at each daily tailgate meeting
7. In the event of a fire or release of airborne toxic chemical, check local wind indicators. Evacuate in a direction perpendicular to the wind direction if possible
8. Be attentive for instructions on changes in rally location based on site conditions

9. In some cases, a shelter-in-place order may be given. In that case, close doors and windows and shut off ventilation system
10. Report to your Supervisor at the rally point
11. Supervisors will report on the presence of crew members to SSHO for accountability purposes.
12. Look around for friends and co-workers. Report anyone missing to the SSHO
13. Critical plant operations – there are no critical plant operations on this project. Upon hearing the evacuation alert, all personnel will shut off power tools and equipment and proceed immediately to the rally point
14. Rescue procedures are included in the Fall Prevention and Protection Plan or Confined Space Entry Plan, if applicable. Once an evacuation order is given, rescue activities will be turned over to off-site emergency responders
15. Site First Aid Providers will render First Aid and support to injured personnel at the rally point. In an evacuation, the local Emergency Medical Service will be notified and will take charge of medical support
16. The SSHO will report the status of evacuated personnel to the Incident Commander, including the name, description and last known location of any unaccounted for individuals
17. Site(s) may be re-entered when the SSHO gives the "all clear" order. An incident investigation will begin immediately, led by the SSHO.

Emergency Action Procedures - Severe Weather

Prevention:

The SSHO will monitor the weather at least twice daily. Weather monitoring will become continuous when the National Weather Service issues a severe weather Watch or Warning.

Recognition and Reporting:

A Watch means that a weather emergency is possible. It means Be Prepared. On issuance of a Watch, the SSHO will determine what site preparations will be made to secure the site, shut down, evacuate or call off a scheduled work shift.

A Warning means that a weather emergency is in the area. It means Take Action. Upon issuance of a Warning, the SSHO will implement emergency shut down procedures.

Actions:

1. Thunderstorm, Lightning, Tornado
    a. Remove loose or stacked materials from roofs, or open floor decks
    b. Remove from site or secure stacks of materials at ground level
    c. Lightning - Stop outdoor activities involving load handling equipment, roofing, working on elevating platforms and scaffolds, tree trimming, or work in open areas upon hearing thunder or seeing lightning. Seek indoor shelter. Stay indoors for 30 minutes after the last audible thunder or visible flash of light
    d. Proceed to pre-determined tornado shelter upon issuance of a Warning. The SSHO will work with RSA personnel or local emergency agencies to identify shelters during mobilization.

Emergency Action Procedures - Spills and Releases of Hazardous Materials

Prevention:

Supervisors will review the hazards of chemicals with their work crews, and SDS and labels will be maintained in accordance with the Hazard Communication Program.

- **Avoid mixing chemicals**, even common household products. Some combinations, such as ammonia and bleach, can create toxic gases. When in doubt, consult the SDS or the SSHO.
- **Always read and follow the directions** when using a new product. Some products should not be used in small, confined spaces to avoid inhaling dangerous vapors. Other products should not be used without gloves and eye protection to help prevent the chemical from touching your body.
- **Store chemical products properly.** Non-food products should be stored tightly closed in their original containers so you can always identify the contents of each container and how to properly use the product. Containers of flammable and combustible liquids will be stored in flammable liquid storage cabinets or removed from the site at the end of the day. Bulk storage of fuels or other hazardous materials will have secondary containment, and containment around transfer valves, spigots and hoses.
- **Report and Clean up any spills immediately** with some rags, being careful to protect your eyes and skin.
- **Follow operating procedures**. Implement procedures designed to limit open containers, excess pressure, surface area of contaminated environmental media, drum and container handling, etc.
- **Implement the Storm Water Pollution Prevention Plan** if one is required on the site, or general good chemical handling practices to keep materials from flowing off-site with stormwater.

Recognition and Reporting:

Notify your Supervisor or the SSHO of any spill or airborne release of hazardous materials. The SSHO will investigate and determine if an emergency should be declared and will issue an alert to evacuate or shelter-in-place if necessary. The SSHO will call the RSA emergency services if an emergency is declared.

The SSHO will notify the client representative immediately of any spill or release. Where reporting to installation and regulatory agencies is required, the reporting will be done in accordance with the communications plan approved by the Contracting Officer. See Contact List **Table A1-1**.

Actions:

The actions to be taken will depend on the nature and extent of the release. Only personnel trained in the procedures and PPE required to handle the spill or release should be involved in containing, stabilizing, and cleaning up the material.

1. If a release from an on-site or off-site source results in a shelter-in-place order:
    a. Proceed to the nearest designated shelter
    b. Shut doors and windows
    c. Turn off ventilation system.
    d. If possible, seal gaps around doors and window with tape, wet towels or other items
2. Take immediate measures to control and contain the release (e.g. shut off pumps, close valves).
3. Contact local emergency service providers.
4. Don protective equipment as specified by the SSHO.

5. If exposure to individuals causes injury/health effects, make sure the area is safe before attempting rescue or First Aid. If safe to do so, move them to fresh air and apply appropriate First Aid. Notify the Emergency Medical Service of the nature of injury.
6. Isolate and contain hazardous release areas.
7. Deny entry to the spill area to unauthorized personnel.
8. Do not allow anyone to touch spilled material.
9. Stay upwind, keep out of low areas.
10. Keep combustible materials away from the spilled material.
11. Use water spray or foam to reduce dust or vapors as needed.
12. Collect samples for analysis to determine that cleanup is adequate.
13. If the release is from tanks, prevent the discharge from traveling beyond site boundaries.
14. Containerize materials and arrange for proper disposal.
15. Take caution when handling drums and containers (opening, sampling, and over packing).

ATTACHMENT 2

FIRE PREVENTION AND PROTECTION PLAN

Attachment 2
FIRE PREVENTION AND PROTECTION PLAN

1.0 PROJECT

Contract Number:	W9124J-18-D-0004
Delivery Order	W9124J21F0020
Project Name:	Environmental Remediation Services
Location:	Redstone Arsenal (RSA), Alabama

2.0 SCOPE

This Plan applies to all activities, including subcontractor activities for the project identified above.

3.0 LIST OF MAJOR WORKPLACE FIRE HAZARDS

On this project, the major workplace fire hazards will include:

- Normal combustibles including transmitter building, trash, construction materials, vegetation and waste piles. Good housekeeping will be maintained. Trash will be collected daily and placed in a designated receptacle.
- Combustible and flammable liquids used as fuels in site vehicles, mobile construction equipment and power tools.
    - Gasoline will be kept in labeled five-gallon metal safety cans with flame arrestor and spring-loaded lid, or in Underwriters Laboratories (UL) approved one to two-gallon plastic cans.
    - Diesel fuel will be kept in labeled UL approved containers.
    - A temporary Diesel fuel tank will be protected with barriers and secondary containment.
    - The refueling area is shown on the Site Layout.

4.0 CONTROL OF IGNITION SOURCES

- Smoking is prohibited inside vehicles and buildings. A designated smoking area will be established during mobilization and supplied with a self-extinguishing ash tray stand.
- Temporary fuel storage tanks will be protected from accidental impact by vehicles and equipment.
- Storage tanks will be double-walled or have other secondary containment measures which will have a capacity of at least the tank volume +10 percent (%). Secondary containment will be inspected regularly and kept free of accumulation of liquids, including rainwater to ensure sufficient free board at all times.
- Tanks, pumps and hoses will be rated/approved and listed for the service and will include appropriate bonding to control static sparks.
- Hose nozzles used to fill equipment from the temporary tank will be automatic closing and will not be equipped with a latch-open device. All filling and transfer operations will be attended.
- Normal combustibles, including high vegetation will be kept at least 25 feet from the refueling area.
- Sources of ignition will be prohibited within 25 feet of the refueling area.
- Equipment with small engines will not be fueled while hot.
- The refueling area will be posted with signs, including “No Smoking”, “No Hot Work”, and “Do not fuel hot equipment.”
- A Fire Extinguisher rated at least 40 B:C will be placed in a fixed and visibly labeled location within 100 feet of the refueling area.
- Tanks will have appropriate hazard warning labels.
- A spill kit suitable for minor spills and leaks of petroleum products will be stationed at the refueling area.

- The refueling area, equipment, and emergency supplies will be inspected as needed.
- Small portable containers of flammable liquids will be stored out of direct sunlight and in a designated location. A Flammable liquid storage cabinet will be used if more than two containers of flammable liquids are stored on site. The cabinet will include a "No Smoking" label.
- See **Section 9** for Hot Work requirements.

5.0 TYPES OF FIRE SUPPRESSION EQUIPMENT

Portable fire extinguishers will be selected and distributed as follows:

- Fire extinguishers rated to 1-A:10-B:C or higher, will be in all work vehicles, mobile construction equipment, and in the immediate vicinity of stored flammable materials.
- 40-B:C extinguisher in the refueling area.
- 4-A: 60-B:C (10-pound agent minimum) at each hot work location.
- Not anticipated, but if in buildings under construction, alteration or demolition, at least one 4-A:6-0B:C extinguisher will be located per every 6,000 square feet of floor space, on each floor. Extinguishers shall not require a travel distance of more than 75 feet, and one extinguisher on each floor should be placed close to the stairways. Note: If unusual fire hazards exist, consult National Fire Protection Association (NFPA) 10 for additional selection and distribution information.
- The equipment will not be removed except for inspection and/or use in an emergency.
- The Site Safety and Health Officer (SSHO) will provide training on the use of the fire extinguisher during the pre-entry briefing.
- Fire extinguishers will be visually inspected monthly.

6.0 RESPONSIBILITIES FOR MAINTAINING EQUIPMENT AND SYSTEMS

The SSHO will be responsible for inspection of work areas on a daily basis, and inspection of fire extinguishers on a monthly basis.

Fixed systems in buildings under construction, alteration or demolition will be inspected by, or under the direction of the Authority Having Jurisdiction.

7.0 PERSONNEL RESPONSIBLE FOR CONTROLLING FUEL SOURCE HAZARDS

The SSHO is responsible for controlling fuel source hazards, in accordance with this Plan. This includes regular inspections of areas and equipment, maintaining adequate freeboard in secondary containment, limiting combustibles around fuel storage and dispensing operations, and ensuring control of ignition sources in these areas.

8.0 HOUSEKEEPING PROCEDURES

Trash will not be permitted to accumulate. Receptacles with lids or roll off boxes will be used to contain trash. Work areas will be cleaned up each day, as often as necessary to maintain a safe job site.

Waste piles will be limited in size, segregated and removed from site as soon as possible.

Spills of flammable and combustible materials will be contained and cleaned up as soon as possible. See Emergency Action Plan, **Attachment 1** to the APP.

9.0 HOT WORK PERMITS

Hot work is defined as any process that produces open flames, heat or sparks, including, but not limited to: burning, cutting, welding, soldering, brazing, torch applied roofing, and the use of temporary heating devices involving an open flame or exposed heating elements.

Before any hot work is performed, ECC personnel shall obtain a Hot Work Permit from the U.S. Army local authority. A hot work site will have a designated fire watch. This person's sole responsibility shall be to monitor the hot work and have immediate access to the fire extinguisher located at each hot work site (a portable fire extinguisher (A:B:C) will be readily available). The fire watch shall remain at his/her designated watch for 30 minutes from the conclusion of hot work activities.

It is the responsibility of the SSHO to work with the Army or local authority/permit issuing group to establish the requirements, definitions, and regulations. In general, a hot work permit is required from the local hosting facility when the hot work is being performed on a pre-existing building/structure or new attachment to an existing structure. If the hot work is solely on a new building/structure not connected to a preexisting structure and has not been handed over to client or end user, then an ECC Hot Work permit can be used. This should be communicated prior to the start of any hot work activities.

ATTACHMENT 3

MEDICAL SUPPORT PLAN

1.0 PROJECT

Contract Number:	W9124J-18-D-0004
Delivery Order	W9124J21F0020
Project Name:	Environmental Remediation Services
Location:	Redstone Arsenal (RSA), Alabama

2.0 SCOPE

This plan provides information for medical support for all operations at the project identified above.

3.0 COMMUNICATION

The site will have ready communications to medical support facilities via cell phone. Phone numbers are listed on the Emergency Contact List (Emergency Action Plan, **Attachment 1** to the APP, **Table A1-1**) and the list will be kept in all site vehicles.

4.0 FIRST AID AND MEDICAL FACILITIES

Minor injuries will be treated on-site by certified First Aid Providers (see Emergency Contact List). If additional care is needed, the local facility, Huntsville Hospital Urgent Care**,** will be used. **Figure A3-1** shows the route map to the facility.

If an incident results in a major injury, call 911 for ambulance. Environmental Chemical Corporation (ECC) will not transport non-ambulatory, unconscious or shock risk patients. **Figure A3-2** is the route map to Huntsville Hospital. Copies of the route maps will be kept in all site vehicles.

Medical consultation can be obtained from ECC's occupational medical consultant, Dr. Greaney or his associates at WorkCare, Inc. WorkCare should be called before transporting any minor injury to the local clinic or emergency room.

At least one First Aid kit for every 25 employees will be kept on-site. The First Aid kits will comply with American National Standards Institute (ANSI) Z308.1. All kits will contain bloodborne pathogen prevention personal protective equipment (PPE) including surgical gloves and resuscitator mask or shield.

At least two individuals with current certification in First Aid and Cardiopulmonary Resuscitation (CPR) will available on each shift.

Each will have current certification in First Aid and CPR from the American Red Cross, the American Heart Association, or from an organization whose training adheres to the standards of the International Liaison Committee on Resuscitation (as stated in writing), or from a Licensed Physician. Certification courses will have hands-on component that cannot be taken on-line. Retraining will occur every two years.

First Aid Providers on this project include the Site Safety and Health Officers (SSHOs) Mr. Brian Kateley and Mr. Aaron Glad. They are First Aid and CPR trained; are qualified to administer First Aid and CPR; and have completed Bloodborne Pathogen training in accordance with 29 Code of Federal Regulations (CFR) 1910.1030. Their duties are to provide First Aid/CPR in accordance with their training.

DIRECTIONS (6.9 mi, 10 min)

1. Turn right onto Market St SW (200 ft)
2. Turn right onto Redstone Gatway SW (0.1 mi)
3. Use the right lane to turn left onto Rideout Rd (0.3 mi)
4. Use the right lane to take the ramp onto I-565 E (0.7 mi)
5. Merge onto I-565 E (3.8 mi)
6. Take exit 19A to merge onto US-231 S/US-431 S/ Memorial Pkwy SW toward Memorial Pkwy (1.2 mi)
7. Take the exit toward Bob Wallace Ave (300 ft)
8. Merge onto AL-53 S (0.3 mi)
9. Keep right to continue on US-231 Frontage Rd (0.2 mi)
10. Turn left onto Bob Wallace Ave SW (0.2 mi)
11. Turn left onto Commerce Ct (200 ft)
12. Destination will be on the right.

Huntsville Hospital Urgent Care
900 Bob Wallace Ave SW #104
Huntsville, AL 35801
(256) 539-0781
Mon-Fri: 8:00 am - 8:00 pm
Sat: 9:00 am - 5:00 pm
Sun: 1:00 pm - 5:00 pm

START
Main Gate 9
Visitors Center

END
Huntsville Hospital Urgent Care

LEGEND

- Clinic Route
- Redstone Arsenal

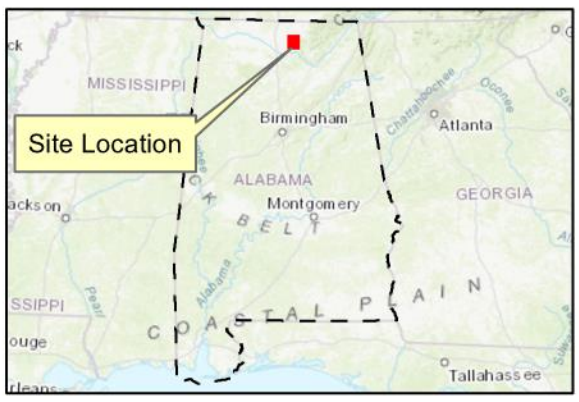

NOTES
1. Coordinate System: NAD83 State Plane Alabama East, US Feet (FIPS 0101)
2. Basemap data from IGI&S Office at Redstone Arsenal
3. Map Size: B-size (17" x11")
4. Revision Date: 2/8/2021

Figure A3-1

Clinic Route Map
Redstone Arsenal
Madison County, Alabama

0 3,500 7,000 Feet
1 inch = 2,778 feet

Mission & Installation Contracting Command (MICC)
U.S. Army Garrison-Redstone

DISCLAIMER- The data represent the results of data collection/processing for a specific Redstone Arsenal activity and indicates the general existing conditions. As such, it is only valid for its intended use, content, time, and accuracy specifications. The user is responsible for the results of any application of the data for other than its intended purpose.

ECC GIS Server: E:\Projects\Redstone\MapDocument\APP\FigA3-1_RSA_APP_ClinicMap.mxd

DIRECTIONS (7.4 mi, 12 min)

1. Turn right onto Market St SW (200 ft)
2. Turn right onto Redstone Gateway SW (0.1 mi)
3. Use the right lane to turn left onto Rideout Rd (0.3 mi)
4. Use the right lane to take the ramp onto I-565 E (0.7 mi)
5. Merge onto I-565 E (4.4 mi)
6. Use the right lane to take exit 19C for Jefferson St toward Downtown (0.3 mi)
7. Continue onto Jefferson St N (0.2 mi)
8. Turn right onto Monroe St NW (0.5 mi)
9. Turn left onto Church St NW (0.5 mi)
10. Turn left onto Williams Ave SW (0.2 mi)
11. Turn right onto Madison St SE (0.5 mi)
12. Turn right (70 ft)
13. Destination will be on the right

Huntsville Hospital
101 Sivley Rd SW
Huntsville, AL 35801
(256) 265-1000

START
Main Gate 9
Visitors Center

END
Huntsville
Hospital

LEGEND

Hospital Route

Redstone Arsenal

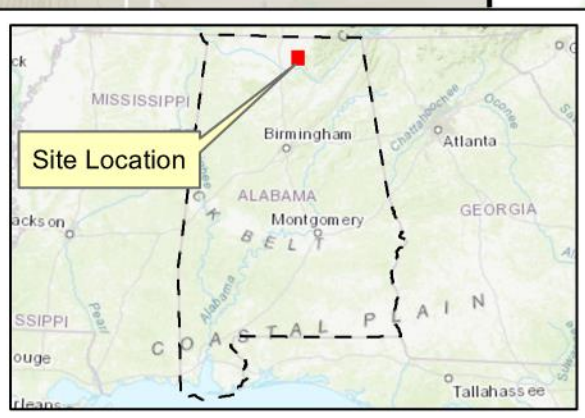

NOTES
1. Coordinate System: NAD83 State Plane Alabama East, US Feet (FIPS 0101)
2. Basemap data from IGI&S Office at Redstone Arsenal
3. Map Size: B-size (17" x11")
4. Revision Date: 2/8/2021

Figure A3-2

Hospital Route Map
Redstone Arsenal
Madison County, Alabama

0 4,000 8,000 Feet

1 inch = 3,045 feet

Mission & Installation Contracting Command (MICC)
U.S. Army Garrison-Redstone

DISCLAIMER- The data represent the results of data collection/processing for a specific Redstone Arsenal activity and indicates the general existing conditions. As such, it is only valid for its intended use, content, time, and accuracy specifications. The user is responsible for the results of any application of the data for other than its intended purpose.

ECC GIS Server: E:\Projects\Redstone\MapDocument\APP\FigA3-2_RSA_APP_HospitalMap.mxd

ATTACHMENT 4

DRUG AND ALCOHOL ABUSE PREVENTION

1.0 PROJECT

Contract Number:	W9124J-18-D-0004
Delivery Order	W9124J21F0020
Project Name:	Environmental Remediation Services
Location:	Redstone Arsenal (RSA), Alabama

2.0 PURPOSE

The purpose of this Standard Operating Procedure (SOP) is to a) meet the requirements of applicable laws and regulations to ensure that the workplace is free of illegal drugs; b) establish restrictions on the workplace-related use of legal substances, such as alcohol and prescription drugs; c) address other behaviors and practices that can be related to the abuse of drugs and other substances; and d) enable Environmental Chemical Corporation (ECC) to comply with client Drug Free Workplace policies.

3.0 SCOPE AND APPLICATION

This SOP includes requirements for the control of the use of alcohol, illegal drugs and legally prescribed drugs that may impact an employee's ability to work safely. This SOP applies to all ECC employees, as well as to all subcontractors who work on ECC project sites. For the purposes of this procedure, the term "employee" includes subcontractor employees.

4.0 PROCEDURES

This section includes the Drug Free Workplace Policy and implementation procedures.

4.1 Drug Free Workplace Policy

ECC prohibits the use, sale, dispersal, possession, or manufacture of illegal drugs, narcotics or alcoholic beverages on its premises. This prohibition also covers all legal or prescription drugs that impair an employee's ability to perform his/her job safely or properly. Employees will be subjected to disciplinary action, up to and including dismissal, for bringing illegal, non-prescribed drugs and narcotics or alcoholic beverages to work; being under the influence of such substances while working; using such substances while working; or dispensing, distributing, or illegally manufacturing or selling such substances on ECC premises or work sites.

Employees, their possessions, and ECC issued equipment and containers under their control are subject to search and surveillance at all times while on ECC premises or while conducting ECC business.

Employees may be required to take a test at any time to determine the presence of drugs, narcotics, or alcohol, unless such tests are prohibited by law. Employees convicted of any criminal drug violation occurring in the workplace must report such conviction to Human Resources within five days, who will then take appropriate actions as required by law.

Employees judged to be under the influence of drugs, narcotics, or alcohol will be required to leave the premises. Employees who must use prescribed drugs or narcotics during work should report this fact to their supervisor and provide acceptable medical documentation. A determination will then be made as to whether the employee should be able to perform his/her job safely and properly.

Employees experiencing problems resulting from drug, narcotic, or alcohol abuse or dependency are encouraged to seek rehabilitation, counseling, and/or other help.

4.2 Drug and Alcohol Testing

For the purposes of this SOP, the terms "drug screening" or "drug testing" includes testing for alcohol, in either blood, urine, or breath.

4.2.1 Pre-employment Drug Screening

Pre-employment drug screening shall be required for all ECC full-time and project employees. ECC shall test for the following drugs: ethanol (alcohol), amphetamines, barbiturates, benzodiazepines, cocaine metabolites, methadone, opiates, phencyclidine, and marijuana metabolites. The list and cutoffs may be modified by the Corporate Medical Consultant, who also serves as the Medical Review Officer, in accordance with rules and guidelines established by the Substance Abuse and Mental Health Services Administration (SAMHSA). This testing may also be required before a new assignment, such as a promotion or assignment to a particular job site. All positive tests results are kept confidential at all times by the Human Resource Department.

Subcontractors must provide a statement or certification that their employees have had pre-employment screening with negative results.

4.2.2 Periodic Drug Screening

Annual or biennial drug screening shall be required for all operational department personnel conducting work activities at ECC project sites. Periodic drug tests will measure the same substances as the pre-employment tests. All positive results are kept confidential at all times by the Human Resource Department.

4.2.3 Post Accident Testing

Employees who are involved in an incident that results in an employee injury requiring medical treatment beyond First Aid, equipment or property damage above $500, a serious environmental release, or who have been observed committing a substandard practice that could result in the above, will be required to submit to drug and alcohol testing as soon as possible. Operators of vehicles or construction equipment involved in a collision with a person or another object or contact with overhead power lines are included in this testing requirement.

4.2.4 Test Sample Validity

Employees will be retested if the test results are deemed invalid or too dilute to detect levels at or below the cutoff values. Evidence of sample tampering will be grounds for immediate discharge or revocation of offer of employment.

4.2.5 Refusal of Testing

Refusals to submit valid samples for testing in accordance with this SOP will be treated as positive results.

5.0 MONITORING

Monitoring conformance with this SOP will be the responsibility of the Human Resources Department, with the assistance of Environment, Safety and Quality and the Medical Review Officer.

6.0 TRAINING

Employees will be trained on this SOP during their new-hire orientation. Subcontractor employees will be trained on the SOP during site-orientation.

7.0 DOCUMENTATION

ECC employees will be required to pass a quiz after reviewing a power point presentation on their Training Matrix.

Project employees including site subcontractors will sign an Orientation sign-in sheet which will be maintained in the site files.

8.0 REFERENCES

SAMHSA Drug Free Workplace Kit http://store.samhsa.gov/product/Making-Your-Workplace-Drug-Free/SMA07-4230

Title 48-Federal Acquisition Regulations System; Chapter 1-Federal Acquisition Regulation; Part 52_Solicitation Provisions and Contract Clauses- Subpart 52.2_Text of Provisions and Clauses; Sec. 52.223-6 Drug-Free-Workplace http://www.gpo.gov/fdsys/pkg/CFR-2011-title48-vol2/pdf/CFR-2011-title48-vol2-sec52-223-6.pdf

ATTACHMENT 5

SITE SANITATION PLAN

1.0 PROJECT

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

2.0 SCOPE

This Plan is applicable to work being performed by Environmental Chemical Corporation (ECC), their subcontractors and their employees on the project identified above.

3.0 HOUSEKEEPING

The sites will be kept as clean as possible, taking into consideration the nature of the work. Regular cleaning shall be conducted to ensure safe and sanitary conditions in the workplace.

Waste materials will be properly disposed of, and routinely removed from the site.

Vegetation will not be allowed to grow around storage and dispensing containers containing flammable liquids and gases.

4.0 DRINKING WATER

An adequate supply of potable water (cool drinking water when weather is hot) shall be provided for both drinking and personal cleansing. Bottled water is acceptable. Empty bottles will be deposited into a designated recycling (or trash if recycling is not available) receptacle immediately to maintain good housekeeping.

5.0 NON-POTABLE WATER

Non-potable water will be used on this project

6.0 TOILETS

The project site will have sufficient toilet facilities for each sex in accordance with the **Table A5-1** below:

Table A5-1

Number of Employees	Minimum Number of Toilets[1]
20 or fewer	One
20 or greater	One toilet seat and One urinal per 40 workers
200 or greater	One toilet seat and One urinal per 50 workers

NOTE: [1]Where toilet facilities will not be used by women, urinals may be provided instead of commodes, except that the number of commodes in such cases shall not be reduced to fewer than 2/3 of the minimum number specified.

All shall be provided with adequate light and ventilation. Toilet paper shall be provided and when water is not present, hand sanitizer. Facilities shall be constructed so that occupants are protected against the weather and falling objects; all cracks shall be sealed and the door self-closing, tight fitting and capable of being latched.

The toilet facilities will be kept clean and orderly in between servicing. Graffiti on toilet facilities is forbidden.

7.0 WASHING FACILITIES

Washing facilities shall be provided at toilet facilities and as needed to maintain healthful and sanitary conditions. If it is not practical to provide running water and soap, hand sanitizers may be used as a substitute.

8.0 WASTE DISPOSAL

Field team will be responsible for waste, refuse, and garbage. All waste, refuse, and garbage shall be removed in a manner which avoids creating a menace to health and should be properly disposed of on a daily basis.

ATTACHMENT 6

BLOODBORNE PATHOGENS PROGRAM AND EXPOSURE CONTROL PLAN

1.0 PROJECT

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

2.0 SCOPE AND APPLICATION

This Plan applies to Environmental Chemical Corporation (ECC) and subcontractor employees who may be exposed to another individual's blood or other bodily fluids during the course of the project identified above. Specifically, this includes individuals who have current First Aid training and may provide First Aid on the job (e.g., Site Safety and Health Officers [SSHOs]), as these are the only project members who may have exposure to bloodborne pathogens (BBP) and providing First Aid is the only activity where such exposure is anticipated. It includes the site-specific Exposure Control Plan for the project. For the purposes of this Plan, First Aid refers to administration of cardiopulmonary resuscitation (CPR) as well as other common First Aid procedures.

3.0 EXPOSURE CONTROL PLAN

3.1 Definitions

Bloodborne Pathogens means pathogenic microorganisms that are present in human blood and can cause disease in humans. These pathogens include, but are not limited to, Hepatitis B virus (HBV) and Human Immunodeficiency Virus (HIV).

Occupational Exposure means reasonably anticipated skin, eye, mucous membrane, or other non-oral contact with blood or other potentially infectious materials that may result from the performance of an employee's duties.

Personal Protective Equipment (PPE) is specialized clothing or equipment worn by an employee for protection against a hazard. General work clothes (e.g., uniforms, pants, shirts, or blouses) not intended to function as protection against a hazard are not considered to be personal protective equipment.

Universal Precautions is an approach to infection control. According to the concept of Universal Precautions, all human blood and certain human body fluids are treated as if known to be infectious for HBV, HIV, and other BBP.

3.2 EXPOSURE DETERMINATION

3.2.1 Job Classifications in which All Employees have Occupational Exposure

ECC has no job classifications in which all employees have occupational exposure.

3.2.2 Job Classifications in which Some Employees have Occupational Exposure

The potential for occupational exposure exists for individuals who have current First Aid training and may provide First Aid on the job, including project SSHOs, and designated First Aid Providers for this project.

3.3 HEPATITIS B VACCINATION

A Hepatitis B vaccination will be made available at no charge to First Aid Providers immediately following an occupational exposure, unless the employee has previously received the complete Hepatitis B vaccination series, antibody testing has revealed that the employee is immune, or the vaccine is

contraindicated for medical reasons. If an employee desires a Hepatitis B vaccination after the initial BBP training, but prior to an occupational exposure, they should contact the Safety and Health Manager (SHM).

3.4 EXPOSURE PREVENTION

Engineering Controls - The only foreseeable exposure potential on this project is through application of First Aid, which requires direct contact with the injured party. Engineering controls are not feasible for this activity.

Administrative Controls – Only personnel trained in First Aid/CPR and Universal Precautions will attend to individuals injured or ill on the project. First Aid Providers will keep other personnel out of the immediate First Aid area where contact with bodily fluids may occur by the use of caution tape barricades or posting a spotter to keep other employees away. Spilled bodily fluids will be demarcated and barricaded with caution tape until the First Aid Providers clean the area as described below.

PPE and Clean up Materials - This project will have available on site a bloodborne pathogen kit, with appropriate PPE. The kit includes but is not limited to:

- Gloves
- Eyewear (goggles or glasses)
- Face shields
- Resuscitation barrier
- Bleach and water (or 10 percent [%] bleach solution in labeled container)
- Paper towels
- Disposal bag for contaminated materials

These materials will be maintained with the First Aid kit in the SSHO's site vehicle.

Universal Precautions - Universal precautions include wearing gloves when contact with blood or other bodily fluids is possible and wearing eye protection. Face shields must be worn when there is danger of blood splashing on mucous membranes.

In providing First Aid, where exposure to bodily fluids is possible, the First Aid Provider shall:

- Try to isolate the area, and limit approach by other people
- Don protective gear including surgical gloves and eye protection, and a face shield if splashing is possible
- Collect all wastes such as gauze pads, gloves and resuscitation barriers and place in a red bag (or other properly labeled container)
- Clean any spillage and disinfect potentially contaminated surfaces in accordance with **Section 3.6** below, disposing of the cleaning materials also in red bag
- Carefully remove gloves inside-out, placing them in the disposal bag
- Call the SHM to report a potential exposure event

3.5 POST-EXPOSURE ACTIONS

Following an occupational exposure incident, the affected party shall **IMMEDIATELY** inform the SSHO or other management personnel, who in turn must **IMMEDIATELY NOTIFY THE SHM (Ms. Kym Edelman)** by telephone. In no case shall the report be made later than the end of the work shift during

which the incident occurred. Immediate notification is essential to allow proper consultation with the WorkCare Occupational Physician in order to ensure that the proper post-exposure evaluation, prophylaxis (initiation of Hepatitis B vaccination), and follow-up procedures are made available immediately.

This notification must include:

- A description of the First Aid incident including time and date
- The potential routes of exposure
- The names of all First Aid Providers who rendered assistance
- Type of personal protective equipment used, or if none used
- The identity of the source individual where feasible

A confidential post-exposure medical evaluation and follow-up must be immediately made available to the employee after the report of an occupational exposure, along with the opportunity for Hepatitis B vaccination. The medical evaluation is offered at no cost to the employee.

If the Hepatitis B vaccination is provided, a copy of the employee's Hepatitis B vaccination status including the dates of all the Hepatitis B vaccinations and any other relevant medical record required by 29 Code of Federal Regulations (CFR) 1910.1030(f)(2) shall be forwarded to WorkCare for retention and maintenance in the employee's medical file.

If the employee declines to accept a recommended Hepatitis B vaccination following an occupational exposure, the employee shall complete and sign the Declination Form and return it to the SHM. The form can be obtained from the SHM. The SHM shall forward the form to Corporate Records Administrator for retention as an employee Medical Surveillance document.

Although the BBP standard excludes employees who perform unanticipated Good Samaritan acts from coverage (as this is does not constitute "occupational exposure"), ECC shall offer follow-up medical evaluations and Hepatitis B vaccinations to ECC employees who experience a work-related exposure incident as the result of performing a Good Samaritan act at work.

3.6 DECONTAMINATION, STERILIZATION, AND DISPOSAL

All surfaces that come in contact with blood or potentially infectious materials must be decontaminated as soon as possible. Decontamination should be accomplished by using a solution of household bleach (5.25% sodium hypochlorite) diluted about 1:10 with water.

> *When diluting bleach, always carefully add bleach to water to avoid a hazardous exothermic reaction. NEVER pour water directly into bleach.*

When cleaning up a spill of blood, carefully cover the spill with paper towels or rags, and then gently pour the 10% solution of bleach over the towels or rags. This will decrease the chances of causing a splash when you pour the bleach on it. ***Leave it in place for at least 10 minutes.*** This will help ensure that the bloodborne pathogens are killed before beginning to clean or wipe up the material.

When decontaminating equipment or other objects (knives, tweezers, mechanical equipment upon which someone has been cut, First Aid boxes, etc.), leave the disinfectant in place for *at least 10 minutes* before continuing the cleaning process. Any materials used to clean up a spill must also be decontaminated or disposed immediately, including mops, sponges, buckets, towels, and rags.

Materials for disposal shall be placed in a strong, plastic garbage bag, sealed, and labeled. Contact your local health agency/hospital and waste company for additional information on appropriate or required disposal methods.

4.0 TRAINING

Three elements are part of the required training: 1) First Aid/CPR, 2) BBP, and 3) this Plan.

4.1 First Aid/CPR

SSHOs, as well as individuals designated as First Aid Providers, shall (at time of assignment) hold current certification in First Aid and CPR from the American Red Cross, National Safety Council, American Heart Association, or another qualified provider.

4.2 Bloodborne Pathogens

SSHOs, as well as individuals designated as First Aid Providers, shall (at time of assignment) hold current BBP training. When BBP training has not been received as part of a First Aid/CPR class, individuals must complete the on-line training. Contact the Environment, Safety and Quality (ESQ) Administrative Assistant in the ECC Lakewood, Colorado office.

BBP training is required at least annually thereafter.

4.3 ECC Bloodborne Pathogen Plan

The contents of this Plan will be reviewed with designated First Aid Providers by the SSHO at the initial assignment to the project. This training will be documented by having the First Aid Providers sign the plan review, below.

5.0 DOCUMENTATION

Copies of all records and certificates related to completion of First Aid, CPR, and/or BBP training shall be submitted to the Contracting Officers' Representative and maintained on site for the duration of the project.

Bloodborne Pathogen Plan Review

I certify that I have been informed of the potential for exposure to bloodborne pathogens on this project, and this BBP Plan, including the Exposure Control Plan. I agree to use Universal Precautions in applying First Aid procedures. I also understand my rights to prophylactic or post-exposure Hepatitis B vaccination, and the availability of Medical consultation. I agree to immediately report any potential exposure to bloodborne pathogens that occur on this project site.

First Aid Provider (PRINT)	Signature	Date

ATTACHMENT 7

SITE LAYOUT PLANS

(Will be included in the future or in applicable Work Plans)

ATTACHMENT 8

ACCESS AND HAUL ROAD PLAN

(If/when an Access and Haul Road Plan is required, this plan will be provided)

ATTACHMENT 9

HEARING CONSERVATION PROGRAM

1.0 PROJECT

Contract Number:	W9124J-18-D-0004
Delivery Order	W9124J21F0020
Project Name:	Environmental Remediation Services
Location:	Redstone Arsenal (RSA), Alabama

2.0 PURPOSE

Environmental Chemical Corporation's (ECC's) Hearing Protection Program is prepared in accordance with 29 Code of Federal Regulations (CFR) 1910.95 and 29 CFR 1926.

3.0 OBJECTIVE

The objective of this Standard Operating Procedure (SOP) is to protect the hearing of employees who may be exposed to noise levels exceeding the permissible exposure levels set by the Occupational Safety and Health Administration (OSHA).

4.0 HEARING CONSERVATION PROGRAM REQUIREMENTS

ECC shall administer a continuing, effective Hearing Conservation Program whenever employee noise exposures equal or exceed an eight-hour time-weighted average sound level (TWA) of 85 decibels (dB) measured on the A scale (slow response) or equivalently, a dose of 50 percent (%).

4.1 Action Level

An 8-hour TWA of 85 dB or a dose of 50% shall also be referred to as the action level.

5.0 MONITORING

When information indicates that any employee's exposure may equal or exceed an eight-hour TWA of 85 dB, ECC shall develop and implement a monitoring program.

Where circumstances such as high worker mobility, significant variations in sound level, or a significant component of impulse noise make area monitoring generally inappropriate, ECC shall use representative personal sampling to comply with the monitoring requirements of this paragraph, unless ECC can show that area sampling produces equivalent results.

All continuous, intermittent, and impulsive sound levels from 80 dB to 130 dB shall be integrated into the noise measurements. Instruments used to measure employee noise exposure shall be calibrated to ensure measurement accuracy. Monitoring shall be repeated whenever a change in production, process, equipment, or controls increases noise exposures to the extent that:

- Additional employees may be exposed at or above the action level or
- The attenuation provided by hearing protectors being used by employees might be rendered inadequate to meet the requirements of paragraph (j) of 29 CFR 1910.95 (Occupational Noise Exposure).

The protection against the effects of noise exposure shall be provided when the sound levels exceed those shown in **Table A9-1** when measured on the A scale of a standard sound level meter at slow response. When employees are subjected to sound exceeding those listed in **Table A9-1**, feasible administrative and/or engineering controls shall be utilized. If such controls fail to reduce sound levels within the levels

of **Table A9-1**, personal protective equipment shall be provided and used to reduce sound levels within the levels of the table. If the variations in noise level involve maxim at intervals of one second or less, it is to be considered continuous.

Table A9-1 Permissible Noise Exposures

Duration Per Day, Hours	Sound Level (Decibels adjusted [dBA] Slow Response
8	90
6	92
4	95
3	97
2	100
1 ½	102
1	105
2	110
¼ or less	115

Notes:
Footnote (1) when the daily noise exposure is composed of two or more periods of noise exposure of different levels, their combined effect should be considered, rather than the individual effect of each. If the sum of the following fractions: C(1)/T(1) + C(2)/T(2) C(n)/T(n) exceeds unity, then, the mixed exposure should be considered to exceed the limit value. Cn indicates the total time of exposure at a specified noise level, and Tn indicates the total time of exposure permitted at that level. Exposure to impulsive or impact noise should not exceed **140 dB** peak sound pressure level.

6.0 EMPLOYEE NOTIFICATION

ECC shall notify each employee exposed at or above an eight-hour TWA of 85 dB of the results of the monitoring.

7.0 AUDIOMETRIC TESTING PROGRAM

ECC shall establish and maintain an audiometric testing program as provided in this paragraph by making audiometric testing available to all employees whose exposures equal or exceed an eight-hour TWA of 85 dBA. The program shall be provided at no cost to employees.

Hearing measurements (audiograms) made periodically are the best way to determine whether a Hearing Conservation Program is preventing noise-induced hearing loss. Hearing measurements are made at least annually. For very high noise exposures, measurements shall be made more often, until the noise exposure is reduced to safe levels.

Hearing measurements also help to accomplish the following:

- Document hearing-threshold changes that may occur during employment
- Determine the ability to hear (communicate) effectively at work, (i.e., direction, warning signals)
- Assist in proper job placement
- Diagnose pre-existing hearing loss prior to employment and establish a baseline hearing ability

Audiometric tests shall be performed by a licensed or certified audiologist, otolaryngologist, or other physician, or by a technician who is certified by the Council of Accreditation in Occupational Hearing Conservation, or who has satisfactorily demonstrated competence in administering audiometric examinations, obtaining valid audiograms, and properly using, maintaining, and checking calibration and

proper functioning of the audiometers being used. A technician who operates microprocessor audiometers does not need to be certified. A technician who performs audiometric tests must be responsible to an audiologist, otolaryngologist, or physician.

7.1 Baseline Audiogram

Within six months of an employee's first exposure at or above the action level, ECC shall establish a valid baseline audiogram against which subsequent audiograms can be compared.

7.2 Annual Audiogram

At least annually after obtaining the baseline audiogram, ECC shall obtain a new audiogram for each employee exposed at or above an eight-hour TWA of 85 dB.

7.3 Evaluation of Audiogram

Each employee's annual audiogram shall be compared to that employee's baseline audiogram to determine whether the audiogram is valid and if a standard threshold shift has occurred. A technician may do this comparison. If the annual audiogram shows that an employee has suffered a standard threshold shift, ECC may obtain a retest within 30 days and consider the results of the retest as the annual audiogram.

The audiologist, otolaryngologist, or physician shall review problem audiograms and determine whether there is a need for further evaluation. ECC shall provide the following information to the person performing this evaluation:

- A copy of the requirements for hearing conservation
- The baseline audiogram and most recent audiogram of the employee to be evaluated
- Measurements of background sound pressure levels in the audiometric test room
- Records of audiometer calibrations required by paragraph (h)(5) of this section

7.4 Follow-up Procedures

If a comparison of the annual audiogram to the baseline audiogram indicates a standard threshold shift, the employee shall be informed of this fact in writing, within 21 days of the determination.

Unless a physician determines that the standard threshold shift is not work related or aggravated by occupational noise exposure, ECC shall ensure that the following steps are taken when a standard threshold shift occurs:

- Employees not using hearing protectors shall be fitted with hearing protectors, trained in their use and care, and required to use them.
- Employees already using hearing protectors shall be refitted and retrained in the use of hearing protectors and provided with hearing protectors offering greater attenuation if necessary.
- The employee shall be referred for a clinical audiological evaluation or an otological examination, as appropriate, if additional testing is necessary or if ECC suspects that a medical pathology of the ear is caused or aggravated by the wearing of hearing protectors.
- The employee shall be informed of the need for an otological examination if a medical pathology of the ear that is unrelated to the use of hearing protectors is suspected.

If subsequent audiometric testing of an employee whose exposure to noise is less than an eight-hour TWA of 90 dB indicates that a standard threshold shift is not persistent, ECC:

- Shall inform the employee of the new audiometric interpretation
- May discontinue the required use of hearing protectors for that employee

7.5 Standard Threshold Shift

As used in this section, a standard threshold shift is a change in hearing threshold relative to the baseline audiogram of an average of 10 dB or more at 2,000, 3,000, and 4,000 Hertz (Hz) in either ear.

In determining whether a standard threshold shift has occurred, allowance may be made for the contribution of aging (presbycusis) to the change in hearing level by correcting the annual audiogram.

7.6 Audiometric Test Requirements

Audiometric tests shall be pure tone, air conduction, hearing threshold examinations, with test frequencies including as a minimum 500, 1,000, 2,000, 3,000, 4,000, and 6,000 Hz. Tests at each frequency shall be taken separately for each ear.

Audiometric tests shall be conducted with audiometers (including microprocessor audiometers) that meet the specifications of, and are maintained and used in accordance with, American National Standard Specification for Audiometers, S3.6-1969, which is incorporated by reference as specified in Sec. 1910.6.

7.7 Audiometer Calibration

The functional operation of the audiometer shall be checked before each day's use by testing a person with known, stable hearing thresholds, and by listening to the audiometer's output to ensure that the output is free from distorted or unwanted sounds. Deviations of 10 dB or greater require an acoustic calibration. Audiometer calibration shall be checked acoustically at least annually. Test frequencies below 500 Hz and above 6,000 Hz may be omitted from this check. Deviations of 15 dB or greater require an exhaustive calibration.

8.0 HEARING PROTECTORS

ECC shall make hearing protectors available to all employees exposed to an eight-hour TWA of 85 dB or greater at no cost to the employees. Hearing protectors shall be replaced as necessary. ECC shall ensure that hearing protectors are worn:

- For all explosive blasts. Due to the potential of blasts exceeding 115 decibels adjusted (dBA), personal ear protection equivalent to the combination of earplugs and earmuffs shall be required.
- By an employee who is required to wear personal protective equipment.
- By any employee who is exposed to an 8hr TWA of 85 dB or greater.
- Has not yet had a baseline audiogram established pursuant to 29 CFR 1910.95 paragraph (g)(5)ii.
- Has experienced a standard threshold shift.

Employees shall be given the opportunity to select their hearing protectors from a variety of suitable hearing protectors provided by ECC.

ECC shall provide training in the use and care of all hearing protectors provided to employees. ECC shall ensure proper initial fitting and supervise the correct use of all hearing protectors.

9.0 HEARING PROTECTOR ATTENUATION

ECC shall evaluate hearing protector attenuation for the specific noise environments in which the protector will be used.

Hearing protectors must attenuate employee exposure at least to an eight-hour TWA of 90 dB.

For employees who have experienced a standard threshold shift, hearing protectors must attenuate employee exposure to an eight-hour TWA of 85 dB or below.

The adequacy of hearing protector attenuation shall be re-evaluated whenever employee noise exposures increase to the extent that the hearing protectors provided may no longer provide adequate attenuation. ECC shall provide more effective hearing protectors where necessary.

10.0 TRAINING PROGRAMS

ECC shall institute a Training Program for all employees who are exposed to noise at or above an eight-hour TWA of 85 dB and shall ensure employee participation in such program.

The Training Program shall be repeated annually for each employee included in the Hearing Conservation Program. Information provided in the Training Program shall be updated to be consistent with changes in protective equipment and work processes.

ECC shall ensure that each employee is informed of the following:

- The effects of noise on hearing
- The purpose of hearing protectors, the advantages, disadvantages, and attenuation of various types, and instructions on selection, fitting, use, and care
- The purpose of audiometric testing, and an explanation of the test procedures

11.0 ACCESS TO INFORMATION AND TRAINING MATERIALS

ECC shall make copies of this standard available to affected employees or their representatives and shall also post a copy in the workplace.

ECC shall provide any informational materials pertaining to the standard that are supplied to ECC by the Assistant Secretary of Labor – OSHA to affected employees.

ECC shall provide, upon request, all materials related to ECC's training and education program pertaining to this standard to the Assistant Secretary of Labor – OSHA and the Director – National Institute for Occupational Safety and Health (NIOSH).

12.0 RECORDKEEPING

ECC shall maintain an accurate record of all employee exposure measurements required by 29 CFR 1910.95.

11.1 Audiometric Tests

ECC shall retain all employee audiometric test records. These records shall include:

- Name and job classification of the employee

- Date of the audiogram
- The examiner's name
- Date of the last acoustic or exhaustive calibration of the audiometer
- Employee's most recent noise exposure assessment
- Accurate records of the measurements of the background sound pressure levels in audiometric test rooms

11.2 Record Retention

ECC shall retain records required by the Hearing Conservation Standard for at least the following periods:

- Noise exposure measurement records shall be retained for two years.
- Audiometric test records shall be retained for the duration of the affected employee's employment at ECC.

11.3 Access to Records

All records required by this section shall be provided upon request to employees, former employees, representatives designated by the individual employee, and the Assistant Secretary of Labor - OSHA. The provisions of 29 CFR 1910.20.

11.4 Transfer of Records

If ECC ceases to do business, ECC shall transfer to the successor employer all records required to be maintained by this section, and the successor employer shall retain them for the remainder of the period as required by this Program.

ATTACHMENT 10

HEALTH HAZARD CONTROL PLAN

1.0 PROJECT

Contract Number:	W9124J-18-D-0004
Delivery Order	W9124J21F0020
Project Name:	Environmental Remediation Services
Location:	Redstone Arsenal (RSA), Alabama

2.0 INTRODUCTION

This Plan addresses the requirements of EM 385-1-1 06.A. It describes the general approach to Health Hazard Control and references other portions of the Accident Prevention Plan (APP) where more site-specific information is found.

3.0 EXPOSURE STANDARDS

Exposures to harmful chemicals or biological agent will be controlled to levels as low as reasonably achievable through the use of combinations of control methods. Uncontrolled inhalation exposures above the Occupational Exposure Limits (OELs) are not permitted.

The OELs for chemical substances for this project will be the most stringent from among those specified in the current American Conference of Governmental Industrial Hygienists (ACGIH) guideline, "Threshold Limit Values and Biological Exposure Indices", published by Department of the Army (DA) or Department of Defense (DoD) Exposure Limits, or by Occupational Safety and Health Administration (OSHA) in 29 Code of Federal Regulations [CFR] 1910.1000 (Permissible Exposure Limits [PELs]) or appropriate construction standards in 29 CFR 1926. Activities where occupational exposure to explosive constituents or chemical or biological warfare agents will comply with current DA safety and occupational health (SOH) requirements.

OELs for substances that may create an inhalation hazard due to construction materials and processes are listed in the Activity Hazard Analysis (AHA) for the activities for which the hazard is present.

4.0 HAZARD EVALUATION

Where hazardous or toxic agents may be used or produced in an activity, a qualified industrial hygienist will evaluate the hazards, considering the following information:

- Toxicity of the material, likely routes of exposure
- Physical and chemical properties (e.g. physical state, vapor pressure, particle size distribution, pH, flammability, reactivity, solubility, concentration in the material or product)
- Conditions of use, including approximate amount, surface area, usage rates, etc.
- Work operations that may impact exposures, such as drilling, grinding, application methods, proximity, duration, etc.
- Likely environmental conditions, such as location (outdoor, indoor, enclosed or confined space), natural ventilation, temperature, etc.

The results of this evaluation will be incorporated into the AHA for the activity, in the form of listing exposure in the Hazards section of appropriate steps and the exposure controls to be used in the Controls column.

5.0 TESTING AND MONITORING

The need for other Real Time or Personal exposure monitoring will be determined by the Safety and Health Manager (SHM) (or a Certified Industrial Hygienist [CIH]) during the hazard evaluation for specific features of work. This determination will be based on the substances used or generated; the likelihood of significant exposure considering frequency, duration and proximity; OSHA requirements in expanded health standards; employee concerns or complaints; and other factors as necessary. If such testing or monitoring is determined to be necessary, it will be listed in the Controls section of the AHA at the appropriate job step. Monitoring requirements will include the instrumentation, selection of personnel or area for monitoring, frequency and duration of monitoring, action levels and required actions.

Based information available regarding levels of contaminants in soils, air monitoring is not anticipated to be necessary. Controlling visible dust will maintain levels of contaminants in air, in the breathing zone of employees, well below PELs. As work progresses, evaluations will continue to be made, to determine if air monitoring is necessary. In the event it becomes necessary, all air monitoring instrumentation will be maintained and calibrated by trained personnel according to the applicable National Institute for Occupational Safety and Health (NIOSH)/OSHA analytical methods and the manufacturer's recommendations. Where samples are collected for laboratory analysis, ECC will utilize the services of a laboratory accredited by the American Industrial Hygiene Association to analyze the samples in accordance with standard NIOSH or OSHA methods.

Records will include the date, time, substances or hazards monitored, person conducting monitoring, calibration date and method, operations and location of monitoring, and results. An air monitoring data sheet will be completed for each day of operations at the site when monitoring is conducted. Results will be provided to employees. Records are available to employees, their representatives and to the Government Designated Authority.

6.0 HEALTH HAZARD CONTROLS

ECC will prioritize the following control hierarchy for health hazards on this project:

- ***Elimination of the hazard*** – substitute the process or materials
- ***Engineering controls*** – wet methods for concrete cutting, concrete surface grinding, dusty earth moving operations; general or local exhaust ventilation for welding; mechanical ventilation for confined spaces
- ***Work Practice controls*** – limiting or modifying the time of exposure to maintain cumulative exposures below health hazard concerns. Limiting the duration of exposure to noisy operations or radiation sources are examples. Performing work in high levels of personal protection during night shift or early morning hours is another example
- ***Personal Protective Equipment (PPE)*** – generally a last resort, to be used in combination with other controls.
- ***Housecleaning and contaminant control*** – decontamination areas and measures used to control the spread of contamination, regular cleaning of support facilities and if required by SHM, testing of contact surfaces to ensure proper cleaning/contamination control.

The specific control measures to be used for an anticipated exposure will be identified in the Controls column of the AHA for the activity where exposure may occur.

ATTACHMENT 11

HAZARD COMMUNICATION PROGRAM

1.0 PROJECT

Contract Number:	W9124J-18-D-0004
Delivery Order	W9124J20F0020
Project Name:	Environmental Remediation Services
Location:	Redstone Arsenal (RSA), Alabama

2.0 SCOPE

The Environmental Chemical Corporation (ECC) Hazard Communication Program applies to all known hazardous substances in the workplace that ECC employees and their subcontractors may be exposed to under normal conditions of use or in a foreseeable emergency, such as equipment failure or rupture of containers, resulting from workplace operations.

Each hazardous material will be documented before being brought onto the job site. The Safety Data Sheets (SDSs) and proposed use and storage locations will be reviewed by the ECC Site Safety and Health Officer (SSHO) for approval. Site personnel will have access to the hazardous material inventory and SDS file upon request.

ECC will communicate this hazard communication program to project employees and subcontractors and provide information about chemical hazards and controls through SDSs, chemical inventory, chemical labeling, and chemical storage. ECC will communicate employee information and training programs as detailed in this written hazard communication program.

3.0 SAFETY DATA SHEETS

A SDS will be available for each chemical in the Chemical Inventory List. A copy of the SDS supplied by the manufacturer or distributor of the chemical(s) will be kept with the SSHO in a folder or binder. The SSHO will be responsible for obtaining SDSs for all hazardous chemicals or materials present at the project site.

The SSHO will review incoming SDSs for new and important health and safety information. The SSHO is responsible for disseminating the SDS information to the appropriate workers at the appropriate preliminary, initial and follow-up inspections of the Definable Features of Work (DFOW) where the hazardous chemical or material is to be utilized for which the SDS was written. Supervisors and employees will be informed of all new SDSs as soon as possible. If an SDS is missing, a new SDS will be requested from the manufacturer within seven days.

SDSs will be kept conspicuous location (i.e., office trailer, SSHO vehicle, etc.) at all times.

Employees and/or subcontractors are responsible for reading the SDSs for substances they use.

4.0 CHEMICAL INVENTORY

The project site must have a Chemical Inventory List. The inventory will be placed with the SDS binder in a conspicuous location at all times. The SSHO is responsible for updating the Chemical Inventory List and adding the appropriate SDS whenever a new chemical is brought on-site.

5.0 CHEMICAL LABELING

ECC will not accept or release hazardous chemicals or materials for use unless the original container is clearly labeled with at least the following information: product identifier; hazard statement(s); pictogram(s);

precautionary statement(s); the name, address and telephone number of the manufacturer, importer or other responsible party. If the hazardous chemical(s) or material(s) is transferred to a secondary container, the secondary container must be clearly labeled with at least the following information: product identifier and words, pictures, symbols, or combination thereof.

All labels must be legible, in English, and prominently displayed on the container. Labels will not be defaced or removed unless the container is immediately marked with the required information. Unlabeled containers should be immediately reported to the SSHO. The name of the material that appears on the manufacturer's label will be the same as the name that appears in the chemical area or Chemical Inventory List as well as the SDS.

6.0 CHEMICAL STORAGE

Hazardous chemicals or materials will be properly stored in approved flammable storage lockers, corrosive storage lockers, shelves or cabinets.

All incompatible chemicals or materials will be properly separated and stored by hazard classes.

No open flames, heat sources or smoking will be allowed in the vicinity of flammable liquids or materials.

7.0 EMPLOYEE INFORMATION AND TRAINING

Project employees and subcontractors will be trained on the hazards and proper uses of all hazardous chemical(s) or materials in their work area:

- At the time of their initial assignment;
- Whenever a new hazardous chemical(s) or material(s) is introduced into their area; and
- Whenever ECC or the subcontractor receives updated SDSs containing new information indicating significant increased risk or changes in the use of personal protective equipment.

Project employees and subcontractors will be trained in the following:

- Overview of the Hazard Communication Regulation (29 Code of Federal Regulations [CFR] 1910.1200) and the elements of ECC's Hazard Communication Program;
- Operations involving hazardous chemicals or materials in their work area and methods of detecting and identifying them;
- Location and availability of the SDSs and a written hazard communication program;
- How to read an SDS and container labels;
- Physical properties and health effects of hazardous chemicals and materials and measures to be taken by the employee to protect themselves;
- Use of engineering controls, personal protective equipment (PPE) and work practices to prevent or lessen exposure to hazardous chemicals or materials;
- Emergency and first aid procedures to follow in case of exposure to hazardous chemicals or materials.

Activity Hazard Analyses (AHA) will be developed for each DFOW with hazardous activities, and employees and/or subcontractor will be trained in the hazardous chemicals or materials to be used or encountered in that activity when the AHA is discussed.

ATTACHMENT 12A AND 12B

HEAT AND COLD STRESS MONITORING PLAN

1.0 PROJECT

Contract Number:	W9124J-18-D-0004
Delivery Order	W9124J21F0020
Project Name:	Environmental Remediation Services
Location:	Redstone Arsenal (RSA), Alabama

2.0 SCOPE

This Plan applies to the project identified above and will be incorporated into the Accident Prevention Plan (APP). Subcontractors are required to comply with this program by virtual of their coverage under the APP.

3.0 PROCEDURES

3.1 HEAT STRESS AND HEAT STRAIN

Heat stress is the net heat load to which a worker may be exposed from the combined contributions of metabolic cost of work, environmental factors and clothing requirements. Heat stress is a hazard during warm weather or when personnel are wearing personal protective equipment (PPE) that aggravates the heat stress hazard. Heat stress can occur even when temperatures are moderate if the body's physiological processes fail to maintain a normal body temperature.

Heat strain is the overall physiological response resulting from heat stress. The resulting physical reactions that occur are fatigue, irritability, anxiety, and a decrease in concentration, dexterity, and/or movement. Onset of signs and symptoms of exposure can occur rapidly, and may progress to a medical emergency (i.e., heat stroke) without intervention. In extreme cases, death can result if the patient is not given immediate treatment.

3.1.1 Symptoms of Heat Exhaustion

Heat exhaustion occurs when your body cannot sweat enough to cool you off. It generally happens when you are working or exercising in hot weather. Symptoms include:

- Fatigue, weakness, dizziness, or nausea
- Cool, clammy, pale, red, or flushed skin
- Heavy sweating

First Aid for Heat Exhaustion

- Get the person out of the sun and into a shady or air-conditioned location
- Lay the person down and elevate the legs and feet slightly
- Loosen or remove the person's clothing
- Have the person drink cool water, not iced, or a sports drink containing electrolytes
- Cool the person by spraying or sponging him or her with cool water and fanning
- Monitor the person carefully. Heat exhaustion can quickly become heatstroke. If fever greater than 102 degrees Fahrenheit (ºF), fainting, confusion or seizures occur, call for emergency medical assistance.

3.1.2 Symptoms of Heat Stoke

Heat exhaustion can sometimes lead to a heat stroke. Heat stoke requires emergency treatment. It happens when your body stops sweating but the body temperature continues to rise, often to 105°F or higher. Symptoms include the following:

- Cessation of sweating
- Confusion, delirium, or unconsciousness
- Hot, dry, red or flushed skin, even under the arm pits
- Rapid and shallow breathing
- Chills
- Irritability
- Malaise
- Disorientation or confusion

First Aid for Heat Stroke

- It is vital to lower a heat stroke victim's body temperature. Seconds count.
- Call emergency medical assistance and get an ambulance on the way as soon as possible.
- Move the person out of the sun and into a shady or air-conditioned space.
- Pour water on them, fan them, apply cold packs.

3.2 CONTROL MEASURES

Where monitoring indicates a possible heat stress hazard the following safety procedures shall be implemented:

General Controls

- Review signs and symptoms of heat strain, as well as controls and First Aid measures with site personnel.
- Encourage employees to eat a normal diet and get proper rest.
- Encourage employees to refrain from consuming diuretics, including caffeine from coffee and tea beverages, or any form of alcohol. (Note: Consumption of alcohol is prohibited during working hours). Counsel and monitor workers on medications that may affect blood pressure, sweating, body temperature regulation, or kidney function.
- Adjust expectations of those returning to work after absence from heat exposure situations and encourage them to eat salty foods (with approval of physician for those on salt-restricted diets).
- Provide potable drinking water and encourage workers to about one cup every 20 minutes.
- Permit self-limitation of exposures and plan frequent rest breaks.
- Encourage workers to report signs and symptoms of heat strain and not to try to work through it.
- Encourage the buddy system to detect signs and symptoms in co-workers.
- Provide shade (i.e., fixed or portable canopy) and/or cool rest areas.

Job-Specific Controls

Where the screening or physiological monitoring discussed below exceed the criteria, the job-specific controls for this project will include the following:

- Engineering controls to reduce workload, (e.g., mechanical vs. manual material handling where possible).
- Mobile construction equipment will have functioning air conditions and be operated with the doors/windows closed.
- Office trailer and vehicles will have functional air conditioning to provide cool rest locations during breaks.
- Wear breathable polypropylene disposable coveralls over modesty clothing for activities requiring Modified Level C.
- Use heat reducing PPE, such as cool vests, head bands, wrist bands, etc.
- Modify work schedule to take advantage of the cooler parts of the day.
- Establish work/rest regimens to reduce exposure times, when physiological monitoring indicates heat strain conditions.

3.3 Heat Stress and Heat Strain Monitoring

Heat stress and heat strain monitoring shall begin when ambient conditions exceed 85°F when working in Level D and 70°F when working in Modified Level C and above. For clear weather conditions (i.e., 100 percent [%] sunshine) ambient temperatures shall be decreased by 5°F (i.e., 65°F and 80°F, respectively) to determine when to begin monitoring. Ambient conditions shall be determined by maintaining a properly calibrated outdoor thermometer in the shade at each workstation, or by monitoring local weather reports throughout each work shift.

3.3.1 Environmental Monitoring

Use a Wet Bulb – Globe Temperature (WBGT) monitor to perform heat stress screening in accordance with the **Tables A12-1** (Acclimatized Workers) and **Table A12-2** (Unacclimatized Workers) below. Clothing adjustment factors are included in **Table A12-3**.

If the WBGT levels (corrected for clothing ensemble) for the particular workload and work/rest cycle are exceeded, then implement the General Controls and either perform physiological monitoring as described below or implement Job Specific Controls such as those listed in **Section 3.2**.

Table A12-1 - WBGT Screening Criteria for Acclimatized Workers

Allocation of Work in a Cycle of Work and Recovery	Light	Moderate	Heavy	Very Heavy
75% - 100%	88°F 31°C	82.5°F 28°C	-	-
50% - 75%	88°F 31°C	84°F 29°C	81.5°F 27.5°C	-
25% - 50%	89.5°F 32°C	86°F 30°C	84°F 29°C	82.5°F 28°C
0%-25%	90.5°F 32.5°C	88.5°F 31.5°C	87°F 30.5°C	86°F 30°C

From ACGIH Threshold Limit Values (TLVs)® and BEIs® 2014.
Note: Light moderate work includes operating heavy equipment. Heavy work includes hand shoveling or other manual labor activities.
°C – degrees Celsius °F – degrees Fahrenheit

Table A12-2 - WBGT Screening Criteria for Unacclimatized Workers

Allocation of Work in a Cycle of Work and Recovery	Light	Moderate	Heavy	Very Heavy
75% - 100%	86°F 28°C	77°F 25°C	-	-
50% - 75%	83.5°F 28.5°C	79°F 26°C	75°F 24°C	-
25% - 50%	85°F 29.5°C	80.5°F 27°C	78°F 25.5°C	76.1°F 24.5°C
0%-25%	86°F 30°C	84°F 29°C	82°F 28°C	80.5°F 27°C

From ACGIH TLVs® and BEIs® 2015.
°C – degrees Celsius °F – degrees Fahrenheit

Table A12-3 – Clothing-Adjustment Factors for Some Clothing Ensembles*

Clothing Type	Addition to WBGT (°C)
Work clothes (long sleeve shirt and pants)	0
Cloth (woven material) coveralls	0
Double-layer woven clothing	3
SMS polypropylene coveralls	0.5
Polyolefin coveralls	1
Limited-use vapor barrier coveralls	11

*These values must not be used for completely encapsulating suits, often called Level A. Clothing Adjustment Factors cannot be added for multiple layers. The coveralls assume that only modesty clothing is worn underneath, not a second layer of clothing.
From ACGIH TLVs® and BEIs® 2014.
°C – degrees Celsius

3.3.2 Alternate Environmental Monitoring Procedures

Where permitted by the client, ECC may use the Occupational Safety and Health Administration (OSHA) Heat Tool mobile app for monitoring environmental conditions based on the HEAT INDEX. Precautions recommended for the different Heat Index levels should be followed and are consistent with the General Controls and Job Specific Controls listed above. Where the HEAT INDEX level falls in the High or Very High to Extreme categories, implement physiological monitoring in addition to Job Specific Controls. The Heat Tool app can be accessed in OSHA's Heat Stress prevention topic section at https://www.osha.gov/SLTC/heatillness/heat_index/heat_app.html

3.3.3 Physiological Monitoring

For site personnel wearing vapor barrier clothing and for site personnel where Job-Specific Controls may not be sufficient to control heat strain, physiological monitoring will be performed. Physiological monitoring will also be performed when workers report signs and symptoms of heat strain.

Select workers whose exposure is most extreme or who are probably the least heat tolerant. Heat tolerance may be affected by acclimatization, body size, general health and physical fitness, medications, and age.

Heat strain should be evaluated by monitoring the heart rate and temperature.

Where an individual's pulse rate or temperature exceeds the criteria below, action should be taken to limit the individual's heat exposure. However, where a pattern develops among workers of exceeding the criteria, then additional Job-Specific Controls shall be implemented for the work group.

Pulse Rate

The radial pulse should be taken for 30 seconds one minute after beginning to rest (i.e., at the beginning of a rest break). This rate is multiplied by two to determine the heart rate at initial rest. This rest should not exceed 110 beats per minute (bpm). If the resting heart rate exceeds 110 bpm, then modify the work rest schedule for the individual by decreasing the work period and increasing the rest period.

Heart rate monitoring should be recorded on an Exposure Monitoring Log. Monitoring should begin at the first break. The first rest break should be taken within the first hour of work when ambient conditions exceed the screening criteria of **Table A10-1** if working in Level D, and within the first 30 minutes if ambient conditions exceed 70°F if working in Modified Level C.

Oral Temperature

Use a digital oral thermometer with disposal plastic sleeves or similar device (e.g. aural thermometer) to measure the oral temperature at the end of the work period (before drinking).

If an individual's temperature exceeds 99.6°F (or 37.6 degrees Celsius [°C]), adjust the work rest cycle.

Do not permit a worker to wear semipermeable or impermeable clothing when his/her oral temperature exceeds 100.6 °F (or 38.1 °C).

- Never ignore signs and symptoms of heat-related disorders -

4.0 TRAINING

Workers on project sites will be trained by the SSHO at site orientation, or during special tailgate meetings. The training will include the elements of this program, and in particular:

- Heat related disorders and First Aid measures
- Environmental factors and workload impacts on heat strain
- Personal factors impacting heat strain including health status, caffeine, alcohol and drugs
- Reporting Signs and Symptoms of exposure
- Monitoring measures to be employed on the project
- General and Job-Specific Controls to reduce exposure
- Emergency Response

5.0 DOCUMENTATION

The SSHO will record periodic environmental monitoring results in the Logbook, if needed. Physiological monitoring will be recorded on the Physiological Monitoring Form, if needed. Records will be maintained on the job site and will be archived with the project files at the end of the job.

1.0 PROJECT

Contract Number:	W9124J-18-D-0004
Delivery Order	W9124J21F0020
Project Name:	Environmental Remediation Services
Location:	Redstone Arsenal (RSA), Alabama

2.0 COLD STRESS

Cold stress hazards are most likely to occur at low temperatures or low wind chill factors, with wet, windy conditions contributing to risk. Where cold stress is a potential hazard (temperatures less than 40 degrees Fahrenheit [ºF]) workers will be trained on the information in the attached Cold Weather Fact Sheet.

As a precautionary measure, employees will wear layers of loose-fitting clothing including insulated coveralls, head cover (perhaps a liner beneath a hard hat), and boots when temperatures fall below 40°F, including wind chill. Protection of the hands, feet, and head is particularly important because these are likely to be injured first by cold. However, actual injury to hands, feet, and head is not likely to occur without prior development of early signs of hypothermia, such as numbing and shivering. Bare skin contact with cold surfaces (below 32°F) will be avoided.

The wind chill factor is the cooling effect of any combination of temperature and wind velocity or air movement. An anemometer can be used to measure wind velocity. The wind chill index (below) should be consulted when planning for exposure to low temperatures and wind. The Site Safety and Health Officer (SSHO) will monitor weather forecasts and determine wind chills at least every four hours when the temperature drops below 20ºF. The wind chill index does not take into account the specific part of the body exposed to cold, the level of activity that affects body heat production, or the amount of clothing being worn.

Like with heat strain, employees are permitted and encouraged to self-limit outdoor work activities when symptoms of cold stress are experienced. The buddy system is also encouraged to ensure that employees frequently check on co-workers in temperature extremes. A temperature-dependent work regimen limiting lengthy periods of outdoor activity may be necessary. If required, this will be developed by the SSHO in coordination with the Project Safety and Health Manager (SHM).

Wind Chill Index

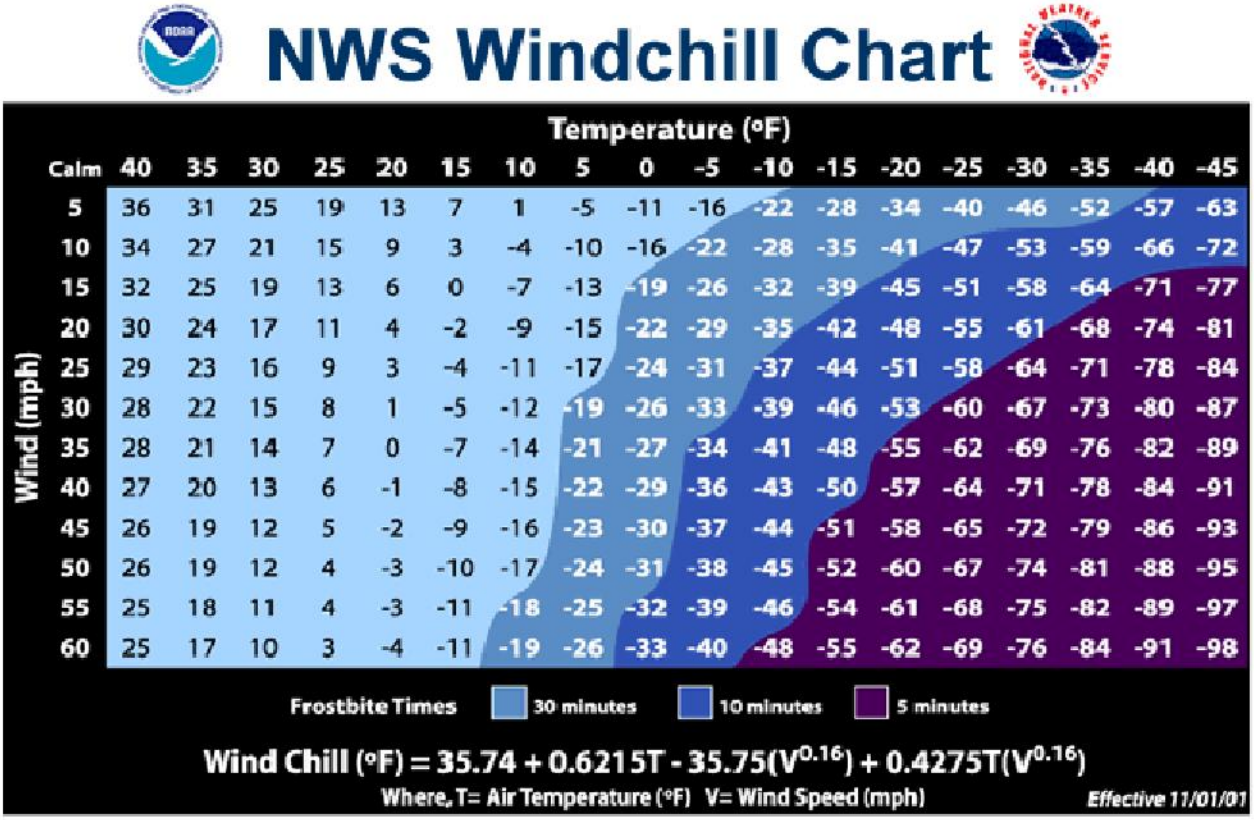

3.0 REFERENCES

National Weather Service http://www.nws.noaa.gov/om/winter/windchill.shtml

OSHA's Campaign to Prevent Heat Illness in Outdoor Workers.
https://www.osha.gov/SLTC/heatillness/index.html

Injury Prevention: Fact vs Fiction

Cold Weather Injuries

FACT SHEET 12-004-0415

What causes Cold Weather Injuries?

Cold weather injuries (CWIs) can occur due to an imbalance of body temperature regulation, where heat loss is greater in an area of the body (or the body core) than heat production. There are 4 primary types of cold injuries: hypothermia, frostbite, non-freezing cold injuries, and injuries related to cold exposure. **Tables 1-4** provide details on these injuries.[1]

Why are CWIs a concern to the Army?

CWIs are preventable, yet if early signs and symptoms go unrecognized or preventive measures are not taken, these injuries may result in permanent injury and even death. A typical CWI casualty is a 20 year-old male at the rank of E-4 and below and often from a warm climate. However, anyone can become a CWI casualty.[2]

How can Soldiers protect themselves from a CWI?

Soldiers should be aware of risk factors and increase resilience by consuming a healthy diet with plenty of fluids, maintaining fitness levels according to Army standards, and getting quality sleep each night. Dressing properly for the weather conditions in a way to easily adjust (layers), and balancing the time and amount of activity spent in cold weather conditions will reduce risks.[1,3,4,5]

Prevention of Cold Weather Injuries

Clothing
- ❖ Wear uniform properly (layers worn loosely).
- ❖ Keep socks & clothes dry (use sock liners and foot powder).
- ❖ Remember the acronym C-O-L-D
  - Keep it CLEAN
  - Avoid OVERHEATING
  - Wear clothing LOOSE and in LAYERS
  - Keep clothing DRY

Eyes
- ❖ Wear dark UV protective glasses
- ❖ If no sun glasses – improvise with cut slits in cardboard/cloth; or use tape over regular eyeglasses

Skin
- ❖ Keep your skin clean, covered, & dry
- ❖ Use sunscreen and lip balm
- ❖ Use gloves to handle all equipment and fuel products

Hydration
- ❖ Drink warm liquids
- ❖ Monitor urine color for dehydration

Environment
- ❖ Use warming tents when needed
- ❖ Monitor conditions, especially the wind chill index
- ❖ Use anti-slip shoe gear if outside extensively

Other
- Conduct NCO checks and look after your battle buddy

What factors increase the risk of having a CWI?

All Soldiers regardless of rank are susceptible to a CWI in the right conditions. However, surveillance data from the Army and other Services indicate that rates of cold injuries appear higher among African Americans, women, Service members under 20 years old, and enlisted personnel[2] Additional risk factors are discussed below[1-7]:

✚ *Prior cold injury or medical conditions*

Soldiers who have had a cold injury in the past are much more likely to develop a new cold injury sooner or one of more severe nature in the future. Existing medical conditions may predispose an individual to a CWI. For example, Raynaud's Disease is a disorder that causes blood vessel constriction in cold temperatures or during emotional distress, resulting in reduced blood flow to the extremities (e.g., fingers & toes).[6] Other conditions, such as anemia, diabetes, sickle cell disease, hypotension, and atherosclerosis, may also increase susceptibility to frostbite and injuries related to cold exposure.[1]

✚ *Dehydration*

Inadequate fluid intake affects the body's ability to sustain physical activity, which in turn affects thermoregulation (i.e., the balance between heat production and loss). In cold environments sensitivity to thirst declines, which can increase the risk of dehydration during strenuous activity, where fluid loss often exceeds intake.[1, 4, 5]

✚ *Over- and Under- Activity*

Vigorous exercise/activity induces sweating, which leads to wet clothing and subsequent increased heat loss. Conversely, under-activity results in low heat production, which may lower the body's core temperature.[1, 4, 5]

✚ *Tight clothing*

Close-fitting clothing reduces insulation and may restrict movement, resulting in heat loss. Clothing should be worn loosely and layered to allow adjustments as physical activity levels and environmental conditions change.[1, 4, 5]

✚ *Inadequate nutrition*

Underfeeding can cause low blood sugar (hypoglycemia) which impairs shivering, thereby making it difficult to generate body heat. Low carbohydrates stores also limit the ability to maintain physical activity.

✚ *Alcohol & nicotine*

Alcohol imparts a sense of warmth and causes dilation of skin blood vessels which increases heat loss to the environment. It may also impair the senses and judgment, making it difficult for a Soldier to detect signs and symptoms of a CWI. Tobacco use (smoking or chewing) causes increased constriction of skin blood vessels, which increases the risk for frostbite.[1, 4, 5]

✚ *Medications*

Some medications may affect thermoregulation by impairing vasoconstriction. These include benzodiazepines, tricyclic antidepressants, barbiturates, and general anesthetics.[1, 4, 5]

U.S. Army Public Health Command - Injury Prevention Program
usarmy.apg.medcom-phc.mbx.injuryprevention@mail.mil ***410-436-4655/DSN 584-4655***
5158 Blackhawk Road, APG, MD 21010-5403
Approved for Public Release, Distribution Unlimited

ATTACHMENT 13

CRYSTALLINE SILICA ASSESSMENT

1.0 PROJECT/ TASK ORDER DESCRIPTION

Contract Number:	W9124J-18-D-0004
Delivery Order	W9124J21F0020
Project Name:	Environmental Remediation Services
Location:	Redstone Arsenal (RSA), Alabama

2.0 SCOPE AND APPLICATION

There are operations that could present occupational exposures of personnel to respirable crystalline silica above the American Conference of Governmental Industrial Hygienists (ACGIH) Threshold Limit Value (TLV) of 25 micrograms per cubic meter ($\mu g/m^3$)[3] These operations include, but are not limited to the following:

- Mixing grouts and concrete for well installation

3.0 EXPOSURE CONTROL PLAN

Sub-contractors will be required to comply with Environmental Chemical Corporation's (ECC's) plan, or provide their own internal plan, for approval, prior to beginning activities that may generate crystalline silica.

Both the exposure control methods and alternative exposure control methods identified in 29 Code of Federal Regulations (CFR) 1926.1153 Table 1, will be used at the project, to control employee exposures to respirable crystalline silica.

4.0 ENGINEERING AND WORK PRACTICE CONTROL METHODS

Due to the limited nature of these tasks, employees will implement, at a minimum, the following controls to prevent exposure to crystalline silica found in grouts and concrete utilized for installing monitoring wells.

The engineering and work practice control methods identified for these tasks include:

- Use water spray/mist when feasible.
- Work from upwind direction.
- Preferentially use materials that contain lower percentages of silica and are formulated for reduced dusting.

5.0 HOUSEKEEPING

The housekeeping procedures to be used for reducing employee exposure to respirable crystalline silica include:

- Dry sweeping or dry brushing is not allowed when respirable crystalline silica is present. Use wet sweeping and high-efficiency particulate air (HEPA)-filtered vacuuming when feasible.
- Do not use compressed air to clean clothing or surfaces when respirable crystalline silica is present.

6.0 WORK AREA ACCESS CONTROL

Work will be isolated to control access.

7.0 COMPETENT PERSON

The Site Safety and Health Officer (SSHO) is the designated competent person. The competent person is responsible for making frequent and regular inspections of job sites, materials, and equipment to implement the written exposure control plan.

8.0 COMMUNICATION OF RESPIRABLE CRYSTALLINE SILICA HAZARDS TO EMPLOYEES

ECC addresses respirable crystalline silica in the Hazard Communication Program. Each employee must have access to labels on containers of crystalline silica and the safety data sheets. At a minimum, the following respirable crystalline silica hazards are to be communicated to employees:

- Cancer
- Lung effects
- Immune system effects
- Kidney effects

9.0 EMPLOYEE INFORMATION AND TRAINING

All workers potentially exposed to silica will be trained. The training shall include the following information:

- The health hazards associated with exposure to respirable crystalline silica.
- Specific work tasks that could result in exposure to respirable crystalline silica.
- Specific measures ECC has implemented to protect employees from exposure to respirable crystalline silica, including engineering controls, work practices, and respirators to be used.
- The contents of the Occupational Safety and Health Administration (OSHA) respirable crystalline silica standard (29 CFR 1926.1153).
- Methods for limiting silica exposure.
- The identity of the competent person.

All workers who will be wearing respirators will be trained in accordance with ECC Standard Operating Procedure (SOP) Environment, Safety, and Quality (ESQ) 6.2 ‘Respiratory Protection’.

10.0 RECORDKEEPING

An accurate record of all exposure measurements taken to assess employee exposure to respirable crystalline silica will be made and maintained as required by OSHA.

11.0 MEDICAL SURVEILLANCE

Personnel using a respirator for 30 or more days per year shall participate in a medical surveillance program as required by 29 CFR 1926.1153.

ATTACHMENT 14

HAZARDOUS ENERGY CONTROL PLAN

1.0 PROJECT/ TASK ORDER DESCRIPTION

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

2.0 SCOPE AND APPLICATION

The requirements in this procedure applies to the activities associated with this Plan applies to all activities, including subcontractor activities, for the project identified above involving cleaning, maintenance, adjustment and repairs of tools, machinery and equipment where hazardous energy may be present.

3.0 PROCEDURES

3.1 General Procedures

Before working on machinery, equipment, or process units where employees may be exposed to hazardous energy sources, a lockout/tagout procedure will be implemented.

1. Notify affected employees of the shut down and lockout.
2. Issue a lockout permit. See *Form ESQ-7.3.01 Lockout Permit*.
   Note: For fixed plant equipment, an equipment-specific procedure may be developed and used in lieu of a permit.
3. Shut down the system by shutting off the generator.
4. Isolate the energy sources, vent the vapor lines, drain the liquid lines.
5. Lock out the generator start switch and place a tag on it. The system will be locked out by each employee working on the equipment (authorized employees). If it is not feasible to place a lock on the system, tags alone may be used.
   Note: All employees working on the equipment and potentially exposed to the hazardous energy must have control over the system. Each one must place a lock on the isolation device, or on a lockbox under a group lockout procedure. See TI ESQ-7.3.03 Group Lockout Procedures.
6. Block or release any stored energy. (Examples: vent vapor line, drain liquid lines)
7. Verify the de-energization. In mechanical system cases, this is accomplished by trying to start the equipment. However, the specific verification procedure should be documented on the permit.
   Note: If the work is to be done on or near current carrying electrical equipment, verification must be done by a qualified electrical worker using test equipment.
8. Perform work.
9. Clear work area of personnel, tools and material. Replace all parts and guards.
10. Notify affected employees.
11. Remove locks.
    Note: If an employee leaves the site with his lock on equipment to be returned to operation, the Supervisor must contact the employee and verify their whereabouts. If still on site, the employee must return to remove their lock. If they have left the site, and it is verified, the lock may be cut.
12. Re-energize the system or equipment.
13. Follow normal start-up procedure.

3.2 Exceptions

Lockout permits and lockout devices are not required by this Plan for the following equipment:

1. Equipment that is provided with a cord and plug need not comply with the permit and lockout procedures in this Plan, provided the equipment is unplugged and the plug is under the direct control of the person performing the servicing.
2. Mobile Equipment using an ignition key is considered locked out if the service mechanic removes the key from the ignition and keeps it in his/her pocket and places a "Do Not Operate" tag on the steering wheel or operating levers. Mobile equipment tools (blades, buckets, booms etc.) must be lowered or blocked and the equipment must be properly blocked or chocked to prevent unintentional movement.
3. Other small equipment that is operated on hydrocarbon fuel that does not have a keyed ignition switch can be de-energized by disconnecting the starter battery or the fuel line. The disconnected items must be under the direct control of the person performing the servicing.

4.0 MONITORING

The Site Safety and Health Officer (SSHO) will monitor the implementation of the energy control procedures.

5.0 TRAINING

Each employee engaged in lockout/tagout must be trained in this procedure, appropriate Task Instructions, and any site-specific or equipment-specific procedures. See *TI ESQ-7.3.05 Energy Control Procedure Training Outline.*

6.0 DOCUMENTATION

Training in this procedure shall be documented using a training sign-in sheet, a Daily Tailgate sign-in sheet, or a copy of the *TI ESQ-7.3.05 Energy Control Procedure Training Outline.*

Lockout/tagout activities are documented using the permit, *Form ESQ-7.3.01 Lockout Permit.* Where a specific written procedure is applicable, it should be documented using *Form ESQ-7.3.02 Equipment-Specific Written Lockout Procedure.*

7.0 REFERENCES

29 Code of Federal Regulations (CFR) 1910.147 The Control of Hazardous Energy The control of hazardous energy (lockout/tagout). - 1910.147

United States Army Corps of Engineers (USACE) EM 385-1-1. Section 12. Control of Hazardous Energy (Lockout/Tagout) http://www.hq.usace.army.mil/soh/em385/current/SECTION12-V2-final.pdf

LOCKOUT/TAGOUT PERMIT

Fill out Completely

Project Name: _____ Location: _____

DATE:_____ SHIFT:_____PERMIT #:

EQUIPMENT/SYSTEM IDENTIFICATION:_____

REASON FOR LOCKOUT/TAGOUT:_____

ISOLATION INFORMATION

Device Description	Location	Isolation Position	Lockout Device

SPECIAL INSTRUCTIONS FOR REMOVAL OR RELEASING STORED ENERGY

SIGNATURES

Supervisor:		
Authorized Employee		**Lock #:**
Authorized Employee		**Lock #:**
Authorized Employee		**Lock #:**

TI ESQ-7.3.03
GROUP LOCKOUT PROCEDURES

1.0 GENERAL

The purpose of this Task Instruction is to provide guidance on the implementation of a Group Lockout Procedure. It is ECC's policy that each employee who may be involved in servicing equipment while it is de-energized and locked out (authorized employee), have control over the hazardous energy source(s) through the use of personally assigned padlock(s). This policy is summarized by the phrase "One employee – One lock – One Key".

However, there are occasions when multiple energy sources must be locked by a group of employees. It may not be feasible or practical for each employee to physically place a lock on each source. An example is during an outage on a thermal desorption unit. In such instances, the Group Lockout Procedure described below maintains the control of each authorized person over each energy isolation device and may be implemented.

2.0 PROCEDURE

1. The Supervisor (or Lead Operator) Completes the Lock Out / Tag Out Permit listing items to be locked out.
2. Notify personnel (authorized and affected employees) of what is being locked out and why.
3. Shut down the system using normal shutdown procedures
4. Isolate the energy source (e.g. open circuit breaker, valve, etc.)
5. Release stored energy (drain, vent, block/crib, ground, etc.)
6. The Supervisor (or Lead Operator) applies a set of **keyed-alike** locks on each energy isolation device. These locks should be a different color than those **keyed-differently** locks issued to the authorized employees.
7. In the case of electrical sources, the Supervisor (or Lead Operator) opens the appropriate circuit breakers in the main circuit panels. Prior to shutting and locking the cabinet door, authorized employees assigned to work on the isolated systems visually observe that the correct breakers are open. They also observe the correct position and Supervisor (or Lead Operator) locks on other energy isolation devices. Each of these authorized employees then initials the Lock Out / Tag Out Permit.
8. After the authorized employees initial the Lock Out / Tag Out Form, the Supervisor (or Lead Operator) puts his/her key for the **keyed-alike** set of locks into the group lockbox. This should be the only key for this set of locks. Each authorized employee then applies his/her individually assigned lock, which is uniquely keyed to the lockbox. The Supervisor (or Lead Operator) cannot retrieve the key for the set of keyed-alike locks, until each authorized employee removes his/her lock from the lockbox.
9. The authorized employees then perform or witness the "try" or isolation verification step. (Note: For work on or near current carrying parts of electrical equipment, this step is done by a Qualified Electrical Worker using electrical test equipment. See *SOP ESQ-5.7 Electrical Safety.*)
10. If a different employee needs to work on the system, that employee must review the Lock Out / Tag Out Form, noting the authorized employees initials verifying that the correct isolation devices

have been locked out, and then places his/her lock on the lockbox. If the new authorized employee has any doubt as to the whether the appropriate devices are isolated and locked out, he/she may request a first-hand observation.

11. After the work is performed, follow normal procedures for removal of locks and restarting the system.

TI ESQ-7.3.05
CONTROL OF HAZARDOUS ENERGY – TRAINING OUTLINE

1.0 GENERAL

The purpose of this Task Instruction is to provide guidance on training of employees in ECC SOP ESQ-7.3 Control of Hazardous Energy and associated Task Instructions and equipment specific equipment.

Each employee involved in servicing equipment that must be shut down and locked out is considered an authorized employee. Affected employees are those not directly involved in the servicing or maintenance equipment but may use the equipment or be exposed to a hazard from inadvertent starting of the shutdown equipment. This training must be provided to authorized employees. Affected employees must be trained in items 1 through 4 below. Training is to be documented with sign-in sheets, and the records must be maintained in the project files.

TRAINING OUTLINE

1. Energy Source Hazards – General
   a. Electrocution
   b. Struck-by falling/flying objects, pressure release, compressed gas
   c. Caught in or between mechanical parts
   d. Contact with chemicals, steam, hot surfaces
   e. Spills, fires and explosions
2. Energy Source Hazards – Site Specific
3. Hazardous energy sources on this site (or with this system or equipment). (List)

   _____

   _____

   _____

   _____
4. ECC Policies:
   a. One employee – one lock – one key
   b. Locks used whenever feasible. When infeasible to use locks, standard, durable tags used.
5. Assignment and description of Locks and Tags (show samples)
6. Lockout Permit (go over permit requirements)
7. General Procedures:

   Before working on machinery, equipment or process units where employees may be exposed to hazardous energy sources a lockout/tagout procedure will be implemented.
   Notify Affected employees of the shut down and lockout.
   a. Issue a lockout permit. See *Form ESQ-7.3.01 Lockout Permit*.
      Note: For fixed plant equipment, an equipment-specific procedure may be developed and used in lieu of a permit.
   b. Shut down the equipment following normal shutdown procedures.
   c. Isolate the energy sources.

d. Lock out the energy source isolation device and place a tag on it. The system will be locked out by each employee working on the equipment (authorized employees). If it is not feasible to place a lock on the system, tags alone may be used.
Note: All employees working on the equipment and potentially exposed to the hazardous energy must have control over the system. Each one must place a lock on the isolation device, or on a lockbox under a group lockout procedure. See TI ESQ-7.3.03 Group Lockout Procedures.

e. Block or release any stored energy. (Examples: detach springs; discharge capacitors; use cribbing or secured blocking under raised items; vent pressure and check gauge; drain fluids; check temperatures)

f. Verify the de-energization. In mechanical system cases, this is accomplished by trying to start the equipment. However, the specific verification procedure should be documented on the permit.
Note: If the work is to be done on or near current carrying electrical equipment, verification must be done by a qualified electrical worker using test equipment.

g. Perform work.

h. Clear work area of personnel, tools and material. Replace all parts and guards.

i. Notify affected employees.

j. Remove locks.
Note: If an employee leaves the site with his lock on equipment to be returned to operation, the Supervisor will contact employee, verify they left the site, then authorize cutting the lock.

k. Re-energize the system or equipment.

l. Follow normal start-up procedure.

8. Job or Equipment-specific procedures (List procedures discussed)

_____

_____

_____

9. Group Lockout Procedures (if used). See *TI ESQ-7.3.03*

INSTRUCTOR	COMPANY	DATE
ATTENDEE (Print)	**COMPANY**	**SIGNATURE**

ATTACHMENT 15

EXCAVATION AND TRENCHING PLAN

1.0 PROJECT/ TASK ORDER DESCRIPTION

Contract Number:	W9124J-18-D-0004
Delivery Order	W9124J21F0020
Project Name:	Environmental Remediation Services
Location:	Redstone Arsenal (RSA), Alabama

2.0 SCOPE AND APPLICATION

The Activity Hazard Analysis (AHA) for excavation related activities is included in Appendix A of the Accident Prevention Plan (APP).

(a) Excavations that may exceed 4 feet in depth, and therefore, Environmental Chemical Corporation (ECC) and sub-contractor personnel will adhere to the requirements of EM 385 1-1 and 29 Code of Federal Regulations (CFR) 1926. Additionally, prior to conducting any excavation activities, utility locates must be conducted.

(b) Ramps or ladders will be placed to allow access/egress of employees if working in excavations is necessary. Egress points must be within 25 feet of personnel, so at least every 50 feet. Ladders must extend from bottom of excavation to three feet above surface. Ramps for personnel access must be a minimum of four feet wide and have standard guardrails – see Section 21.F.01 of EM 385-1-1. Ramps for equipment must be at least 12 feet wide and curbs of not less than eight by eight-inch timbers. Equipment ramps must be designed and constructed in accordance with accepted engineering practice. In addition to the access/egress the AHA must provide the proper Perimeter Protection Class per definitions in Appendix Q of EM 385-1-1 and provide the acceptable controls according to Section 25.B of EM 385-1-1]

(c) Competent Person (CP) must be able to demonstrate:
  (1) Training, experience, and knowledge of soil analysis, use of protective systems, and requirements of this Section and 29 CFR 1926 Subpart P;
  (2) Ability to detect conditions that could result in cave-ins, failures in protective systems, hazardous atmospheres, and other hazards including those associated with confined spaces; and
  (3) The authority to take prompt corrective measures to eliminate existing and predictable hazards and stop work when required.

(d) The CP will conduct inspections daily, and as conditions change, and provide documentation that examination of the ground by the CP provides no indication of a potential cave-in. Daily inspections by CP will be recorded on ECC Form Environment, Safety and Quality (ESQ)-7.7.01.

3.0 RESCUE PLAN

A rescue plan will be provided, as applicable, for each separate location.

3.1 Diagram of Excavation Area

As applicable diagrams will be provided (at later date or in an applicable work plan), for each location, and will provide the following:

- Location and extent of excavation
- Structures or trees within excavation to be removed
- Structures, trees or other features adjacent to excavation to be protected and preserved
- Expected Underground utility locations and locations of shut offs
- Nearby Overhead power lines

- Access to excavation area, and protective systems around perimeter of excavation
- Access/egress points to excavation
- Expected depths of excavation

3.2 Projected Maximum Depth(s)

If depths exceed that 4 feet, additional measures will be implemented in accordance with EM 385 1-1.

4.0 PROJECTED SOIL TYPE AND METHOD OF TESTING TO DETERMINE SOIL TYPE

Soil shall be evaluated and classified by the CP. The classifications will in accordance with Occupational Safety and Health Administration (OSHA) 1926 Subpart P, App. A as stable rock, type A, B, or C soil. Classifications shall be made using at least one visual and one manual analysis identified in 1926 Subpart P, App. A.

It is anticipated all soil will be classified as Type C.

In layered soil systems, the system shall be classified according to its weakest layer. However, each layer may be classified individually where a more stable layer exists under a weaker layer.

In the event the properties, factors, or conditions affecting classification change, the system shall be reevaluated by the CP. Reclassify as necessary to reflect the changed circumstances.

Soil Classification will be documented using the Soil Classification Form.

5.0 PROTECTIVE SYSTEMS

It is anticipated excavations will be sloped. In the event sloping is not possible, alternate methods including shoring or trench boxes, will be utilized.

6.0 PLANNED METHOD FOR CONFINED SPACE ENTRY, TRENCH ACCESS AND EGRESS AND ATMOSPHERIC MONITORING PROCESSES

6.1 Entry into Excavations

Each excavation will be evaluated by the Safety and Health Manager (SHM) to determine the anticipated potential hazards and if confined space regulations apply. In the event it is necessary to treat an excavation as a confined space, this plan will be updated accordingly.

6.2 Trench Access and Egress

Trenches in excess of four feet deep require a minimum of two means of egress. The AHA and drawing for each location, where applicable, will address locations.

6.3 Atmospheric Monitoring

In the event there is potential for sources of toxic gases, such as exhaust from nearby combustion engines, to the enter the excavation, monitoring will be conducted. Monitoring in general would consist of a multi-gas detector, to check for oxygen, Carbon monoxide (CO), and explosive gases. Action levels are as follows:

- Oxygen: less than (<) 20.8 or greater than (>) 21.0 percent (%) = stop work, contact SHM for evaluation
- Lower explosive limit (LEL): > 10% = stop work, ventilate, and contact SHM

- CO: > 25 ppm, stop work, ventilate, and contact SHM

7.0 LOCATION OF UTILITY SHUT OFFS

Utilities connected to drainage lines will be blocked and locked out. Other utilities that may affect work will be evaluated at each location and measures will be taken to control associated hazardous energy.

8.0 DAMAGE PREVENTION

For all adjacent structures that pose a hazard to workers or potential damage incidents, precautions shall be established per OSHA 29 CFR 1926.651(i). Sidewalks, pavements and appurtenant structure shall not be undermined unless a support system or another method of protection is provided to protect employees from the possible collapse of such structures.

9.0 MANAGEMENT OF EXCAVATED SOIL

Excavated materials will be kept a minimum of two feet from the edge of all excavations to avoid falling into excavation or creating a hazardous surcharge on excavation faces.

10.0 TRAFFIC CONTROL PLAN

In areas where activities are adjacent to roadways, traffic controls will be implemented accordingly, based on the requirements of EM 385 1-1. Additionally, traffic control is addressed in the work plan.

11.0 DIGGING PERMITS

Prior to excavation work being performed, utilities must be located in accordance with Standard Operating Procedure ESQ-7.6 – Underground Utilities. All utility locates shall be performed a minimum of two days in advance of any excavation work being performed. Private locating services will be utilized as well.

A "Digging Permit" processed through the Contracting Officer's Representative must be obtained from the base authority having jurisdiction.

ATTACHMENT 16

SITE SAFETY AND HEALTH PLAN (HAZARDOUS, TOXIC, AND RADIOACTIVE WASTE [HTRW])

1.0 PROJECT

Contract Number: W9124J-18-D-0004
Delivery Order W9124J21F0020
Project Name: Environmental Remediation Services
Location: Redstone Arsenal (RSA), Alabama

This SSHP supplements the Accident Prevention Plan (APP) and contains project-specific information for environmental remediation services at RSA. Additional safety and health requirements are found in the Activity Hazard Analyses (AHAs), supplemental plans, and Environmental Chemical Corporation (ECC) Safety and Health Standard Operating Procedures (SOPs).

If hazards or conditions are identified that are not covered by this Site Safety and Health Plan (SSHP), ECC staff must contact the project manager or the Site Safety and Health Officer (SSHO).

1.1 Redstone Arsenal History and Description

See Section 2.1 of the APP.

1.2 Scope of Work

See Section 2.2 of the APP.

2.0 ACTIVITY HAZARD ANALYSIS

Section 2.3 of the APP lists the definable features of work for this project. The AHAs will be reviewed with the field team prior to commencing a new activity.

Tables A16-1 and **A16-2** list maximum concentrations, exposure limits, and health hazards for the chemicals of concern. The contaminant concentrations in groundwater and soil, together with the nature of operations, are such that the potential of hazardous exposures to site workers is low.

Table A16-1: Site Contaminants

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
RSA-156/157						
Cobalt	0.1 mg/m^3 0.02 mg/m^3 0.05 mg/m^3	NA	PEL TLV REL	20 mg/m^3 (as Co)	Inh, Ing, Con	Cough, dyspnea, wheezing, weight loss; dermatitis; diffuse nodular fibrosis; asthma
Iron	10 mg/m^3 5 mg/m^3 5 mg/m^3	NA	PEL TLV REL	2500 mg/m^3 (as Fe)	Inh	Benign pneumoconiosis with X-ray shadows indistinguishable from fibrotic pneumoconiosis (siderosis)
Manganese	0.02 mg/m^3 1 mg/m^3	C 5 mg/m^3 3 mg/m^3	PEL TLV REL	500 mg/m^3 (as Mn)	Inh, Ing	Manganism; mental confusion; metal fume fever: dry throat, cough, chest tightness, dyspnea, flu-like fever; low-back pain; vomiting; malaise; lassitude; kidney damage

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
TCE	100 ppm 50 ppm 25 ppm	100 ppm	PEL TLV REL	Ca (1,000 ppm)	Inh, Abs, Ing, Con	Irritation of eyes, skin; headache, vertigo; visual disturbances, fatigue, tremor, nausea, vomiting; dermatitis.
2-hexanone	5 ppm 5 ppm 1 ppm	NA	PEL TLV REL	1600 ppm	Inh, Abs, Ing	irritation eyes, nose; peripheral neuropathy: lassitude, paresthesia; dermatitis; headache, drowsiness
Vinyl chloride	1 ppm	NA	PEL TLV REL	Ca ND	Inh, Con	Lassitude; abdominal pain, gastrointestinal bleeding; liquid: frostbite; [potential occupational carcinogen]..
1,1- dimethyl-hydrazine	0.5 ppm 0.01 ppm NA	(Ca C) 0.06 ppm	PEL TLV REL	Ca (15 ppm)	Inh, Abs Ing	irritation eyes, skin; choking, chest pain, dyspnea; drowsiness; nausea; anoxia; convulsions; [potential occupational carcinogen].
2-nitrotoluene	5 ppm 2 pm 2 ppm	NA	PEL TLV REL	200 ppm	Inh, Abs, Ing, Con	Anoxia, cyanosis; headache, lassitude, dizziness; ataxia; dyspnea; tachycardia; nausea, vomiting.
Nitrobenzene	1 ppm 1 ppm 1 ppm	NA	PEL TLV REL	200 ppm	Inh, Abs, Ing, Con	irritation eyes, skin; anoxia; dermatitis; anemia; methemoglobinemia.
2,6- DNT	1.5 mg/m^3 1.5 mg/m^3 1.5 mg/m^3	NA	PEL TLV REL	200 mg/m^3	Con	headache, irritability, dizziness, weakness, nausea, vomiting, dyspnea, drowsiness, unconsciousness, and possibly death. Repeated or prolonged exposure may cause anemia [potential occupational carcinogen].
Nitroglycerin	0.05 ppm	(C) 0.2 ppm 0.1	PEL TLV REL	200 mg/m^3 [e]	Inh, Abs, Ing, Con	throbbing headache; dizziness; nausea, vomiting, abdominal pain; flush; palpitations; delirium; angina; skin irritation.
1,3-dinitrobenzene	1 mg/m^3 1 mg/m^3 1 mg/m^3	NA	PEL TLV REL	50 mg/m^3 [f]	Inh, Abs, Ing, Con	Anoxia, cyanosis; visual disturbance, central scotomas; bad taste, burning mouth, dry throat, thirst; yellowing hair, eyes, skin; anemia; liver damage.

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
2,4-DNT	1.5 mg/m^3 1.5 mg/m^3 1.5 mg/m^3	NA	PEL TLV REL	200 mg/m^3	Con	headache, irritability, dizziness, weakness, nausea, vomiting, dyspnea, drowsiness, unconsciousness, and possibly death. Repeated or prolonged exposure may cause anemia [potential occupational carcinogen].
Perchlorate	10 mg/m^3 Inhalable particles 3.0 mg/m^3 Respirable Particles	NA	PEL TLV REL	NA	Inh, Ing, Con, Abs	Local irritation or stinging effect. Chronic ingestion of sufficient quantities may interfere with uptake of iodine by the thyroid which may cause hypothyroidism. Irritation of the eyes will cause stinging effect.
RSA-262						
Benzo[a] anthracene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Benzo[a] pyrene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Benzo[b] fluoranthene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Dibenz[a,h] anthracene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
2-nitrotoluene	5 ppm 2 ppm 2 ppm	NA	PEL TLV REL	200 ppm	Inh, Abs, Ing, Con	Anoxia, cyanosis; headache, lassitude, dizziness; ataxia; dyspnea; tachycardia; nausea, vomiting.
1,1,2-trichloroethane	10 ppm 10 ppm 10 ppm	NA	PEL TLV REL	Ca (100 ppm)	Inh, Abs, Ing, Con	Irritation eyes, nose; liver, kidney damage; dermatitis; [potential occupational carcinogen].
CT	10 ppm 5 ppm-skin	(C) 25 ppm 10 ppm-skin 2 ppm (60-min)	PEL TLV REL	Ca (200 ppm)	Inh, Abs, Ing, Con	Irritation eyes, skin; nausea, vomiting; drowsiness, dizziness, incoordination; (potential occupational carcinogen).
PCE	100 ppm 25 ppm (minimize workplace exposure concentrations)	(C)200 ppm 100 ppm	PEL TLV REL	Ca (150 ppm)	Inh, Abs, Ing, Con	irritation eyes, skin, nose, throat, respiratory system; nausea; flush face, neck; dizziness, headache, drowsiness; [potential occupational carcinogen].

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
TCE	100 ppm 50 ppm 25 ppm	100 ppm	PEL TLV REL	Ca (1,000 ppm)	Inh, Abs, Ing, Con	Irritation of eyes, skin; headache, vertigo; visual disturbances, fatigue, tremor, nausea, vomiting; dermatitis.
1,1,2,2-tetrachloro-ethane	5 ppm 1 ppm 1 ppm	NA	PEL TLV REL	Ca (100 ppm)	Inh, Abs, Ing, Con	Nausea, vomiting, abdominal pain; tremor fingers; jaundice, hepatitis, dermatitis; kidney damage; [potential occupational carcinogen].
CCSWMU-306						
Benzene	1 ppm 0.5 ppm 0.1 ppm	4 ppm 2.5 ppm 1 ppm	PEL TLV REL	Ca (500 ppm)	Inh, Abs, Ing, Con	Irritated eyes, skin, nose, respiratory system, giddiness, headache, nausea, dermatitis, bone marrow depression.
1-methyl-naphthalene	0.5 ppm	NA	PEL TLV REL	NA	Inh, Abs, Ing, Con	Lower Respiratory Tract irritation Lung damage Danger of cutaneous absorption.
Iron	10 mg/m^3 5 mg/m^3 5 mg/m^3	NA	PEL TLV REL	2500 mg/m^3 (as Fe)	Inh	Benign pneumoconiosis with X-ray shadows indistinguishable from fibrotic pneumoconiosis (siderosis).
RSA-308						
Perchlorate	10 mg/m^3 Inhalable particles 3.0 mg/m^3 Respirable Particles	NA	PEL TLV REL	NA	Inh, Abs, Ing, Con	Local irritation or stinging effect. Chronic ingestion of sufficient quantities may interfere with uptake of iodine by the thyroid which may cause hypothyroidism. Irritation of the eyes will cause stinging effect.
RDX	0.5 mg/m^3	NA	PEL TLV REL	NA	Inh, Abs, Ing, Con	Irritation eyes, skin; headache, irritability, lassitude, tremor, nausea, dizziness, vomiting, insomnia, convulsions.
RSA-056/RSA-139						
Arsenic	0.01 mg/m^3 0.01 mg/m^3	Ca 0.002 mg/m^3	PEL TLV REL	5 mg/m^3	Inh, Ing, Con	Cough, diarrhea, shortness of breath, vomiting, grey skin. Redness.

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
RSA-009						
Arsenic	0.01 mg/m^3 0.01 mg/m^3	Ca 0.002 mg/m^3	PEL TLV REL	5 mg/m^3	Inh, Ing, Con	Cough, diarrhea, shortness of breath, vomiting, grey skin. Redness.
Mercury	0.05 mg/m^3 (vapor)(skin)	C 0.1 mg/m^3	PEL TLV REL	10 mg/m^3 (as Hg)	Inh, Ing, Con, Abs	Irritation of eyes, skin; cough, chest pain, dyspnea, bronchitis, pneumonitis, tremor, insomnia, irritability, headache, weakness, stomatitis, salivation, GI disturbance, low-weight, proteinuria.
Aroclor-1248	0.5 mg/m^3 0.5 mg/m^3 0.001 mg/m^3	NA	PEL TLV REL	Ca (5 mg/m^3)	Inh, Ing, Con, Abs	irritation eyes, chloracne; liver damage; reproductive effects; [potential occupational carcinogen].
Aroclor-1254	0.5 mg/m^3 0.5 mg/m^3 0.001 mg/m^3	NA	PEL TLV REL	Ca (5 mg/m^3)	Inh, Ing, Con, Abs	irritation eyes, chloracne; liver damage; reproductive effects; [potential occupational carcinogen].
Aroclor-1260	0.5 mg/m^3 0.5 mg/m^3 0.001 mg/m^3	NA	PEL TLV REL	Ca (5 mg/m^3)	Inh, Ing, Con, Abs	irritation eyes, chloracne; liver damage; reproductive effects; [potential occupational carcinogen].
RSA-140						
Cadmium	0.005 mg/m^3 0.01mg/m^3 0.002 mg/m^3	NA	PEL TLV REL	Ca (9 mg/m^3) (as Cd)	Inh, Ing	Pulmonary edema, dyspnea, cough, chest tightness, substernal pain; headache; chills, muscle aches; nausea, vomiting, diarrhea; anosmia, emphysema, proteinuria, mild anemia; [potential occupational carcinogen].
Lead	0.05 mg/m^3 0.05 mg/m^3 0.05 mg/m^3	NA	PEL TLV REL	100 mg/m^3 (as Pb)	Ihh Ing, Con	lassitude, insomnia; facial pallor; anorexia, weight loss, malnutrition; constipation, abdominal pain, colic; anemia; tremor; paralysis wrist, ankles; kidney disease; irritation eyes'; hypertension.
Dieldrin	0.25 mg/m^3 0.1 mg/m^3 Ca 0.25 mg/m^3	NA	PEL TLV REL	Ca (50 mg/m^3)	Inh, Ing, Con, Abs	headache, dizziness; nausea, vomiting, malaise, sweating; In Animals: liver, kidney damage [potential occupational carcinogen].
Aroclor-1254	0.5 mg/m^3 0.5 mg/m^3 0.001 mg/m^3	NA	PEL TLV REL	Ca (5 mg/m^3)	Inh, Ing, Con, Abs	irritation eyes, chloracne; liver damage; reproductive effects; [potential occupational carcinogen].

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
RSA-058						
Arsenic	0.01 mg/m^3 0.01 mg/m^3	Ca 0.002 mg/m^3	PEL TLV REL	5 mg/m^3	Inh, Ing Con	Cough, diarrhea, shortness of breath, vomiting, grey skin. Redness.
DDT	1 mg/m^3 1 mg/m^3 0.5 mg/m^3	NA	PEL TLV REL	500 mg/m3	Inh, Ing, Con, Abs	Irritation eyes, skin; anxiety, dizziness, confusion, malaise headache, lassitude; convulsions; vomiting; (potential occupational carcinogen).
Benzo[a] pyrene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL		Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Dibenz(a,h) anthracene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Benzo[a] anthracene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Benzo[b] fluoranthene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Endrin	0.1 mg/m^3 0.1 mg/m^3 0.1 mg/m^3	NA	PEL TLV REL	2 mg/m^3	Inh, Ing, Con, Abs	Stupor, headache, dizziness; abdominal discomfort, nausea, vomiting; insomnia; aggressiveness, confusion; drowsiness, lassitude; anorexia.
Chlorobenzene	75 ppm 10 ppm	NA	PEL TLV REL	1,00 ppm	Ing, Inh, Con	Irritation eyes, skin, nose; drowsiness, incoordination.
Nitroglycerine	0.05 ppm	(C) 0.2 ppm 0.1	PEL TLV REL	200 mg/m^3 [e]	Inh, Abs, Ing, Con	throbbing headache; dizziness; nausea, vomiting, abdominal pain; flush; palpitations; delirium; angina; skin irritation.
Beta-BHC	0.5 mg/m^3 0.5 mg/m^3 0.5 mg/m^3	NA	PEL TLV REL	50 mg/m^3	Inh, Abs, Ing, Con	Irritation eyes, skin, nose, throat; headache; nausea; resp difficulty; cyanosis; muscle spasm.
RSA-083						
TCE	100 ppm 50 ppm 25 ppm	100 ppm	PEL TLV REL	Ca (1,000 ppm)	Inh, Abs, Ing, Con	Irritation of eyes, skin; headache, vertigo; visual disturbances, fatigue, tremor, nausea, vomiting; dermatitis.
Cis-1,2-DCE	200 ppm 200 ppm 200 ppm	NA	PEL TLV RE	1,000 ppm	Inh, Ing, Con	Irritation eyes, respiratory system; central nervous system depression.
Vinyl chloride	1 ppm	NA	PEL TLV REL	Ca ND	Inh, Con	Lassitude; abdominal pain, gastrointestinal bleeding; liquid: frostbite; [potential occupational carcinogen].

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
1,1-DCE (vinylidene chloride)	NA	NA	NA	NA	Inh, Abs, Ing, Con	Irritation of eyes, skin; throat, dizziness, headache, nausea, dyspnea, liver injury, kidney disturbance.
Chlorobenzene	75 ppm 10 ppm	NA	PEL TLV REL	1,00 ppm	Ing, Inh, Con	Irritation eyes, skin, nose; drowsiness, incoordination.
2,4-DNT	1.5 mg/m^3	NA	PEL TLV REL	NA	NA	Headaches; fatigue, nausea, vomiting, chest pain, and weight loss.
CCSWMU-003						
TCE	100 ppm 50 ppm 25 ppm	100 ppm	PEL TLV REL	Ca (1,000 ppm)	Inh, Abs, Ing, Con	Irritation of eyes, skin; headache, vertigo; visual disturbances, fatigue, tremor, nausea, vomiting; dermatitis.
Cis-1,2-DCE	200 ppm 200 ppm 200 ppm	NA	PEL TLV RE	1,000 ppm	Inh, Ing, Con	Irritation eyes, respiratory system; central nervous system depression.
Vinyl chloride	1 ppm	NA	PEL TLV REL	Ca ND	Inh, Con	Lassitude; abdominal pain, gastrointestinal bleeding; liquid: frostbite; [potential occupational carcinogen].
1,1-DCE	NA	NA	PEL TLV REL	NA	Inh, Abs, Ing, Con	Irritation of eyes, skin; throat, dizziness, headache, nausea, dyspnea, liver injury, kidney disturbance, pneumonitis.
1,2-dichloroethane	50 ppm 10 ppm Ca 1 pp	C 100 ppm 2ppm	PEL TLV REL	Ca (50 ppm)	Inh, Abs, Ing, Con	Irritation eyes, corneal opacity; nausea, vomiting; dermatitis; liver, kidney, cardiovascular system damage; [potential occupational carcinogen].
2-nitrotoluene	5 ppm 2 pm 2 ppm	NA	PEL TLV REL	200 ppm	Inh, Abs, Ing, Con	Anoxia, cyanosis; headache, lassitude, dizziness; ataxia; dyspnea; tachycardia; nausea, vomiting.
RSA-048						
TCE	100 ppm 50 ppm 25 ppm	100 ppm	PEL TLV REL	Ca (1,000 ppm)	Inh, Abs, Ing, Con	Irritation of eyes, skin; headache, vertigo; visual disturbances, fatigue, tremor, nausea, vomiting; dermatitis.
1,1,2-trichloroethane	10 ppm 10 ppm 10 ppm	NA	PEL TLV REL	Ca (100 ppm)	Inh, Abs, Ing, Con	Irritation eyes, nose; liver, kidney damage; dermatitis; [potential occupational carcinogen].
1,1,2,2-tetrachloro-ethane	5 ppm 1 ppm 1 ppm	NA	PEL TLV REL	Ca (100 ppm)	Inh, Abs, Ing, Con	Nausea, vomiting, abdominal pain; tremor fingers; jaundice, hepatitis, dermatitis; kidney damage; [potential occupational carcinogen].

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
Dibromo-chloroethane	NA	NA	PEL TLV REL	NA	Inh, Abs, Ing, Con	Sleepiness or sedation liver and kidney injury; central nervous system depression and respiratory failure.
Benzo[a] anthracene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Benzo[b] fluoranthene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Manganese	0.02 mg/m^3 1 mg/m^3	C 5 mg/m^3 3 mg/m^3	PEL TLV REL	500 mg/m^3 (as Mn)	Inh, Ing	Manganism; mental confusion; metal fume fever: dry throat, cough, chest tightness, dyspnea, flu-like fever; low-back pain; vomiting; malaise; lassitude; kidney damage.
RSA-059						
Arsenic	0.01 mg/m^3 0.01 mg/m^3	Ca 0.002 mg/m^3	PEL TLV REL	5 mg/m^3	Inh, Ing Con	Cough, diarrhea, shortness of breath, vomiting, grey skin. Redness.
Cadmium	0.005 mg/m^3 0.01mg/m^3 0.002 mg/m^3	NA	PEL TLV REL	Ca (9 mg/m^3) (as Cd)	Inh, Ing	Pulmonary edema, dyspnea, cough, chest tightness, substernal pain; headache; chills, muscle aches; nausea, vomiting, diarrhea; anosmia, emphysema, proteinuria, mild anemia; [potential occupational carcinogen].
Chromium	1 mg/m^3 0.5 mg/m^3 0.5 mg/m^3	NA	PEL TLV REL	250 mg/m^3 (as Cr)	Inh Ing, Con	Irritation eyes, skin; lung fibrosis (histologic).
Silver	0.01 mg/m^3 0.1 mg/m^3 0.01 mg/m^3	NA	PEL TLV REL	10 mg/m^3 (as Ag)	Inh Ing, Con	Blue-gray eyes, nasal septum, throat, skin; irritation, ulceration skin; gastrointestinal disturbance.
Lead	0.05 mg/m^3 0.05 mg/m^3 0.05 mg/m^3	NA	PEL TLV REL	100 mg/m^3 (as Pb)	Inh Ing, Con	lassitude, insomnia; facial pallor; anorexia, weight loss, malnutrition; constipation, abdominal pain, colic; anemia; tremor; paralysis wrist, ankles; kidney disease; irritation eyes'; hypertension.
Chlorobenzene	75 ppm 10 ppm	NA	PEL TLV REL	1,00 ppm	Ing, Inh, Con	Irritation eyes, skin, nose; drowsiness, incoordination.
TCE	100 ppm 50 ppm 25 ppm	100 ppm	PEL TLV REL	Ca (1,000 ppm)	Inh, Abs, Ing, Con	Irritation of eyes, skin; headache, vertigo; visual disturbances, fatigue, tremor, nausea, vomiting; dermatitis.

Chemical	TWA[a]	STEL/ CEIL(C) [b]	Source [c]	IDLH (NIOSH) [d]	Route	Symptoms of Exposure
1,2-DCE	200 ppm 200 ppm 200 ppm	NA	PEL TLV RE	1,000 ppm	Inh, Ing, Con	Irritation eyes, respiratory system; central nervous system depression.
Pentachloro phenol	0.5 mg/m^3 0.5 mg/m^3 0.5 mg/m^3	NA	PEL TLV RE	2.5 mg/m^3	Inh, Abs, Ing, Con	Irritation eyes, nose, throat; sneezing, cough; lassitude, anorexia, weight loss; sweating; headache, dizziness; nausea, dyspnea, chest pain; high fever; dermatitis.
Benzo(a) anthracene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80 mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Benzo[b] fluoranthene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80 mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Dibenz(a,h) anthracene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80 mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Indeno(1,2,3-cd)pyrene[g]	0.2 mg/m^3 Ca 0.1 mg/m^3	NA	PEL TLV REL	Ca (80 mg/m^3)	Inh, Con	Dermatitis, bronchitis [potential occupational carcinogen].
Bis(2-chloroethyl) ether	5 ppm 5 ppm	C 15 ppm 10 ppm 10 ppm	PEL TLV REL	Ca (100 ppm)	Inh, Abs, Ing, Con	Irritation nose, throat, respiratory system; cough; nausea, vomiting; [potential occupational carcinogen].
Alpha-BHC	0.5 mg/m^3 0.5 mg/m^3 0.5 mg/m^3	NA	PEL TLV REL	50 mg/)m^3	Inh, Abs, Ing, Con	Irritation eyes, skin, nose, throat; headache; nausea; resp difficulty; cyanosis; muscle spasm.
Beta-BHC	0.5 mg/m^3 0.5 mg/m^3 0.5 mg/m^3	NA	PEL TLV REL	50 mg/m^3	Inh, Abs, Ing, Con	Irritation eyes, skin, nose, throat; headache; nausea; resp difficulty; cyanosis; muscle spasm.
Aldrin	0.25 mg/ m^3 0.05 mg/ m^3 0.25 mg/ m^3	NA	PEL TLV REL	Ca (25 mg/m^3)	Inh, Abs, Ing, Con	Headache, dizziness; nausea, vomiting, malaise tonic convulsions; coma; hematuria; [potential occupational carcinogen].
Dieldrin	0.25 mg/m^3 0.1 mg/m^3 Ca 0.25 mg/m^3	NA	PEL TLV REL	Ca (50 mg/m^3)	Inh, Ing, Con, Abs	headache, dizziness; nausea, vomiting, malaise, sweating; [potential occupational carcinogen].
Aroclor 1254	0.5 mg/m^3 0.5 mg/m^3 0.001 mg/m^3	NA	PEL TLV REL	Ca (5 mg/m^3)	Inh, Ing, Con, Abs	irritation eyes, chloracne; liver damage; reproductive effects; [potential occupational carcinogen].
Aroclor 1016	0.5 mg/m^3 0.5 mg/m^3 0.001 mg/m^3	NA	PEL TLV REL	Ca (5 mg/m^3)	Inh, Ing, Con, Abs	irritation eyes, chloracne; liver damage; reproductive effects; [potential occupational carcinogen].

Chemical	TWA[(a)]	STEL/ CEIL(C) [(b)]	Source [(c)]	IDLH (NIOSH) [(d)]	Route	Symptoms of Exposure
RSA-255						
Manganese	0.02 mg/m^3 1 mg/m^3	C 5 mg/m^3 3 mg/m^3	PEL TLV REL	500 mg/m^3 (as Mn)	Inh, Ing	Manganism; mental confusion; metal fume fever: dry throat, cough, chest tightness, dyspnea, flu-like fever; low-back pain; vomiting; malaise; lassitude; kidney damage.

Notes:

(a) The time-weighted average (TWA) concentration for a normal workday (usually 8 or 10 hours) and a 40-hour work week, to which nearly all workers may be repeatedly exposed, day after day without adverse effect.

(b) Short-term exposure limit (STEL). A 15-minute TWA exposure that should not be exceeded at any time during a workday, even if the TWA is not exceeded.

(c) PEL - Occupational Safety and Health Administration (OSHA) permissible exposure limit (29 Code of Federal Regulations [CFR] 1910.1000, Table Z). AEL - Airborne Exposure Limit. TLV - American Conference of Governmental Industrial Hygiene (ACGIH) threshold limit value—TWA. REL - National Institute for Occupational Safety and Health (NIOSH) recommended exposure limit.

(d) IDLH (NIOSH)—Immediately dangerous to life or health (NIOSH). Represents the maximum concentration from which, in the event of respirator failure, one could escape within 30 minutes without a respirator and without experiencing any escape-impairing or irreversible health effects.

(e) No data on acute inhalation toxicity are available on which to base the IDLH for ethylene glycol dinitrate (EGDN) and/or nitroglycerin. The chosen Immediately Dangerous to Life and Health (IDLH), therefore is based on chronic toxicity data concerning the physiological response to animals to EGDN (NIOSH for Nitroglycerine, May 1994)

(f) No inhalation toxicity data are available on which to base an IDLH for dinitrobenzene. Therefore, the revised IDLH for dinitrobenzene is 50 mg/m3 based on acute oral toxicity data in humans [Deichmann and Gerarde 1969] (NIOSH for dinitrobenzene

(g) Exposure limits are based on coal tar pitch.

µg/L – micrograms per liter
Abs – skin absorption
Ag – Silver
Beta-BHC – Beta-hexachlorocyclohexane
C = Ceiling limit value which should not be exceeded at any time.
Ca – Carcinogen
Cd – Cadmium
Co – Cobalt
Con – skin and/or eye contact
Cr - Chromium
CT – carbon tetrachloride
DCE - dichloroethene
DDT – Dichlorodiphenyltrichloroethane
DNT – dinitrotoluene
Hg - mercury
Inh – inhalation
Ing – ingestion
mg/m^3 – milligrams per cubic meter
Mn – Manganese
NA – Not applicable
ND – Not determined
Pb - Lead
PCE - Tetrachloroethene
ppm – parts per million
RDX – 1,3,5-trinitro-1,3,5-triazine
TCE – trichloroethene

Table A16-2: Chemical Contaminants

Chemical	Max (mg/kg)	PEL	TLV	Exposure Routes and Symptoms	Fire/ Reactivity Hazards
Gasoline	NA	300 ppm STEL 500 ppm	900 mg/m^3	Routes of exposure: inhalation, ingestion, and skin contact Symptoms: Irritation eyes, skin, mucous membrane; dermatitis; headache, lassitude (weakness, exhaustion), blurred vision, dizziness, slurred speech, confusion, convulsions; chemical pneumonitis (aspiration liquid); possible liver, kidney damage; [potential occupational carcinogen]	Flammable; Flash Point = -45 ºF
Diesel Fuel	NA	none	100 mg/m^3	Routes of exposure: inhalation, ingestion, and skin contact Skin and upper respiratory irritation. May cause central nervous system effects, dizziness, nausea, etc.	Combustible ; Flash Point >100 ºF

Notes:

ºF – degrees Fahrenheit
> – greater than
NA – Not Applicable
PEL – Permissible Exposure Limit
ppm – parts per million
mg/kg – milligrams per kilogram
mg/m^3 – milligrams per cubic meter
STEL – Short term exposure limit
TLV – Threshold Limit Value

3.0 TRAINING

See Section 4 of the APP.

4.0 TRAINING

See Section 6 of the APP.

5.0 PERSONAL PROTECTIVE EQUIPMENT

5.1 Selection

Unless otherwise approved by the SSHO, all activities will include at least American National Standards Institute (ANSI)-approved hard hats, safety-toe footwear, safety glasses with side impact protection and high visibility garments. Other Personal Protective Equipment (PPE) requirements are listed below, and included in the AHAs for specific activities/tasks.

Table A16-3. PPE Selection

Activity	Respiratory Protection	Body Protection*	Hand Protection	Eye/Face/Other Protection	Hearing Protection	Fall Protection
Mobilization, Site Inspection and Site Preparation	NA	Level D	Leather palm work gloves; cut resistant gloves if sharp objects, cutting devices, or sharp edges are present	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA
Environmental Sampling	NA	Modified Level D[(a)]	Leather or cut resistant gloves when cutting plastic tubes/ nitrile gloves when sampling	Safety glasses; for splash hazards, face shield with safety glasses or goggles	Plugs or muffs if necessary, based on equipment use	NA
Well Installation, Maintenance, and Abandonment	NA	Level D	Nitrile or Leather palm work gloves	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA
Landfill Repair and Maintenance	NA	Level D	Nitrile or Leather palm work gloves	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA
LUC inspections and Geophysical Survey	NA	Level D	Nitrile or Leather palm work gloves	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA

Activity	Respiratory Protection	Body Protection*	Hand Protection	Eye/Face/Other Protection	Hearing Protection	Fall Protection
MIP Survey	NA	Level D	Nitrile or Leather palm work gloves	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA
Excavation, Transportation, and Disposal	NA	Modified Level D[(b)]	Nitrile or Leather palm work gloves	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA
ISEB injection	NA	Level D	Nitrile or Leather palm work gloves	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA
Disc and Raking Contaminated Soil	NA	Modified Level D[(b)]	Nitrile or Leather palm work gloves	Safety glasses	Plugs or muffs if necessary, based on equipment use	NA
Equipment Decontamination, Demobilization and Site Restoration[(a)]	NA	Level D	Nitrile or Leather palm work gloves	Safety glasses and face shield and apron (if necessary, for equipment decon)	Plugs or muffs if necessary, based on equipment use	NA

Notes:

(a) – A face shield with safety glasses or goggles shall be used during activities where a splash hazard exists. Wear permethrin treated gaiters when in grassy areas.

(b) – If direct contact with soils, boot covers/ over boots and Tyvek ® may be required. SSHO will determine when boot covers and Tyvek ® are needed.

* - Level D body protection includes high visibility Class II garment.

ISEB – In-Situ Enhanced Bioremediation

LUC – Land Use Control

MIP – Membrane Interface Probe

NA – Not applicable

5.2 Use and Limitations

Read and follow all manufacturer instructions regarding product use and limitations!!!

Body protection – Wear normal work clothing including high visibility Class II garment. During soil disc and raking and excavation activities, boot covers /over boots and Tyvek ® may be required. The SSHO will determine when these over garments are required.

Hand protection – Use gloves described in **Table A16-3**. Chemical protective gloves are meant for incidental contact. Change gloves in the event of immersion unless specifically selected for that purpose. Inspect frequently and change gloves on signs of contamination, and when protection is compromised by wear and tear.

Eye/face protection – Wear protection prescribed in **Table A16-3**. Discard when protection is scratched or worn impacting visibility. If face shields are worn for chemical splash, also wear splash goggles underneath. Safety glasses will be worn under face shields for impact protection and under welding helmets. Lens shade will be selected based on hazard, following SOP Environment, Safety and Quality (ESQ)-6.1 (Task Instruction 6.1.02)

Hearing Protection – Wear hearing protective devices in accordance with manufacturers' instructions, including fitting and insertion. Use of specific devices will be limited to exposures within the noise reduction ratings.

Fall Protection – For the activities covered by this SSHP, fall protection is not anticipated; however, if it becomes necessary, the Safety and Health Manager (SHM) will prepare a site-specific fall protection plan and submit it to the Contracting Officer's Representative (COR) for acceptance before proceeding.

5.3 Work Mission Duration

Work mission durations will be limited to accommodate acceptable service life of the PPE.

Where PPE may cause a hazard, such as heat stress, work mission duration will be determined in the AHA by the SSHO with the assistance of the SHM. Employees must exit the exclusion zone (EZ) for rest or monitoring in accordance with the established schedule.

5.4 PPE Maintenance and Storage

It is important that all PPE be kept clean and properly maintained. Cleaning is particularly important for eye and face protection where dirty or fogged lenses could impair vision. Employees must inspect, clean, and maintain their PPE according to the manufacturers' instructions before and after each use. Supervisors are responsible for ensuring that users properly maintain their PPE in good condition.

Personal protective equipment must not be shared between employees until it has been properly cleaned and sanitized. PPE will be distributed for individual use whenever possible. Where employees provide their own protective equipment, ECC will be responsible to assure its adequacy, including proper maintenance, and sanitation of such equipment.

5.5 PPE Decontamination and Disposal

It is anticipated that most of the PPE utilized on the project, beyond the basic PPE elements (hard hat, safety glasses, steel-toed boots, leather gloves), will be of a disposable nature (nitrile or other chemical gloves, ear plugs, boot covers, and Tyvek ®). Contaminated PPE will be collected in a dedicated container and disposed of appropriately at a suitable facility. Based on the contaminants present and their concentrations it is anticipated that disposable PPE will be disposed of as non-hazardous waste.

Earmuffs, safety glasses, and other non-disposable forms of PPE will be routinely wiped clean of any visible contamination after each use.

5.6 PPE Training and Proper Fitting

Users will be trained on the selection, use and limitations of PPE. Each affected employee will demonstrate an understanding of the training specified in this section, and the ability to use PPE properly, before being allowed to perform work requiring the use of PPE.

Should ECC have reason to believe that any affected employee who has already been trained does not have the understanding and skill required of this section, the employer will retrain that employee.

Gloves, head gear, coveralls, and footwear must fit properly to avoid tripping and snagging hazards, or constriction and tearing. Hearing protection will be checked by the user and SSHO for proper fit and must be inserted/worn in accordance with manufacturer instructions.

5.7 PPE Donning and Doffing Procedures

The SSHO will train on and demonstrate proper donning and doffing procedures for PPE ensembles worn in EZs during site orientation.

5.8 PPE Inspection Procedures

Each person who is required to wear PPE will inspect their equipment prior to, during, and after each use. Defective or damaged equipment will not be used. Heavily contaminated PPE that cannot be adequately cleaned will be discarded. Stored PPE will be inspected every month to ensure that it has not been damaged and is suitable for use. Workers who wear PPE in the field will take note of the condition of the PPE worn by their co-workers and inform them of any apparent problems, such as missing equipment, tears in protective clothing, excessive contamination, improper use of PPE, inadequate PPE, etc.

5.9 Evaluation of Effectiveness of PPE Program

The SSHO will inspect the jobsite each day and as frequently as necessary to ensure that PPE has been properly selected and is being used as designed. The SSHO will also inspect PPE stored for emergency use every month. Similar PPE inspections will be conducted by ECC's SHM during scheduled visits of the project site.

6.0 MEDICAL SURVEILLANCE

Employees on this project whose work involves potential exposure to site contaminants will be included in the medical surveillance program.

Personnel will have a current medical exam clearance (physician's written opinion) in accordance with Occupational Safety and Health Administration (OSHA) standards prior to entering regulated work areas in accordance with 29 Code of Federal Regulations (CFR) 1910.120. ECC uses the services of WorkCare, whose Principal is Dr. Peter Greaney, a Board-Certified Occupational Physician to review all exams and provide the clearances, which include an assessment of employee ability to wear respiratory protection and PPE safely. Complete results of each individual's medical examination results are maintained by the medical provider and will not to be kept on-site. The SSHO will ensure appropriate subcontractor's medical screenings are completed, documented, and the physician's written opinions are available at the work site.

7.0 EXPOSURE MONITORING AND AIR SAMPLING

Based on historical sampling analysis data (low-level concentrations of volatile organic compounds [VOCs]), elevated levels of VOCs in the breathing zone are not anticipated, air monitoring is not required during intrusive activities; however, air monitoring will be performed in the general work area and the breathing zone prior to starting intrusive activities to establish background concentrations. Personnel performing testing and monitoring will be trained in testing and monitoring procedures and hazards. Monitoring equipment will be used, inspected, maintained, and properly calibrated in accordance with the manufactures' instructions and standard industrial hygiene practice.

Table A16-4 below lists the monitoring requirements and response actions for this project. All direct and integrated air monitoring equipment will be properly calibrated before and after each period of use in accordance with the manufactures' instructions and standard industrial hygiene practice.

Table A16-4. Exposure Monitoring

Real Time (air, noise, heat, radiation, light)			
Instrument / Contaminant	**Frequency**	**Action Levels**	**Actions/Upgrade and Rationale**
Multi-RAE Plus or equivalent / VOCs	During any intrusive activities	Work Area: Sustained reading of 5 ppm in the breathing zone.	Stop activities, suspend work activities for 15 to 30 minutes; if readings are sustained then contact SHM[(a)].
OSHA/NIOSH HEAT Index App + Body Temp / Heart Rate Monitoring	Daily during work in hot conditions (> 85°F Level D, > 70°F when impervious coveralls worn)	Variable depending on the individual and work activity	Follow Precautions recommended by the HEAT Index app. Implement physiological monitoring when Heat Index indicates Moderate Risk for employees in protective clothing working in sunlight; and for other workers when Heat Index indicates High Risk; and for any workers indicating signs and symptoms of heat stress.

Notes:
(a) Contact with the SHM must be made prior to continuance of work. The SHM may then initiate perimeter/integrated air sampling along with additional engineering controls.
°F – degrees Fahrenheit
> – greater than
PID – Photoionization detector
ppm – parts per million
NIOSH – National Institute for Occupational Safety and Heath
OSHA – Occupational Safety and Health Administration
VOC – Volatile organic compounds

Records will include the date, time, substances or hazards monitored, person conducting monitoring, calibration date and method, operations and location of monitoring, and results. Records are available to employees, their representatives, and to the Army.

8.0 HEAT STRESS/COLD STRESS

See Attachments 12A and 12B in the APP.

9.0 STANDARD OPERATING PROCEDURES

The following procedures will be employed on this project where appropriate.

9.1 Site Rules/Prohibitions

The following site rules are applicable to all ECC projects:

- Eat, drink, use gum or tobacco products, or apply cosmetics in designated areas only.
- Do not smoke within site areas or near flammable or combustible materials; areas shall be marked where smoking is permitted.
- Use the buddy system when working in EZ. Know who your buddy is, communicate regularly with each other, and be alert to signs of distress in your buddy.
- Wash hands, face, and any exposed skin during decontamination, before eating, drinking or using tobacco products, and at the end of each shift.
- Participate in Daily Safety Tailgate Meetings.
- Continually observe work location and be alert to changes that may affect safety.

- Avoid direct contact with contamination by not purposefully walking, touching, or contacting any obviously contaminated surfaces.
- Immediately report any mishaps, including near misses, or unusual situations to SSHO.
- Use PPE provided and as instructed by the SSHO.
- Avoid hand-to-mouth or hand-to-face activities.
- Testing and monitoring instruments, safety equipment, rigging, hand and power tools, vehicles and mobile construction equipment shall be inspected prior to use.
- Minimize the number of personnel in a work area to reduce potential exposures.
- Work within physical and mental limits.
- Take adequate rest breaks and replace body fluids (water and electrolyte) continuously.
- At all times follow the instructions of the SSHO or designee.
- Do not deviate from the APP or the instruction of the SSHO.
- Avoid rushing and/or taking short cuts.
- Handle and dispose all waste generated from decontamination procedures per contract requirements.
- Conduct visual checks on machinery and equipment prior to use, and complete the daily inspection form.
- Take precautions to prevent spillage and splashing; contain spilled liquid if possible.
- Alert your senses to potentially dangerous situations (e.g., strong, irritating, or nauseating odors).
- Familiarize yourself with the physical characteristics of the sites.
- Dispose of all wastes generated during activities as directed by the Supervisor, SSHO or designee.

Conformance with these site rules is mandatory for continued project participation.

9.2 Work Permit Requirements

Excavation/Digging Permit: Where required, ECC will obtain a dig permit from the authority having jurisdiction. The dig permit will be updated prior to expiration. Work will stay within the parameters on the permit. If excavation is extended in terms of area or time, a new/revised permit will be obtained.

Control of Hazardous Energy Permits: Where equipment or systems must be de-energized to safely work on them, and a specific written procedure does not exist for the equipment, a Lockout/Tagout permit will be completed in accordance with ECC SOP ESQ 7.3.

9.3 Material Handling Procedures

Contaminated groundwater and soil from sampling activities will be contained, labeled and disposed of properly in accordance with appropriate characterization.

9.4 Drum/Container/Tank Handling Procedures

Investigation Derived Waste (IDW) generated during the field activities will consist of soil, sediment, surface water, and groundwater. Field sampling team will ensure that the containers are labeled, handled, stored, and secured in accordance with applicable regulations. IDW will be characterized and disposed of at the proper facility.

10.0 CONTAMINATION CONTROL, SANITATION AND WASTE MANAGEMENT

The following sections describe the contamination control during the field activities.

10.1 Work Zones

Access to the sites are limited to authorized project personnel, approved subcontractors and their employees, and local/State/Federal agency staff escorted by site personnel.

For the purposes of Work Zone Delineation, the site perimeters will encompass an area slightly larger than the portion of the site identified for activities. The perimeter of the sites will be properly delineated (caution tape or high visibility fencing).

10.1.1 Support Zone

The Support Zone (SZ) is located outside the Contamination Reduction Zone (CRZ) and within the site perimeter. The support zone is an uncontaminated (clean) area where personnel will not be exposed to hazardous materials or contaminants.

10.1.2 Contamination Reduction Zone

The CRZ is located in between and serves as a buffer between the SZ and the EZ. The CRZ is intended to prevent the spread of contamination and is utilized for both personnel and equipment decontamination.

10.1.3 Exclusion Zone

The EZ is the work area where, based on planned activities, there is potential for worker exposure to site contaminants. The EZ is bounded by the CRZ and accessed only through the Contamination Reduction Corridor (CRC). The EZ perimeter will be delineated with caution tape or high visibility fencing.

10.2 Access Controls

The SSHO and Site Superintendent will establish the physical boundaries of each zone and instruct all workers and visitors on the limits of the restricted areas. No one will be allowed to enter the restricted area without the required PPE for that area. The Site Superintendent will ensure compliance with all restricted area entry and exit procedures. The Site Superintendent will also designate a decontamination point for personnel to exit the contaminated area and to enter the clean area, which is where personnel may eat and rest.

All site personnel and/or visitors entering and exiting the EZ or the CRZ will be required to log-in/log-out from the site on a daily basis. The log will be maintained at the entrance.

10.3 Hazard Briefing

No person will be allowed on the site during site operations without first participating in a hazard briefing. In general, the briefing will consist of a review of the SSHP and the tailgate safety meeting. All persons on the site, including visitors, must sign the SSHP Acknowledgment Sheet and Tailgate Safety Meeting Form. Tailgate safety meetings will be held daily before site activities begin.

10.4 Visitor Access

The following section describes how to handle visitors to the site.

10.4.1 Approach

If unannounced visitors arrive at a site, ECC employees should approach them, introduce themselves, and respectfully ask the visitors to identify themselves and state their business. An effort should be made to distinguish between ECC workers and subcontractors and people for whom ECC is not responsible for enforcing health and safety rules on job sites, such as client representatives, agency representatives, and other visitors authorized by the client. For example, hardhats and safety glasses may be a requirement in the SZ or anywhere on the site for workers, but to enforce this requirement on all visitors may not be necessary. A respectful explanation of what areas to avoid may be all that is necessary.

10.4.2 Unauthorized Visitors

If visitors are unauthorized, ECC employees should explain to the visitors that entry to the site is restricted because the site contains hazards. The site boundaries and any other relevant restrictions should be pointed out to the visitors.

10.4.3 Visitors Authorized to View the Site from the SZ

If visitors are authorized by the client to see the site from the SZ, ECC employees should do the following:

- Review the tailgate safety meeting form with them and ask them to sign it;
- Provide the visitors with hardhats, safety glasses, and safety vests, if applicable; and,
- Prohibit entry to the EZ.

10.4.4 Visitors Authorized to Enter the EZ During Ongoing Work Activities

If the visitors are authorized by the client to enter the EZ, ECC employees should do the following:

- Verify that they have current Hazardous Waste Operations and Emergency Response (HAZWOPER) training;
- Verify that they had a current physical exam authorizing work on hazardous waste sites;
- Review the SSHP and the tailgate safety meeting form and have the visitors sign the acknowledgement forms of all documents;
- Provide the PPE required for the site; and,
- Escort the visitor while in the EZ.

10.4.5 Refusal

If visitors refuse to comply with any one of the requirements listed in the previous sections, and the **client authorizes** the visitor to enter the EZ anyway, ECC will **shut down** any potentially hazardous equipment and take all practicable steps to eliminate other hazards and exposures. The event will be thoroughly documented.

Visitors who refuse to comply and are not authorized by the client should be asked to leave. Contact the local police if problems occur with visitors who refuse to leave.

10.5 Emergency Entry and Exit

People who will enter the site on an emergency basis will be briefed by the Site Superintendent regarding the hazards. All hazardous activities will cease in the event of an emergency. Attachment 1, "Emergency Action Plan," provides more information for emergency procedures.

10.6 Personal Hygiene and Decontamination Procedures

The importance of good hygiene practices will be emphasized with all site workers. Upon exiting the EZ and CRZ, workers and/or site visitors will enter the CRZ and carefully remove all designated PPE, wash their hands, face, and forearms prior to eating, drinking or smoking. Smoking, eating and drinking will only be allowed in clean work areas (i.e. SZ).

10.7 Equipment Decontamination Procedures

Heavy equipment will be decontaminated using dry methods, a pressure washer, and/or equivalent. Hand tools and smaller equipment will be decontaminated using a non-phosphate detergent scrub, followed by fresh water and distilled or deionized water rinses. Prior to removal from site, decontaminated equipment and material will be inspected and accepted by the SSHO and the Site Superintendent.

11.0 EMERGENCY PLANNING

See the Emergency Action Plan, Attachment 1 to the APP.

12.0 PRE-ENTRY BRIEFING

As discussed in Section 6 of the APP and above, all personnel entering the site will be provided with site-orientation training, and must be present at the daily tailgate meeting.

13.0 EFFECTIVENESS OF PLAN

The effectiveness of this SSHP will be determined by the inspections listed in Section 7 of the APP, as well as from incident investigations and input by site personnel including reports of hazards, safety observations, and suggestions for improvement

APPENDIX G

SITE MONITORING PLAN

This page intentionally left blank.

SITE MONITORING PLAN
RSA-262, CWS WAREHOUSE AREA
OPERABLE UNIT 08
(Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027)
REVISION 1

ENVIRONMENTAL REMEDIATION SERVICES
U.S. ARMY GARRISON-REDSTONE ARSENAL

April 2023

Prepared for:

U.S. ARMY ENVIRONMENTAL COMMAND
Southeast-Environmental Service and Support Division
2455 Connell Road, Building 2266
Fort Sam Houston, TX 78234

Prepared by:

ECC
9200 Church Street
Manassas, VA 20110

Contract No. W9124J-18-D-004, Delivery Order W9124J21F0020

TABLE OF CONTENTS

1. INTRODUCTION 1-1

1.1 Objective and Scope 1-1

2. DESCRIPTION OF RSA-262 2-1

2.1 Overview 2-1
2.2 Site History 2-1
2.3 Topography and Surface Hydrology 2-3
2.4 Geology 2-3

2.4.1 Hydrogeology 2-4

3. SITE MONITORING PROGRAM 3-1

3.1 Scope and Implementation Strategy for the Site Monitoring Program 3-1
3.2 Applicable Standard Operating Project Procedures 3-1
3.3 RSA-262 Project Specific QAPP Worksheets 3-2
3.4 Monitoring Wells Proposed for Groundwater Monitoring 3-2
3.5 Constituent List and Sampling Frequency 3-3
3.6 Sampling and Analytical Protocol 3-2
3.7 Quality Assurance/Quality Control 3-2

4. DATA EVALUATION AND REPORTING 4-1

4.1 Data Evaluation and Interpretation 4-1
4.2 Reporting 4-2

5. MONITORING WELL MAINTENANCE PLAN 5-1

5.1 Well Redevelopment 5-1
5.2 Well Replacement or Closure 5-1
5.3 Well Inspections 5-1

6. REFERENCES 6-1

LIST OF TABLES

Table G-1 Worksheet #12 – Measurement Performance Criteria
Table G-2 Worksheet #15 – Preliminary Screening Values and Laboratory Specific Limits – Groundwater and Soil
Table G-3 Worksheet #17 – Sampling Design and Rationale
Table G-4 Worksheet #18 – Sample Locations, Analytical, and SOPP Requirements
Table G-5 Worksheet #19 & 30 – Sample Containers, Preservation and Hold Times
Table G-6 Worksheet #20 – Field Quality Control Sample Summary
Table G-7 Worksheet #23 – Analytical Standard Operating Procedures
Table G-8 Worksheet #24 – Analytical Instrument Calibration
Table G-9 Worksheet #25 – Analytical Instrument and Equipment Maintenance, Testing and Inspection
Table G-10 Worksheet #26 – Sample Handling, Custody and Disposal
Table G-11 Worksheet #28 – Analytical Quality Control and Corrective Action

ACRONYMS AND ABBREVIATIONS

<	less than
≤	less than or equal to
>	greater than
≥	greater than or equal to
%	percent
% Rec.	percent recovery
°C	degrees Celsius
µg/L	micrograms per liter
µg/mL	micrograms per milliliter
A	Analytical
AAC	Alabama Administrative Code
ADEM	Alabama Department of Environmental Management
AEL	Advanced Environmental Laboratory
amsl	above mean sea level
APP	Accident Prevention Plan
APTIM	Aptim Federal Services, LLC
ARBCA	Alabama Risk-Based Corrective Action
BFB	Bromofluorobenzene
bgs	below ground surface
btoc	below top of casing
CA	Corrective Action
$CaCO_3$	calcium carbonate
CAS	Chemical abstract service
CB&I	CB&I Federal Services, LLC
CCB	Continuing Calibration Blank
CCV	Continuing Calibration Verification
CG	Cleanup goal
CLP	Contract Laboratory Program
CMI	Corrective Measures Implementation
CMO	Corrective Measure Objectives
CO_2	carbon dioxide
COC	Contaminant of concern
COPEC	Chemicals of Potential Ecological Concern
CS	Composite sample
CT	Carbon tetrachloride
DDT	Dichlorodiphenyltrichloroethane
DFTPP	Decafluorotriphenylphosphine
DIA	Defense Intelligence
DL	Detection limit
DO	Dissolved oxygen
DoD	Department of Defense
DQI	Data quality indicator
DUA	Data Usability Assessment
DVW	Data Validation Worksheets
EB	Equipment Blank
ECC	Environmental Chemical Corporation

EDD	Electronic Data Deliverable
EDL	Estimated Detection Limit
EDMS	Environmental Data Management System
Eff.	Effective
ER	Equipment rinsate
ERIS	Environmental Remediation Information System
FD	Field duplicate
FID	Flame Ionizing Detector
Ft	feet
GC/FID	Gas Chromatography/Flame Ionization Detector
GC/MS	Gas Chromatography/Mass Spectrometry
GW	groundwater
GCWD	Gulf Chemical Warfare Depot
H_2SO_4	sulfuric acid
HCl	hydrochloric acid
HDPE	High-density polyethylene
HGL	HydroGeoLogic, Inc.
HHRA	Human Health Risk Assessment
HPLC	High performance liquid chromatography
HS-GC	Headspace Gas Chromatography
IB	Instrument blank
IC	Ion Chromatography
ICAL	Initial calibration
ICV	Initial calibration verification
IDW	Investigation-Derived Waste
IS	Internal standard
ISEB	In-situ enhanced bioremediation
IW-QAPP	Installation-Wide Quality Assurance Project Plan
L/min	liters per minute
LCS	Laboratory Control Sample
LCSD	Laboratory Control Sample Duplicate
LOD	Limit of Detection
LOQ	Limit of Quantitation
LUC	Land-Use Control
M	molar
MAG	Monitoring Acceptance Goal
MB	Method blank
MCL	Maximum Contaminant Level
MEE	methane, ethane, ethene
mg	milligrams
mg/kg	milligrams per kilogram
mg/L	milligrams per liter
Microbac	Microbac Laboratory
mL	milliliter
mL/min	milliliter per minute
MNA	Monitored Natural Attenuation

MPC	Measurement Performance Criteria
MS	Matrix spike/Mass spectrometry
MSD	Matrix spike duplicate
NA	Not applicable
NTU	nephelometric turbidity units
OU	Operable Unit
ORP	Oxidation-reduction potential
oz	ounce
PAH	polycyclic aromatic hydrocarbons
PCE	Tetrachloroethene
PID	photoionization detector
ppm	parts per million
PQL	Practical Quantification Limit
PSV	Preliminary Screening Value
PTFE	Polytetrafluoroethylene
QA	Quality Assurance
QAPP	Quality Assurance Project Plan
QC	Quality Control
QCP	Quality Control Plan
QSM	Quality Systems Manual
R	Coefficient of correlation
RCRA	Resource Conservation and Recovery Act
REG	Regular sample
Res.	Residential
Rev.	Revision
RFA	RCRA Facility Assessment
RFI	RCRA Facility Investigation
RPD	Relative Percent Difference
RRT	Relative Retention Time
RSA	Redstone Arsenal
RSL	Regional Screening Level
RT	Retention Time
s.u.	standard unit
S	sampling
Shaw	Shaw Environmental, Inc.
SIM	Selected ion monitoring
SLERA	Screening-Level Ecological Risk Assessment
SOP	Standard Operating Procedure
SOPP	Standard Operating Project Procedures
SPE	Solid Phase Extraction
Surr.	Surrogate
SVOC	Semivolatile organic compound
SW	Solid Waste 846
TAT	Turnaround time
TB	Trip blank
TBD	To be determined

TCA	Trichloroethane
TCE	Trichloroethene
TCLP	Toxicity Characteristic Leaching Procedure
TDS	Total Dissolved Solids
TeCA	tetrachloroethane
TIC	Total inorganic carbon
TOC	Total organic carbon
UIC	Underground Injection Control
UPL	upper prediction limit
USEPA	United States Environmental Protection Agency
UTL	Upper tolerance limit
VOA	Volatile organic analysis
VOC	Volatile Organic Compound

1. INTRODUCTION

This Site Monitoring Plan has been developed in support of the Redstone Arsenal (RSA)-262 Corrective Measures Implementation (CMI) Work Plan. This document provides details for implementation of site monitoring as a component of the corrective measures for RSA-262 contaminated groundwater in order to achieve The Cleanup Goals (CGs). The plan will include identification of soil excavation extent and wells scheduled for monitoring, monitoring parameters, the monitoring period, analytical methods, reporting, and records maintenance. The corrective measures to be implemented at RSA-262 include In-Situ Enhanced Bioremediation (ISEB) injection and site monitoring to track progress of injection substrate and natural abiotic and biotic attenuation processes in reducing the concentrations of Contaminants of Concern (COC) to CGs. Additionally, monitoring will be conducted for nitrobenzene until the concentrations meet the Monitoring Acceptance Goal (MAG).

1.1 Objective and Scope

The primary objective of the site monitoring program for RSA-262 is to determine whether the site corrective measures (ISEB injection and Monitored Natural Attenuation [MNA]) reduce concentrations of the following COCs in groundwater and soil beneath the site to levels determined to be acceptable to human health (i.e., CGs). Nitrobenzene will also be monitored for concentrations beneath the MAG.

Analyte	CG	CG Reference
Groundwater (µg/L) – ISEB and MNA		
1,1,2,2-Tetrachloroethane	0.058	Risk-based
1,1,2-Trichloroethane	5	MCL
Carbon Tetrachloride	5	MCL
Chloroform	80	MCL
Tetrachloroethene	5	MCL
Trichloroethene	5	MCL
Dibenz(a,h)anthracene	0.019	Risk-based
2-Nitrotoluene	2.1	Risk-based
Nitrobenzene	0.14	MAG/RSL
Groundwater – UIC Permit Monitoring		
TDS (mg/L)	UIC permit requirement	
Nitrate (mg/L)	UIC permit requirement	
pH (s.u.)	UIC permit requirement	
Soil (mg/kg)		
Benzo(a)anthracene	0.03	RSL
Benzo(a)pyrene	0.2	MCL
Benzo(b)fluoranthene	0.25	RSL
Dibenz(a,h)anthracene	0.025	RSL

Notes:
µg/L – micrograms per liter
CG – Cleanup Goal
ISEB – In-situ enhanced bioremediation
MAG – Monitoring Acceptance Goal
MCL – Maximum Contaminant Limit
mg/L – milligrams per liter
MNA – monitored natural attenuation
RSL – Regional Screening Level
s.u. – standard units
TDS – Total Dissolved Solids
UIC – Underground Injection Control

This plan is designed to be modified, if necessary, in response to new hydrologic or geochemical data or changes in remedial, hydrologic, technical, or land-use conditions. Recommendations for changes to the site monitoring program will be documented in annual CMI effectiveness reports.

Contaminated groundwater will be monitored as part of the corrective measures for the site. This site monitoring program is needed to track the progress of groundwater toward attaining the CGs so the site can be released for unrestricted use.

Corrective measures for soil were warranted at RSA-262 because of polycyclic aromatic hydrocarbons (PAHs) observed above the soil cleanup goals. Soil excavation was chosen as the corrective measure for this site because full removal of the PAH-contaminated soil is likely with this alternative, resulting in clean site closure without the financial liability of Land-Use Controls (LUCs).

Through ISEB injection and groundwater MNA, natural biotic and abiotic processes will act to reduce the site COCs and nitrobenzene to below the CGs and MAG, respectively. Closure for soils will be achieved after post-excavation confirmatory sampling, as discussed in Section 4.2.4 of the CMI Work Plan.

2. DESCRIPTION OF RSA-262

2.1 Overview

RSA occupies approximately 38,300 acres in Madison County, Alabama. The RSA is bounded on the north and east by the city of Huntsville, on the west by the city of Madison, on the west and southwest by Wheeler National Wildlife Refuge, and on the south by the Tennessee River. Huntsville has a population of nearly 165,000; Madison County's population is about 320,000. Approximately 330 military families reside in government quarters on RSA and approximately 40,000 government employees and contractors work at the facility. The primary mission of RSA is the development, acquisition, testing, fielding, and sustainment of aviation and missile weapon systems. Most of the installation tenants support this effort; however, RSA is also home to such diverse activities as training for handling explosives and ordnance devices, Defense Intelligence Agency (DIA) activities, and the production of iron carbonyl. The RSA is home to over 70 different tenant organizations.

2.2 Site History

RSA-262 occupies approximately 50 acres in the south-central portion of RSA, in the former Gulf Chemical Warfare Depot (GCWD) area. This site falls within Operable Unit (OU) 08 and is located within the RSA-154 groundwater unit (Figure 1 of CMIP). Approximately 15.2 acres of the site are covered by buildings or former building slabs. The Open Storage Area comprises 8.7 acres and contained former Building 8010 (open-ended Quonset hut for equipment storage and metal cutting). A small area of the site is paved with asphalt roadway, and the remainder of the site is vegetated with maintained grass. Five of the seven warehouses (Buildings 8021, 8022, 8023, 8024, and 8026) remain and are used primarily for general storage and administrative purposes. Buildings 8025 and 8027 were demolished in 2004. The foundation slab for former Building 8027 has been removed; however, the foundation slabs for former Buildings 8010 and 8025 are used for storage purposes. Each of the warehouse buildings occupy/occupied an area of approximately 110,370 square feet. Figure 2 of CMIP illustrates the location of roads, buildings, and other features at RSA-262. Eight other surface media sites listed in the Permit lie within 0.5 miles of RSA-262 (Figure 3 of CMIP).

The GCWD warehouses were constructed in October 1942 and used for storage of inert materials, such as spare parts and shipping crates, and for rehabilitation of unserviceable munitions and equipment. Rehabilitation of unserviceable items involved the inspection, classification, and repackaging of materials received from other facilities, including those overseas. A railroad spur ran between the two rows of warehouses to facilitate materials loading and unloading (Figure 2 of CMIP). By 1960, the warehouses became general purpose warehouses.

The following investigations have been conducted at RSA-262:

- RSA-154 potential source area investigation (Shaw Environmental, Inc. [Shaw], 2006)
- RSA Resource Conservation and Recovery Act (RCRA) Facility Assessment (Alabama Department of Environmental Management [ADEM], 2008)

- RSA-154 and RSA-152 RCRA Facility Investigations (RFIs) (Shaw, 2013 and CB&I Federal Services, LLC [CB&I], 2016)
- RSA-262 RFI (Aptim Federal Services, LLC [APTIM], 2018)

The investigations to date have provided sufficient characterization data for determining the nature and extent of contamination (see Section 3.0 of the RFI Report [APTIM, 2018]). The following sections present a summary of the nature and extent of contamination for PAHs in soil (Former Oil Service Pit Area only) and explosives, semivolatile organic compounds (SVOCs), and volatile organic compounds (VOCs) in site-wide groundwater as documented in the RSA-262 RFI report (APTIM, 2018).

Historical operations at RSA-262 have resulted in contamination in both soil and groundwater. Four PAHs (benzo[a]anthracene, benzo[a]pyrene, benzo[b]fluoranthene, and dibenz[a,h] anthracene) were identified as relevant COCs in soil. Five VOCs (1,1,2,2-tetrachloroethane [TeCA], 1,1,2-trichloroethane [TCA], carbon tetrachloride (CT), tetrachloroethene [PCE], and trichloroethene [TCE]), one SVOC (dibenz[a,h]anthracene), and one explosive (2-nitrotoluene) were identified as relevant COCs warranting action in groundwater. Nitrobenzene was also identified as requiring groundwater monitoring based on a Preliminary Screening Value (PSV) exceedance. Lastly, a single VOC (chloroform) was identified as a relevant soil gas COC warranting action, which will be implanted through groundwater corrective measures.

An Alabama Risk-Based Corrective Action (ARBCA) evaluation for human health and an ecological risk evaluation were performed for RSA-262 in accordance with the ARBCA guidance manual (ADEM, 2017) as part of the RFI (APTIM, 2018). Separate soil risk evaluations were conducted for the three areas of RSA-262 because the activities and historical uses of the three areas varied and were not consistent across the entire site; these areas are referred to as Former Oil Service Pit, Former Rail Spur, and Remainder of the Site. Groundwater data under the site were evaluated as one data set. The ARBCA evaluation concluded that PAHs in soil [benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, and dibenz(a,h)anthracene], VOCs, SVOCs, and a single explosive in groundwater (TeCA, TCA, CT, PCE, and TCE, dibenz[a,h] anthracene, and 2-nitrotoluene), and a single VOC in soil gas (chloroform) pose an unacceptable risk under future residential use and/or if groundwater is ever used for potable water. The results of the RFI Screening-Level Ecological Risk Assessment (SLERA) indicate that Chemicals of Potential Ecological Concern (COPECs) in surface soil at RSA-262 are unlikely to pose hazards to ecological receptor communities and/or populations, and further evaluation of ecological hazards at RSA-262 is not warranted. The CGs for RSA-262 are summarized in Section 1.1.

The Corrective Measure Objectives (CMOs) for RSA-262 (APTIM, 2018) are to:

1) reduce or prevent exposure of future residents to soil in the Former Oil Service Pit Area contaminated with PAHs (benzo[a]anthracene, benzo[a]pyrene, benzo[b]fluoranthene, and dibenz[a,h]anthracene) such that no unacceptable hazard or risk is present and
2) reduce or prevent human exposure to groundwater used for potable purposes that is contaminated with 2-nitrotoluene, dibenz(a,h)anthracene, TeCA, TCA, CT, PCE, and TCE such that applicable or relevant and appropriate requirements are met and no unacceptable hazard or risk is present.

2.3 Topography and Surface Hydrology

The RSA-262 site lies north of Buxton Road and east of Shields Road. The site is primarily vegetated with maintained lawn and unmaintained fields. It is located approximately 1.0 mile northeast of the Tennessee River and is surrounded by low-lying, flood-prone areas adjacent to the river. The buildings associated with the former GCWD are located on a topographic high bordered by forested areas, wetlands, and a small pond (Cribbs Pond) located to the northwest of the site. Drainage is radial off of the main portion of the property. Surface runoff is collected by a series of small ditches and directed to the pond or lower-lying areas bounding the site. No surface water bodies are within the site boundary. Approximately 0.26 acres in the northwestern corner of the site lie within the 100-year floodplain.

2.4 Geology

The subsurface geologic setting beneath RSA-262 includes overburden consisting of low permeability, residual red, brown, and gray clay; silty clay; and silt. Intervals of chert and chert fragments increase with depth and represent residual deposits formed by in situ chemical weathering of chert nodules and layers within the limestone bedrock.
The RSA-154/155 groundwater unit is underlain primarily by Mississippian-age carbonates (Tuscumbia Limestone and Fort Payne Formation), which are underlain by the Mississippian/ Devonianage Chattanooga Shale, a regional stratigraphic and structural marker. In the highland area along the southern boundary between RSA-154 and RSA-156/157 and the eastern boundary with RSA-146, younger Mississippian-age rocks (Monteagle Limestone and Hartselle sandstone) are mapped as remnants of an eroded Cumberland Plateau (Shaw, 2013). The RSA-154/155 surface is underlain by a residual clay overburden derived from chemical weathering of the underlying bedrock. Borehole data indicate bedrock within RSA-154/155 lies generally from 14 to 107 feet below ground surface (bgs), covering a range of elevation from 453 to 590 feet above mean sea level (amsl).

The structural framework of the RSA-154/155 area is complex. Seismic surveys completed within RSA-154/155 revealed widespread faulting, with faults extending through the entire bedrock stratigraphic section, including the Chattanooga Shale and overlying Fort Payne Formation and Tuscumbia Limestone. A number of normal faults and fault splays have been mapped, with an overall north-south trend across RSA-154/155 and RSA, in general. As shown in Figure 2 of CMIP, RSA-262 is bordered on the east and northwest by two of these north-south-trending faults and is bisected by a third north-south-trending fault.

Depth to the bedrock surface generally ranges from 26 to 70 feet bgs beneath RSA-262. The variability over such short distances is attributed to localized solution weathering of the limestone bedrock. During drilling into bedrock at RSA-262, cavities were encountered at various depths (Figure 2 of CMIP). These features are consistent with the development of epikarstic bedrock at RSA-262, similar to other locations throughout the southeastern portion of RSA (Shaw, 2003).

As previously discussed, north-south-trending faults border RSA-262 to the east and northwest and a third fault bisects the site north to south (Figure 2 of CMIP). Wells 152-RS1804D, 154-RS1765, 152-RS2232D, and 152-RS1802D are drilled immediately south of the site along the

traces of these referenced faults. These faults are no longer active; however, the bedrock along the fault traces has been weakened, and these features likely form preferential flow pathways for groundwater.

2.4.1 Hydrogeology

Groundwater beneath RSA-262 occurs in the unconsolidated overburden and in the upper portion of the carbonate bedrock. The overburden and upper bedrock comprise a single interconnected aquifer. The potentiometric surface maps shown on Figure 4 of CMIP are based on the groundwater elevations measured in March 2012 and June 2016. The potentiometric surface across RSA-262 mimics local topography across the site (Figure 4 of CMIP). Groundwater flow is directed radially off of a northwest-southeast-trending potentiometric surface high, which generally parallels the long axis of the site. There is a smaller low-relief groundwater potentiometric surface high associated with RSA-268 (March 2012). Based on the June 2016 groundwater elevation measurements, this low-relief groundwater potentiometric surface high appears to be persistent but manifests itself within the northwestern portion of the RSA-262 site instead of near the RSA-268 site (Figure 4 of CMIP).

3. SITE MONITORING PROGRAM

The Site Monitoring Program for RSA-262 includes a soil excavation and wells proposed for monitoring, sampling frequency and sampling parameters, sampling and analytical protocol, and quality assurance (QA)/quality control (QC) requirements. The laboratory-specific reference limits and evaluation tables are presented in Table G-2, PSVs and Laboratory Specific Limits. Well identifiers, sampling frequency and analytical parameters, sampling and analytical protocols, and QA/QC requirements are presented in **Tables G-4** and **G-6**. The soil excavation is shown on Figure 11 of the CMIP. The selected wells, including 16 existing, are shown on Figure 12 of the CMIP. The duration of monitoring is estimated at 35 years for the RSA-262 site, or until CGs are achieved or confirmed. Subject to ADEM approval, in the event that COC and nitrobenzene concentrations for action in all 16 monitoring wells have reached CGs and/or the MAG before that time, site monitoring will be proposed for early termination. Changes in the Site Monitoring Program can be adjusted in the recommendations section of each annual Site Monitoring Report.

3.1 Scope and Implementation Strategy for the Site Monitoring Program

Site monitoring will be performed to evaluate the effectiveness and permanence of the RSA-262 corrective measure; subsurface soil contamination monitoring through groundwater concentration reduction and MNA for groundwater.

The Site Monitoring Program is designed to maximize cost-effectiveness without compromising program and data quality using the following general strategies:

- Excavate soil to ensure that PAHs are below the site CG;
- Select and maintain an optimal number of sampling points and an appropriate analytical suite to evaluate the progress of MNA in groundwater;
- Select wells that act as indicators of contaminant concentration changes or expansion;
- Maintain surveillance for contaminant migration away from RSA-262;
- Maintain an adequate frequency of conventional and/or mainstream sampling;
- Where appropriate, utilize cost-effective analytical programs; and
- Initiate a streamlined data management and reporting information system.

3.2 Applicable Standard Operating Project Procedures

Copies of the following applicable Standard Operating Project Procedures (SOPPs) to be applied at RSA-262 are presented in Volume II of the *Installation-Wide Quality Assurance Project Plan* (IW-QAPP) (HydroGeologic, Inc. [HGL], 2019):

- SOPP 1.0, Field Documentation
- SOPP 2.0, Collection and Field Screening of Soil Samples
- SOPP 3.0, Field Equipment Decontamination
- SOPP 4.0, Investigation-Derived Waste (IDW)
- SOPP 5.0, Surface Soil Sampling

- SOPP 6.0, Subsurface Soil Sampling
- SOPP 7.0, Groundwater Sampling
- SOPP 11.0, Field Generated Records Management
- SOPP 12.0, Field Measurable Physical Characteristics
- SOPP 15.0, Non-Hazardous Sample Handling, Packaging and Shipping
- SOPP 16.0, Groundwater Level Measurements
- SOPP 24.0, Field Equipment Calibration

3.3 RSA-262 Project Specific QAPP Worksheets

The IW-QAPP (HGL, 2019) requires project-specific worksheets that are not included in the generic IW-QAPP. **Tables G-1** through **G-12** provide the following RSA-262 project-specific QAPP worksheets:

- **Table G-1: Worksheet #12** Measurement of Performance Criteria
- **Table G-2: Worksheet #15** PSV and Laboratory Specific Limits – Groundwater and Soil
- **Table G-3: Worksheet # 17** Sampling Design and Rationale
- **Table G-4: Worksheet #18** Sample Locations, Analytical, and SOPP Requirements
- **Table G-5: Worksheet #19 & 30** Sample Containers, Preservation, and Hold Times
- **Table G-6: Worksheet #20** Field QC Sample Summary
- **Table G-7: Worksheet #23** Analytical Laboratory Standard Operating Procedures (SOPs)
- **Table G-8: Worksheet #24** Analytical Instrument Calibration
- **Table G-9: Worksheet #25** Analytical Instrument and Equipment Maintenance, Testing, and Inspection
- **Table G-10: Worksheet #26** Sample Handling, Custody, and Disposal
- **Table G-11: Worksheet #28** Analytical QC and Corrective Action
- **Table G-12: Worksheet #36** Data Validation Procedures

Additional Site-specific information can be found in the Project Management Plan (Environmental Chemical Corporation [ECC], 2021a) and the Quality Control Plan (QCP) provided in Appendix E of the CMIP.

3.4 Monitoring Wells Proposed for Groundwater Monitoring

The following existing wells at RSA-262 are scheduled for groundwater monitoring:

Location	Zone	Screen Intervals (feet bgs)		Rationale
		Top	Base	
154-RS1764S	Overburden	38	48	ISEB and MNA Effectiveness
262-RS1699	Overburden	32.9	42.9	ISEB and MNA Effectiveness, UIC Permit Monitoring
262-RS1700	Overburden	23.9	33.9	ISEB and MNA Effectiveness

Location	Zone	Screen Intervals (feet bgs)		Rationale
		Top	Base	
262-RS2007	Overburden	41.3	51.3	ISEB and MNA Effectiveness, UIC Permit Monitoring
262-RS2008	Overburden	54.4	64.6	UIC Permit Monitoring
262-RS2009	Overburden	60.2	70.2	ISEB and MNA Effectiveness
262-RS2010	Overburden	49.3	59.3	ISEB and MNA Effectiveness
262-RS2768	Overburden	36.2	46.2	ISEB and MNA Effectiveness
262-RS2769	Overburden	30	40	ISEB and MNA Effectiveness
262-RS2770	Overburden	35.8	45.8	ISEB and MNA Effectiveness
262-RS2771	Overburden	19.1	29.1	ISEB and MNA Effectiveness
262-RS2772	Overburden	32.4	42.4	ISEB and MNA Effectiveness
262-RS2855	Overburden	21.8	31.8	ISEB and MNA Effectiveness
262-RS2856	Overburden	45.5	55.5	ISEB and MNA Effectiveness
262-RS2857	Overburden	15.4	25.4	ISEB and MNA Effectiveness
268-RS2564	Overburden	22.9	33.3	ISEB and MNA Effectiveness
154-RS1764D	Bedrock	108	118	ISEB and MNA Effectiveness

Notes:
bgs – below ground surface
ISEB – in-situ enhanced bioremediation
MNA – Monitored Natural Attenuation
TBD – To be Determined
UIC – Underground Injection Control

Well locations included in the groundwater monitoring program were selected based on their proximity to the COC plume area and upgradient and downgradient locations as shown on Figure 12 of the CMIP.

3.5 Constituent List and Sampling Frequency

Based on the Human Health Risk Assessment (HHRA) presented in the RFI (APTIM, 2018) and the updated HHRA evaluation discussed in Section 2.4.2 of the CMI Work Plan, select VOCs, PAHs, and explosives will be monitored as part of the corrective measures. In addition to the laboratory analytical parameters, MNA parameters including dissolved oxygen (DO), oxidation-reduction potential (ORP), and pH will be collected in the field. Alkalinity, dissolved gases (ethane/ethene/methane), and total organic carbon (TOC) will be analyzed at the laboratory. Water levels will also be measured during each sampling event. This Site Monitoring Program will be used to evaluate progress towards meeting the CMOs for soil and groundwater and the CGs. The analytical program will monitor for COCs, nitrobenzene, and degradation products for action to track the progress of the MNA (groundwater) and excavation effectiveness (soil).

In order to meet the objectives of this Site Monitoring Program, quarterly post-injection sampling will be performed following initial injection activities and groundwater sampling will be conducted semiannually from Years 1 through 3 following the baseline groundwater sampling in Year 0. Groundwater will be monitored on an annual basis for the next 32 years (Years 4 through 35) to evaluate the effectiveness of MNA in the overburden and the interface. As determined by an evaluation of previous monitoring results, annual groundwater sampling will be performed in the season providing the most representative picture of groundwater quality for the site. The Army review of these data during this selection process will be completed in consultation with ADEM.

Site monitoring will continue until it is demonstrated that the CGs and/or the nitrobenzene MAG have been achieved for COCs for action (e.g., approximately Year 35). A COC for action will be omitted from future monitoring after it has reached the CG for three consecutive years.

3.6 Sampling and Analytical Protocol

All data will be collected, stored, and managed in accordance with the requirements defined by the IW-QAPP (HGL, 2019 or as updated based on submissions to ADEM) and the Installation-Wide Accident Prevention Plan (APP) (ECC, 2021b). Prior to sampling the wells, static water levels will be measured in all wells. Water level measurements will be performed in accordance with SOPP No. 16.0, Groundwater Level Measurements. Groundwater sampling will be performed using a submersible pump for purging and low-flow sampling techniques in accordance with SOPP No. 7.0, Groundwater Sampling Rev. 4. Soil sampling will be performed in accordance with SOPP No. 2.0, Collection and Field Screening of Soil Samples; SOPP No 5.0 Surface Soil Sampling; and SOPP 6.0 Subsurface Soil Sampling.

The sampling technician will measure and record physical parameters of the groundwater during well purging to help determine when the well is ready to be sampled. Complete and accurate records in the groundwater well development/purge log are necessary in order to ensure representative groundwater samples are being collected. Samples (soil and groundwater) will be analyzed using United States Environmental Protection Agency (USEPA) SW-846 methods as presented in the IW-QAPP (HGL, 2019 or most recent submission to ADEM) including updates resulting from changes in USEPA and ADEM guidance documents.

The analytical laboratory will provide sample containers. Sample containers are purchased precleaned and treated according to USEPA specifications for the methods. Sample containers are not reused. Containers are stored in clean areas to prevent exposure to fuels, solvents, and other contaminants. The required sample containers for the analysis of constituents in groundwater at RSA-262 are provided in **Table G-5**, along with sample volumes, preservation requirements, and holding times for the analytical methods performed on the groundwater samples.

Sample preservation, packaging, and shipping will follow the procedures as specified in SOPP No. 15, Non-Hazardous Sampling Handling, Packaging, and Shipping, in the IW-QAPP (HGL, 2019 or as updated based on submissions to ADEM).

Completed analysis request/chain-of-custody records will be secured and included with each shipment of coolers to the contracted laboratory.

Recommendations to modify the Site Monitoring Program will be made in the annual CMI effectiveness reports.

3.7 Quality Assurance/Quality Control

Soil and groundwater media will be sampled and analyzed to meet the objectives of the Site Monitoring Program. QA/QC samples will be collected for all sampling events in accordance with requirements established in the IW-QAPP (HGL, 2019 or as updated based on submissions to

ADEM) to assure long-term comparability of data. Samples will be analyzed by USEPA-approved SW-846 methods of analysis where applicable, comply with USEPA definitive data requirements, and be reported using both hard copy and electronic data packages.

The chemical data will be reported via hard-copy packages by the laboratory using Contract Laboratory Program-like forms, in addition to electronic deliverables, and will include all raw analytical and QC data for each analysis.

All sample preparation and analysis shall be completed within the method-required holding times specified in **Table G-5**. The holding time of a sample begins at the time of sample collection. If holding times are exceeded and the analyses are performed, the results shall be flagged accordingly.

This page intentionally left blank.

4. DATA EVALUATION AND REPORTING

4.1 Data Evaluation and Interpretation

The 16 groundwater samples will be collected using low flow purging and sampling techniques. The samples will be analyzed for a select list of VOCs (including COCs, nitrobenzene, and degradation products for performance monitoring), PAHs, and explosives, as well as MNA parameters including DO, ORP, and pH as field measurements and alkalinity, dissolved gases ethane/ethene/methane, TOC, as laboratory analyses. The following events are contained within the scope of site monitoring: a baseline Year 0 event (occurring prior to ISEB injection), quarterly post-injection sampling, semiannual sampling (Years 1 through 3); and annual sampling (Years 4 through 35 or until CGs are achieved and confirmed). Soil samples will be excavated and collected using soil compositing techniques and will be used to ensure that PAHs in soil do not remain above the site CGs. Additional excavations will be needed if soil remains above the CGs.

The primary objective of the Site Monitoring Program for RSA-262 is to determine whether the corrective measures (ISEB injection and MNA [groundwater] and soil excavation) reduce concentrations of COCs and nitrobenzene in groundwater beneath the site to levels determined to be acceptable to human health (i.e., CGs/MAG). This will be determined based on the results of a statistical test or other methods. Statistical analysis will follow Alabama Administrative Code (AAC) 335-14-5-.06(8)(h) (ADEM, 2013) and USEPA guidance for site monitoring at RCRA facilities. Soil and groundwater data collected during sampling events will be compared to the CGs and MAG. COCs that exceed these values may be subjected to additional analysis as allowed in AAC 335-14-5-.06(8)(h). The additional analyses may include, for example, control charts, Wilcoxon rank sum tests, box plots, and/or temporal trend analysis, as appropriate. Specific evaluation techniques will depend upon detection frequencies and statistical distributions of each COC. For example, one COC concentration at a given well may exceed the site-specific upper tolerance limit (UTL) or upper prediction limit (UPL), and that could be either a random occurrence or indicative of an increasing trend. Trend analysis will indicate if a trend is present and whether it has statistical significance.

Well data sets that pass statistical comparison tests (i.e., wells that do not demonstrate statistically significant increases over baseline concentrations) for all COCs will be sampled in accordance with planned activities. Wells that fail statistical comparison tests for one or more COCs will be resampled. Following the collection of these additional data, statistical evaluation will again be performed and reported, along with recommendations for adjustment to sampling frequency, if appropriate.

The following non-statistical methods may also be used to characterize RSA-262 groundwater conditions:

- **Hydrographs:** Graph water levels versus time may be constructed to determine increases, decreases, seasonal, or man-made fluctuations in groundwater levels;
- **Potentiometric Surface Maps:** Depths to groundwater from multiple wells may be used to construct potentiometric surface contour maps to estimate flow directions;

- **Concentration-versus-Time Plots:** Graphs of COC concentration versus time at each well will be constructed for each data set subjected to trend analysis. This supports the identification of trends and helps determine if concentration changes are related to changes in water level, changes in groundwater flow directions, or natural attenuation.
- **Plume Maps:** Map depicting the physical distribution of chemical constituents will aid in determining movement of plumes.

COCs will be evaluated for compliance with the CMO by comparison of site monitoring results with the established CGs. After an actionable COC is present in a concentration below the CG for three consecutive years, the Army will petition ADEM to eliminate that constituent from the Site Monitoring Program.

4.2 Reporting

Based on the proposed sampling schedule, an annual CMI effectiveness report will be prepared. Letter reports summarizing the activities and the analytical results for each quarterly, semiannual, and annual sampling event will be issued upon receipt of the analytical data. The annual report will present and summarize the analytical data from all sampling events completed in that calendar year and will include well redevelopment records, completed well inspection checklist forms, well repair or closure records, and other pertinent information. The annual report will discuss the most recent sampling events and relate the findings as they pertain to the CGs for the groundwater contaminants. Recommendations for changes to the sampling frequency, wells sampled, and parameters for analysis, if appropriate, will be included in the reports. At a minimum, the annual report will include a discussion of sampling activities, tables and maps to document contaminant concentrations in groundwater, an evaluation of the groundwater contaminant data, and all activities completed as part of the Monitoring Well Maintenance Plan. Other recommendations may include installation of additional monitoring wells and resampling for verification of sampling results. Record keeping for data and reports is described in the IW-QAPP (HGL, 2019 or most recent submission to ADEM).

5. MONITORING WELL MAINTENANCE PLAN

In order to maintain consistent data quality and track contaminant concentrations and migration, the groundwater monitoring wells at RSA-262 will be maintained and replaced, as necessary. Further details are presented in the IW QAPP (HGL, 2019 or as updated based on submissions to ADEM).

5.1 Well Redevelopment

A well may be redeveloped prior to sampling if any of the following conditions are exhibited:

- Sediment accumulation in the well covers more than 5 percent (%) of the total length of the well screen.
- Turbidity of groundwater is greater than 20 nephelometric turbidity units (NTU) after the well has been purged prior to sampling.
- Recharge rate to the well has declined through time (e.g., recharge rates have declined to less than 60% of the recharge rate recorded in the initial development).

5.2 Well Replacement or Closure

If the well still does not meet the above requirements after two episodes of redevelopment, the well may be deemed nonfunctional and scheduled for replacement or closure. Consultation with RSA personnel and ADEM staff will be made to determine whether closure or replacement is necessary. The procedures for well replacement or closure are outlined in the IW-QAPP (HGL, 2019 or most recent submission to ADEM).

5.3 Well Inspections

Site inspections will be performed to help ascertain the condition of monitoring wells and confirm the integrity of the monitoring wells has not been compromised. Wells will be inspected during each sampling event. At a minimum, all monitoring wells in the Site Monitoring Program will be inspected annually. The groundwater monitoring wells at the site will be inspected for the integrity of the following:

- Locks
- Locking cap
- Protective casing
- Bollards (stick-up wells only)
- Concrete pad.

Well redevelopment, replacement, or closure will be documented in the annual report. In addition, well inspection checklist forms for all pertinent site wells will be included in the annual reports. Deficiencies will be documented and corrected as soon as practical, but not less than annually. If a well cannot be properly repaired, it should be replaced or closed.

This page intentionally left blank.

6. REFERENCES

Alabama Department of Environmental Management (ADEM). 2008. *Draft RCRA Facility Assessment,* Redstone Arsenal, Huntsville, Alabama, USEPA ID Number AL7 210 020 742. September.

ADEM. 2013. *Administrative Code r.335-5, Land Division – Uniform Environmental Covenants Program*. March.

ADEM. 2017. *Alabama Environmental Investigation and Remediation Guidance.* September.

Aptim Federal Services, LLC (APTIM). 2018. *Revision 2, RCRA Facility Investigation Report RSA-262, CWS Warehouse Area (Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027) Operable Unit 08.* U.S. Army Garrison-Redstone Madison County, Alabama. 9 May.

CB&I (CB&I Federal Services LLC). 2016. *Revision 1 RCRA Facility Investigation Report, RSA-152 Groundwater Site, Groundwater Unit GW-08, Operable Unit 19,* U.S. Army Garrison-Redstone, Madison County, Alabama. Prepared for the U.S. Army Mission & Installation Contracting Command, Fort Sam Houston, Texas. January.

Environmental Chemical Corporation (ECC). 2021a. *Project Management Plan*, Environmental Remediation Services, U.S. Army Garrison-Redstone Arsenal. March.

ECC. 2021b. *Accident Prevention Plan*, Environmental Remediation Services, U.S. Army Garrison-Redstone Arsenal. February.

HydroGeoLogic, Inc. (HGL). 2019. *Final Revision 4 Installation-Wide Quality Assurance Program Plan*, U.S. Army Garrison-Redstone, Madison County, Alabama. December.

Shaw Environmental, Inc. (Shaw). 2003. *Final Sitewide Karst Hydrogeologic Investigation Phase I Report of Findings*, *Redstone Arsenal, Madison County, Alabama*. Prepared for U.S. Army Corps of Engineers, Savannah District, Savannah, Georgia. May.

Shaw. 2006. *RSA-150/153/154/155 Potential Source Area Investigation*, Redstone Arsenal, Madison County, Alabama. Draft. April.

Shaw. 2013. *RCRA Facility Investigation Report, RSA-154 and RSA-155 Groundwater Sites, Groundwater Units GW-10/GW-11, Operable Unit 19.* Prepared for the Mission and Installation Contracting Command. August.

This page intentionally left blank.

TABLES

This page intentionally left blank.

Table G-1: Reference Limits and Evaluation

RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama

Worksheet #12 Measurement of Performance Criteria

Analytical Group: VOCs, PAHs, Explosives, Dissolved Gases (MEE), Total Organic Carbon (TOC), Alkalinity
Concentration Level: Low

Analytical Method & SOP	DQIs	MPC	QC Sample and/or Activity Used to Assess Measurement Performance	QC Sample Assesses Error for S, A or both (S&A)
SW5030C/8260C & VOC-001/VOC-003	Precision	RPD from **Worksheet #28**	Lab duplicates and/or LCS/LCSD, if MS/MSD not performed	A
		Sampling per QAPP/SOP	FD and MS/MSD	S&A
	Accuracy/Bias	% Rec. from **Worksheet #28**	LCS	A
	Accuracy/Bias (contamination)	Acceptable Blanks Levels	MB	
		Sampling per QAPP/SOP	EB and TB	S&A
	Completeness	Laboratory Analysis	> 90%	
	Representativeness	Sampling per QAPP/SOP	Blank Samples and DUA	S
	Comparability	Use of promulgated Methodology	QAPP compliance, data review	A
	Sensitivity	LOQ or LOD to meet project objectives	ICAL level acceptable, MB acceptable	
SW3510C/8270D & SVOC-001/SVOC-028 (SIM)	Precision	RPD from **Worksheet #28**	Lab duplicates and/or LCS/LCSD, if MS/MSD not performed	A
		Sampling per QAPP/SOP	FD and MS/MSD	S&A
	Accuracy/Bias	% Rec. from **Worksheet #28**	LCS	A
	Accuracy/Bias (contamination)	Acceptable Blanks Levels	MB	
		Sampling per QAPP/SOP	Equipment Blanks	S&A
	Completeness	Laboratory Analysis	> 90%	
	Representativeness	Sampling per QAPP/SOP	Blank Samples and DUA	S
	Comparability	Use of promulgated Methodology	QAPP compliance, data review	A
	Sensitivity	LOQ or LOD to meet project objectives	ICAL level acceptable, MB acceptable	
USEPA 3535A/8330B SVOC-032/ SVOC-031	Precision	RPD from **Worksheet #28**	Lab duplicates and LCS/LCSD	A
	Precision	Sampling per QAPP/SOP	Field duplicates and MS/MSD	S&A
	Accuracy/Bias	% Rec. from **Worksheet #28**	LCS	A
	Accuracy/Bias (contamination)	Acceptable Blanks Levels	MB	A
		Sampling per QAPP/SOP	Field Blanks and/or EBs	S&A
	Completeness	Laboratory Analysis	> 90%	S&A
	Representativeness	Sampling per QAPP/SOP	Field Notes	S
	Comparability	Use of promulgated Methodology	QAPP compliance, data review	A
	Sensitivity	PQL/EDL to meet project objectives	ICAL level acceptable, MB acceptable	A

Table G-1: Reference Limits and Evaluation

RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama

Worksheet #12 Measurement of Performance Criteria

Analytical Method & SOP	DQIs	MPC	QC Sample and/or Activity Used to Assess Measurement Performance	QC Sample Assesses Error for S, A or both (S&A)
RSK-175 VOC-013	Precision	RPD from **Worksheet #28**	Lab duplicates and LCS/LCSD	A
		Sampling per QAPP/SOP	FD and MS/MSD	S&A
	Accuracy/Bias	% Rec. from **Worksheet #28**	LCS	A
	Accuracy/Bias (contamination)	Acceptable Blanks Levels	MB	
		Sampling per QAPP/SOP	Field Blanks and/or EBs	S&A
	Completeness	Laboratory Analysis	> 90%	
	Representativeness	Sampling per QAPP/SOP	Field Notes	S
	Comparability	Use of promulgated Methodology	QAPP compliance, data review	A
	Sensitivity	PQL/EDL to meet project objectives	ICAL level acceptable, MB acceptable	
SW9060A K4151	Precision	RPD from **Worksheet #28**	Lab duplicates and/or LCS/LCSD, if MS/MSD not performed	A
		Sampling per QAPP/SOP	FD, sample duplicate, or MS/MSD	S&A
	Accuracy/Bias	% Rec. from **Worksheet #28**	LCS	A
	Accuracy/Bias (contamination)	Acceptable Blanks Levels	MB	
		Sampling per QAPP/SOP	Field Blanks and/or EBs	S&A
	Completeness	Laboratory Analysis	> 90%	
	Representativeness	Sampling per QAPP/SOP	Blank Samples and DUA	S
	Comparability	Use of promulgated Methodology	QAPP compliance, data review	A
	Sensitivity	LOQ or LOD to meet project objectives	ICAL level acceptable, MB acceptable	
USEPA 310.1 WC-043	Precision	RPD from **Worksheet #28**	Lab duplicates and LCS/LCSD	A
		Sampling per QAPP/SOP	FD and sample duplicates	S&A
	Accuracy/Bias	% Rec. from **Worksheet #28**	LCS	A
	Accuracy/Bias (contamination)	Acceptable Blanks Levels	MB	
		Sampling per QAPP/SOP	Field Blanks and/or EBs	S&A
	Completeness	Laboratory Analysis	> 90%	
	Representativeness	Sampling per QAPP/SOP	Field Notes	S
	Comparability	Use of promulgated Methodology	QAPP compliance, data review	A
	Sensitivity	PQL/EDL to meet project objectives	ICAL level acceptable, MB acceptable	
USEPA 300.0 WC-054	Precision	RPD from **Worksheet #28**	Lab duplicates and/or LCS/LCSD, if MS/MSD not performed	A
		Sampling per QAPP/SOP	FD and MS/MSD	S&A
	Accuracy/Bias	% Rec. from **Worksheet #28**	LCS	A
	Accuracy/Bias (contamination)	Acceptable Blanks Levels	MB	
		Sampling per QAPP/SOP	Field Blanks and/or EB	S&A

Table G-1: Reference Limits and Evaluation
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #12 Measurement of Performance Criteria

Analytical Method & SOP	DQIs	MPC	QC Sample and/or Activity Used to Assess Measurement Performance	QC Sample Assesses Error for S, A or both (S&A)
USEPA 300.0 WC-054	Completeness	Laboratory Analysis	> 90%	S&A
	Representativeness	Sampling per QAPP/SOP	Blank Samples and DUA	S
	Comparability	Use of promulgated Methodology	QAPP compliance, data review	A
	Sensitivity	LOQ or LOD to meet project objectives	ICAL level acceptable, MB acceptable	
SW9040B WC-002	Precision	RPD from **Worksheet #28**	Lab duplicates and LCS/LCSD	A
		Sampling per QAPP/SOP	FD and MS/MSD	S&A
	Accuracy/Bias	% Rec. from **Worksheet #28**	LCS	A
	Completeness	Laboratory Analysis	> 90%	S&A
	Representativeness	Sampling per QAPP/SOP	Field Notes	S
	Comparability	Use of promulgated Methodology	QAPP compliance, data review	A
SM2540C WC-007	Precision	RPD from **Worksheet #28**	Lab duplicates	A
		Sampling per QAPP/SOP	Sample duplicates	S&A
	Accuracy/Bias	% Rec. from **Worksheet #28**	LCS	A
	Accuracy/Bias (contamination)	Acceptable Blanks Levels	MB	
		Sampling per QAPP/SOP	Field Blanks and/or EBs	S&A
	Completeness	Laboratory Analysis	> 90%	
	Representativeness	Sampling per QAPP/SOP	Field Notes	S
	Comparability	Use of promulgated Methodology	QAPP compliance, data review	A
	Sensitivity	PQL/EDL to meet project objectives	Daily calibration acceptable, MB acceptable	

Notes:

> – greater than
% – percent
% Rec. – percent Recovery
A – Analytical
DQI – Data Quality Indicator
DUA – Data Usability Assessment
EB – Equipment Blank
EDL – Estimated Detection Limit
FD – Field Duplicate
ICAL – Initial Calibration
LCS – Laboratory Control Sample
LCSD – Laboratory Control Sample Duplicate
LOD – Limit of Detection
LOQ – Limit of Quantitation
MB – Method Blank
MEE – methane, ethane, ethene
MPC – Measurement Performance Criteria
MS – Matrix Spike
MSD – Matrix Spike Duplicate
PAH – Polycyclic aromatic hydrocarbon
PQL – Practical Quantification Limits
QAPP – Quality Assurance Project Plan
QC – Quality Control
RPD – Relative Percent Difference
S – Sampling
SIM – Selected Ion Monitoring
SOP – Standard Operating Procedure
SVOC – Semivolatile organic compound
SW – Solid Waste 846
TB – Trip Blank
TOC – total organic carbon
USEPA – United States Environmental Protection Agency
VOC – Volatile organic compound

Table G-2: Reference Limits and Evaluation,
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #15 Preliminary Screening Values and Laboratory Specific Limits – Groundwater and Soil

Hazardous Constituent	CAS Number	PSV[1]	Reference for PSV	CMO CG	Reference for CMO CG	Laboratory Specific LOQ	Laboratory Specific LOD	Laboratory Specific DL
Groundwater								
ISEB and MNA Parameters								
VOCs (µg/L) by SW8260C								
1,1,2,2-Tetrachloroethane	79-34-5	0.076	RSL	0.058	Risk-based	1.000	0.400	0.200
1,1,2-Trichloroethane	79-00-5	0.041	MCL	5	MCL	1.000	0.500	0.250
1,2-Dichloroethane	107-06-2	5	MCL	Not a COC		1.000	0.500	0.250
Carbon tetrachloride	56-23-5	0.46	RSL	5	MCL	1.000	0.500	0.250
Chloroethane	75-00-3	830	RSL	Not a COC		2.000	1.000	0.500
Chloroform	67-66-3	80	MCL	80	MCL	2.000	1.000	0.500
Chloromethane	74-87-3	19	RSL	Not a COC		1.000	0.500	0.250
cis-1,2-Dichloroethene	156-59-2	70	MCL	Not a COC		2.000	1.000	0.500
Dichloromethane (Methylene chloride)	75-09-2	5	MCL	Not a COC		5.000	2.500	1.250
Tetrachloroethene	127-18-4	4.1	RSL	5	MCL	1.000	0.500	0.250
trans-1,2-Dichloroethene	156-60-5	100	MCL	Not a COC		2.000	1.000	0.500
Trichloroethene	79-01-6	0.28	RSL	5	MCL	1.000	0.500	0.250
Vinyl chloride	75-01-4	2	MCL	Not a COC		1.000	0.500	0.250
PAHs (µg/L) by SW8270D-SIM								
Dibenz(a,h)anthracene	53-70-3	0.025	RSL	0.019	Risk-based	0.400	0.200	0.100
Energetics (µg/L) by SW8330B								
2-Nitrotoluene	88-72-2	0.31	RSL	2.1	Risk-based	0.300	0.150	0.075
Nitrobenzene	98-95-3	0.14	RSL	Not a COC		0.300	0.150	0.075
MNA Parameters								
Dissolved Gases (µg/L) by RSK-175								
Methane	74-82-8	NA	NA	NA	NA	2.15	0.72	0.36
Ethene	74-85-1	NA	NA	NA	NA	3.73	1.24	0.62
Ethane	74-84-0	NA	NA	NA	NA	4.04	1.35	0.67
Total Organic Carbon (mg/L) by SW9060A								
Total Organic Carbon	TOC	NA	NA	NA	NA	2	1	0.5
Alkalinity (mg/L $CaCO_3$) by USEPA 310.1								
Alkalinity	ALK	NA	NA	NA	NA	5	5	5
UIC Permit Monitoring								
Total Dissolved Solids (mg/L)	TDS	NA	NA	Not a COC		10	10	10
Nitrate (mg/L)	14797-55-8	NA	NA	Not a COC		0.8	0.4	0.2
pH (s.u.)	pH	NA	NA	Not a COC		1	1	1

Table G-2: Reference Limits and Evaluation,
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #15 Preliminary Screening Values and Laboratory Specific Limits – Groundwater and Soil

Hazardous Constituent	CAS Number	PSV[1]	Reference for PSV	CMO CG	Reference for CMO CG	Laboratory Specific LOQ	Laboratory Specific LOD	Laboratory Specific DL
Soil - PAHs (mg/kg) by SW8270D-SIM								
Benzo(a)anthracene	56-55-3	1.1	Res. RSL	2.8	Risk-Based	0.016	0.008	0.004
Benzo(a)pyrene	50-32-8	0.11	Res. RSL	0.29	Risk-Based	0.016	0.008	0.004
Benzo(b)fluoranthene	207-08-9	11	Res. RSL	2.9	Risk-Based	0.016	0.008	0.004
Dibenz(a,h)anthracene	53-70-3	0.11	Res. RSL	0.29	Risk-Based	0.016	0.008	0.004

Notes:

1. PSV for groundwater based on the following hierarchy if not specified in the Permit: 1) MCL (*2018 Edition of the Drinking Water Standards and Health Advisories*, USEPA 822-S-12-001, Office of Water, Washington, District of Columbia, March, 2) Site-specific background screening values (BSV), 3) Where BSVs do not exist, then the most recent USEPA Tap-water RSL Table (November 2022) using a Hazard Quotient of 0.1 shall be used (https://www.epa.gov/risk/regional-screening-levels-rsls-generic-tables).

µg/L – micrograms per liter
$CaCO_3$ – calcium carbonate
CAS – Chemical Abstract System
CG – Cleanup Goal
CMO – Corrective Measures Objective
COC – Constituent of Concern
DL – Detection limit
ISEB – in-situ enhanced bioremediation
LOD – Limit of detection
LOQ – Limit of quantitation
MCL – Maximum Contaminant Level
mg/kg – milligrams per kilogram
mg/L – milligrams per liter
MNA – monitored natural attenuation
NA – not applicable
PAH – Polycyclic Aromatic Hydrocarbon
PSV – Preliminary Screening Value
Res. – Residential
RSL – Regional screening level
s.u. – standard unit
SIM – Selected Ion Monitoring
SW – Solid Waste 846
UIC – underground injection control
USEPA – United States Environmental Protection Agency
VOC – Volatile Organic Compound

Table G-3: Sampling Design and Rationale
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet # 17 Sampling Design and Rationale

Sample Location	Sample Media	Sample Location Rationale[1]
Overburden Well: 154-RS1764S 262-RS1699 262-RS1700 262-RS2007 262-RS2009 262-RS2010 262-RS2768 262-RS2769 262-RS2770 262-RS2771 262-RS2772 262-RS2855 262-RS2856 262-RS2857 268-RS2564 **Bedrock Wells:** 154-RS1764D	Groundwater	Groundwater sampling events (Years 0 through 35) will be used to evaluate the effectiveness and permanence of the RSA-262 corrective measure; subsurface soil contamination monitoring through groundwater concentration reduction and MNA for groundwater. Results from sampling events will be used to evaluate progress towards meeting the CMOs and CGs. The analytical program will monitor for COCs for action and nitrobenzene to track the progress of MNA. Groundwater samples are to be collected from these sixteen monitoring wells (as presented in Figure 12 of the CMI Work Plan) and each groundwater sample will be analyzed for the select list of VOCs, PAHs, and explosives.
Overburden Well: 262-RS1699 262-RS2007 262-RS2008	Groundwater	UIC Permit Monitoring for TDS, nitrate, and pH will occur quarterly for one year beginning 30 days after the first injection event.
Confirmatory Sample: 262-CS0001	Soil	For each stockpile (estimated to be 40 cy), grab samples will be randomly retrieved from three exterior points of each pile from a depth between zero to two feet. Two additional samples will be taken from the interior of the pile at a depth between two to five feet bgs. The five grab samples will be composited, representing 200 cubic yards. These samples will be analyzed for the PAHs identified as COCs (benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, dibenz(a,h)anthracene). The stockpile will also be analyzed for waste characterization and disposal.

Notes:

1. The frequency of sampling and/or analyte lists may be modified over the life of the project, based upon sampling results, if approved by the Alabama Department of Environmental Management (ADEM). Permit modifications will be made in accordance with Permit Condition I.J.

bgs – below ground surface
CG – Cleanup Goal
COC – Contaminant of Concern
CMI – Corrective Measures Implementation
CMO – Corrective Measures Objective
CS – composite sample
cy – cubic yard
MNA – Monitored Natural Attenuation
PAH – Polycyclic Aromatic Hydrocarbon
TDS – total dissolved solids
UIC – Underground Injection Control
VOC – Volatile organic compound

Table G-4: Sampling Locations, Analytical Parameters, and SOPP Requirements
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #18 Sample Locations, Analytical, and SOPP Requirements

Sample Events through Year 4 Annual Sampling

Sample Location	Sample Name[c]	Sample Depth (ft bgs)	QC Sample Designation[c]		Analytical Suite	Field SOPP
			FD	MS/MSD		
Soil Confirmation Sample (Excavation)						
262-CS0001	262-CS0001-AAN-5000-REG	0 – 2 and 2 – 5 composite	262-CS0001-AAN-5001-FD	262-CS0001-AAN-5000-MS/MSD	PAHs	SOPP 2.0, 5.0, 6.0
IDW Soil Sample (Excavation)						
RSA-262	RSA-262-SO-A9000-REG	NA			TCLP Metals, PAHs (**Worksheet #15**)	SOPP 4.0
RSA-262 Baseline Sample Locations – Year 0						
154-RS1764S	154-RS1764S-GW-AAN-4000-REG	38 - 48			VOCs, PAHs, Explosives (Worksheet #15)	SOPP 7.0
262-RS1699	262-RS1699-GW-AAN-4001-REG	32.9 - 42.9				
262-RS1700	262-RS1700-GW-AAN-4002-REG	23.9 - 33.9	262-RS1700-GW-AAN-4003-FD			
262-RS2007	262-RS2007-GW-AAN-4004-REG	41.3 - 51.3		262-RS2007-GW-AAN-4004MS/MSD		
262-RS2009	262-RS2009-GW-AAN-4005-REG	60.2 - 70.2				
262-RS2010	262-RS2010-GW-AAN-4006-REG	49.3 - 59.3				
262-RS2768	262-RS2768-GW-AAN-4007-REG	36.2 - 46.2				
262-RS2769	262-RS2769-GW-AAN-4008-REG	30 - 40				
262-RS2770	262-RS2770-GW-AAN-4009-REG	35.8 - 45.8				
262-RS2771	262-RS2771-GW-AAN-4010-REG	19.1 - 29.1				
262-RS2772	262-RS2772-GW-AAN-4011-REG	32.4 - 42.4				
262-RS2855	262-RS2855-GW-AAN-4012-REG	21.8 - 31.8				
262-RS2856	262-RS2856-GW-AAN-4013-REG	45.5 - 55.5	262-RS2856-GW-AAN-4014-FD			
262-RS2857	262-RS2857-GW-AAN-4015-REG	15.4 - 25.4				
268-RS2564	268-RS2564-GW-AAN-4016-REG	22.9 - 33.3				
154-RS1764D	154-RS1764D-GW-AAN-4017-REG	108 - 118				
Trip Blanks						
RSA-262	RSA-262-WA-TB7000-TB	NA			VOC **(Worksheet #15)**	See notes[a]
	RSA-262-WA-TB7001-TB					
	RSA-262-WA-TB7002-TB					
Equipment Rinsate Sample						
RSA-262	RSA-262-BW-A8000-ER	NA			VOCs, PAHs, Explosives **(Worksheet #15)**	See notes[b]

Table G-4: Sampling Locations, Analytical Parameters, and SOPP Requirements
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #18 Sample Locations, Analytical, and SOPP Requirements

Sample Location	Sample Name[c]	Sample Depth (ft bgs)	QC Sample Designation[c]		Analytical Suite	Field SOPP
			FD	MS/MSD		
IDW Water Sample[d]						
RSA-262	RSA-262-WA-A9001-REG	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 4.0
First Quarterly UIC Permit Monitoring						
262-RS1699	262-RS1699-GW-AAN-4018-REG	32.9 - 42.9			TDS, Nitrate, pH	SOPP 7.0
262-RS2007	262-RS2007-GW-AAN-4019-REG	41.3 - 51.3				
262-RS2008	262-RS2008-GW-AAN-4020-REG	54.4 - 64.4				
Second Quarterly UIC Permit Monitoring						
262-RS1699	262-RS1699-GW-AAN-4021-REG	32.9 - 42.9			TDS, Nitrate, pH	SOPP 7.0
262-RS2007	262-RS2007-GW-AAN-4022-REG	41.3 - 51.3				
262-RS2008	262-RS2008-GW-AAN-4023-REG	54.4 - 64.4				
RSA-262 Baseline Sample Locations – Year 1, First Semiannual						
154-RS1764S	154-RS1764S-GW-AAN-4024-REG	38 - 48			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 7.0
262-RS1699	262-RS1699-GW-AAN-4025-REG	32.9 - 42.9				
262-RS1700	262-RS1700-GW-AAN-4026-REG	23.9 - 33.9	262-RS1700-GW-AAN-4027-FD			
262-RS2007	262-RS2007-GW-AAN-4028-REG	41.3 - 51.3		262-RS2007-GW-AAN-4028MS/MSD		
262-RS2009	262-RS2009-GW-AAN-4029-REG	60.2 - 70.2				
262-RS2010	262-RS2010-GW-AAN-4030-REG	49.3 - 59.3				
262-RS2768	262-RS2768-GW-AAN-4031-REG	36.2 - 46.2				
262-RS2769	262-RS2769-GW-AAN-4032-REG	30 - 40				
262-RS2770	262-RS2770-GW-AAN-4033-REG	35.8 - 45.8				
262-RS2771	262-RS2771-GW-AAN-4034-REG	19.1 - 29.1				
262-RS2772	262-RS2772-GW-AAN-4035-REG	32.4 - 42.4				
262-RS2855	262-RS2855-GW-AAN-4036-REG	21.8 - 31.8				
262-RS2856	262-RS2856-GW-AAN-4037-REG	45.5 - 55.5	262-RS2856-GW-AAN-4038-FD			
262-RS2857	262-RS2857-GW-AAN-4039-REG	15.4 - 25.4				
268-RS2564	268-RS2564-GW-AAN-4040-REG	22.9 - 33.3				
154-RS1764D	154-RS1764D-GW-AAN-4041-REG	108 - 118				
Trip Blanks						
RSA-262	RSA-262-WA-TB7003-TB	NA			VOC (**Worksheet #15**)	See notes[a]
	RSA-262-WA-TB7004-TB					
	RSA-262-WA-TB7005-TB					

Table G-4: Sampling Locations, Analytical Parameters, and SOPP Requirements
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #18 Sample Locations, Analytical, and SOPP Requirements

Sample Location	Sample Name[c]	Sample Depth (ft bgs)	QC Sample Designation[c]		Analytical Suite	Field SOPP
			FD	MS/MSD		
Equipment Rinsate Sample						
RSA-262	RSA-262-BW-A8001-ER	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	See notes[b]
IDW Water Sample[d]						
RSA-262	RSA-262-WA-A9002-REG	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 4.0
Third Quarterly UIC Permit Monitoring						
262-RS1699	262-RS1699-GW-AAN-4042-REG	32.9 - 42.9			TDS, Nitrate, pH	SOPP 7.0
262-RS2007	262-RS2007-GW-AAN-4043-REG	41.3 - 51.3				
262-RS2008	262-RS2008-GW-AAN-4044-REG	54.4 - 64.4				
Fourth Quarterly UIC Permit Monitoring						
262-RS1699	262-RS1699-GW-AAN-4045-REG	32.9 - 42.9			TDS, Nitrate, pH	SOPP 7.0
262-RS2007	262-RS2007-GW-AAN-4046-REG	41.3 - 51.3				
262-RS2008	262-RS2008-GW-AAN-4047-REG	54.4 - 64.4				
RSA-262 Baseline Sample Locations – Year 1, Second Semiannual						
154-RS1764S	154-RS1764S-GW-AAN-4048-REG	38 - 48			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 7.0
262-RS1699	262-RS1699-GW-AAN-4049-REG	32.9 - 42.9				
262-RS1700	262-RS1700-GW-AAN-4050-REG	23.9 - 33.9	262-RS1700-GW-AAN-4051-FD			
262-RS2007	262-RS2007-GW-AAN-4052-REG	41.3 - 51.3		262-RS2007-GW-AAN-4052MS/MSD		
262-RS2009	262-RS2009-GW-AAN-4053-REG	60.2 - 70.2				
262-RS2010	262-RS2010-GW-AAN-4054-REG	49.3 - 59.3				
262-RS2768	262-RS2768-GW-AAN-4055-REG	36.2 - 46.2				
262-RS2769	262-RS2769-GW-AAN-4056-REG	30 - 40				
262-RS2770	262-RS2770-GW-AAN-4057-REG	35.8 - 45.8				
262-RS2771	262-RS2771-GW-AAN-4058-REG	19.1 - 29.1				
262-RS2772	262-RS2772-GW-AAN-4059-REG	32.4 - 42.4				
262-RS2855	262-RS2855-GW-AAN-4060-REG	21.8 - 31.8				
262-RS2856	262-RS2856-GW-AAN-4061-REG	45.5 - 55.5	262-RS2856-GW-AAN-4062-FD			
262-RS2857	262-RS2857-GW-AAN-4063-REG	15.4 - 25.4				
268-RS2564	268-RS2564-GW-AAN-4064-REG	22.9 - 33.3				
154-RS1764D	154-RS1764D-GW-AAN-4065-REG	108 - 118				

Table G-4: Sampling Locations, Analytical Parameters, and SOPP Requirements
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #18 Sample Locations, Analytical, and SOPP Requirements

Sample Location	Sample Name[c]	Sample Depth (ft bgs)	QC Sample Designation[c]		Analytical Suite	Field SOPP
			FD	MS/MSD		
Trip Blanks						
RSA-262	RSA-262-WA-TB7006-TB	NA			VOC (**Worksheet #15**)	See notes[a]
RSA-262	RSA-262-WA-TB7007-TB					
RSA-262	RSA-262-WA-TB7008-TB					
Equipment Rinsate Sample						
RSA-262	RSA-262-BW-A8002-ER	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	See notes[b]
IDW Water Sample[d]						
RSA-262	RSA-262-WA-A9003-REG	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 4.0
RSA-262 Baseline Sample Locations – Year 2, First Semiannual						
154-RS1764S	154-RS1764S-GW-AAN-4066-REG	38 - 48			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 7.0
262-RS1699	262-RS1699-GW-AAN-4067-REG	32.9 - 42.9				
262-RS1700	262-RS1700-GW-AAN-4068-REG	23.9 - 33.9	262-RS1700-GW-AAN-4069-FD			
262-RS2007	262-RS2007-GW-AAN-4070-REG	41.3 - 51.3		262-RS2007-GW-AAN-4070MS/MSD		
262-RS2009	262-RS2009-GW-AAN-4071-REG	60.2 - 70.2				
262-RS2010	262-RS2010-GW-AAN-4072-REG	49.3 - 59.3				
262-RS2768	262-RS2768-GW-AAN-4073-REG	36.2 - 46.2				
262-RS2769	262-RS2769-GW-AAN-4074-REG	30 - 40				
262-RS2770	262-RS2770-GW-AAN-4075-REG	35.8 - 45.8				
262-RS2771	262-RS2771-GW-AAN-4076-REG	19.1 - 29.1				
262-RS2772	262-RS2772-GW-AAN-4077-REG	32.4 - 42.4				
262-RS2855	262-RS2855-GW-AAN-4078-REG	21.8 - 31.8				
262-RS2856	262-RS2856-GW-AAN-4079-REG	45.5 - 55.5	262-RS2856-GW-AAN-4080-FD			
262-RS2857	262-RS2857-GW-AAN-4081-REG	15.4 - 25.4				
268-RS2564	268-RS2564-GW-AAN-4082-REG	22.9 - 33.3				
154-RS1764D	154-RS1764D-GW-AAN-4083-REG	108 - 118				
Trip Blanks						
RSA-262	RSA-262-WA-TB7009-TB	NA			VOC (**Worksheet #15**)	See notes[a]
	RSA-262-WA-TB7010-TB					
	RSA-262-WA-TB7011-TB					

Table G-4: Sampling Locations, Analytical Parameters, and SOPP Requirements
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #18 Sample Locations, Analytical, and SOPP Requirements

Sample Location	Sample Name[c]	Sample Depth (ft bgs)	QC Sample Designation[c]		Analytical Suite	Field SOPP
			FD	MS/MSD		
Equipment Rinsate Sample						
RSA-262	RSA-262-BW-A8003-ER	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	See notes[b]
IDW Water Sample[d]						
RSA-262	RSA-262-WA-A9004-REG	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 4.0
RSA-262 Baseline Sample Locations – Year 2, Second Semiannual						
154-RS1764S	154-RS1764S-GW-AAN-4084-REG	38 - 48			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 7.0
262-RS1699	262-RS1699-GW-AAN-4085-REG	32.9 - 42.9				
262-RS1700	262-RS1700-GW-AAN-4086-REG	23.9 - 33.9	262-RS1700-GW-AAN-4087-FD			
262-RS2007	262-RS2007-GW-AAN-4088-REG	41.3 - 51.3		262-RS2007-GW-AAN-4088MS/MSD		
262-RS2009	262-RS2009-GW-AAN-4089-REG	60.2 - 70.2				
262-RS2010	262-RS2010-GW-AAN-4090-REG	49.3 - 59.3				
262-RS2768	262-RS2768-GW-AAN-4091-REG	36.2 - 46.2				
262-RS2769	262-RS2769-GW-AAN-4092-REG	30 - 40				
262-RS2770	262-RS2770-GW-AAN-4093-REG	35.8 - 45.8				
262-RS2771	262-RS2771-GW-AAN-4094-REG	19.1 - 29.1				
262-RS2772	262-RS2772-GW-AAN-4095-REG	32.4 - 42.4				
262-RS2855	262-RS2855-GW-AAN-4096-REG	21.8 - 31.8				
262-RS2856	262-RS2856-GW-AAN-4097-REG	45.5 - 55.5	262-RS2856-GW-AAN-4098-FD			
262-RS2857	262-RS2857-GW-AAN-4099-REG	15.4 - 25.4				
268-RS2564	268-RS2564-GW-AAN-4100-REG	22.9 - 33.3				
154-RS1764D	154-RS1764D-GW-AAN-4101-REG	108 - 118				
Trip Blanks						
RSA-262	RSA-262-WA-TB7012-TB	NA			VOC (**Worksheet #15**)	See notes[a]
	RSA-262-WA-TB7013-TB					
	RSA-262-WA-TB7014-TB					
Equipment Rinsate Sample						
RSA-262	RSA-262-BW-A8004-ER	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	See notes[b]
IDW Water Sample[d]						
RSA-262	RSA-262-WA-A9005-REG	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 4.0

Table G-4: Sampling Locations, Analytical Parameters, and SOPP Requirements
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #18 Sample Locations, Analytical, and SOPP Requirements

Sample Location	Sample Name[c]	Sample Depth (ft bgs)	QC Sample Designation[c]		Analytical Suite	Field SOPP
			FD	MS/MSD		
RSA-262 Baseline Sample Locations – Year 3, First Semiannual						
154-RS1764S	154-RS1764S-GW-AAN-4102-REG	38 - 48			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 7.0
262-RS1699	262-RS1699-GW-AAN-4103-REG	32.9 - 42.9				
262-RS1700	262-RS1700-GW-AAN-4104-REG	23.9 - 33.9	262-RS1700-GW-AAN-4105-FD			
262-RS2007	262-RS2007-GW-AAN-4106-REG	41.3 - 51.3		262-RS2007-GW-AAN-4106MS/MSD		
262-RS2009	262-RS2009-GW-AAN-4107-REG	60.2 - 70.2				
262-RS2010	262-RS2010-GW-AAN-4108-REG	49.3 - 59.3				
262-RS2768	262-RS2768-GW-AAN-4109-REG	36.2 - 46.2				
262-RS2769	262-RS2769-GW-AAN-4110-REG	30 - 40				
262-RS2770	262-RS2770-GW-AAN-4111-REG	35.8 - 45.8				
262-RS2771	262-RS2771-GW-AAN-4112-REG	19.1 - 29.1				
262-RS2772	262-RS2772-GW-AAN-4113-REG	32.4 - 42.4				
262-RS2855	262-RS2855-GW-AAN-4114-REG	21.8 - 31.8				
262-RS2856	262-RS2856-GW-AAN-4115-REG	45.5 - 55.5	262-RS2856-GW-AAN-4116-FD			
262-RS2857	262-RS2857-GW-AAN-4117-REG	15.4 - 25.4				
268-RS2564	268-RS2564-GW-AAN-4118-REG	22.9 - 33.3				
154-RS1764D	154-RS1764D-GW-AAN-4119-REG	108 - 118				
Trip Blanks						
RSA-262	RSA-262-WA-TB7015-TB	NA			VOC (**Worksheet #15**)	See notes[a]
	RSA-262-WA-TB7016-TB					
	RSA-262-WA-TB7017-TB					
Equipment Rinsate Sample						
RSA-262	RSA-262-BW-A8005-ER	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	See notes[b]
IDW Water Sample[d]						
RSA-262	RSA-262-WA-A9006-REG	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 4.0
RSA-262 Baseline Sample Locations – Year 3, Second Semiannual						
154-RS1764S	154-RS1764S-GW-AAN-4120-REG	38 - 48			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 7.0
262-RS1699	262-RS1699-GW-AAN-4121-REG	32.9 - 42.9				
262-RS1700	262-RS1700-GW-AAN-4122-REG	23.9 - 33.9	262-RS1700-GW-AAN-4123-FD			

Table G-4: Sampling Locations, Analytical Parameters, and SOPP Requirements
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #18 Sample Locations, Analytical, and SOPP Requirements

Sample Location	Sample Name[c]	Sample Depth (ft bgs)	QC Sample Designation[c]		Analytical Suite	Field SOPP
			FD	MS/MSD		
262-RS2007	262-RS2007-GW-AAN-4124-REG	41.3 - 51.3		262-RS2007-GW-AAN-4124MS/MSD	VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 7.0
262-RS2009	262-RS2009-GW-AAN-4125-REG	60.2 - 70.2				
262-RS2010	262-RS2010-GW-AAN-4126-REG	49.3 - 59.3				
262-RS2768	262-RS2768-GW-AAN-4127-REG	36.2 - 46.2				
262-RS2769	262-RS2769-GW-AAN-4128-REG	30 - 40				
262-RS2770	262-RS2770-GW-AAN-4129-REG	35.8 - 45.8				
262-RS2771	262-RS2771-GW-AAN-4130-REG	19.1 - 29.1				
262-RS2772	262-RS2772-GW-AAN-4131-REG	32.4 - 42.4				
262-RS2855	262-RS2855-GW-AAN-4132-REG	21.8 - 31.8				
262-RS2856	262-RS2856-GW-AAN-4133-REG	45.5 - 55.5	262-RS2856-GW-AAN-4134-FD			
262-RS2857	262-RS2857-GW-AAN-4135-REG	15.4 - 25.4				
268-RS2564	268-RS2564-GW-AAN-4136-REG	22.9 - 33.3				
154-RS1764D	154-RS1764D-GW-AAN-4137-REG	108 - 118				
Trip Blanks						
RSA-262	RSA-262-WA-TB7018-TB	NA			VOC (**Worksheet #15**)	See notes[a]
	RSA-262-WA-TB7019-TB					
	RSA-262-WA-TB7020-TB					
Equipment Rinsate Sample						
RSA-262	RSA-262-BW-A8006-ER	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	See notes[b]
IDW Water Sample[d]						
RSA-262	RSA-262-WA-A9007-REG	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 4.0
RSA-262 Baseline Sample Locations – Year 4, Annual						
154-RS1764S	154-RS1764S-GW-AAN-4138-REG	38 - 48			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 7.0
262-RS1699	262-RS1699-GW-AAN-4139-REG	32.9 - 42.9				
262-RS1700	262-RS1700-GW-AAN-4140-REG	23.9 - 33.9	262-RS1700-GW-AAN-4141-FD			
262-RS2007	262-RS2007-GW-AAN-4142-REG	41.3 - 51.3		262-RS2007-GW-AAN-4142MS/MSD		
262-RS2009	262-RS2009-GW-AAN-4143-REG	60.2 - 70.2				
262-RS2010	262-RS2010-GW-AAN-4144-REG	49.3 - 59.3				
262-RS2768	262-RS2768-GW-AAN-4145-REG	36.2 - 46.2				
262-RS2769	262-RS2769-GW-AAN-4146-REG	30 - 40				

Table G-4: Sampling Locations, Analytical Parameters, and SOPP Requirements
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #18 Sample Locations, Analytical, and SOPP Requirements

Sample Location	Sample Name[c]	Sample Depth (ft bgs)	QC Sample Designation[c]		Analytical Suite	Field SOPP
			FD	MS/MSD		
262-RS2770	262-RS2770-GW-AAN-4147-REG	35.8 - 45.8			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 7.0
262-RS2771	262-RS2771-GW-AAN-4148-REG	19.1 - 29.1				
262-RS2772	262-RS2772-GW-AAN-4149-REG	32.4 - 42.4				
262-RS2855	262-RS2855-GW-AAN-4150-REG	21.8 - 31.8				
262-RS2856	262-RS2856-GW-AAN-4151-REG	45.5 - 55.5	262-RS2856-GW-AAN-4152-FD			
262-RS2857	262-RS2857-GW-AAN-4153-REG	15.4 - 25.4				
268-RS2564	268-RS2564-GW-AAN-4154-REG	22.9 - 33.3				
154-RS1764D	154-RS1764D-GW-AAN-4155-REG	108 - 118				
Trip Blanks						
RSA-262	RSA-262-WA-TB7021-TB	NA			VOC (**Worksheet #15**)	See notes[a]
	RSA-262-WA-TB7022-TB					
	RSA-262-WA-TB7023-TB					
Equipment Rinsate Sample						
RSA-262	RSA-262-BW-A8007-ER	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	See notes[b]
IDW Water Sample[d]						
RSA-262	RSA-262-WA-A9008-REG	NA			VOCs, PAHs, Explosives (**Worksheet #15**)	SOPP 4.0

Notes:

a) TBs are laboratory provided VOC vials filled with hazardous constituent free water and no headspace. TBs accompany the VOC sample containers into the field during sample collection and during shipment to the laboratory. One TB per sample shipping cooler containing RSA-262 groundwater VOC samples.

b) ERs are collected by pouring de-ionized water (obtained from the on-site deionized water treatment system) over non-dedicated decontaminated sampling equipment. One ER will be collected per sampling event.

c) The MS/MSD and FD locations are subject to change due to field conditions.

d) Optionally, groundwater sample results may be used instead of IDW sampling, which is contingent upon receiving facility.

e) The last four digits in the sample name are sequential.

bgs – below ground surface
ER – Equipment rinsate
FD – Field Duplicate
ft – Feet
GW – groundwater
IDW – Investigative Derived Waste
MS – Matrix spike
MSD – Matrix spike duplicate
NA – Not applicable
PAH – polycyclic aromatic hydrocarbon
QC – Quality control
REG – Regular sample
SOPP – Standard Operating Project Procedure
TB – Trip Blank
UIC – Underground Injection Control
VOC – volatile organic compounds

Table G-5: Sample Containers, Preservation, and Hold Times
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet # 19 & 30 Sample Containers, Preservation, and Hold Times

Analyte/ Analyte Group	Matrix	Analytical Method	Accreditation Expiration Date	Sample Container/ Preservation Requirements	Holding Time	Total Number of Containers	Data Package Turnaround
ISEB and MNA Groundwater Samples/Event							
VOCs	Water	SW8260C	4 August 2023	3 – 40 mL vials; HCl to pH < 2	Preserved – 14 days Unpreserved – 7 days	24	15 days
PAHs		SW8270D-SIM	4 August 2023	2 – 1 Liter amber glass	Extraction – 7 days Analysis – 40 days	21	
Explosives		SW8330B	4 August 2023	2 – 1 Liter amber glass	7 days extraction; 40 days analysis	21	
MEE		RSK-175	4 August 2023	3 total 40 mL VOA vials w/ PTFE-faced silicone septum. 1 HCl preserved to pH < 2, 2 unpreserved	14 days	21	
TOC		SW9060A	4 August 2023	1 – 40 mL plastics or glass container; H_2SO_4 to pH < 2	28 days	21	
Alkalinity		USEPA 310.1	4 August 2023	1 – 250 mL HDPE	14 days	21	
IDW Water/Event							
VOCs	Water	SW8260C	4 August 2023	3 – 40 mL vials; HCl to pH < 2	Preserved – 14 days Unpreserved – 7 days	1	15 days
PAHs		SW8270D-SIM	4 August 2023	2 – 1 Liter amber glass	Extraction – 7 days Analysis – 40 days	1	
Explosives		SW8330B	4 August 2023	2 – 1 Liter amber glass	7 days extraction; 40 days analysis	1	
UIC Permit Monitoring Groundwater Samples/Event							
Nitrate	Water	USEPA 300.0	4 August 2023	1 – 1 Liter HDPE	Nitrate – 48 hours	3	15 days
TDS		SM 2540C	4 August 2023	1 – 500 mL polyethylene plastic	7 days	3	
pH		SW9040B	4 August 2023	1 – Filled 8-oz glass or plastic jar	As soon as possible	3	
Soil Samples (Excavation)							
PAHs	Composite Soil	SW8270D-SIM	4 August 2023	1 – 8-oz glass jar with Teflon lid	14 days extraction; 40 days analysis	4	15 days

Table G-5: Sample Containers, Preservation, and Hold Times
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet # 19 & 30 Sample Containers, Preservation, and Hold Times

Analyte/ Analyte Group	Matrix	Analytical Method	Accreditation Expiration Date	Sample Container/ Preservation Requirements	Holding Time	Total Number of Containers	Data Package Turnaround
IDW Soil (Excavation)							
PAHs	Soil	SW8270D-SIM	4 August 2023	1 – 8-oz glass jar with Teflon lid	14 days extraction; 40 days analysis	1	15 days
TCLP Metals		1311/6010C/ 7470A	4 August 2023	2 -250 mL amber wide mouth glass jars	Mercury – 28 days Metals – 180 days after sample collection.	1	

Notes:

a) All samples should be cooled to 4 ± 2°C in conjunction with preservation requirements noted prior to shipment to the laboratory.
b) See **Worksheet #15** for the analyte list per method.
c) Sample deliverables should include a Level IV, Contract Laboratory Program (CLP)-like data package and Electronic Data Deliverable (EDD) for all samples with the exception of IDW samples that require certificates of analysis and EDD only.

< – less than
°C – degrees Celsius
H_2SO_4 – sulfuric acid
HCl – hydrochloric acid
HDPE – High-density polyethylene
IDW – Investigative-derived waste
ISEB – In-Situ Enhanced Bioremediation
MEE – methane, ethene, ehthane
mL – milliliter
oz – ounce
PAH – Polycyclic Aromatic Hydrocarbon
PTFE – Polytetrafluoroethylene
SIM – Selected Ion Monitoring
SW – Solid Waste
TCLP – Toxicity Control Leachate Procedure
TOC – Total Organic Carbon
USEPA – United States Environmental Protection Agency
VOA – volatile organic analysis
VOC – Volatile organic compound

Table G-5: Sample Containers, Preservation, and Hold Times
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet # 19 & 30 Sample Containers, Preservation, and Hold Times

Lab Point of Contact:

Mr. Craig Meyers
Advanced Environmental Laboratories (AEL) Client Services Manager
Voice: 904-363-9350 Ext. 202
FAX: 904-363-9354
After Hours/Emergency: 904-710-7158

All samples will be shipped to AEL. AEL will ship TOC to Microbac Laboratory (Microbac). Contact Microbac through AEL Client Services Manager.

Laboratory Addresses:

For shipments Monday through Thursday, ship to:

Attn: Sample Receiving
Advanced Environmental Laboratories, Inc.
6681 Southpoint Parkway
Jacksonville, Florida 32216
904-363-9350

For shipments for Friday or Saturday delivery, there are specific instructions, they will be shipped and held for pickup at the following FedEx location across the street from the lab:

Attn: AEL
FedEx Shipping Center
3736 N Salisbury Rd
Jacksonville, Florida 32216
800-463-3339

Table G-6: Field Quality Control Sample Summary
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #20 Field Quality Control Sample Summary

Parameters[a]	Analytical Method	Matrix	Total # of Samples	FD	MS	MSD	ER (1/event)	TB (1/cooler)	TAT Needed[a]	Sample Container/ Preservation Requirements	Holding Time	Total # of Containers
ISEB and MNA Groundwater Samples/Event												
VOCs	SW8260C	Water	16	2	1	1	1	3	Normal	3 – 40 mL vials; HCl to pH < 2	Preserved – 14 days Unpreserved – 7 days	24
PAHs	SW8270D-SIM	Water	16	2	1	1	1	0	Normal	2 – 1 Liter amber glass	Extraction – 7 days Analysis – 40 days	21
Explosives	SW8330B	Water	16	2	1	1	1	0	Normal	2 – 1 Liter amber glass	7 days extraction; 40 days analysis	21
MEE	RSK-175	Water	16	2	1	1	1	0	Normal	3 total 40 mL VOA vials w/ PTFE-faced silicone septum. 1 HCl preserved to pH < 2, 2 unpreserved	14 days	21
TOC	SW9060A	Water	16	2	1	1	1	0	Normal	1 – 40 mL plastics or glass container; H_2SO_4 to pH < 2	28 days	21
Alkalinity	USEPA 310.1	Water	16	2	1	1	1	0	Normal	1 – 250 mL HDPE	14 days	21
IDW Water/Event												
VOCs	SW8260C	Water	1	0	0	0	0	0	Normal	3 – 40 mL vials; HCl to pH < 2	Preserved – 14 days Unpreserved – 7 days	1
PAHs	SW8270D-SIM	Water	1	0	0	0	0	0	Normal	2 – 1 Liter amber glass	Extraction – 7 days Analysis – 40 days	1
Explosives	SW8330B	Water	1	0	0	0	0	0	Normal	2 – 1 Liter amber glass	Extraction – 7 days Analysis – 40 days	1
UIC Permit Monitoring Groundwater Samples/Event												
Nitrate	USEPA 300.0	Water	3	0	0	0	0	0	Normal	1 x 1 Liter HDPE; < 6 °C	Nitrate – 48 hours	3
TDS	SM2540C	Water	3	0	0	0	0	0	Normal	1 – 500 mL polyethylene plastic	7 days	3
pH	SW9040B	Water	3	0	0	0	0	0	Normal	1 – Filled 8-oz glass or plastic jar	As soon as possible	3
Soil (Excavation)												
PAHs	SW8270D-SIM	Soil	1	0	0	0	0	0	Normal	1 – 8-oz glass jar with Teflon lid	Extraction – 14 days; Analysis – 40 days	1

Table G-6: Field Quality Control Sample Summary
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #20 Field Quality Control Sample Summary

Parameters[a]	Analytical Method	Matrix	Total # of Samples	FD	MS	MSD	ER (1/event)	TB (1/cooler)	TAT Needed[a]	Sample Container/ Preservation Requirements	Holding Time	Total # of Containers
IDW Soil (Excavation)												
PAHs	SW8270D-SIM	Soil	1	0	0	0	0	0	Normal	1 – 8-oz glass jar with Teflon lid	Extraction – 14 days; Analysis – 40 days	1
TCLP Metals	1311/ 6010C/	Soil	1	0	0	0	0	0	Normal	2 -250 mL amber wide	Mercury – 28 days Metals – 180 days after sample collection.	1

Notes:

a) Sample deliverables should include a Department of Defense (DoD) Quality Systems Manual (QSM) Stage 3-4 data package and Environmental Chemical Corporation (ECC) Environmental Data Management System (EDMS) electronic data deliverable (EDD) for all groundwater samples. IDW samples require Level I/II data package and EDD.

b) TBs are filled containers and not counted as part of the empty container total. TBs must be ordered from the contract laboratory. IDW water will be analyzed for constituents as required by receiving facility.

c) All samples should be cooled to 4°C for shipment to the laboratory.

d) Purge water IDW contamination levels may be determined from groundwater laboratory results, based upon acceptance of IDW water receiving facility, instead of IDW water sampling.

< – less than
°C – degrees Celsius
ER – Equipment rinsate
FD – Field duplicate
H_2SO_4 – Sulfuric acid
HCl – Hydrochloric acid
HDPE – High density polyethylene
IDW – Investigation derived waste
ISEB – In Situ Enhanced Bioremediation
MEE – Methane, ethane, ethene
mL – Milliliter
MNA – Monitored Natural Attenuation
MS – Matrix spike
MSD – Matrix spike duplicate
oz - ounce
PAH – Polycyclic aromatic hydrocarbons
PTFE – Polytetrafluoroethylene
SIM – Selection ion monitoring
SW – Solid Waste 846
TAT – Turnaround time
TCLP – Toxicity Characteristic Leachate Procedure
TB – Trip Blank
TDS – Total Dissolved Solids
TOC – Total organic carbon
USEPA – United States Environmental Protection Agency
VOA – Volatile organic analysis
VOC – Volatile organic compound

Table G-7: Analytical Laboratory Standard Operating Procedures
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #23 Analytical Laboratory Standard Operating Procedures

SOP Reference Number	Title, Revision, Date	Definitive or Screening Data	Analytical Group	Matrix	Instrument	Organization Performing Analysis	Modified for Project Work (Yes/No)?
K4151	TOC (Oxidation) USEPA 415.1/SW846 9060A/ SM5310C-2011, Rev. 18, Eff. 2020-08-15	Definitive	TOC Sample Analysis	Water	Shimadzu TOC Analyzer	Microbac	No
SVOC-001	Method 3510C: Separatory Funnel Liquid-Liquid Extraction, Rev. 07, Eff. 2020-03-27	Definitive	PAHs	Water	NA	AEL	No
SVOC-002	Method 3550B and 3550C, Rev. 06, Eff. 2020-04-15	Definitive	PAHs	Soil	NA	AEL	No
SVOC-028	Method 8270C/D/E SIM: SVOCs by GC/MS in SIM, Rev. 12, Eff. 2020-12-22	Definitive	PAHs	Water	GC/MS	AEL	No
SVOC-031	Method 8330B: Explosives by HPLC, Rev. 02, Eff. 2022-02-17	Definitive	Explosives	Water	HPLC	AEL	No
SVOC-032	Method 3535A: SPE for Nitroaromatics, Nitramines, and Explosives. Rev. 01, Eff 2022-02-17	Definitive	Explosives	Water	N/A	AEL	No
VOC-001	Method 5030C: Purge-and-Trap for Aqueous Samples, Rev. 06, Eff. 2020-08-10	Definitive	VOCs	Water	Purge and Trap	AEL	No
VOC-003	Methods 8260B, C, & D: VOCs by GC/MS, Rev. 16, Eff. 2021-04-19	Definitive	VOCs	Water	GC/MS	AEL	No
VOC-013	Method RSK-175: Dissolved Gas Analysis in Water Samples by HS-GC with FID; Rev. 02, Eff. 2021-02-03	Definitive	Dissolved Gas Sample Analysis	Water	HS-GC with FID	AEL	No
WC-002	USEPA Methods 150.1, 9040c, & SM 4500H+B Determination of pH (and Corrosivity) Electrometrically, Rev. 15, Eff: 2021-02-02	Definitive	Wet Chemistry (pH)	Water	pH Meter	AEL	No
WC-007	Method 160.1 / SM 2540C TDS, Rev. 18, Eff: 2021-08-20	Definitive	Wet Chemistry (TDS)	Water	Gravimetric	AEL	No
WC-043	Method 310.1 / SM 2320 B-1997: Determination of Alkalinity Rev. 14, Eff. 2020-06-24	Definitive	Alkalinity Sample Analysis	Water	Automated Titrator	AEL	No
WC-054	Method USEPA 300.0 and USEPA 9056A: Determination of Inorganic Anions by IC, Rev 18, Eff. 2021-04-05	Definitive	Nitrate	Water	IC	AEL	No

Notes:

AEL – Advanced Environmental Laboratories
Eff. – Effective
FID – Flame ionization detector
GC/MS – Gas chromatography/Mass spectrometry
HPLC – High performance liquid chromatography
HS-GC – Headspace gas chromatography
IC – ion chromatography
Microbac – Microbac Laboratory
NA – not applicable
PAH – Polycyclic Aromatic Hydrocarbon
Rev. – Revision
SIM – Selected Ion Mode
SOP – Standard Operating Procedure
SPE – Solid Phase Extraction
SVOC – Semivolatile organic compound
TDS – Total dissolved solid
TOC – Total organic carbon
USEPA – United States Environmental Protection Agency
VOC – Volatile organic compounds

Table G-8: Analytical Instrument Calibration
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #24 Analytical Instrument Calibration

Instrument	Calibration Procedure	Calibration Range	Frequency of Calibration	Acceptance Criteria	CA	Person Responsible for CA	SOP Reference
VOCs GC/MS	Tune Check	Ion ratio verified	Every 12 hours and beginning of the analytical batch.	Specific ion abundance criteria for BFB tune solution.	Retune Instrument	Analyst	VOC-003, Section 12.1
	ICAL	On instrument: 1 to 200 µg/L, 0.1 to 1.2 µg/L for SIM	At instrument set-up and after ICV or CCV failure, prior to sample analysis	Either RSD for each analyte ≤15% or linear least squares regression for each analyte ≥ 0.99	Correct problem then repeat ICAL		VOC-003, Sections 10, 13
	RT Windows Verification	NA	At ICAL at midpoint and daily at beginning CCV	IS shift ≤ 10 seconds otherwise reset. Analytes reported within ± 0.06 RRT	NA		VOC-003, Section 13
	ICV	At concentration level ± 25-50% of curve range	Once after ICAL	All target analytes within ± 20% of true value	Correct problem. Rerun ICV. If fails, repeat ICAL		VOC-003, Sections 10, 13
	CCV	At concentration level ± 25-50% of curve range	Daily before sample analysis, every 12 hours thereafter, and close of analysis	All target analytes within ± 20% of true value. Closing CCV ± 50%	Immediately analyze two additional CCVs. If both pass, samples can be reported. If either fails, repair problem, rerun samples with new passing CCV. May require new ICAL. If reanalysis not possible, data must be qualified with case narration.		VOC-003, Sections 12, 13
	IS	All QC and Samples	All QC and Samples	RT within ± 10 seconds at ICAL midpoint or first daily CCV. Area Counts -50% to +100% midpoint standard	Correct problem, reanalyze samples.		
PAHs GC/MS	Tune Check	Ion ratio verified	Every 12 hours and beginning of the analytical batch.	Specific ion abundance criteria for DFTPP tune solution.	Retune Instrument	Analyst	SVOC-028, Sections 12, 13, 24
	Tailing and Degradation Check	50 µg/mL		Degradation of DDT ≤ 20%, Benzidine and pentachlorophenol tailing factor < 2	Correct problem (Change liner and/or trim column)		

Table G-8: Analytical Instrument Calibration
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #24 Analytical Instrument Calibration

Instrument	Calibration Procedure	Calibration Range	Frequency of Calibration	Acceptance Criteria	CA	Person Responsible for CA	SOP Reference
PAHs GC/MS	Resolution Check	20 µg/mL	Every 12 hours and beginning of the analytical batch.	Resolution Criteria - The height of the valley between the 2 isomers (benzo(b) and benzo(k)) must be less 50% of the average height of the 2 peak heights. Correct problem and re-analyze all QC and project	Correct problem (Change liner and/or trim column)		SVOC-028, Sections 14, 24
	ICAL	For PAH analytes, 0.025 to 100 mg/L on instrument. All other analytes, 5 to 100 mg/L.	At instrument set-up and after ICV or CCV failure, prior to sample analysis	Either RSD for each analyte ≤15%; linear or quadratic least squares regression for each analyte ≥ 0.99	Correct problem then repeat ICAL		SVOC-028, Sections 10, 13, 16, 24
	ICV	At concentration level ± 25-50% of curve range	Once after ICAL	All target analytes within ± 20% of true value	Correct problem. Rerun ICV. If fails, repeat ICAL		
	RT Windows Verification	NA	At ICAL at midpoint and daily at beginning CCV	IS shift ≤ 10 seconds otherwise reset. Analytes reported within ± 0.06 RRT	NA		SVOC-028, Sections 12, 14, 16, 24
	CCV	At concentration level ± 25-50% of curve range	Daily before sample analysis, every 12 hours thereafter, and close of analysis	All target analytes within ± 20% of true value. Closing CCV ± 50%	Immediately analyze two additional CCVs. If both pass, samples can be reported. If either fails, repair problem, rerun samples with new passing CCV. May require new ICAL. If reanalysis not possible, data must be qualified with case narration.	Analyst	SVOC-028, Sections 10, 13, 24

Table G-8: Analytical Instrument Calibration
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #24 Analytical Instrument Calibration

Instrument	Calibration Procedure	Calibration Range	Frequency of Calibration	Acceptance Criteria	CA	Person Responsible for CA	SOP Reference
Explosives/ HPLC	ICAL	Prepare calibration standards at a maximum of 7 levels: 0.05 µg/mL, 0.1 µg/mL, 0.5 µg/mL, 2.5 ug/mL, 5.0 µg/mL,10 ug/mL and 20 µg/mL. External calibration is used with Method 8330B because of the internal standard co-elution.	At instrument set-up and after ICV or CCV failure, prior to sample analysis	Either RSD for each analyte ≤ 20% or linear least squares regression for each analyte ≥0.99	Correct problem then repeat ICAL	Analyst	SVOC-031 Sections 10,12,13
	ICV	At concentration level ± 25-50% of curve range	Once after ICAL	All target analytes within ± 20% of true value	Correct problem. Rerun ICV. If fails, repeat ICAL		
	RT Windows Verification	NA	At ICAL at midpoint and daily at beginning CCV	ISs shift ≤ 10 seconds otherwise reset. Analytes reported within ± 0.05 min.	NA		
	CCV	At concentration level ± 25-50% of curve range	Daily before sample analysis, every 10 field samples, and close of analysis	All target analytes within ± 20% of true value.	Immediately analyze two additional CCVs. If both pass, samples can be reported. If either fails, repair problem, rerun samples with new passing CCV. May require new ICAL. If reanalysis not possible, data must be qualified with case narration.	Analyst	
Volatiles GC/FID	ICAL	Varied per Analyte.	At instrument set-up and after ICV or CCV failure, prior to sample analysis	Either RSD for each analyte ≤ 20%; linear or quadratic regression for each analyte ≥ 0.99	Correct problem then repeat ICAL	Analyst	VOC-013, Sections 10, 12, 13, 24
	RT Windows Verification	NA	Before ICAL and daily before IB.	Set at ± 3 times standard deviation of 72 hour study.	NA	Analyst	VOC-013, Section 12, 24

Table G-8: Analytical Instrument Calibration
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #24 Analytical Instrument Calibration

Instrument	Calibration Procedure	Calibration Range	Frequency of Calibration	Acceptance Criteria	CA	Person Responsible for CA	SOP Reference
Volatiles GC/FID	ICV	Varied per Analyte.	Once after ICAL	All target analytes within ± 20% of true value	Correct problem. Rerun ICV. If fails, repeat ICAL	Analyst	VOC-013, Sections 10, 12, 13, 24
	CCV	Varied per Analyte.	Daily before sample analysis, every 4 hours thereafter, and close of analysis	All target analytes within ± 20% of true value.	Immediately analyze two additional CCVs. If both pass, samples can be reported. If either fails, repair problem, rerun samples with new passing CCV. May require new ICAL. If reanalysis not possible, data must be qualified with case narration.	Analyst	
Titrator	ICAL	pH buffer 4, 7, 10 (validating pH meter calibration)	Daily	Slope – 95-105% for pH meter calibration	Regenerate pH probe in 0.1 M HCl solution for one hour. Recalibrate pH meter.	Analyst	WC-043, Section 12, 13
	ICV	100 mg/L	Once after ICAL	All target elements ± 10% of true value	Correct problem. Re-prepare and re-analyze ICV.		
	CCV		Daily before sample analysis, every 10 samples, and at the end of analysis.		Correct problem. Re-prepare and re-analyze CCV.		
	IB/CCB	NA		No analytes detected >LOD	Correct problem. Re-prepare and re-analyze calibration blank. All samples following the last acceptable calibration blank must be re-analyzed		
TOC analyzer	ICAL	1 - 50 mg/L	As needed or project defined	R must be ≥ 0.995	Re-analyze curve	Analyst/ Supervisor	K4151
	ICV	25 mg/L TIC	Immediately after ICAL	90-110% Recovery			
	CCV	TOC/TIC Combined: 25 mg/L and 10 mg/L	Daily at the beginning of analysis	TOC RPD <10%	Make a new stock and re-analyze stock from the last acceptable CCV		
		25 mg/L TOC	Before analysis of samples, every 10 samples and at the end of the analysis	90-110% Recovery			

Table G-8: Analytical Instrument Calibration
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #24 Analytical Instrument Calibration

Instrument	Calibration Procedure	Calibration Range	Frequency of Calibration	Acceptance Criteria	CA	Person Responsible for CA	SOP Reference
TOC analyzer	CCB	Not spiked	After every CCV	No analytes detected greater than the LOD	Correct problem, Rerun CCB. If rerun fails, repeat ICAL and reanalyze all samples since the last successful CCB	Analyst/ Supervisor	K4151
Wet Chemistry (IC)	ICAL	5 to 200 mg/L for Chloride/Sulfate. All others 0.5 to 5 mg/L.	6 months or sooner if QC fails.	$R \geq 0.995$	Correct problem, rerun ICAL.	Analyst	WC-054, Section 12, 13
	ICV	25 mg/L for Chloride and Sulfate. All other analytes 1.0 mg/L.	Once after ICAL	All target elements ± 10% of true value	Correct problem, rerun ICV. If that fails, repeat ICAL.		
	CCV	25 mg/L for Chloride and Sulfate. All other analytes 1.0 mg/L.	Every 10 field samples	All target elements ± 10% of true value	Immediately analyze two additional CCVs. If both pass, samples can be reported. If either fails, repair problem, rerun samples with new passing CCV. May require new ICAL. If reanalysis not possible, data must be qualified with case narration.		
	IB/CCB	NA	Daily before analysis, every 10 samples, and end of analysis.	No analytes detected > LOD	Correct problem. Re-prepare and re-analyze CCB. All samples following the last acceptable CCB must be re-analyzed		
Analytical Balance for Gravimetric Methods (SM2540C)	Calibration Check	N/A	Daily, in duplicate, before sample analysis	Within + 0.1% or 0.5 mg of true value for analytical balances	Correct problem. Perform routine maintenance and then verify calibration. If the problem still persists, call the manufacturer and place the balance out-of-service.	Analyst	AEL QM 10.3 and Tech-004

Table G-8: Analytical Instrument Calibration
RSA-262 Site Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #24 Analytical Instrument Calibration

Instrument	Calibration Procedure	Calibration Range	Frequency of Calibration	Acceptance Criteria	CA	Person Responsible for CA	SOP Reference
pH Meter	ICAL	4.00, 7.00, 10.00 pH units	At instrument set-up and after ICV or CCV failure, prior to sample analysis	All levels re-analyzed after calibration, and must be within ± 5% of true value	Correct problem then repeat ICAL	Analyst	WC-002
	ICV	7.0 pH units	Once after ICAL	Within ± 5% of true value	Correct problem. Rerun ICV. If fails, repeat ICAL		
	CCV	7.0 pH units	Daily before sample analysis, and at the end of analysis.	Within ± 5% of true value	Correct problem. Rerun CCV. If fails, repeat ICAL		

Notes:

< – less than
≤ – less than or equal to
> – greater than
≥ – greater than or equal to
% – percent
µg/L – micrograms per liter
µg/mL – micrograms per milliliter
BFB – Bromofluorobenzene
CA – Corrective Action
CCB – Continuing Calibration Blank
CCV – Continuing Calibration Verification
DDT – Dichlorodiphenyltrichloroethane
DFTPP – Decafluorotriphenylphosphine
GC/FID – Gas Chromatography/Flame Ionization Detector
GC/MS – Gas Chromatography/Mass Spectrometry
HCl – Hydrochloric acid
HPLC – High–performance liquid chromatography
IB – Instrument blank
IC – ion chromatography
ICAL – Initial Calibration
ICV – Initial Calibration Verification
IS – Internal Standard
LOD – Limit of Detection
M – molar
mg – milligrams
mg/L – milligrams per liter
NA – Not Applicable
PAH – Polycyclic aromatic hydrocarbon
QC – Quality Control
R – Coefficient of correlation
RRT – Relative retention time
RPD – Relative Percent Difference
RSD – Relative standard deviation
RT – Retention time
SIM – Selected Ion Monitoring
SOP – Standard Operating Procedure
SVOC – Semivolatile organic compound
TIC – total inorganic carbon
TOC – Total organic carbon
VOC – Volatile organic compound

Table G-9. Analytical Instrument and Equipment Maintenance, Testing, and Inspection
RSA-262 Groundwater Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet# 25: Analytical Instrument and Equipment Maintenance, Testing, and Inspection

Instrument/ Equipment	Maintenance Activity	Testing Activity	Inspection Activity/Preventive Maintenance	Frequency	Acceptance Criteria	CA	Title/ Position Responsible for CA	Reference
VOC Purge and Trap System	Concentrating Trap	ICAL and CCVs	• purge flow rate (40 L/m) at least weekly • bake flow rate (80-120 mL/min) at least monthly • shape and tailing of chromatographic peaks continuously • monitor trending in surrogate & standard recoveries continuously • changes in tuning daily • IB baselines continuously	As Listed with Inspection	MBs < DL, ICAL, ICV, CCV, and surrogate limits as seen on **Worksheet #28**	Trap replacement, sparge tube cleaning and replacement, trap conditioning, check for leaks by flow.	Analyst/ Supervisor	VOC-001
VOCs GC/MS	Column performance		• shape and tailing of chromatographic peaks continuously • monitor trending in surrogate & standard recoveries continuously • changes in tuning daily • IB baselines continuously		MB < DL, ICAL, ICV, CCV, peak shape, & LCS, Internal Area Counts, surrogate limits as seen on **Worksheet #28**	Trim or replace column		
	Vacuum System		• Check level of oil in rotary pump quarterly • Replace oil in vacuum rotary pump annually		Levels within level check marks	Add or change oil		
	Ion source/ chamber		• Clean MS ion source, check pre-rods and lenses quarterly • Deep cleaning of MS including ion source, pre-rods and lenses semi-annually or as needed.		Passing Tune criteria	Clean and/or replace ion source parts.		
	Filament		• Check filaments condition (filaments are replaced through the year as needed)		Passing Tune criteria, Passing QC, Area Counts and Sensitivity.			VOC-003

Table G-9. Analytical Instrument and Equipment Maintenance, Testing, and Inspection
RSA-262 Groundwater Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet# 25: Analytical Instrument and Equipment Maintenance, Testing, and Inspection

Instrument/ Equipment	Maintenance Activity	Testing Activity	Inspection Activity/Preventive Maintenance	Frequency	Acceptance Criteria	CA	Title/ Position Responsible for CA	Reference
PAHs GC/MS	Column/liner performance	ICAL and CCVs	• shape and tailing of chromatographic peaks continuously • monitor trending in surrogate & standard recoveries continuously • changes in tuning daily • IB baselines continuously	As Listed with Inspection	MBs < DL, ICAL, ICV, CCV, peak shape, & LCS, Internal Area Counts, surrogate limits as seen on **Worksheet #28**	Trim or replace column. Replace liner.	Analyst	SVOC-028
	Vacuum System		• Check level of oil in rotary pump quarterly • Replace oil in vacuum rotary pump annually		Levels within level check marks	Add or change oil		
	Ion source/ chamber		• Clean MS ion source, check pre-rods and lenses quarterly • Deep cleaning of MS including ion source, pre-rods and lenses semi-annually or as needed.		Passing Tune criteria	Clean and/or replace ion source parts.	Senior Analyst/ Department Supervisor	
	Filament		• Check filaments condition (filaments are replaced through the year as needed)		Passing Tune criteria, Passing QC, Area Counts and Sensitivity.			
Explosives/ HPLC	Pump/tubing/ inline filters/ seals		• Replace teflon frit (monthly or as needed). • Replace rotor seal (quarterly or as needed). • Replace gold seal (quarterly or as needed). • Replace piston seals (yearly or as needed).		MBs < DL, ICAL, ICV, CCV, peak shape, & LCS, as seen on **Worksheet #28**	Normal replacement		SVOC-031
Volatiles GC/FID	Column/liner performance		• shape and tailing of chromatographic peaks continuously • monitor trending in standard recoveries continuously • IB baselines continuously		MBs < DL, ICAL, ICV, CCV, peak shape, LCS, and Internal Area Counts, as seen on **Worksheet #28**.	Trim or replace column. Replace liner.		VOC-013
	Detector					Clean or replace as needed		
Titrator	Regenerate or replace probes, replace fluids	Alkalinity	• Monitor ICV and CCV performance		QC passing criteria	Replace fluids or probes as necessary		WC-043

Table G-9. Analytical Instrument and Equipment Maintenance, Testing, and Inspection
RSA-262 Groundwater Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet# 25: Analytical Instrument and Equipment Maintenance, Testing, and Inspection

Instrument/ Equipment	Maintenance Activity	Testing Activity	Inspection Activity/Preventive Maintenance	Frequency	Acceptance Criteria	CA	Title/ Position Responsible for CA	Reference
TOC analyzer	Verify drain vessel is full. Verify waste container is not full. Verify there is sufficient gas. Check for leaks. Replace CO_2 absorber. Replace Halogen scrubber	TOC	• Monitor ICV and CCV performance	Daily and periodically	Analyze check standard recovery	Correct problems, reanalyze standard	Analyst/ Supervisor	K4151
IC	Pump/tubing/ Inline filters/ membrane filter	ICAL and CCV	• Checked daily, • Replaced weekly	As listed with Inspection	MBs < DL, ICAL, ICV, CCV, peak shape, & LCS, as seen on **Worksheet #28**	Normal replacement	Analyst	WC-054
pH meter	Analytical Performance		• Checked daily • Inspect probe for cleanliness, check tubing, check flow of reagents, calibrate		QC passing criteria	Perform necessary equipment maintenance and check calibration standards	Analyst.	WC-002
Analytical Balance for Gravimetric Methods (2540C)	Clean balance tray or work area.		• Checked daily • Replaced weekly		Within + 0.1% or 0.5 mg of true value for analytical balances	Annual calibration	Third Party Service.	AEL QM 10.3 and Tech-004

Notes:

% – percent
< – Less than
CA – Corrective action
CCV – Continuing calibration verification
CO_2 – carbon dioxide
DL – Detection limit
GC/FID – Gas Chromatography/Flame Ionization Detector
GC/MS – Gas Chromatography/Mass Spectrometry
HPLC – High–performance liquid chromatography
IB – Instrument blank
IC – Ion Chromatography
ICAL – Initial calibration
ICV – Initial calibration verification
LCS – Laboratory control sample
L/min – liters per minute
MB – Method blank
mL/min – milliliter per minute
MS – Mass Spectrometry
PAH – Polycyclic aromatic hydrocarbon
QC – Quality control
SVOC – Semivolatile organic compound
TOC – Total organic carbon
VOC – Volatile organic compound

Table G-10: Sample Handing, Custody, and Disposal
RSA-262 Groundwater Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #26 Sample Handling, Custody, and Disposal

SAMPLE COLLECTION, PACKAGING, AND SHIPMENT (FIELD)
Sample Collection (Personnel/Organization): ECC Personnel TBD
Sample Packaging (Personnel/Organization): ECC Personnel TBD
Coordination of Shipment (Personnel/Organization): ECC Personnel TBD
Type of Shipment/Carrier: Cooler/Lab Courier, FedEx
SAMPLE RECEIPT AND ANALYSIS
Sample Receipt (Personnel/Organization): AEL Laboratory Personnel
Sample Custody and Storage (Personnel/Organization): AEL Laboratory Personnel
Sample Preparation (Personnel/Organization): AEL Laboratory Personnel
Sample Determinative Analysis (Personnel/Organization): AEL Laboratory Personnel
SAMPLE ARCHIVING
Field Sample Storage (number of days from sample collection): 60 days from receipt
Sample Extract/Digestate Storage (number of days from extraction/digestion): 3 months from sample extraction/digestion
Biological Sample Storage (number of days from sample collection): NA
SAMPLE DISPOSAL
Personnel/Organization: AEL Laboratories, LLC Personnel
Number of Days from Analysis: 30 days from submittal of Final report or 60 days from receipt, whichever is longer

Notes:

AEL – Advanced Environmental Laboratories
ECC – Environmental Chemical Corporation
NA – not applicable
TBD – To be determined

Post sample collection in the field will be conducted in accordance with Standard Operating Projected Procedure (SOPP) 15.0 *Non-Hazardous Sample Handling, Packaging, and Shipping.* This procedure is located in the Installation-Wide – Quality Assurance Project Plan (IW-QAPP), Volume II (HGL, 2019).

Specific laboratory sample custody procedures (receipt of samples, archiving, and disposal) will be used for all post-sample handling. Coolers will be received and checked for proper temperature. A sample cooler receipt form will be filled out to note the conditions and any discrepancies. The chain of custody will be checked against the sample containers for correctness. Samples will be logged into the data base and given a unique log number, which can be tracked through processing. The Project Chemist will be notified of any problems.

Table G-11, Analytical Quality Control and Corrective Action
RSA-262 Groundwater Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #28 Analytical Quality Control and Corrective Action

Analytical Group: VOCs
Analytical Method/SOP Reference: USEPA 5030B / 8260C by VOC-001 & VOC-003

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	Project Specific MPC
MB	Once every prep/analytical batch of 20 or fewer samples	No analyte detected ≥ DL or > 1/10 the regulatory limit, whichever is greater. (DoD: No analytes > ½ LOQ; common lab contaminants none detected > LOQ)	Correct problem. If required, reprep and reanalyze MB and all QC samples and field samples processed with the contaminated blank. If not enough sample volume to re-prep, data qualified with case narration.	Analyst with Department Supervisor and QA Officer review.	MB detections used to qualify project samples per validation guidance
LCS		QC limits set in QSM 5.4 LCS tables or in-house generated limits when DoD limits unavailable.	Correct problem. If required, reprep and reanalyze LCS and all QC samples and field samples processed in batch. If not enough sample volume to re-prep, data qualified with case narration.		Same as Method/SOP
MS			When outside limits examine project specific requirements and/or contact client. Flag data appropriately.	Analyst with Department Supervisor review.	
MSD		QC limits set in QSM 5.4 LCS tables or in-house generated limits when DoD limits unavailable. RPD of all target compounds ≤ 20% between MS and MSD.			
Surr	All samples and QC (except tune)	QC limits set in QSM 5.4 tables or in-house generated limits when DoD limits unavailable.	Action dependent upon type. If MB or LCS, correct problem and reprep-reanalyze all associated samples. If sample, examine matrix. If obvious chromatographic interferences, reanalysis may not be required. Qualify recovery data and notify and/or case narrate.		

Analytical Group: PAHs
Analytical Method/SOP Reference: USEPA 3510C / 8270-SIM by SVOC-001, SVOC-002 & SVOC-028

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	MPC
MB	Once every prep/analytical batch of 20 or fewer samples	No analyte detected ≥ DL or > 1/10 the regulatory limit, whichever is greater; (DoD: No analytes > ½ LOQ; common lab contaminants none detected > LOQ)	Correct problem. If required, reprep and reanalyze MB and all QC samples and field samples processed with the contaminated blank. If not enough sample volume to re-prep, data qualified with case narration.	Analyst with Department Supervisor and QA Officer review.	MB detections used to qualify project samples per validation guidance

Table G-11, Analytical Quality Control and Corrective Action
RSA-262 Groundwater Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #28 Analytical Quality Control and Corrective Action

Analytical Group: PAHs
Analytical Method/SOP Reference: USEPA 3510C / 8270-SIM by SVOC-001, SVOC-002 & SVOC-028

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	MPC
LCS	Once every prep/analytical batch of 20 or fewer samples	QC limits set in QSM 5.4 LCS tables or in-house generated limits when DoD limits unavailable.	Correct problem. If required, reprep and reanalyze LCS and all QC samples and field samples processed in batch. If not enough sample volume to re-prep, data qualified with case narration.	Analyst with Department Supervisor review.	Same as Method/SOP
MS			When outside limits examine project specific requirements and/or contact client. Flag data appropriately.		
MSD		QC limits set in QSM 5.4 LCS tables or in-house generated limits when DoD limits unavailable. RPD of all target compounds ≤ 20% between MS and MSD.			
Surr	All samples and QC (except tune)	QC limits set in QSM 5.4 tables or in-house generated limits when DoD limits unavailable.	Action dependent upon type. If MB or LCS, correct problem and reprep-reanalyze all associated samples. If sample, examine matrix. If obvious chromatographic interferences, reanalysis may not be required. Qualify recovery data and notify and/or case narrate.		

Analytical Group: Explosives
Analytical Method/SOP Reference: USEPA 3535A/ 8330B by SVOC-032 & SVOC-031

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	Project Specific MPC
MB	Once every prep/analytical batch of 20 or fewer samples	No analyte detected ≥ DL or > 1/10 the regulatory limit, whichever is greater. (DoD: No analytes > ½ LOQ; common lab contaminants none detected > LOQ)	Correct problem. If required, reprep and reanalyze MB and all QC samples and field samples processed with the contaminated blank. If not enough sample volume to re-prep, data qualified with case narration.	Analyst w/Department Supervisor & QA Officer review.	MB detections used to qualify project samples per validation guidance
LCS		QC limits set in QSM 5.4 LCS tables or in-house generated limits when DoD limits unavailable.	Correct problem. If required, reprep and reanalyze LCS and all QC samples and field samples processed in batch. If not enough sample volume to re-prep, data qualified with case narration.		Same as Method/SOP

Table G-11, Analytical Quality Control and Corrective Action
RSA-262 Groundwater Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #28 Analytical Quality Control and Corrective Action

Analytical Group: Explosives
Analytical Method/SOP Reference: USEPA 3535A/ 8330B by SVOC-032 & SVOC-031

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	Project Specific MPC
MS	Once every prep/analytical batch of 20 or fewer samples	QC limits set in QSM 5.4 LCS tables or in-house generated limits when DoD limits unavailable. RPD of all target compounds ≤ 20% between MS and MSD.	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.	Analyst with Department Supervisor review.	Same as Method/SOP
MSD					
Surr		QC limits set in QSM 5.4 tables or in-house generated limits when DoD limits unavailable.	Action dependent upon type. If MB or LCS, correct problem and reprep-reanalyze all associated samples. If sample, examine matrix. If obvious chromatographic interferences, reanalysis may not be required. Qualify recovery data and notify and/or case narrate.		

Analytical Group: Alkalinity
Analytical Method/SOP Reference: USEPA 310.1 by WC-043

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	Project Specific MPC
MB	Once every prep/analytical batch of 20 or fewer samples	No analyte detected ≥ DL or > 1/10 the regulatory limit, whichever is greater. (DoD: No analytes > ½ LOQ; common lab contaminants none detected > LOQ)	Correct problem. If required, reprep and reanalyze MB and all QC samples and field samples processed with the contaminated blank. If not enough sample volume to re-prep, data qualified with case narration.	Analyst w/Department Supervisor & QA Officer review.	MB detections used to qualify project samples per validation guidance
LCS		QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable.	Correct problem. If required, reprep and reanalyze LCS and all QC samples and field samples processed in batch. If not enough sample volume to re-prep, data qualified with case narration.		Same as Method/SOP
Sample Duplicate	1 per 10 samples or less	RPD <10%	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.	Analyst with Department Supervisor review.	

Table G-11, Analytical Quality Control and Corrective Action
RSA-262 Groundwater Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #28 Analytical Quality Control and Corrective Action

Analytical Group: Dissolved Gases (MEE)
Analytical Method/SOP Reference: RSK-175 by VOC-013

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	Project Specific MPC
MB	Once every prep/analytical batch of 20 or fewer samples	No analyte detected ≥ DL regulatory limit, whichever is greater; (DoD: No analytes > ½ LOQ; common lab contaminants none detected > LOQ)	Correct problem. If required, reprep and reanalyze MB and all QC samples and field samples processed with the contaminated blank. If not enough sample volume to re-prep, data qualified with case narration.	Analyst w/Department Supervisor & QA Officer review.	MB detections used to qualify project samples per validation guidance
LCS		QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable.	Correct problem. If required, reprep and reanalyze LCS and all QC samples and field samples processed in batch. If not enough sample volume to re-prep, data qualified with case narration.		Same as Method/SOP
LCSD	Alternative means of determining laboratory precision is MS/MSD no performed. Perform as needed.	RPD of all target compounds ≤ 30%	No specific CA. Flag accordingly.	Analyst/ Supervisor	
MS	Once every prep/analytical batch of 20 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable.	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.	Analyst with Department Supervisor review.	
MSD					

Analytical Group: Total Organic Carbon
Analytical Method/SOP Reference: SW9060A by K4151

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	Project Specific MPC
MB	Once every prep/analytical batch of 20 or fewer samples	No analyte detected ≥ DL or > 1/10 the regulatory limit, whichever is greater. (DoD: No analytes > ½ LOQ; common lab contaminants none detected > LOQ)	Correct problem. If required, reprep and reanalyze MB and all QC samples and field samples processed with the contaminated blank. If not enough sample volume to re-prep, data qualified with case narration.	Analyst with Department Supervisor and QA Officer review.	MB detections used to qualify project samples per validation guidance
LCS		In house limits 85-115% and RPD ≤ 15%	Correct problem. If required, reprep and reanalyze LCS and all QC samples and field samples processed in batch. If not enough sample volume to re-prep, data qualified with case narration.		Same as Method/SOP

Table G-11, Analytical Quality Control and Corrective Action
RSA-262 Groundwater Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #28 Analytical Quality Control and Corrective Action

Analytical Group: Total Organic Carbon
Analytical Method/SOP Reference: SW9060A by K4151

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	Project Specific MPC
LCSD	Alternative means of determining laboratory precision is MS/MSD not performed. Perform as needed.	RPD of all target compounds ≤ 15%	No specific CA. Flag accordingly.	Analyst/ Supervisor	Same as Method/SOP
MS	Once every prep/analytical batch of 20 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable.	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.	Analyst with Department Supervisor review.	
MSD		QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable. RPD of all target compounds ≤ 15% between MS and MSD.			
Duplicate	One each per preparatory batch of up to 20 samples.	RPD ≤ 15%	Investigate and reanalyze		

Analytical Group: Nitrate
Analytical Method/SOP Reference: USEPA WC-054

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	Project Specific MPC
MB	Once every prep/analytical batch of 20 or fewer samples	No analyte detected ≥ DL or > 1/10 the regulatory limit, whichever is greater. (DoD: No analytes > ½ LOQ; common lab contaminants none detected > LOQ)	Correct problem. If required, reprep and reanalyze MB and all QC samples and field samples processed with the contaminated blank. If not enough sample volume to re-prep, data qualified with case narration.	Analyst with Department Supervisor and QA Officer review	MB detections used to qualify project samples per validation guidance
LCS		QC limits set in QSM 5.4 LCS tables or in-house generated limits when DoD limits unavailable.	Correct problem. If required, reprep and reanalyze LCS and all QC samples and field samples processed in batch. If not enough sample volume to re-prep, data qualified with case narration.	Analyst with Department Supervisor review	Same as Method/SOP

Table G-11, Analytical Quality Control and Corrective Action
RSA-262 Groundwater Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #28 Analytical Quality Control and Corrective Action

Analytical Group: Nitrate
Analytical Method/SOP Reference: USEPA WC-054

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	Project Specific MPC
MS	Once every prep/analytical batch of 10 or fewer samples	QC limits set in QSM 5.4 LCS tables or in-house generated limits when DoD limits unavailable.	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.	Analyst with Department Supervisor review	Same as Method/SOP
MSD		QC limits set in QSM 5.4 LCS tables or in-house generated limits when DoD limits unavailable. RPD of all target compounds ≤ 10% between MS and MSD.			
Sample duplicate	Once every prep/analytical batch	RPD < 20%			

Analytical Group: pH
Analytical Method/SOP Reference: SW9040B by WC-002

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	Project Specific MPC
LCS/CCV	Once every prep/analytical batch of 10 or fewer samples, and at the end of the batch	QC limits set in QSM 5.4 LCS tables or in-house generated limits when DoD limits unavailable.	Correct problem. If required, reprep and reanalyze LCS/CCV and all QC samples and field samples processed in batch. If not enough sample volume to re-prep, data qualified with case narration.	Analyst with Department Supervisor and QA Officer review.	
Sample duplicate	Once every prep/analytical batch of 10 or fewer samples	within 0.1 pH unit of original reading	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.	Analyst with Department Supervisor review.	

Table G-11, Analytical Quality Control and Corrective Action
RSA-262 Groundwater Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #28 Analytical Quality Control and Corrective Action

Analytical Group: TDS
Analytical Method/SOP Reference: SW9040B by WC-002

QC Sample	Number / Frequency	Method / SOP QC Acceptance Limits	CA	Title of Person Responsible for CA	Project Specific MPC
MB	Once every prep/analytical batch of 20 or fewer samples	No analyte detected ≥ DL or > 1/10 the regulatory limit, whichever is greater (DoD: No analytes > ½ LOQ; common lab contaminants none detected > LOQ)	Correct problem. If required, reprep and reanalyze MB and all QC samples and field samples processed with the contaminated blank. If not enough sample volume to re-prep, data qualified with case narration.	Analyst/w Department Supervisor & QA Officer review.	
LCS	Once every prep/analytical batch of 20 or fewer samples	QC limits set in QSM 5.3 LCS tables or in-house generated limits when DoD limits unavailable.	Correct problem. If required, reprep and reanalyze LCS and all QC samples and field samples processed in batch. If not enough sample volume to re-prep, data qualified with case narration.	Analyst w/Department Supervisor & QA Officer review.	
Sample duplicate	1 per 10 samples or less	RPD <10%	When outside limits examine project specific requirements and/or contact client. Flag data appropriately.	Analyst with Department Supervisor review.	

Notes:
% – percent
< – less than
≤ – less than or equal to
> – greater than
≥ – greater than or equal to
CA– Corrective Action
DL – Detection Level
DoD – Department of Defense
LCS – Laboratory Control Spike
LCSD – Laboratory Control Spike Duplicate
LOQ – Limit of quantitation
MB – Method Blank
MEE – methene, ethane, ethene
MPC – Measurement performance criteria
MS – Matrix Spike
MSD – Matrix Spike Duplicate
PAH – Polycyclic aromatic hydrocarbon
QA – Quality assurance
QC – Quality Control
QSM – Quality Systems Manual
RPD – Relative Percent Difference
SOP – Standard Operating Procedure
Surr – Surrogate
SVOC – Semivolatile organic compound
TDS – Total Dissolved Solids
USEPA – United States Environmental Protection Agency
VOC – Volatile Organic Compound

Data validation is an analyte and sample-specific process for evaluating compliance with contract requirements, methods/Standard Operating Procedures (SOPs), and measurement performance criteria (MPC).

All project field samples will undergo a Tier 1 Plus (Department of Defense [DoD] Quality Systems Manual [QSM] Stage 2B) data validation using lab limits as the MPC. IDW samples will be reviewed for completeness only.

Data validation will be documented on ECC Data Validation Worksheets (DVW). Project electronic data deliverables (EDDs) (ECC Environmental Data Management System [EDMS] EDD and Environmental Remediation Information System [ERIS]) will be updated with

Table G-11, Analytical Quality Control and Corrective Action
RSA-262 Groundwater Monitoring Plan, Redstone Arsenal, Madison County, Alabama
Worksheet #28 Analytical Quality Control and Corrective Action

IW-QAPP data validation qualifiers and rationale for validation qualifications provided in the DVW).

- U – Not detected by the lab or as a result of qualifying data due to cross-contamination as determined by blank evaluation less than five times blank level) during data validation.
- UJ – Not detected with estimated reporting limits. Assigned due to data validation exceedance.
- R – Rejected data. Data determined to be unusable during data validation.

Step IIa/IIb	Matrix	Analytical Group	Concentration Level	Validation Criteria	Data Validator
IIa	Groundwater	VOCs, PAHs, Explosives, MNA Parameters	Low/Medium	Laboratory MPC evaluated in accordance with applicable USEPA National Functional Guidelines as applicable to analytical methods listed in this Site Monitoring Report	ECC Project Chemist or designate

Notes:
ECC – Environmental Chemical Corporation
MNA – Monitored Natural Attenuation
MPC – Measurement Performance Criteria
PAH – Polycyclic aromatic hydrocarbon
USEPA – United States Environmental Protection Agency
VOC – Volatile organic compound

ATTACHMENT 1

FIELD DOCUMENTATION

This page intentionally left blank.

Table 1

Water Level Survey Log
RSA-262
Redstone Arsenal, Madison County, Alabama

Date: _____

Personnel: _____

Weather: _____

Other Comments: _____

Well ID	Headspace PID (ppm)	Time	Depth to Water (ft btoc)
154-RS1764S			
262-RS1699			
262-RS1700			
262-RS2007			
262-RS2008			
262-RS2009			
262-RS2010			
262-RS2768			
262-RS2769			
262-RS2770			
262-RS2771			
262-RS2772			
262-RS2855			
262-RS2856			
262-RS2857			
268-RS2564			
154-RS1764D			

Notes:
ft btoc – feet below top of casing
PID – Photoionization detector
ppm – parts per million

Table 2

Monitoring Well Sampling Log
RSA-262
Redstone Arsenal, Madison County, Alabama

Date: _____

Personnel: _____

Weather: _____

Other Comments: _____

Well ID	Top of Casing Elevation (ft amsl)	Ground Elevation (ft amsl)	Installed Well Depth (ft btoc)	Screened Interval (ft bgs)	Date Sampled	Time	Depth to Water (ft btoc)
154-RS1764S	582.16	580.23	48	38 - 48			
262-RS1699	583.5	581.05	43.4	32.9 - 42.9			
262-RS1700	575.19	573.79	34.4	23.9 - 33.9			
262-RS2007	580.96	578.39	51.7	41.3 - 51.3			
262-RS2008	581.39	581.39	64.9	54.4 - 64.4			
262-RS2009	582.54	580.22	70.6	60.2 - 70.2			
262-RS2010	581.04	578.69	59.7	49.3 - 59.3			
262-RS2768	568.07	568.21	46.6	36.2 - 46.2			
262-RS2769	570.92	571.19	40.4	30 - 40			
262-RS2770	579.11	576.76	46.2	35.8 - 45.8			
262-RS2771	561.22	558.55	29.5	19.1 - 29.1			
262-RS2772	566.02	563.27	42.8	32.4 - 42.4			
262-RS2855	565.59	563.18	32.2	21.8 - 31.8			
262-RS2856	566.23	563.97	55.9	45.5 - 55.5			
262-RS2857	572.15	570.23	25.8	15.4 - 25.4			
268-RS2564	576.35	574.31	33.3	22.9 - 33.3			
154-RS1764D	581.97	580.23	118.3	108 - 118			

Notes:
amsl – above mean sea level
bgs – below ground surface
btoc – below top of casing
ft – feet

APPENDIX H

UIC Permit

This page intentionally left blank.

CLASS V UNDERGROUND INJECTION CONTROL PERMIT APPLICATION FOR ENHANCED BIODEGRADATION OF VOLATILE ORGANIC COMPOUNDS IN GROUNDWATER RSA-262, CWS WAREHOUSE AREA (BUILDINGS 8021, 8022, 8023, 8024, 8025, 8026, AND 8027)

ENVIRONMENTAL REMEDIATION SERVICES
U.S. ARMY GARRISON-REDSTONE ARSENAL

July 2023

Prepared for:

U.S. ARMY ENVIRONMENTAL COMMAND
Southeast-Environmental Service and Support Division
2450 Connell Road, Building 2264
Fort Sam Houston, TX 78234-7664

Prepared by:

ECC
9200 Church St
Suite 305
Manassas, VA 20110

Contract No.: W9124J-18-D-0004, Delivery Order W9124J21F0020

This page intentionally left blank.

Class V Underground Injection Control Permit Application
For Enhanced Biodegradation of
Volatile Organic Compounds
in Groundwater
RSA-262, CWS Warehouse Area (Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027)
U.S. Army Garrison-Redstone
Madison County, Alabama

Certification

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.



Michael Klosky
Alabama PE No.26910

6 July 2023
Date

This page intentionally left blank.

TABLE OF CONTENTS

1.0 GENERAL INFORMATION FOR CLASS V UIC PERMIT 1

A. FACILITY 1
B. FACILITY NAME 1
C. LOCATION 1
D. TEST DESCRIPTION 1
E. DESIGN 2
F. HYDROLOGICAL DATA 5
G. FINANCIAL RESPONSIBILITY 5
H. CERTIFICATION 5

LIST OF TABLES

Table H-1 Monitoring Well Information Summary

LIST OF ATTACHMENTS

Attachment H-1 Safety Data Sheets
Attachment H-2 Boring Logs

This page intentionally left blank.

1.0 GENERAL INFORMATION FOR CLASS V UIC PERMIT

A. FACILITY

Applicant: U.S. Army Garrison-Redstone (RSA), Environmental Management Division

Owner: U.S. Army Garrison-Redstone

Address: 4488 Martin Road, Redstone Arsenal, Alabama 35898-5000

Phone: 256-955-6967

Responsible Official: Joey Skinner

Contact Person: Clint Howard

Phone: 256-842-3702

B. FACILITY NAME

Facility Name: RSA-262, Chemical Warfare Storage (CWS) Warehouse Area (Buildings 8021, 8022, 8023, 8024, 8025, 8026, and 8027)

Address: U.S. Army Garrison-Redstone

Location: Latitude 34.353691, Longitude -86.394681, near the intersection of Buxton Road and Shield Road.

Injection Well Description: Up to 117 Direct-Push Technology (DPT) points with injection at 4- to 5-foot intervals within the saturated overburden.

C. LOCATION

Injection Locations: See Figures 13 and 14 of the Corrective Measures Implementation (CMI) Work Plan

Public and Private Water Supply Wells: None within 0.5-mile radius (see Figure 3 of the CMI Work Plan)

Source Area Assessment Areas: None

Well Head Protection Areas: None

Surface Waters and Pertinent Surface Features: See Figure 3 of the CMI Work Plan

Topography: See Figure 2 of the CMI Work Plan

D. PROJECT DESCRIPTION

The U.S. Army Garrison-Redstone is proposing to conduct a groundwater corrective action using in situ enhanced bioremediation (ISEB) treatment of volatile organic compounds (VOC) (primarily trichloroethene [TCE]) in overburden groundwater. The proposed corrective action will inject chemical amendments to stimulate biodegradation of VOCs in up to 117 injection locations completed in overburden groundwater.

The treatment is designed to inject food-grade emulsified vegetable oil (EVO), with additional amendments and a non-pathogen bioaugmentation culture of *Dehalococcoides sp*. (DHC), depending on site conditions, into the shallow overburden groundwater to stimulate biodegradation of the VOC contaminants present in shallow groundwater. In addition, feather meal electron donor

(FMed) may be used as an innovative alternative to EVO as part of a process developed by Clemson University's Environmental Engineering Department. FMed is made of rendered chicken parts and is widely available near the site.

Safety Data Sheets (SDSs) for the chemical amendments are included in **Attachment H-1**.

Reductive dechlorination of chlorinated solvents will be enhanced by the addition of electron donors (carbon sources), pH buffer (if required), and anaerobic bioaugmentation cultures within the subsurface to stimulate and enhance biodegradation of chlorinated ethenes/ethanes. The injection and distribution of carbon sources and anaerobic microbial cultures across the plume (referred to as bioaugmentation) expedites the biodegradation process by enhancing geochemical conditions and providing a food and energy source for the microorganisms to completely and rapidly dechlorinate the chlorinated ethene/ethane compounds to harmless ethene/ethane.

The injections will be completed in two phases: 1) full-scale implementation and 2) follow-up injections.

Full-Scale Implementation

Full overburden plume treatment will focus on the approximate 1,000 micrograms per liter (µg/L) TCE isoconcentration line, which corresponds to an area of approximately 55,000 square feet (Figure 13 of the CMI Work Plan). The objective is to treat all groundwater with TCE concentration of 1,000 µg/L or greater using ISEB.

Up to 79 DPT points may be installed based upon a 15-foot Radius of Influence (ROI) to cover the accessible treatment area using only EVO. If EVO and FMed are used, up to 39 DPT points may be installed in the concrete area of the overburden based upon a 15-foot ROI to cover the accessible treatment area using EVO, and up to 78 DPT points may be installed in the grassy area of the overburden. For design purposes, the number of injection points in the full implementation phase is assumed to be 117; the 117 design injection points are shown on the Figure 14 of the CMI Work Plan. Points will be installed in a grid pattern between buildings 8026 and 8025DEM to ensure full plume treatment and for substrate distribution under the building footprint. Amendments will be injected into the overburden saturated zone using DPT drill methods. Injection intervals will be specified in the field by the contractor's geologist and/or engineer using field measurements of the depths to water and bedrock. For the purpose of the design, the depth to groundwater is assumed to be 19 feet below ground surface (bgs) and a saturated thickness of 27 feet across the target plume area is assumed.

A second round of DPT injections may be implemented after approximately 10 post-injection sampling events after the initial substrate injection to address any remaining residual VOC contamination within the treatment area if statistical analysis identifies any sampling locations where TCE does not have a decreasing trend. The follow-up round of ISEB injections would be assumed for about 25 percent (%) of the initial injections.

E. DESIGN

The injections will be completed in two phases: 1) full-scale implementation and 2) follow-up injections.

Full-Scale Implementation

As described in the CMI Work Plan, either 79 or 116 DPT points are proposed for injection, depending on whether FMed is used. This is based upon a 15-foot ROI to cover the accessible treatment area for EVO. Figures 13 and 14 of the CMI Work Plan identify the proposed treatment area and injection well layout. Points will be installed in a grid pattern between buildings 8026 and 8025DEM to ensure full plume treatment and for substrate distribution under the building footprint. Amendments will be injected in the overburden saturated zone. Between five and seven vertical injection intervals, with a spacing between of 4 and 5 feet, will be selected for each injection point. The exact injection intervals will be determined in the field by the geologist and/or engineer using field measurements of depths to water and bedrock. As described in the previous section, an assumed depth to groundwater of 19 feet bgs will be used if the depth to groundwater cannot be determined during drilling.

The target EVO concentration between 4 and 6% will be assumed for the substrate injections at RSA-262. Design calculations indicate that the total amount of materials to be injected in the saturated zone within the treatment area is as follows.

EVO Only:

Injection Material	Total Amount[1, 2]	Amount/Injection Point [1]
EVO	8,690 gallons	110 gallons
Potable water	165,100 gallons	2,090 gallons

1 – All values are approximate
2 – Assume 79 injection points
EVO – Emulsified Vegetable Oil

EVO and FMed:

Injection Material	Total Amount[1, 2]	Amount/Injection Point [1]
EVO	4,400 gallons	105 gallons
Potable water	83,600 gallons	1,990 gallons
FMed	46,470 pounds	628 pounds

1 – All values are approximate
2 – Assume 42 EVO injection points, and 74 FMed injection points
EVO – Emulsified Vegetable Oil
FMed - feather meal electron donor

The total injection volume is calculated to be approximately 173,800 gallons for 79 injection points using only the 5% EVO solution. Approximately 88,000 gallons of 5% EVO solution would be injected into 42 injection points and 46,470 pounds of FMed would be injected across 74 DPT points if a combination of FMed and EVO is used. Other amendments such as yeast or diammonium phosphate (DAP) are also commonly added to EVO injection solutions. While no additional amendments are planned for use during these injections, they may be added depending on site conditions leading up to injections (this section will likely be updated with the planned amendments prior to the Underground Injection Control (UIC) permit being submitted to the Alabama Department of Environmental management [ADEM]).

Follow-Up Injections

A follow-up round of ISEB injections may be implemented approximately two years after full implementation to address residual VOCs, if any, in groundwater. As described in the CMI Work Plan, about 25% of the initial injection locations can be assumed for a hypothetical follow-up round of ISEB injections.

Groundwater Monitoring

A monitoring network of 16 wells will be used to evaluate groundwater both within and outside the target injection area (Figure 12 of the CMI Work Plan). One of the wells is located in the overburden unit and monitors groundwater chemicals of concern (COCs), monitoring parameters, ISEB performance parameters, and/or monitored natural attenuation (MNA) parameters. Groundwater COCs (target chemicals for remediation) include six VOCs (1,1,2,2-tetrachloroethane, 1,1,2-trichloroethane, carbon tetrachloride, chloroform, tetrachloroethene, and trichloroethene), one explosive (2-nitrotoluene) and one polynuclear aromatic hydrocarbon (PAH) (dibenz[a,h]anthracene). ISEB/MNA parameters include dissolved gases (ethane, ethene, and methane), DO, ORP, alkalinity, pH, total organic carbon, and COC degradation products (1,2-dichloroethane, chloroethane, chloromethane, cis-1,2-dichloroethane, dichloromethane, trans-1,2-dichloroethene, and vinyl chloride). Three bedrock wells will be used to monitor contaminant concentrations. Figure 12 of the CMI Work Plan shows the wells to be monitored as highlighted in yellow.

Additionally, total dissolved solids (TDS), pH, and nitrates will be sampled quarterly to monitor site conditions post injection. The first quarterly sample will be obtained within 30 days of injection's completion.

Prior to injection, a round of baseline groundwater sampling will be completed to establish pre-injection conditions. During the full-scale implementation phase, groundwater monitoring will be conducted semi-annually for Years 1 through 3 and annually during Years 4 through 35 or until CGs are achieved and confirmed.

- Target compound list VOCs and degradation products
- Explosives (2-nitrotoluene)
- Low-level PAHs (benzo[a]anthracene, benzo(a)pyrene benzo[b] fluoranthene, dibenz(a,h)anthracene)
- Dissolved gases (ethane, ethene, and methane)
- Total organic carbon
- Alkalinity
- Water quality parameters (pH, temperature, specific conductance, dissolved oxygen, oxidation/reduction potential, and turbidity).

Table H-1 shows the wells and monitoring parameters for each well. The analytical sampling will be completed using low-flow groundwater sampling methods.

F. HYDROLOGICAL DATA

Groundwater beneath RSA-262 occurs in the unconsolidated overburden and in the upper portion of the carbonate bedrock. The overburden and upper bedrock comprise a single interconnected aquifer. The potentiometric surface maps shown on Figure 4 of the CMI Work Plan are based on the groundwater elevations measured in March 2012 and June 2016. The potentiometric surface across RSA-262 mimics local topography across the site (Figure 4 of the CMI Work Plan). Groundwater flow is directed radially off of a northwest-southeast-trending potentiometric surface high, which generally parallels the long axis of the site. There is a smaller low-relief groundwater potentiometric surface high associated with RSA-268 (March 2012). Based on the June 2016 groundwater elevation measurements, this low-relief groundwater potentiometric surface high appears to be persistent but manifests itself within the northwestern portion of the RSA-262 site instead of near the RSA-268 site (Figure 4 of the CMI Work Plan).

Form 531 is included in **Attachment F-2** (Form 531 is not completed yet, but it will be prior to submission of this UIC permit).

A topographic map is provided on Figure 2 of the CMI Work Plan.

Boring logs for all existing wells are provided in **Attachment F-3**.

G. FINANCIAL RESPONSIBILITY

The Federal government is the owner operator of this facility.

H. CERTIFICATION

Certification is provided on the transmittal letter for this permit application.

This page intentionally left blank.

TABLES

This page intentionally left blank.

FIGURES

This page intentionally left blank.

ATTACHMENT F-1
SAFETY DATA SHEETS

This page intentionally left blank.

ATTACHMENT F-2

FORM 531

This page intentionally left blank.

ATTACHMENT F-3
BORING LOGS

This page intentionally left blank.

APPENDIX I

Injection Design Calculations

This page intentionally left blank.

EOS Remediation, LLC

EOS® SOURCE AREA & DNAPL DESIGN WORKSHEET

U.S. Version 2.1f, Rev. Date: June 18, 2008
www.EOSRemediation.com

Help

Site Name:	Redstone	Aresenal, AL
Location:	RSA 262	1,000 ug/L contour All EVO
Project No.:		

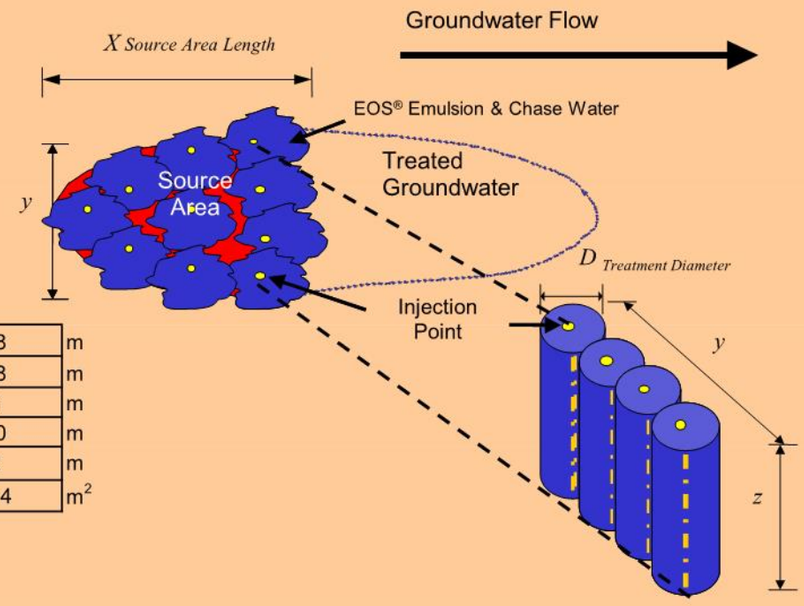

Step 1: Select a Substrate from the EOS® Family of Bioremediation Products

Substrate Selected (pick from drop down list): EOS® 600 (Buffered to pH of 6.5 ± 0.5)
For Product Literature Click Here

Step 2: EOS® Consumption During Contaminant Biodegradation / Biotransformation

Section A: Source Area Dimensions

Length of treatment area parallel to groundwater flow, "x"	229	ft	69.8	m
Width of treatment area perpendicular to groundwater flow, "y"	229	ft	69.8	m
Minimum depth to contamination	19	ft	5.8	m
Maximum depth of contamination	46	ft	14.0	m
Treatment thickness, "z"	27	ft	8.2	m
Treatment zone cross-sectional area, A = y * z	6,183	ft^2	574.4	m^2

Section B: Groundwater Flow Rate / Site Data

Soil Characteristics

Nominal Soil Type (pick from drop down list)	Clay			
Total Porosity (accept default or enter *n*)	0.42	(decimal)		
Effective Porosity (accept default or enter n_e)	0.20	(decimal)		
Soil bulk density; (1-n)*2.65 g/cc (accept calculated or enter dry bulk density)	1.50	g/cc	94	lbs / ft^3
Fraction of organic carbon: foc	0.0350	range: 0.0001 to 0.01		

Hydraulic Characteristics

Hydraulic Conductivity (accept default or enter *K*)	1.63	ft/day	5.8E-04	cm/sec
Hydraulic Gradient (accept default or enter *i*)	0.022	ft/ft		Field Meaurement

Note: Since the hydraulic gradient ($i = dh/dx$) is negative, we ask you to enter $-i$ in the EOS® Design Tool so that you can enter a positive number for convenience.

Non-reactive Transport Velocity, $V_x = -(K \times i) / n_e$	0.18	ft/day	0.055	m/day
Groundwater flow rate through treatment zone, $Q = -KiA$	1658.48	gallons/day	6,278.48	L/day

Section C: Calculated Contact Length

Contact time (τ) between oil and contaminants (accept default or enter τ)	180	typical values 60 to 180 days, see comment		
Calculated Contact Length (x) $= \tau * V_x$	32.3	ft	9.8	m

Treatment zone volume	1,415,907	ft^3	40,094	m^3
Treatment zone groundwater volume (volume * porosity)	4,448,213	gallons	16,839,489	L

Section D: Design Lifespan For One Application	3	year(s)	typical values 5 to 10 years	
Estimated total groundwater volume treated over design life	6,264,253	gallons	23,714,423	L

Section E: Electron Acceptors

Dissolved Phase Electron Donor Demand

Inputs	Typical Value	GW Conc. (mg/L)	MW (g/mole)	e^- equiv./ mole	Stoichiometry *Contaminant/H2 (wt/wt H_2)*	Hydrogen Demand *(g H_2)*
Dissolved Oxygen (DO)	0 to 8	2.58	32.0	4	7.94	7708.608924
Nitrate Nitrogen (NO_3^- - N)	1 to 10	10	62.0	5	12.30	19274.09526
Sulfate (SO_4^{2-})	10 to 500	20	96.1	8	11.91	39812.39087
Tetrachloroethene (PCE), C_2Cl_4		23	165.8	8	20.57	26520.04489
Trichloroethene (TCE), C_2HCl_3		0.0001	131.4	6	21.73	0.109149709
cis-1,2-dichloroethene (c-DCE), $C_2H_2Cl_2$		0.0035	96.9	4	24.05	3.451739438
Vinyl Chloride (VC), C_2H_3Cl		0.0001	62.5	2	31.00	0.076487245
Carbon tetrachloride, CCl_4		0.0051	153.8	8	19.08	6.339702729
Chloroform, $CHCl_3$			119.4	6	19.74	
sym-tetrachloroethane, $C_2H_2Cl_4$			167.8	8	20.82	
1,1,1-Trichloroethane (TCA), CH_3CCl_3			133.4	6	22.06	
1,1-Dichloroethane (DCA), CH_2CHCl_2			99.0	4	24.55	
Chloroethane, C_2H_5Cl			64.9	2	32.18	
Perchlorate, ClO_4^-			99.4	8	12.33	
Hexavalent Chromium, Cr[VI]			52.0	3	17.20	
User added						
User added						
User added						

Sorbed Phase Electron Donor Demand

The concentration of the sorbed contaminant can be estimated by: $C_{SOIL} = K_{OC} \times f_{oc} \times C_{WATER}$

Where: K_{oc} is partition coefficient with respect to organic carbon.
f_{oc} (fraction organic carbon) is the mass of organic matter in soil divided by the total mass of soil
C_{WATER} is the concentration of the contaminant in the groundwater

Default values for Koc taken from: US EPA, Superfund Section, APPENDIX K, Soil Organic Carbon (Koc) / Water (Kow) Partition Coefficients (Average Value Used)

Inputs Adjust *Koc* as necessary to provide site specific estimates or enter sediment concentration (C_{SOIL})	K_{oc} (L/kg)	C_{SOIL} (mg/Kg)	Mass (g)	Hydrogen Demand ($g\ H_2$)
Tetrachloroethene (PCE), C_2Cl_4	272	218.96	13168495.90	640280.14
Trichloroethene (TCE), C_2HCl_3	97	0.00	20.42	0.94
cis-1,2-dichloroethene (c-DCE), $C_2H_2Cl_2$	38	0.00	279.96	11.64
Vinyl Chloride (VC), C_2H_3Cl	241	0.00	50.73	1.64
Carbon tetrachloride, CCl_4	158	0.03	1696.16	88.91
Chloroform, $CHCl_3$	53			
sym-tetrachloroethane, $C_2H_2Cl_4$	79			
1,1,1-Trichloroethane (TCA), CH_3CCl_3	139			
1,1-Dichloroethane (DCA), CH_2CHCl_2	54			
User added				
User added				
User added				

Section F: Additional Hydrogen Demand and Carbon Losses

Generation (Potential Amount Formed)	Typical Value	GW Conc. (mg/L)	MW (g/mole)	e^- equiv./ mole	Stoichiometry *Contaminant / H_2 (wt/wt H_2)*	Hydrogen Demand ($g\ H_2$)	DOC Released *(moles)*
Estimated Amount of $Fe2^+$ Formed	10 to 100	50	55.8	1	55.41	21400.09578	
Estimated Amount of Manganese (Mn^{2+}) Formed		50	54.9	2	27.25	43506.80218	
Estimated Amount of CH_4 Formed	5 to 20	10	16.0	8	1.99	119191.4876	
Target Amount of DOC to Release	60 to 100	80	12.0				157951.36

Design Safety Factor: 2.0 typical values 1 to 3

Calculations assume:

1.) all reactions go to completion during passage through emulsified edible oil treated zone; and,
2.) perfect reaction stoichiometry.

EOS® Requirement Calculations Based on Hydrogen Demand and Carbon Losses

Stoichiometric Hydrogen Demand	4,043.2	pounds
DOC Released	18,035.5	pounds

EOS® Requirement Based on Hydrogen Demand and Carbon Loss

36,461 lbs

Step 3: EOS® Requirement Based on Attachment by Aquifer Material

Soil Characteristics

Effective treatment thickness, "z_e" (typically less than 40%) 0.25

For Additional Information on Effective Thickness, Click Here

Weight of sediment to be treated 33,147,070 lbs

Adsorptive Capacity of Soil (accept default or enter site specific value) 0.0020 lbs EOS® / lbs sediment

EOS® Attachment by Aquifer Material[1]

- Fine sand with some clay 0.001 to 0.002 lbs EOS® / lbs soil
- Sand with higher silt/clay content 0.002 to 0.004 lbs EOS® / lbs soil

[1]Default values provided based on laboratory studies completed by NCSU

For Additional Data, Click Here

EOS® Requirement Based on Oil Entrapment by Aquifer Material

66,294 lbs

Summary – How much EOS® do you need?

Suggested Quantity of EOS® for Your Project 158 drums

Copyright © 2002 - 2007 EOS Remediation, Inc.
All Rights Reserved

†Exclusive license agreement with Solutions-IES under U.S. Patent # 6,398,960, E.U. Patent # EP 1 315 675 and several other pending international patents.
††EOS® is a registered trademark of EOS Remediation, LLC

EOS Remediation, LLC

EOS® SOURCE AREA & DNAPL DESIGN WORKSHEET

U.S. Version 2.1f, Rev. Date: June 18, 2008
www.EOSRemediation.com

Help

Site Name:	Redstone	Aresenal, AL
Location:	RSA 262	1,000 ug/L contour with Half FMed
Project No.:		

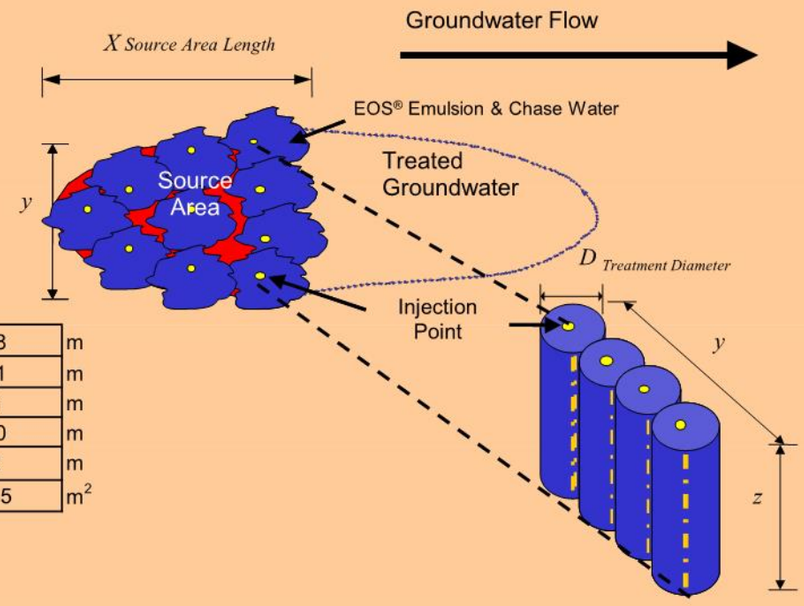

Step 1: Select a Substrate from the EOS® Family of Bioremediation Products

Substrate Selected (pick from drop down list): EOS® 600 (Buffered to pH of 6.5 ± 0.5)
For Product Literature Click Here

Step 2: EOS® Consumption During Contaminant Biodegradation / Biotransformation

Section A: Source Area Dimensions

Length of treatment area parallel to groundwater flow, "x"	229	ft	69.8	m
Width of treatment area perpendicular to groundwater flow, "y"	115	ft	35.1	m
Minimum depth to contamination	19	ft	5.8	m
Maximum depth of contamination	46	ft	14.0	m
Treatment thickness, "z"	27	ft	8.2	m
Treatment zone cross-sectional area, A = y * z	3,105	ft^2	288.5	m^2

Section B: Groundwater Flow Rate / Site Data

Soil Characteristics

Nominal Soil Type (pick from drop down list)	Clay			
Total Porosity (accept default or enter *n*)	0.42	(decimal)		
Effective Porosity (accept default or enter n_e)	0.20	(decimal)		
Soil bulk density; (1-n)*2.65 g/cc (accept calculated or enter dry bulk density)	1.50	g/cc	94	lbs / ft^3
Fraction of organic carbon: foc	0.0350	range: 0.0001 to 0.01		

Hydraulic Characteristics

Hydraulic Conductivity (accept default or enter *K*)	1.63	ft/day	5.8E-04	cm/sec
Hydraulic Gradient (accept default or enter *i*)	0.022	ft/ft		Field Meaurement

Note: Since the hydraulic gradient ($i = dh/dx$) is negative, we ask you to enter $-i$ in the EOS® Design Tool so that you can enter a positive number for convenience.

Non-reactive Transport Velocity, $V_x = -(K \times i) / n_e$	0.18	ft/day	0.055	m/day
Groundwater flow rate through treatment zone, $Q = -KiA$	832.86	gallons/day	3,152.95	L/day

Section C: Calculated Contact Length

Contact time (τ) between oil and contaminants (accept default or enter τ)	180	typical values 60 to 180 days, see comment		
Calculated Contact Length (x) $= \tau * V_x$	32.3	ft	9.8	m

Treatment zone volume	711,045	ft^3	20,135	m^3
Treatment zone groundwater volume (volume * porosity)	2,233,819	gallons	8,456,512	L

Section D: Design Lifespan For One Application

	3	year(s)	typical values 5 to 10 years	
Estimated total groundwater volume treated over design life	3,145,804	gallons	11,908,990	L

Section E: Electron Acceptors

Dissolved Phase Electron Donor Demand

Inputs	Typical Value	GW Conc. (mg/L)	MW (g/mole)	e^- equiv./ mole	Stoichiometry *Contaminant/H2 (wt/wt H_2)*	Hydrogen Demand *(g H_2)*
Dissolved Oxygen (DO)	0 to 8	2.58	32.0	4	7.94	3871.135486
Nitrate Nitrogen (NO_3^- - N)	1 to 10	10	62.0	5	12.30	9679.130806
Sulfate (SO_4^{2-})	10 to 500	20	96.1	8	11.91	19993.12205
Tetrachloroethene (PCE), C_2Cl_4		23	165.8	8	20.57	13317.92647
Trichloroethene (TCE), C_2HCl_3		0.0001	131.4	6	21.73	0.054813173
cis-1,2-dichloroethene (c-DCE), $C_2H_2Cl_2$		0.0035	96.9	4	24.05	1.733406268
Vinyl Chloride (VC), C_2H_3Cl		0.0001	62.5	2	31.00	0.038410625
Carbon tetrachloride, CCl_4		0.0051	153.8	8	19.08	3.18369351
Chloroform, $CHCl_3$			119.4	6	19.74	
sym-tetrachloroethane, $C_2H_2Cl_4$			167.8	8	20.82	
1,1,1-Trichloroethane (TCA), CH_3CCl_3			133.4	6	22.06	
1,1-Dichloroethane (DCA), CH_2CHCl_2			99.0	4	24.55	
Chloroethane, C_2H_5Cl			64.9	2	32.18	
Perchlorate, ClO_4^-			99.4	8	12.33	
Hexavalent Chromium, Cr[VI]			52.0	3	17.20	
User added						
User added						
User added						

Sorbed Phase Electron Donor Demand

The concentration of the sorbed contaminant can be estimated by: $C_{SOIL} = K_{OC} \times f_{oc} \times C_{WATER}$

Where: K_{oc} is partition coefficient with respect to organic carbon.
f_{oc} (fraction organic carbon) is the mass of organic matter in soil divided by the total mass of soil
C_{WATER} is the concentration of the contaminant in the groundwater

Default values for Koc taken from: US EPA, Superfund Section, APPENDIX K, Soil Organic Carbon (Koc) / Water (Kow) Partition Coefficients (Average Value Used)

Inputs Adjust *Koc* as necessary to provide site specific estimates or enter sediment concentration (C_{SOIL})	K_{oc} (L/kg)	C_{SOIL} (mg/Kg)	Mass (g)	Hydrogen Demand ($g\ H_2$)
Tetrachloroethene (PCE), C_2Cl_4	272	218.96	6613000.12	321538.06
Trichloroethene (TCE), C_2HCl_3	97	0.00	10.25	0.47
cis-1,2-dichloroethene (c-DCE), $C_2H_2Cl_2$	38	0.00	140.59	5.85
Vinyl Chloride (VC), C_2H_3Cl	241	0.00	25.48	0.82
Carbon tetrachloride, CCl_4	158	0.03	851.78	44.65
Chloroform, $CHCl_3$	53			
sym-tetrachloroethane, $C_2H_2Cl_4$	79			
1,1,1-Trichloroethane (TCA), CH_3CCl_3	139			
1,1-Dichloroethane (DCA), CH_2CHCl_2	54			
User added				
User added				
User added				

Section F: Additional Hydrogen Demand and Carbon Losses

Generation (Potential Amount Formed)	Typical Value	GW Conc. (mg/L)	MW (g/mole)	e^- equiv./ mole	Stoichiometry *Contaminant / H_2 (wt/wt H_2)*	Hydrogen Demand ($g\ H_2$)	DOC Released *(moles)*
Estimated Amount of $Fe2^+$ Formed	10 to 100	50	55.8	1	55.41	10746.77299	
Estimated Amount of Manganese (Mn^{2+}) Formed		50	54.9	2	27.25	21848.39411	
Estimated Amount of CH_4 Formed	5 to 20	10	16.0	8	1.99	59855.98721	
Target Amount of DOC to Release	60 to 100	80	12.0				79320.55

Design Safety Factor: 2.0 typical values 1 to 3

Calculations assume:

1.) all reactions go to completion during passage through emulsified edible oil treated zone; and,
2.) perfect reaction stoichiometry.

EOS® Requirement Calculations Based on Hydrogen Demand and Carbon Losses

Stoichiometric Hydrogen Demand	2,030.4	pounds
DOC Released	9,057.1	pounds

EOS® Requirement Based on Hydrogen Demand and Carbon Loss

18,310 lbs

Step 3: EOS® Requirement Based on Attachment by Aquifer Material

Soil Characteristics

Effective treatment thickness, "z_e" (typically less than 40%) 0.25

For Additional Information on Effective Thickness, Click Here

Weight of sediment to be treated 16,645,908 lbs

Adsorptive Capacity of Soil (accept default or enter site specific value) 0.0020 lbs EOS® / lbs sediment

EOS® Attachment by Aquifer Material[1]

- Fine sand with some clay 0.001 to 0.002 lbs EOS® / lbs soil
- Sand with higher silt/clay content 0.002 to 0.004 lbs EOS® / lbs soil

[1]Default values provided based on laboratory studies completed by NCSU

For Additional Data, Click Here

EOS® Requirement Based on Oil Entrapment by Aquifer Material

33,292 lbs

Summary – How much EOS® do you need?

Suggested Quantity of EOS® for Your Project 80 drums

Copyright © 2002 - 2007 EOS Remediation, Inc.
All Rights Reserved

†Exclusive license agreement with Solutions-IES under U.S. Patent # 6,398,960, E.U. Patent # EP 1 315 675 and several other pending international patents.
††EOS® is a registered trademark of EOS Remediation, LLC