









Alabama Department of Environmental Management

***Final TMDL Development for***  
Big Nance Creek AL/06030005-010\_01  
Low Dissolved Oxygen/Organic Loading  
Ammonia as Nitrogen

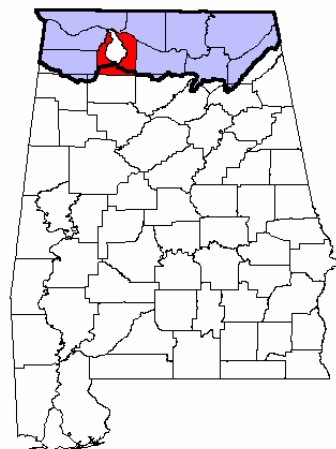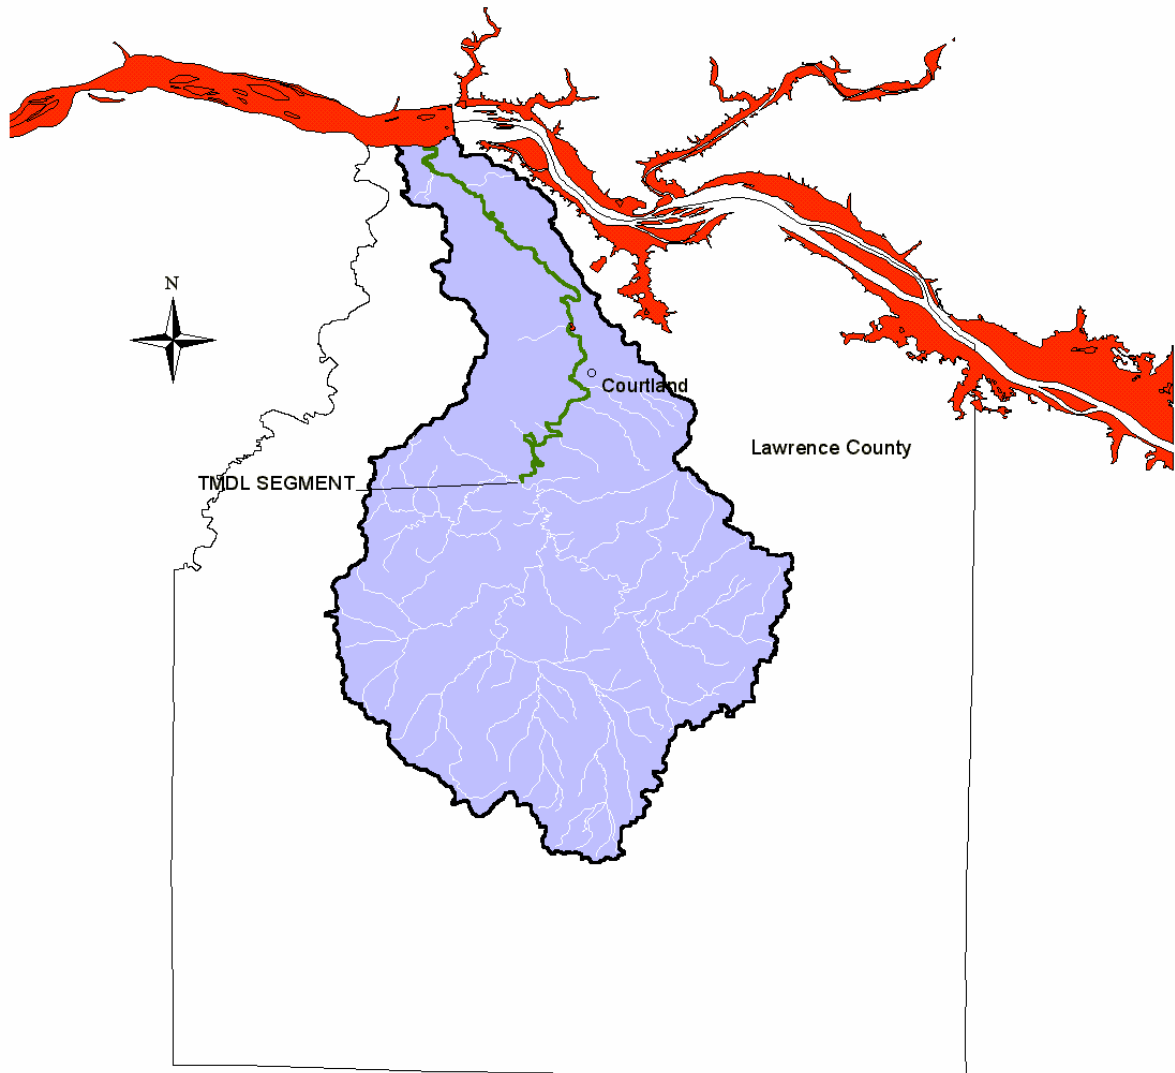Water Quality Branch  
Water Division  
February 2002

## Big Nance Creek Basin



-  Tennessee River
-  Big Nance Creek 6030005-010 303d Segment
-  Lawrence County
-  Land Area

0 6 Miles  


---

| <b><i>Table of Contents</i></b>  | <b><i>Page</i></b> |
|--|--------------------|
| 1. Executive Summary   | 4                  |
| 2. Basis for §303(d) Listing   | 5                  |
| 2.1. Introduction  | 5                  |
| 2.2. Problem Definition  | 6                  |
| 3. Technical Basis for TMDL Development  | 9                  |
| 3.1. Water Quality Target Identification   | 9                  |
| 3.2. Source Assessment   | 9                  |
| 3.3. Loading Capacity - Linking Water Quality Numeric Targets<br>and Pollutant Sources | 15                 |
| 3.4. Data Availability and Analysis  | 16                 |
| 3.5. Critical Conditions   | 19                 |
| 3.6. Margin of Safety  | 19                 |
| 4. Water Quality Model Development   | 20                 |
| 4.1. Water Quality Model Selection and Setup   | 20                 |
| 4.2. Water Quality Model Summary   | 21                 |
| 4.3. Loading Reduction Analysis  | 23                 |
| 4.4. Seasonal Variation  | 29                 |
| 5. Conclusions   | 30                 |
| 6. TMDL Implementation   | 30                 |
| 6.1. Non-Point Source Approach   | 30                 |
| 6.2. Point Source Approach   | 32                 |
| 7. Follow Up Monitoring  | 32                 |
| 8. Public Participation  | 33                 |
| 9. Appendices  |                    |
| 9.1. References  | 9.1.1              |
| 9.2. Water Quality Data  | 9.2.1              |
| 9.3. Water Quality Model Input and Output Files  | 9.3.1              |
| 9.4. Spreadsheet Water Quality Model (SWQM) User Guide                                 | 9.4.1              |

## ***1.0 Executive Summary***

This report contains one or more Total Maximum Daily Loads (TMDLs) for waterbody segments found on Alabama's 1996 and/or 1998 Section 303(d) List(s) of Impaired Waterbodies. Because of the accelerated schedule required by the consent decree, many of these TMDLs have been prepared out of sequence with the State's rotating basin approach. The implementation of the TMDLs contained herein will be prioritized within Alabama's rotating basin approach.

The amount and quality of data on which this report is based are limited. As additional information becomes available, the TMDLs may be updated. Such additional information may include water quality and quantity data, changes in pollutant loadings, or changes in land use within the watershed. In some cases, additional water quality data may indicate that no impairment exists.

Big Nance Creek, a part of the Tennessee River basin, is located in Lawrence County near Courtland, Alabama. It has been on the State of Alabama's §303(d) use impairment list since 1992 for organic enrichment/low dissolved oxygen (O.E./D.O.) and ammonia as nitrogen (NH<sub>3</sub>-N). Its use classification is Fish & Wildlife.

Water quality data or information collected in 1991 and 1996 identified dissolved oxygen impairments for Big Nance Creek. The stream flows during periods of impairment were typically at, or below, the 7Q<sub>10</sub> (the minimum 7-day average flow that occurs once in 10 years on average). Since the D.O. impairments were clearly driven by low flows and high temperatures, occurring during the summer months, a steady state modeling approach was adopted as appropriate for the TMDL analysis.

The following report addresses the results of the TMDL analysis for O.E./D.O and ammonia as nitrogen (NH<sub>3</sub>-N). In accordance with ADEM water quality standards, the minimum dissolved oxygen concentration in a stream classified as Fish and Wildlife is 5.0 mg/l. In the absence of a numerical state water quality standard for ammonia as nitrogen, the EPA's ambient water quality chronic criterion for ammonia as nitrogen in a stream classified as Fish and Wildlife at a pH of 7.81 s.u. is 1.6 mg/l. For the purpose of this TMDL, a minimum dissolved oxygen level of 5.0 mg/l and an ammonia as nitrogen chronic toxicity criterion of 1.6 mg/l will be implemented allowing for an implicit margin of safety resulting from conservative assumptions used in the dissolved oxygen model.

A summary of the TMDL for the watershed is provided in the table presented on the next page. The pollutants shown in the table include ultimate carbonaceous biochemical oxygen demand (CBOD<sub>u</sub>) and nitrogenous biochemical oxygen demand (NBOD), and ammonia as nitrogen (NH<sub>3</sub>-N), which is a component of NBOD. CBOD<sub>u</sub> and NBOD are the principle causes for observed low dissolved oxygen concentrations. CBOD<sub>u</sub> is a measure of the total amount of oxygen required to degrade the carbonaceous portion of the organic matter present in the water. NBOD is the amount of oxygen utilized by bacteria as they convert ammonia to nitrate. Because organic nitrogen can be converted to ammonia, its potential oxygen demand is included in the NBOD component of the

TMDL. The table below lists allowable pollutant loadings by source (point and non-point sources) for the summer season (May through November).

**Table 1-1. Maximum Allowable Pollutant Loads by Source – Critical Period**

| Pollutant          | Point Source Loads<br>(lbs./day) | Non-point Source Loads<br>(lbs./day) |
|--------------------|----------------------------------|--------------------------------------|
| CBOD <sub>u</sub>  | 8.5                              | 88.9                                 |
| NBOD               | 12.5                             | 21.7                                 |
| Total              | 21.0                             | 110.6                                |
| NH <sub>3</sub> -N | 0.9                              | 0.6                                  |

## ***2.0 Basis for §303(d) Listing***

### ***2.1 Introduction***

Section 303(d) of the Clean Water Act (CWA) as amended by the Water Quality Act of 1987 and EPA’s Water Quality Planning and Management Regulations [(Title 40 of the Code of Federal Regulations (CFR), Part 130)] require states to identify waterbodies which are not meeting water quality standards applicable to their designated use classifications. The identified waters are prioritized based on severity of pollution with respect to designated use classifications. Total maximum daily loads (TMDLs) for all pollutants causing violation of applicable water quality standards are established for each identified water. Such loads are established at levels necessary to implement the applicable water quality standards with seasonal variations and margins of safety. The TMDL process establishes the allowable loading of pollutants, or other quantifiable parameters for a waterbody, based on the relationship between pollution sources and in-stream water quality conditions, so that states can establish water-quality based controls to reduce pollution from both point and non-point sources and restore and maintain the quality of their water resources (USEPA, 1991).

The State of Alabama has identified Big Nance Creek as being impaired by organic loading (i.e., CBOD<sub>u</sub> and NBOD) and ammonia as nitrogen for a length of 24 miles, as reported on the 1992, 1994, 1996, 1998, and draft 2000 303(d) list of impaired waters. Big Nance Creek is prioritized as “high ” on the list. Big Nance Creek is located in Lawrence County and lies within the Pickwick Lake watershed of the Tennessee River basin.

The TMDL developed for Big Nance Creek illustrates the steps that can be taken to address a waterbody impaired by low dissolved oxygen levels and ammonia as nitrogen. The TMDL is consistent with a phased-approach: estimates are made of needed pollutant reductions, load reduction controls are implemented, and water quality is monitored for plan effectiveness. Flexibility is built into the plan so that load reduction targets and


control actions can be reviewed if monitoring indicates continuing water quality problems.

## 2.2 Problem Definition

Big Nance Creek is a large, headwater stream with a relatively large drainage area of 115.2 square miles. Dry weather flows for the watershed is relatively low. Water quality data collected for the watershed during 1991 and 1995, indicates that dissolved oxygen impairments occurred primarily during the summer months (May through November). There were no violations of the chronic ammonia criteria recorded. The percentage of the dissolved oxygen data not meeting the minimum water quality standard is 20% and 0.0%, respectively. Generally, depressed in-stream D.O. concentrations may be caused by several sources including the decay of oxygen demanding waste from both point and non-point sources, algal respiration, sediment oxygen demand or other sources. It is believed based on available data that the low dissolved oxygen concentrations observed in this watershed are due to persistent flow conditions at or below the 7Q<sub>10</sub> and high temperatures, occurring during summer months, and are not the result of algal dynamics.

Figure 2.1 below illustrates the dissolved oxygen versus temperature data available for Big Nance Creek.

Figure 2.1 Dissolved Oxygen vs. Temperature Data

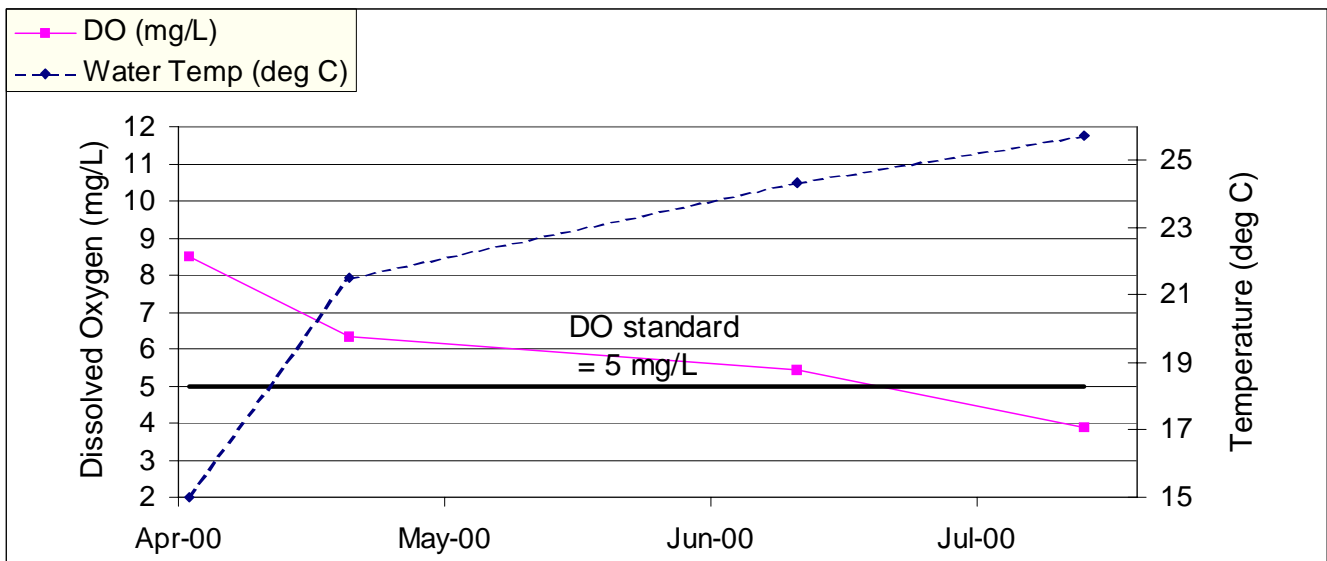

|  |   |
|--|---|
| <u>Waterbody Impaired:</u>               | Big Nance Creek-From Clear and Muddy Fork to Wilson Lake                                  |
| <u>Water Quality Standard Violation:</u> | Dissolved Oxygen/Ammonia as Nitrogen  |
| <u>Pollutant of Concern:</u>             | Organic Enrichment (CBOD <sub>u</sub> /NBOD) and Ammonia as Nitrogen (NH <sub>3</sub> -N) |
| <u>Water Use Classification:</u>         | Fish and Wildlife   |

The impaired stream segment, Big Nance Creek, is classified as Fish and Wildlife. Usage of waters in this classification is described in ADEM Admin. Code R. 335-6-10-.09(5)(a), (b), (c), and (d).

(a) Best usage of waters:

Fishing, propagation of fish, aquatic life, and wildlife, and any other usage except for swimming and water-contact sports or as a source of water supply for drinking or food processing purposes.

(b) Conditions related to best usage:

The waters will be suitable for fish, aquatic life and wildlife propagation. The quality of salt and estuarine waters to which this classification is assigned will also be suitable for the propagation of shrimp and crabs.

(c) Other usage of waters:

It is recognized that the waters may be used for incidental water contact and recreation during June through September, except that water contact is strongly discouraged in the vicinity of discharges or other conditions beyond the control of the Department or the Alabama Department of Public Health.

(d) Conditions related to other usage:

The waters, under proper sanitary supervision by the controlling health authorities, will meet accepted standards of water quality for outdoor swimming places and will be considered satisfactory for swimming and other whole body water-contact sports.

### Low D.O./Organic Loading Criteria:

Alabama's water quality criteria document (ADEM Admin. Code R. 335-6-10-.09-(5)(e)(4.)) states that for a diversified warm water biota, including game fish, daily dissolved oxygen concentrations shall not be less than 5 mg/l at all times; except under extreme conditions due to natural causes, it may range between 5 mg/l and 4 mg/l, provided that the water quality is favorable in all other parameters. The normal seasonal and daily fluctuations shall be maintained above these levels. In no event shall the dissolved oxygen level be less than 4 mg/l due to discharges from existing hydroelectric generation impoundments. All new hydroelectric generation impoundments, including addition of new hydroelectric generation units to existing impoundments, shall be designed so that the discharge will contain at least 5 mg/l dissolved oxygen where practicable and technologically possible. The Environmental Protection Agency, in cooperation with the State of Alabama and parties responsible for impoundments, shall develop a program to improve the design of existing facilities.

### Ammonia as Nitrogen Criteria

Alabama's water quality criteria document (ADEM Admin. Code R. 335-6-10) does not contain a numeric water quality standard for ammonia as nitrogen. However, in applying the following narrative standard found at ADEM Admin. Code R. 335-6-10-.06(c) the Department has relied upon the United States Environmental Protection Agency's (EPA) latest water quality criteria for ammonia.

(c) State waters shall be free from substances attributable to sewage, industrial wastes or other wastes in concentrations or combinations which are toxic or harmful to human, animal or aquatic life to the extent commensurate with the designated usage of such waters.

The Municipal Branch and the Industrial Section of the Water Division of ADEM have adopted as policy EPA's ammonia criteria for purposes of developing permit limits in National Pollutant Discharge Elimination System (NPDES) permits. The EPA's *1998 Update of Ambient Water Quality Criteria for Ammonia*, EPA 822-R-98-008, provides the following equation for calculating Criteria Continuous Concentration (CCC) or the chronic criterion. This criterion is applied in streams with a designated use of Fish and Wildlife or higher.

$$CCC = \frac{0.0577}{1+10^{7.688-pH}} + \frac{2.487}{1+10^{pH-7.688}}, \text{ mg/l } NH_3\text{-N}$$

This equation indicates that allowable in-stream ammonia concentration decreases as pH increases. For Big Nance Creek, the maximum pH value measured was 7.88 s.u. which results in a CCC value of 2.79 mg/l NH<sub>3</sub>-N.



Another consideration in establishing an allowable in-stream ammonia concentration is its effect on the stream's dissolved oxygen (D.O.) concentration due to ammonia being converted to nitrite and then to nitrate. Oxygen is consumed in the process. A water quality model that accounts for this process, known as nitrification, is used to ensure that D.O. concentrations remain above the applicable water quality standard. For Big Nance Creek the D.O. standard is 5.0 mg/l.

### ***3.0 Technical Basis for TMDL Development***

#### ***3.1 Water Quality Target Identification***

The minimum dissolved oxygen concentration in a stream classified as Fish and Wildlife is 5.0 mg/l. For the purpose of this TMDL, a minimum dissolved oxygen level of 5.0 mg/l will be implemented allowing for an implicit margin of safety resulting from conservative assumptions used in the dissolved oxygen model. The target CBOD<sub>u</sub> and NBOD concentrations are concentrations that, in concert with the nitrification of ammonia, will not deplete the dissolved oxygen concentration below this level as a result of the decaying process.

The EPA's ambient water quality chronic criterion for ammonia as nitrogen in stream classified as Fish and Wildlife at a pH 7 s.u. is 2.48 mg/l. For the purposes of establishing a TMDL for ammonia as nitrogen both the CCC value and the ammonia as nitrogen concentration predicted by the dissolved oxygen model is considered and the lower concentration controlled the allowable ammonia as nitrogen loading.

#### ***3.2 Source Assessment***

##### ***3.2.1. General Sources of CBOD<sub>u</sub>, NBOD, and NH<sub>3</sub>-N***

Both point and non-point sources may contribute CBOD<sub>u</sub> and NBOD, including the ammonia as nitrogen component, (i.e., organic loading) to a given waterbody. Potential sources of organic loading are numerous and often occur in combination. In rural areas, storm runoff from row crops, livestock pastures, animal waste application sites, and feedlots can transport significant loads of organic loading. Nationwide, poorly treated municipal sewage comprises a major source of organic compounds that are hydrolyzed to create additional organic loading. Urban storm water runoff, sanitary sewer overflows, and combined sewer overflows can be significant sources of organic loading.

All potential sources of organic loading in the watershed were identified based on an evaluation of current land use/cover information on watershed activities (e.g., agricultural management activities). The source assessment was used as the basis of development of the model and ultimate analysis of the TMDL allocations. The organic loading within the watershed included both point and non-point sources.

3.2.2. Point Sources in the Big Nance Creek Watershed

ADEM maintains a database of current NPDES permits and GIS files that locate each permitted outfall. This database includes municipal, semi-public/private, industrial, mining, industrial storm water, and concentrated animal feeding operations (CAFOs) permits. Table 3-1, below, shows the permitted point sources in the watershed that discharge into or upstream of the impaired segment. Included in Table 3-1 is the percent of the facility wastewater flow to the 7Q<sub>10</sub>. Table 3-2 contains the permit limitations for the significant point sources that were considered in the model development. Figure 3-3 shows the location of each facility considered a significant source relative to the impaired segment.

**Table 3-1. Contributing Point Sources in the Big Nance Creek Watershed.**

| NPDES Permit | Type of Facility (e.g., CAFO, Industrial, Municipal, Semi-Public/Private, Mining, Industrial Storm Water) | Facility Name           | Significant Contributor (Yes/No) (% of 7Q <sub>10</sub> ) |
|--------------|---|-------------------------|---|
| A000276      | CAFO  | Mara Godwin Farms       | No  |
| A000049      | CAFO  | Dewayne C. Little Farm  | No  |
| A000280      | CAFO  | Jackie Hood Farm        | No  |
| A000282      | CAFO  | Jeron Rutherford Farm   | No  |
| A000274      | CAFO  | Richard B. Collier Farm | No  |
| A000281      | CAFO  | Rodrick Rutherford Farm | No  |
| A000283      | CAFO  | Wayne Rutherford Farm   | No  |
| AL0043036    | Semi-Public/Private   | Hatton School           | No  |
| AL0020672    | Municipal   | Moulton WWTP            | No  |
| AL0048585    | Municipal   | Courtland HCR Lagoon    | Yes(4.5%)   |

Note: Storm water discharges listed in the above table were marked as not being significant contributors since the discharge would not occur during low flow conditions. Construction storm water discharges are not listed as these discharges do not occur during low flow and generally do not contribute directly to the organic loading.



3.2.3. Non-Point Sources in the Big Nance Creek Watershed

Shown in Table 3-3, below, is a detailed summary of land usage in the Big Nance Creek watershed. A land use map of the watershed is presented in Figure 3-2. Shown below are the predominant land uses within the watershed are pastureland, forest, row crops, urban, and wetlands.

**Table 3-3. Land Use in the Big Nance Creek Watershed.**

Upper Reach

| Land Use    | Percentage of Watershed |
|-------------|-------------------------|
| Pastureland | 42%                     |
| Forest      | 29%                     |
| Row Crops   | 14%                     |
| Urban       | 8%                      |
| Wetland     | 6%                      |
| Other       | 1%                      |
|             | 100%                    |

Lower Reach

| Land Use    | Percentage of Watershed |
|-------------|-------------------------|
| Pastureland | 14%                     |
| Forest      | 27%                     |
| Row Crops   | 40%                     |
| Urban       | 7%                      |
| Wetland     | 10%                     |
| Other       | 2%                      |
|             | 100%                    |


Crooked Creek

| Land Use    | Percentage of Watershed |
|-------------|-------------------------|
| Pastureland | 46%                     |
| Forest      | 41%                     |
| Row Crops   | 2%                      |
| Urban       | 7%                      |
| Wetland     | 0%                      |
| Other       | 4%                      |
|             | 100%                    |

Each land use has the potential to contribute to the organic loading in the watershed due to organic material on the land surface that potentially can be washed off into the receiving waters of the watershed. Information on agricultural and management activities and watershed characteristics were obtained through coordination with the ADEM Mining and Non-Point Section, the Alabama Cooperative Extension System, and the USDA-Natural Resources Conservation Service (NRCS).

The major sources of organic enrichment from non-point sources within the Big Nance Creek watershed are the pastureland, row crops, and urban land uses. Compared to other land uses organic enrichment from forested land is normally considered to be small. This is because forested land tends to serve as a filter of pollution originating within its drainage areas. However, organic loading can originate from forested areas due to the presence of wild animals such as deer, raccoons, turkeys, waterfowl, etc. Control of these sources is usually limited to land management best management practices (BMPs) and may be impracticable in most cases. In contrast to forested land, agricultural land can be a major source of organic loading. Runoff from pastures, animal operations, improper land application of animal wastes, and animals with access to streams are all mechanisms that can introduce organic loading to waterbodies.

Figure 3-2. Land Use Map for the Big Nance Creek Watershed.

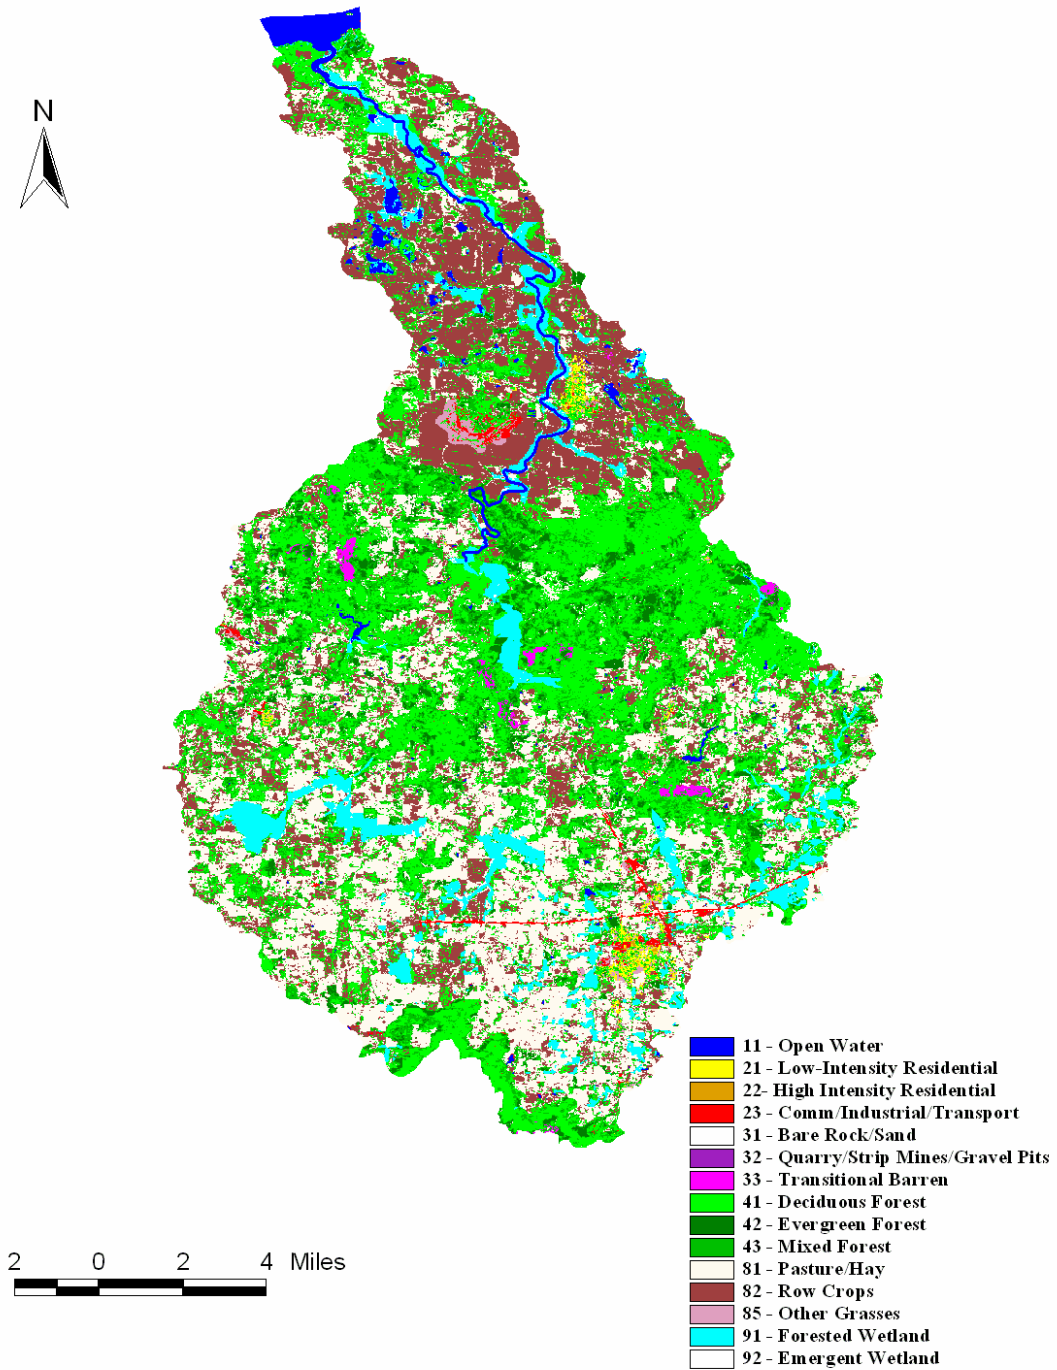

### ***3.3 Loading Capacity – Linking Numeric Water Quality Targets and Pollutant Sources***

EPA regulations define loading, or assimilative capacity, as the greatest amount of loading that a waterbody can receive without violating water quality standards (40 CFR Part 130.2(f)).

Alabama's water quality criteria document (ADEM Admin. Code R. 335-6-10-.09-(5)(e)(4.)) states that for a diversified warm water biota, including game fish, daily dissolved oxygen concentrations shall not be less than 5 mg/l at all times; except under extreme conditions due to natural causes, it may range between 5 mg/l and 4 mg/l, provided that the water quality is favorable in all other parameters. The normal seasonal and daily fluctuations shall be maintained above these levels.

The EPA's ambient water quality chronic criterion for ammonia as nitrogen in a stream classified as Fish and Wildlife at a pH of 7.81 s.u. is 1.6 mg/l. For the purposes of establishing a TMDL for ammonia as nitrogen both the CCC value and the ammonia as nitrogen concentration predicted by the dissolved oxygen model is considered and the lower concentration is used to compute allowable loading. For this TMDL the ammonia as nitrogen toxicity was the limiting factor.

Using the D.O. water quality criterion of 5.0 mg/l and the ammonia as nitrogen chronic criterion of 1.6 mg/l as the numerical targets, a TMDL model analysis was performed at critical conditions (i.e., summer) to determine the loading capacity for the watershed. This was accomplished through a series of simulations aimed at meeting the dissolved oxygen target limit by varying source contributions. The final acceptable simulation represented the TMDL (and loading capacity of the waterbody). If point sources were identified in the watershed, an additional model analysis was performed for the winter to determine the loading capacity during higher flow conditions.

In the TMDL model analysis, the pollutant concentrations from forestland were assumed to be at normal background concentrations. Specific values for background pollutant concentrations are as follows: 2 mg/l CBOD<sub>u</sub>, 0.5 mg/l ammonia oxygen demand (NH<sub>3</sub>OD<sub>u</sub>), and 1 mg/l total organic nitrogen oxygen demand (TONOD<sub>u</sub>). Pollutant concentrations for the other land uses in the watershed were assigned in proportion to measured concentrations and were set in the TMDL model at levels necessary to maintain dissolved oxygen concentrations greater than, or equal to, 5 mg/l. The model predictions for in-stream pollutant concentrations were then compared to actual field data. The model velocities and reaeration coefficients were adjusted in those cases where the field data indicated significant discrepancies from the model predictions.

### ***3.4 Data Availability and Analysis***

#### **3.4.1. Watershed Characteristics**

A. General Description: Big Nance Creek, located in Lawrence County, is a tributary to the Tennessee River. The Big Nance Creek is a part of the Tennessee River basin. Big Nance Creek is a part of the USGS (United States Geological Survey) 06030005 cataloging unit and the NRCS (Natural Resources Conservation Service) 010 sub-watershed. Cataloging unit 06030005 represents the Pickwick Lake basin. NRCS sub-watershed number 010 represents the Big Nance Creek watershed.

Big Nance Creek begins approximately 6 miles south of Courtland, Alabama in Section 25, T5S, and R8W. It has a linear distance of 24 miles and a total drainage area of 190.1 square miles. Big Nance Creek has a use classification of Fish & Wildlife (F&W).


B. Eco-region Description: Big Nance Creek consists mostly of the Eastern Highland Rim (71g). The Eastern Highland Rim has more level terrain and weaker dissection than the Western Highland Rim (71f), with flat to gently rolling landforms. Mississippian-age limestone, chert, shale, and dolomite predominate, and springs, sinks, and caves have formed by solution of the limestone. Cave and spring-associated fish fauna also typify the region. In the southern part of the region, streams flow down from the Pottsville Escarpment of ecoregion 68, cutting north across the Moulton Valley and through narrow valleys of Little Mountain (71j) to the impounded Tennessee River. Natural vegetation for the region is transitional between the oak-hickory type to the west and the mixed mesophytic forests of the Appalachian ecoregions to the east. Much of the original bottomland hardwood forest has been inundated by impoundments. The flatter areas in the east and on both sides of the Tennessee River have deep, well-drained, reddish, productive soils that are intensively farmed.

#### **3.4.2 Available Water Quality and Biological Data**

Water Quality and biological data for the Big Nance Creek is available for the period of 1988 through 2000. This data was collected by the Tennessee Valley Authority and Alabama Department of Environment. A complete listing of the available data can be found in the appendix of this report. A map indicating the location of sampling points relative to applicable point source discharges is presented in Figure 3-3.



**Figure 3-3. Map of Sampling Locations and Point Source Discharges for the Big Nance Creek Watershed.**

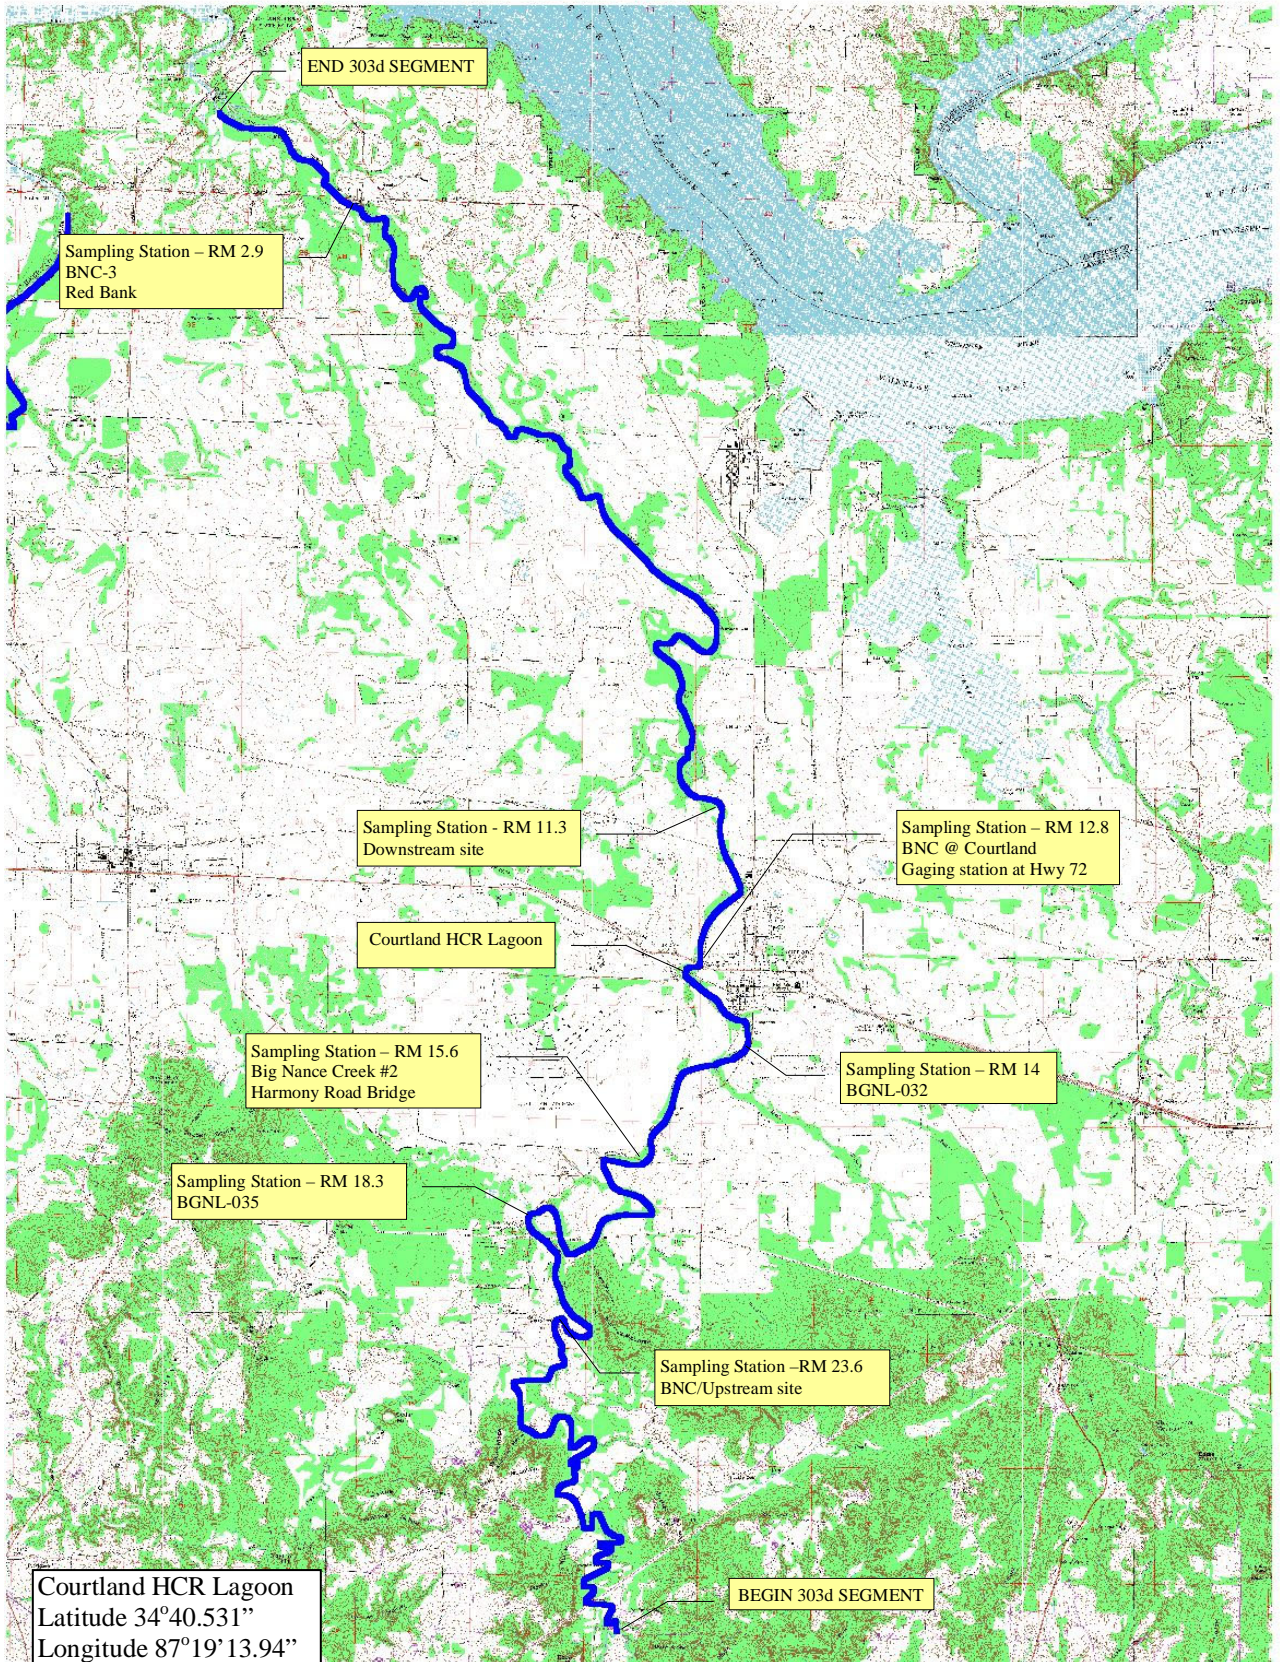



### 3.4.3. Flow data

For the purpose of this TMDL, an annual 7Q<sub>10</sub> stream flow for the summer season is employed. This flow represents a worst-case scenario for the critical model evaluations. The use of worst-case conditions, in turn, creates a margin of safety in the final results.

The 7Q<sub>10</sub> flow represents the minimum 7-day flow that occurs, on average, over a 10-year recurrence interval.

The 7Q<sub>10</sub> can be calculated for the model using gage data from the United States Geological Survey (USGS) or by using the Bingham Equation. The USGS continuous-record station (06030005) on Big Nance Creek near Courtland, Alabama can be found on page 158 of a publication from the USGS entitled, **Low-Flow and Flow-Duration Characteristics of Alabama Streams, Report 93-4186**. The Bingham Equation can be found on page 3 of a publication from the Geological Survey of Alabama entitled, **Low-Flow Characteristics of Alabama Streams, Bulletin 117**.

The equation used to calculate the 7Q<sub>10</sub> flow based on continuous USGS gaging records for the stream and any associated tributaries are as follows:

$$7Q_{10} \text{ (cfs)} = \frac{(7Q_{10} \text{ @ USGS Station (cfs)})}{(\text{Drainage Area @ USGS Station (mi}^2\text{)})} * (\text{Watershed Drainage Area (mi}^2\text{)})$$

$$7Q_{10} = \frac{(0.8)}{(166)} * (115.2)$$

$$7Q_{10} = 0.56 \text{ cfs}$$

The calculated flow was distributed over Big Nance Creek in the form of tributary flow or incremental inflow (identified on the modeled reach schematic as IF). The IF was distributed in proportion to the length of each segment.

### ***3.5 Critical Conditions***

Summer months (May – November) are generally considered critical conditions for dissolved oxygen in streams. This can be explained by the nature of storm events in the summer versus the winter. Periods of low precipitation allow for slower in-stream velocity, which increases the organic loading residence time and decreases stream re-aeration rates. This increased time permits more decay to occur which depletes the stream's dissolved oxygen supply. Reaction rates for CBOD<sub>u</sub> and NBOD (i.e., organic loading) are temperature dependent and high summertime temperatures increase the decay process, which depletes the dissolved oxygen even further.

In winter, frequent low intensity rain events are more typical and do not allow for the build-up of organic loading on the land surface, resulting in a more uniform loading rate. Higher flows and lower temperatures create less residence time and lower decay rates. This pattern is evidenced in the output data of the model where the highest allowable loading achieved was for winter stream flows.

### ***3.6 Margin of Safety (MOS)***

There are two basic methods of incorporating the MOS (USEPA, 1991): 1) implicitly, using conservative model assumptions, or 2) explicitly by specifying a portion of the TMDL as the MOS.

The MOS is implicit in this TMDL process through the use of conservative model input parameters (**temperature, flow and D.O. concentrations**). Conservative temperature values are employed through the use of the highest average maximum temperature that would normally occur under critical stream flow conditions. The 7Q<sub>10</sub> and 7Q<sub>2</sub> stream flows employed for summer and winter, respectively, reflect the lowest flows that would normally occur under critical conditions. All point source discharges were assumed to be continuous at current NPDES permit limits. The D.O. concentration for incremental flow was set at 70% of the saturation concentration at the given temperature, which is 15% lower than the 85% normally assumed in a typical waste load allocation. Finally, the maximum pH value reported was used to determine the ammonia as nitrogen chronic criterion.

The following stream conditions also add to the MOS: 1) water depths are shallow, generally less than one foot, which exaggerates the effect of sediment oxygen demand (SOD); 2) water velocities are generally less than 0.5 fps or less, which intensifies the effect of SOD.

## ***4.0 Water Quality Model Development***

### ***4.1 Water Quality Model Selection and Setup***

Since the impairment noted by the available data occurred during periods of low flows, a steady-state modeling approach was adopted as appropriate to represent the relevant conditions in the impaired waterbody. The steady state TMDL spreadsheet water quality model (SWQM) developed by the ADEM was selected for the following reasons:

- It is a simplified approach without unnecessary complexity.
- It conforms to ADEM standard practices for developing wasteload allocations.
- It lends itself to being developed with limited data, which is the present situation for this waterbody.
- It has the ability to handle tributary inputs and both point and non-point source inputs.

The TMDL spreadsheet model also provides a complete spatial view of a stream, upstream to downstream, giving differences in stream behavior at various locations along the model reach. The model computes dissolved oxygen using a modified form of the Streeter-Phelps equation. The modified Streeter-Phelps equation takes into account the oxygen demand due to carbonaceous decay plus the oxygen demand generated from the nitrification process (ammonia decay). Each stream reach is divided into twenty elements, with each element assumed to be the functional equivalent of a completely mixed reactor.

The following assumptions were used in the spreadsheet TMDL model:

- D.O. concentrations for incremental flow were assumed @ 70% of the saturated value at the given temperature. **(MOS)**
- Incremental and tributary loading were apportioned to correlate with the land usage of the drainage basin.
- Ratios for  $\text{CBOD}_u/\text{NH}_3\text{OD}_u$  and  $\text{CBOD}_u/\text{TONOD}_u$  were calculated using water quality data for the waterbody. These ratios were assigned in the estimation of loading parameters for incremental flow and tributaries for all land uses, except forest and open water.
- $\text{CBOD}_u/\text{BOD}_5$  ratio used for point sources was 1.5.
- $\text{CBOD}_u/\text{BOD}_5$  ratio used for nonpoint sources was 1.5.
- $\text{NH}_3\text{OD}_u$  is equal to 4.57 times the ammonia nitrogen concentration.
- $\text{TONOD}_u$  is equal to 4.57 times the organic nitrogen concentration.
- The ammonia as nitrogen concentration was determined at maximum reported pH.
- Background conditions were assumed for forest incremental flow. Background conditions are typically the following ranges: 2-3 mg/l  $\text{CBOD}_u$ , 0.2-1 mg/l  $\text{NH}_3\text{OD}_u$ , 1-2 mg/l  $\text{TONOD}_u$ .


4.1.1. SOD Representation: Sediment oxygen demand (SOD) can be an important part of the oxygen demand budget in shallow streams. However, for shallow streams with rocky substrate and leaf debris, the SOD component is generally small. These hydrogeological conditions are representative of the Big Nance Creek. It is believed, therefore, that the SOD for this stream is minimal. In the absence of available field SOD measurements for the waterbody, SOD data was obtained from EPA Region IV's SOD database. The EPA SOD database represents mixed land uses and varying degrees of point source activity. The SOD values ranging from 0.04 to 0.003 gm-O<sub>2</sub>/ft<sup>2</sup>/day were applied in time model for Big Nance Creek. The number was determined from the EPA SOD database for a stream with a sand and gravel bottom, which is similar to the characteristics in Big Nance Creek.

4.1.2. Calibration Data: The model calibration period was determined from an examination of the available field data (ref: Appendix) during the period of July 2000. The combination of the lowest, steady flow period with the lowest dissolved oxygen defined the critical modeling period. The stream conditions (i.e., D.O., temperature) during this period were incorporated into the calibrated model TMDL spreadsheet.

## ***4.2 Water Quality Model Summary***

The critical model reach consisted of eight segments. The impaired portion of the critical model reach consists of segments 1 through 8. The length of the impaired portion is 24 miles. Total distance of the critical model reach is 24 miles. A schematic diagram of the model is presented in Figure 4-1. Assumed in-stream seasonal temperatures are based on historical model development. A guide for use of ADEM's TMDL water quality model can be found in the appendix. The guide also explains the theoretical basis for the physical/chemical mechanisms and principles that form the foundation of the model.

**Figure 4-1. Schematic of the Modeled Reach.**

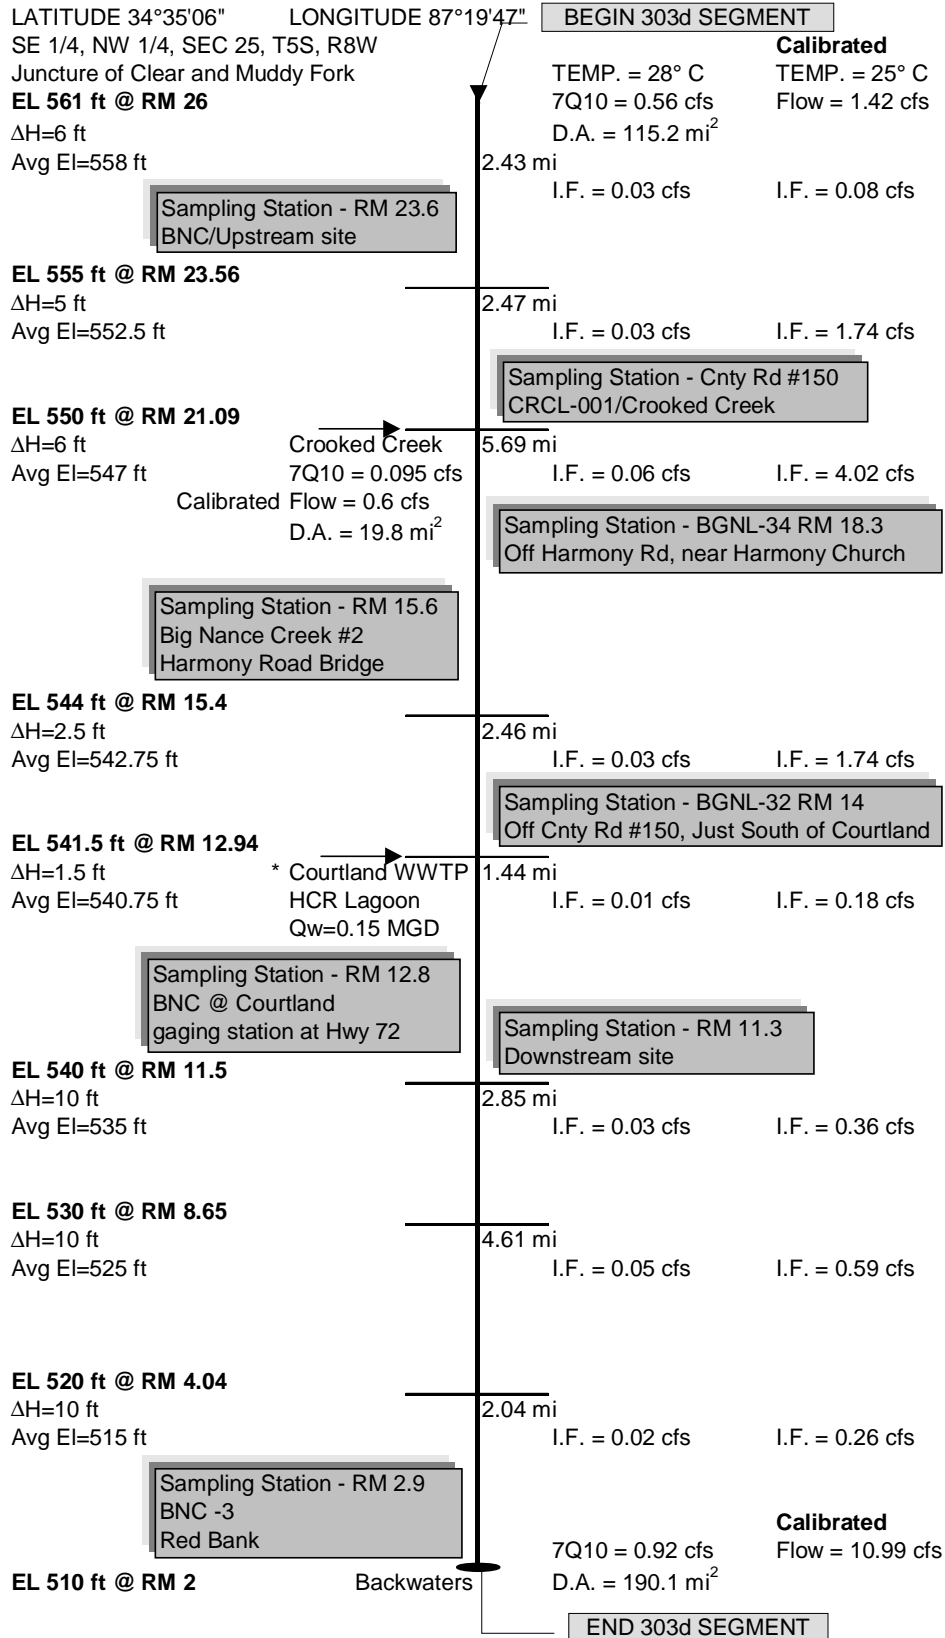

\* Courtland Lagoon discharges only when flow in Big Nance Creek is 5.17 cfs or greater.


### 4.3 Loading Reduction Analysis

#### 4.3.1. Calibrated Model

The only D.O. violation from available field data occurred at BGNL-033. The lowest observed D.O. value occurred during the July 18, 2000, sampling event. The measured concentration was 3.89 mg/l. Field data from the sampling event was used as input into the summer TMDL model to perform a third simulation referred to as the calibrated model (the first and second simulations are the summer and winter models, respectively). Non-point source loading was adjusted so that model predictions simulated the measured D.O. value as closely as possible at BGNL-033, while still providing a reasonable representation of water quality in the stream at the time of the sampling event.

Shown in Figure 4-2, below, is a plot of D.O. calibrated model predictions vs. actual D.O. field data.

**Figure 4-2. Calibrated Model D.O. Predictions vs. Actual D.O. Field Data.**

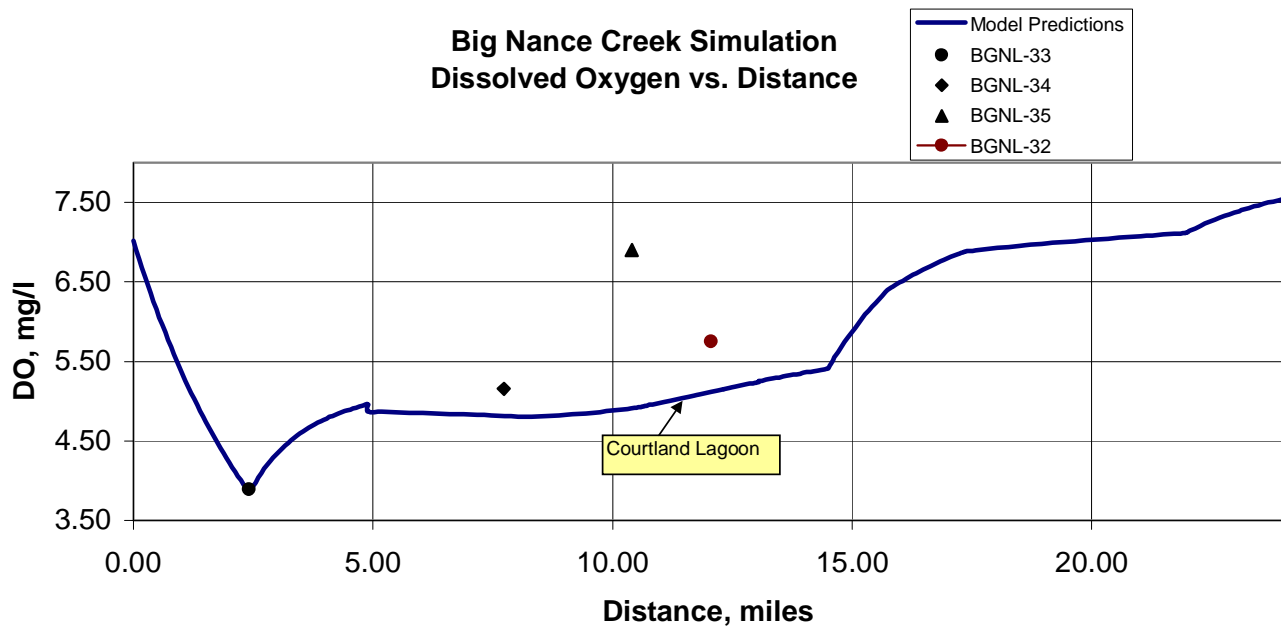

***Calibrated Model Flow Parameters***

| <b>Description</b>            | <b>Flow (cfs)</b> | <b>DO (mg/l)</b> | <b>CBOD<sub>U</sub> (mg/l)</b> | <b>NH<sub>3</sub>N (mg/l)</b> | <b>TON (mg/l)</b> | <b>Temp (°C)</b> |
|-------------------------------|-------------------|------------------|--------------------------------|-------------------------------|-------------------|------------------|
| Headwaters                    | 1.42              | 7.02             | 3.3                            | 0.0394                        | 0.0700            | 25               |
| Crooked Creek                 | 0.60              | 4.38             | 3.1800                         | 0.0394                        | 0.0700            | 25               |
| Courtland Lagoon              | 0.040             | 7.8              | 39.300                         | 4.2                           | 8.4               | 25               |
| Conditions @ Calibrated Point | 1.5000            | 3.8488           | 2.7514                         | 0.0266                        | 0.0639            | 25               |
| Flow @ End of Model           | 11.0322           | 7.5397           | 1.7765                         | 0.0206                        | 0.0750            | 25               |

***Calibrated Model Incremental Flow Parameters***


| <b>Sections</b> | <b>CBOD<sub>U</sub> (mg/l)</b> | <b>NH<sub>3</sub>N (mg/l)</b> | <b>TON (mg/l)</b> | <b>DO (mg/l)</b> | <b>Total Flow (cfs)</b> | <b>Temp. (°C)</b> |
|-----------------|--------------------------------|-------------------------------|-------------------|------------------|-------------------------|-------------------|
| 1               | 3.3000                         | 0.0394                        | 0.0700            | 5.7800           | 0.08                    | 25                |
| 2               | 3.3000                         | 0.0394                        | 0.0700            | 5.7800           | 1.74                    | 25                |
| 3               | 3.2600                         | 0.0394                        | 0.0700            | 5.7800           | 4.02                    | 25                |
| 4               | 3.2600                         | 0.0394                        | 0.0700            | 5.7800           | 1.74                    | 25                |
| 5               | 3.2600                         | 0.0394                        | 0.0700            | 5.7800           | 0.18                    | 25                |
| 6               | 3.2600                         | 0.0394                        | 0.0700            | 5.7800           | 0.36                    | 25                |
| 7               | 3.2600                         | 0.0394                        | 0.0700            | 5.7800           | 0.59                    | 25                |
| 8               | 3.2600                         | 0.0394                        | 0.0700            | 5.7800           | 0.26                    | 25                |

***Comparison of Calibrated Model Flow Parameters to Actual Data***

| <b>Description</b>           | <b>Flow (cfs)</b> | <b>DO (mg/l)</b> | <b>CBOD<sub>U</sub> (mg/l)</b> | <b>NH<sub>3</sub>N (mg/l)</b> | <b>TON (mg/l)</b> | <b>Temp (°C)</b> |
|------------------------------|-------------------|------------------|--------------------------------|-------------------------------|-------------------|------------------|
| Actual Conditions @ Low D.O. | 1.5               | 3.89             | 1.5                            | 0.015                         | 0.37              | 25.72            |
| Cal. Conditions @ Low D.O.   | 1.5000            | 3.8488           | 2.7514                         | 0.039                         | 0.026             | 25               |



Figure 4-3. Calibrated Model Predictions and Graphics.

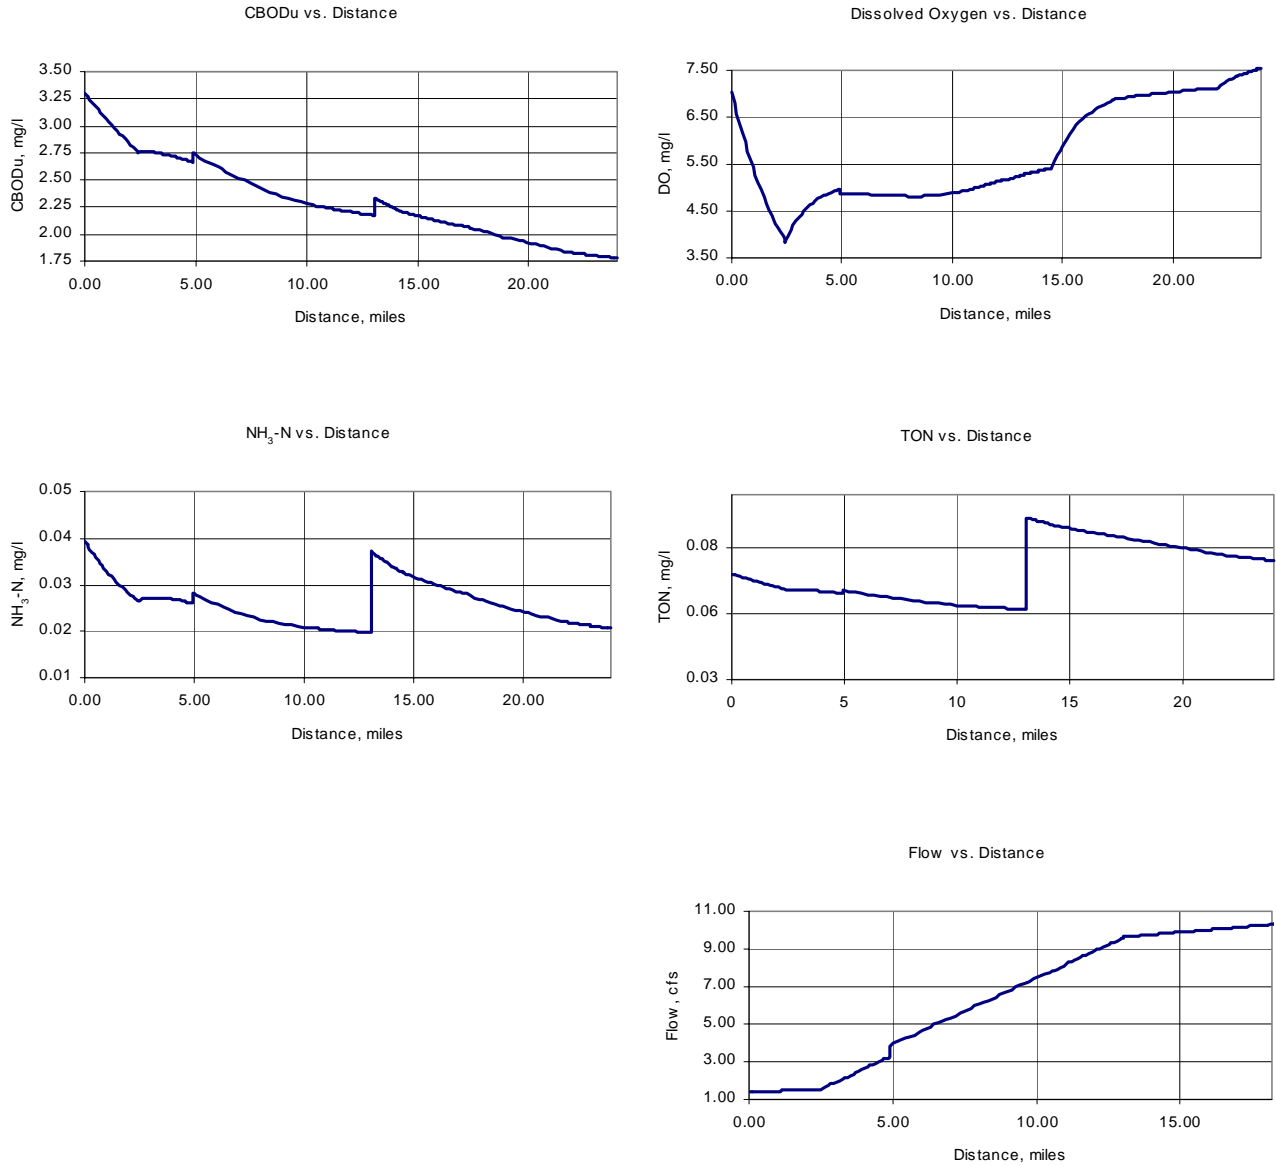

4.3.2. Load Reduction Model

The fourth simulation is referred to as the load reduction model. In this simulation, non-point and point source loadings in the calibrated model were adjusted to bring the waterbody into compliance with the 5 mg/l D.O. Fish & Wildlife water quality standard.


***Load Reduction Model Flow Parameters***

| <b>Description</b>            | <b>Flow (cfs)</b> | <b>DO (mg/l)</b> | <b>CBOD<sub>U</sub> (mg/l)</b> | <b>NH<sub>3</sub>N (mg/l)</b> | <b>TON (mg/l)</b> | <b>Temp (°C)</b> |
|-------------------------------|-------------------|------------------|--------------------------------|-------------------------------|-------------------|------------------|
| Headwaters                    | 1.42              | 7.02             | 1.5000                         | 0.0100                        | 0.0700            | 25               |
| Crooked Creek                 | 0.60              | 7.02             | 1.5000                         | 0.0100                        | 0.0700            | 25               |
| Courtland Lagoon              | 0.040             | 7.8              | 39.300                         | 4.2                           | 8.4               | 25               |
| Conditions @ Calibrated Point | 1.5000            | 4.0984           | 1.2506                         | 0.0102                        | 0.0639            | 25               |
| Flow @ End of Model           | 11.0322           | 7.6461           | 0.8707                         | 0.0157                        | 0.0750            | 25               |

***Load Reduction Model Incremental Flow Parameters***

| <b>Sections</b> | <b>CBOD<sub>U</sub> (mg/l)</b> | <b>NH<sub>3</sub>N (mg/l)</b> | <b>TON (mg/l)</b> | <b>DO (mg/l)</b> | <b>Total Flow (cfs)</b> | <b>Temp. (°C)</b> |
|-----------------|--------------------------------|-------------------------------|-------------------|------------------|-------------------------|-------------------|
| 1               | 1.5000                         | 0.0100                        | 0.0700            | 5.7800           | 0.08                    | 25                |
| 2               | 1.5000                         | 0.0100                        | 0.0700            | 5.7800           | 1.74                    | 25                |
| 3               | 1.5000                         | 0.0100                        | 0.0700            | 5.7800           | 4.02                    | 25                |
| 4               | 1.5000                         | 0.0100                        | 0.0700            | 5.7800           | 1.74                    | 25                |
| 5               | 1.5000                         | 0.0100                        | 0.0700            | 5.7800           | 0.18                    | 25                |
| 6               | 1.5000                         | 0.0100                        | 0.0700            | 5.7800           | 0.36                    | 25                |
| 7               | 1.5000                         | 0.0100                        | 0.0700            | 5.7800           | 0.59                    | 25                |
| 8               | 1.5000                         | 0.0100                        | 0.0700            | 5.7800           | 0.26                    | 25                |


Figure 4-4. Load Reduction Model Predictions and Graphics.

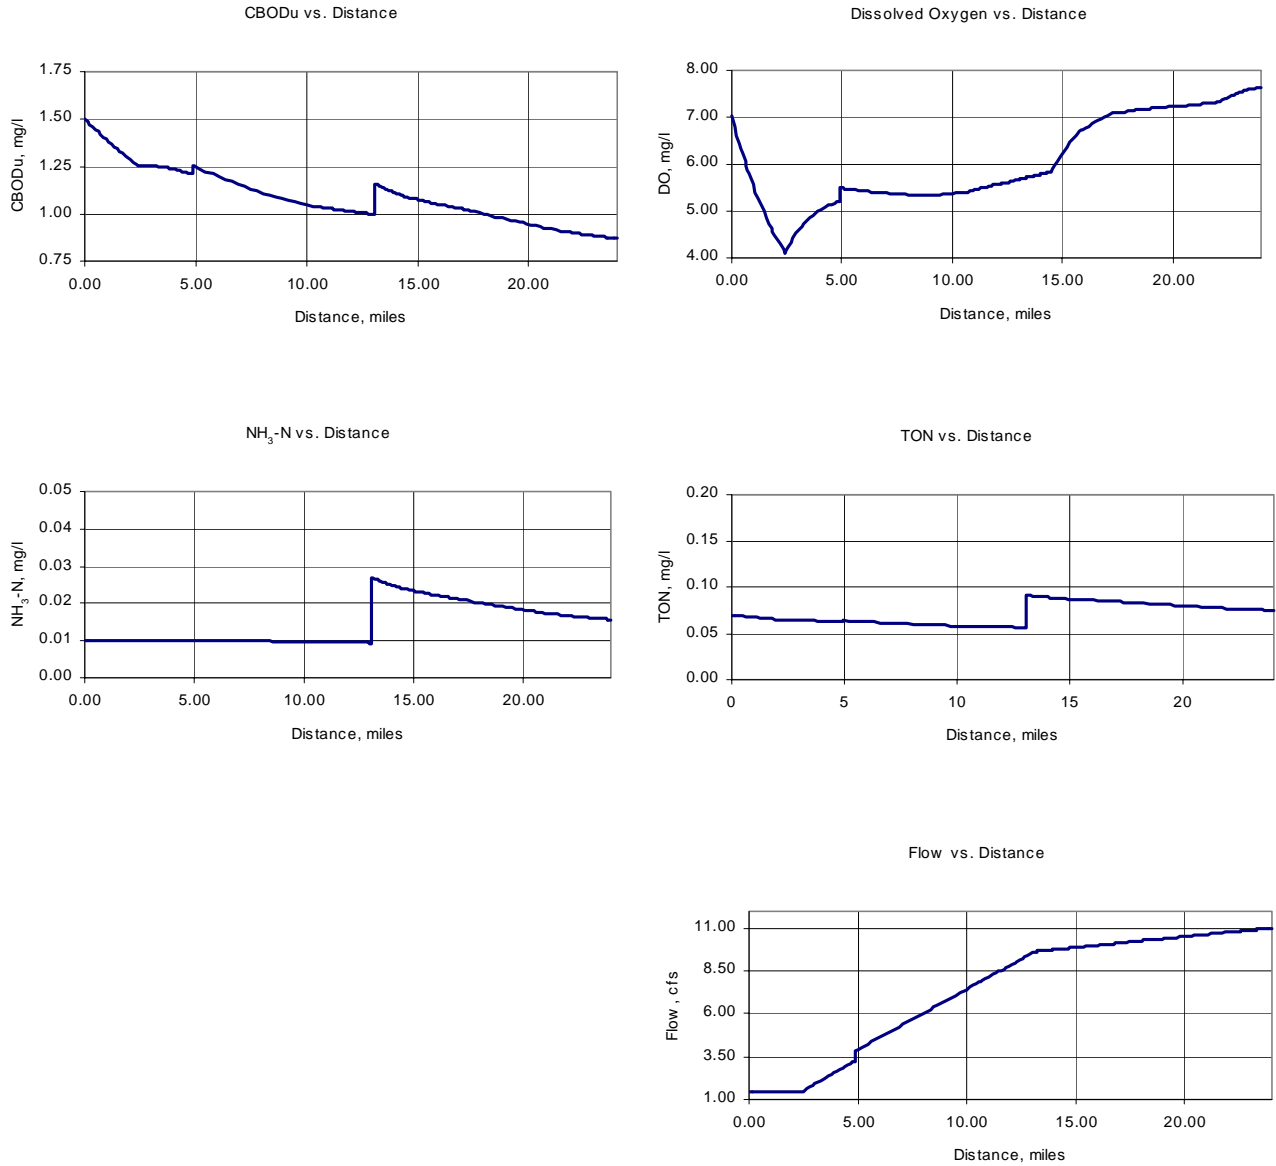

### 4.3.3 Point Source Sensitivity Analysis

Figure 4-5 below shows the influence of point sources, that is, with only nonpoint sources present. The plot includes the target dissolved oxygen concentration and two other sets of model results: 1) with both point and nonpoint sources; and 2) with nonpoint sources alone. The critical condition without point sources but including nonpoint sources labeled no point sources shows very little reduction in dissolved oxygen. From this the point source load would not need to be reduced.

**Figure 4-5 Point Source Sensitivity Analysis**

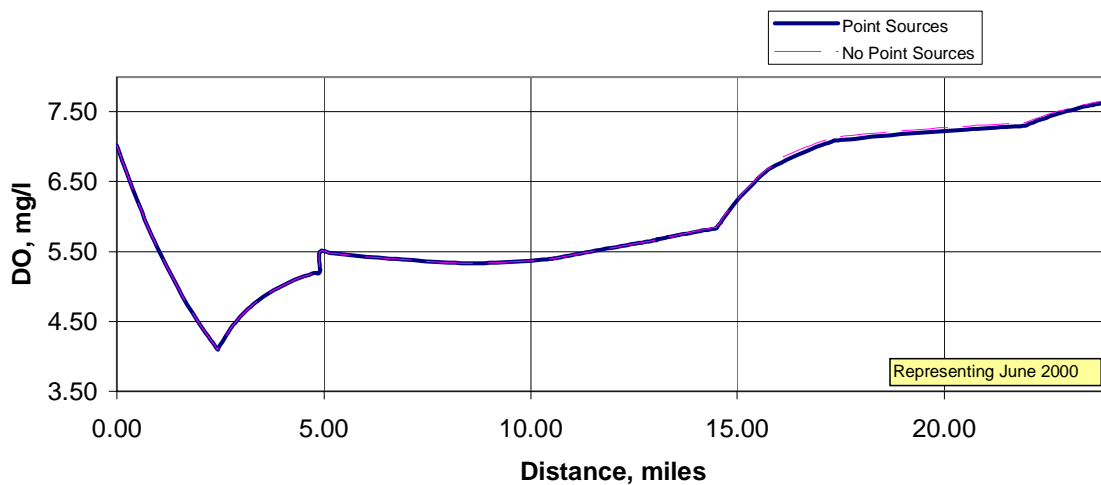

### 4.4.4. Required Reductions

Total organic loading (i.e., CBOD<sub>u</sub> and NBOD) was calculated at BGNL-33 for both the calibrated model and the load reduction model. The total organic loading for the calibrated model was 244.2 lbs./day. For the load reduction model, the total organic loading was 131.6 lbs./day. This would require a theoretical total organic load reduction of 0.0% for point source loads and 50.4% reduction for non-point source loads to bring Big Nance Creek into compliance with the Fish & Wildlife D.O. water quality standard of 5.0 mg/l. The point source was not reduced since there were no violations presented below the discharger. In the process of determining the needed load reductions from the differing land uses, however, it became evident that no load reductions, regardless of their extent would have any sizeable effect on raising the D.O. concentration up to this minimum desired level. All land uses were ultimately set to the same background conditions as for forestland. While this adjustment significantly lowered instream TON, NH<sub>3</sub>-N, and CBOD<sub>u</sub> values, it unfortunately proved to have very little if any effect on raising the dissolved oxygen. Critical (calibrated simulation) flow conditions were at such exceptionally low levels (inclusive of incremental flow) that any changes made to land use would have minimal impact.

A summary of reductions to background conditions for all land uses is presented in Table 4-1, being reminded that these reductions would still not result in a D.O. of 5.0 mg/l. The critical model in this TMDL will be the reduced loadings model.

**Table 4-1. Required Load Reductions for Point and Non-Point Sources.**

| Existing Point Source Load <sup>1</sup> | Existing Non-Point Source Load <sup>1</sup> | Total Existing Load <sup>1</sup> | Reduced Load <sup>1</sup> | % Reduction   | % Reduction       |
|---|---|----------------------------------|---------------------------|---------------|-------------------|
| (lbs./day)                              | (lbs./day)                                  | (lbs./day)                       | (lbs./day)                | Point Sources | Non-Point Sources |
| 21                                      | 223.2                                       | 244.2                            | 131.6                     | 0.0%          | 50.4%             |
|   |   |                                  |                           |               |                   |
|   |   |                                  |                           |               |                   |

Notes: 1 = CBOD<sub>u</sub> + NBOD

The required reductions will be sought through TMDL implementation with follow up monitoring to determine the effectiveness of implementation. Follow up monitoring as discussed further in this document will be conducted according to basin rotation.

#### ***4.4 Seasonal Variation***

The regulations require that a TMDL be established with consideration of seasonal variations. Since impairments for dissolved oxygen would typically be expected during the critical period and not during other times of the year, a seasonal variation in the TMDL was not necessary. Since the point source loads identified do not cause any violations downstream, only a critical TMDL was calculated.

## 5.0 Conclusions

A summary of the TMDL for the summer is presented in Table 5-1.

**Table 5-1. Critical TMDL Summary**

|  | <b>TMDL</b>   |
|--|---------------|
|  | <b>Summer</b> |
| <b>CBOD<sub>u</sub> Loading<br/>(lbs./day)</b> | 97.4          |
| <b>NBOD Loading<br/>(lbs./day)</b>             | 34.2          |
| <b>Total Loading<br/>(lbs./day)</b>            | 131.6         |
| <b>NH<sub>3</sub>-N<br/>(lbs./day)</b>         | 1.5           |

Within the impaired segment, the point source allocations used in development of the critical TMDL will be addressed by the NPDES permit program during permit renewals and modifications. Based on the critical TMDL analysis the NPDES permit limitations will remain the same.

## 6.0 TMDL Implementation

### 6.1 Non-Point Source Approach

Big Nance Creek is impaired primarily by nonpoint sources. For 303(d) listed waters impaired solely or primarily by nonpoint source (NPS) pollutants, necessary reductions will be sought during TMDL implementation using a phased approach. Voluntary, incentive-based mechanisms will be used to implement NPS management measures in order to assure that measurable reductions in pollutant loadings can be achieved for the targeted impaired water. Cooperation and active participation by the general public and various industry, business, and environmental groups is critical to successful implementation of TMDLs. Local citizen-led and implemented management measures offer the most efficient and comprehensive avenue for reduction of loading rates from nonpoint sources. Therefore, TMDL implementation activities will be coordinated through interaction with local entities in conjunction with Clean Water Partnership efforts.

The primary TMDL implementation mechanism used will employ concurrent education and outreach, training, technology transfer, and technical assistance with incentive-based pollutant management measures. The ADEM Office of Education and Outreach (OEO) will assist in the implementation of TMDLs in cooperation with public and private stakeholders. Planning and oversight will be provided by or coordinated with the Alabama Department of

Environmental Management's (ADEM) Section 319 nonpoint source grant program in conjunction with other local, state, and federal resource management and protection programs and authorities. The CWA Section 319 grant program may provide limited funding to specifically ascertain NPS pollution sources and causes, identify and coordinate management programs and resources, present education and outreach opportunities, promote pollution prevention, and implement needed management measures to restore impaired waters.

Depending on the pollutant of concern, resources for corrective actions may be provided, as applicable, by the Alabama Cooperative Extension System (education and outreach); the USDA-Natural Resources Conservation Service (NRCS) (technical assistance) and Farm Services Agency (FSA) (federal cost-share funding); and the Alabama Soil and Water Conservation Committee (state agricultural cost share funding and management measure implementation assistance) through local Soil and Water Conservation Districts, or Resource Conservation and Development Councils (funding, project implementation, and coordination). Additional assistance from such agencies as the Alabama Department of Public Health (septic systems), Alabama Department of Agriculture and Industries (pesticides), and the Alabama Department of Industrial Relations and Dept of Interior - Office of Surface Mining (abandoned minelands), Natural Heritage Program and US Fish and Wildlife Service (threatened and endangered species), may also provide practical TMDL implementation delivery systems, programs, and information. Land use and urban sprawl issues will be addressed through the Nonpoint Source for Municipal Officials (NEMO) education and outreach program. Memorandums of Agreements (MOAs) may be used as a tool to formally define roles and responsibilities.

Additional public/private assistance is available through the Alabama Clean Water Partnership (CWP) Program. The CWP program uses a local citizen-based environmental protection approach to coordinate efforts to restore and protect the state's resources in accordance with the goals of the Clean Water Act. Interaction with the state or river basin specific CWP will facilitate TMDL implementation by providing improved and timely communication and information exchange between community-based groups, units of government, industry, special interest groups, and individuals. The CWP can assist local entities to plan, develop, and coordinate restoration strategies that holistically meet multiple needs, eliminate duplication of efforts, and allow for effective and efficient use of available resources to restore the impaired waterbody or watershed.

Other mechanisms that are available and may be used during implementation of this TMDL include local regulations or ordinances related to zoning, land use, or storm water runoff controls. Local governments can provide funding assistance through general revenues, bond issuance, special taxes, utility fees, and impact fees. If applicable, reductions from point sources will be addressed by the NPDES permit program. The Alabama Water Pollution Control Act empowers ADEM to monitor water quality, issue permits, conduct inspections, and pursue enforcement of discharge activities and conditions that threaten water quality. In addition to traditional "end-of-pipe" discharges, the ADEM NPDES permit program addresses animal feeding operations and land application of animal wastes. For certain water quality improvement projects, the State Clean Water Revolving Fund (SRF) can provide low interest loans to local governments.

Long-term physical, chemical, and biological improvements in water quality will be used to measure TMDL implementation success. As may be indicated by further evaluation of stream water quality, the effectiveness of implemented management measures may necessitate revisions of this TMDL. The ADEM will continue to monitor water quality according to the rotational river basin monitoring schedule as allowed by resources. In addition, assessments may include local citizen-volunteer monitoring through the Alabama Water Watch Program and/or data collected by agencies, universities, or other entities using standardized monitoring and assessment methodologies. Core management measures will include, but not be limited to water quality improvements and designated use support, preserving and enhancing public health, enhancing ecosystems, pollution prevention and load reductions, implementation of NPS controls, and public awareness and attitude/behavior changes.

## 6.2 Point Source Approach

If applicable, reductions from point sources will be addressed by the NPDES permit program.

## 7.0 Follow Up Monitoring

ADEM has adopted a basin approach to water quality management; an approach that divides Alabama's fourteen major river basins into five groups. Each year, the ADEM water quality resources are concentrated in one of the basin groups. One goal is to continue to monitor §303(d) listed waters. This monitoring will occur in each basin according to the following schedule:

| River Basin Group   | Schedule |
|---|----------|
| Cahaba / Black Warrior  | 2002     |
| Tennessee   | 2003     |
| Choctawhatchee / Chipola<br>/ Perdido-Escambia /<br>Chattahoochee | 2004     |
| Tallapoosa / Alabama /<br>Coosa                                   | 2005     |
| Escatawpa / Upper<br>Tombigbee / Lower<br>Tombigbee / Mobile      | 2006     |

Monitoring will help further characterize water quality conditions resulting from the implementation of best management practices in the watershed.



## ***8.0 Public Participation***

A thirty-day public notice will be provided for this TMDL. During this time, the availability of the TMDL will be public noticed, a copy of the TMDL will be provided as requested, and the public will be invited to provide comments on the TMDL.

## ***9.0 Appendices***

## ***9.1 References***

Adkins, J.B., Pearman, J.L. 1994. Low-Flow and Flow-Duration Characteristics of Alabama Streams. Water-Resources Investigations Report 93-4186.

Nelson, George H., Jr. 1984. Maps to Estimate Average Streamflow and Headwater Limits for Streams in the U.S. Army Corps of Engineers, Mobile District, Alabama and Adjacent States. Water-Resources Investigations Report 84-4274.

United States Environmental Protection Agency. 1991. Guidance for Water Quality-Based Decisions: The TMDL Process, Office of Water, EPA 440/4-91-001.

## 9.2 Water Quality Data

Station I.D. Big Nance Creek 01 - 17917 - John R Bridge  
 State-Alabama Latitude 34°35'56"  
 County-Lawrence Longitude 87°20'08"  
 Agency - SE1/4, Sec. 23, T5S, R8W RM 23.6

| Station Name     | Date       | Time  | WATER TEMP. °C | WATER TEMP. °F | Stream Flow cfs | D.O. mg/l | D.O. SAT % | BOD <sub>5</sub> mg/l | Residue TOT NFLT mg/l | TKN mg/l | NH <sub>3</sub> +NH <sub>4</sub> -N mg/l |
|------------------|------------|-------|----------------|----------------|-----------------|-----------|------------|-----------------------|-----------------------|----------|--|
| BIG NANCE CREEK* | 06/06/1988 | 10:30 | 22             | 71.6\$         |                 | 8.7       | 98.86\$    | 3.2                   |                       | 0.20     | K 0.03                                   |
| BIG NANCE CREEK* | 07/11/1988 | 8:30  | 25             | 77\$           |                 | 5.8       | 69.05\$    | 3.5                   |                       | 0.22     | 0.01                                     |
| BIG NANCE CREEK* | 08/03/1988 | 11:00 | 25             | 77\$           |                 | 2.8       | 33.33\$    | 10                    |                       | 0.42     | 0.12                                     |
| BIG NANCE CREEK* | 09/06/1988 | 10:00 | 1.9            | 35.42\$        |                 | 4.1       | 29.71\$    | 0.03                  |                       | 0.38     | 0.03                                     |
| BIG NANCE CREEK* | 10/05/1988 | 11:00 | 12             | 53.6\$         |                 | 4.9       | 45.37\$    | 0.8                   |                       | 0.74     | 0.16                                     |
| BIG NANCE CREEK* | 06/06/1991 | 15:20 | 24             |                |                 | 4.6       |            | 1.6                   |                       | 0.36     | 0.06                                     |
| BIG NANCE CREEK* | 07/09/1991 | 7:40  | 24             |                |                 | 4.3       |            | 3.4                   |                       | 2.2      | 0.03                                     |
| BIG NANCE CREEK* | 08/07/1991 | 9:30  | 26             |                |                 | 3.2       |            | 1.6                   |                       | 0.54     | 0.02                                     |
| BIG NANCE CREEK* | 09/03/1991 | 8:10  | 24             |                |                 | 1.9       |            | 3.0                   |                       | 0.54     | 0.13                                     |
| BIG NANCE CREEK* | 10/02/1991 | 11:15 | 18             |                |                 | 3.1       |            | 0.6                   |                       | 0.23     | 0.14                                     |
| UPSTREAM SITE**  | 06/30/1997 | 13:00 | 23.27          | 73.89\$        | 782             | 6.06      | 69.66\$    | 3                     | 36                    | 0.82     | 0.06                                     |
| UPSTREAM SITE**  | 06/30/1997 | 13:01 |                |                |                 |           |            | 3                     | 32                    | 0.83     | 0.05                                     |
| UPSTREAM SITE**  | 07/22/1997 | 15:00 | 26.05          | 78.89\$        | 17.9            | 3.48      | 42.44\$    | 2                     | 7                     | 0.31     | 0.06                                     |
| UPSTREAM SITE**  | 08/14/1997 | 8:00  | 24.45          | 76.01\$        | 201             | 5.85      | 68.82\$    | 3                     | 42                    | 0.77     | 0.11                                     |
| UPSTREAM SITE**  | 08/14/1997 | 8:01  |                |                |                 |           |            | 2                     | 40                    | 0.80     | 0.12                                     |
| UPSTREAM SITE**  | 09/11/1997 | 13:30 | 22.39          | 72.3\$         | 7               | 5.83      | 66.25\$    | 2                     | 3                     | 0.22     | 0.03                                     |
| UPSTREAM SITE**  | 09/11/1997 | 13:31 |                |                |                 |           |            | K 2                   | 2                     | 0.23     | 0.03                                     |
| UPSTREAM SITE**  | 10/16/1997 | 14:40 | 14.85          | 58.73\$        | 10.6            | 6.62      | 64.9\$     | K 2                   | 2                     | 0.28     | 0.03                                     |
| UPSTREAM SITE**  | 10/16/1997 | 14:41 |                |                |                 |           |            | 2                     | 2                     | 0.26     | 0.03                                     |

| Station # | Coll Date | Air Time | Water Temp °C | pH s.u. | Cond umhos @ 25C | DO mg/L | Turb NTU | Flow cfs | Hardness mg/L | BOD-5 mg/L | TSS mg/L | NO2/NO3 mg/L | NH3 mg/L  | TKN mg/L | T-PO4 mg/L |
|-----------|-----------|----------|---------------|---------|------------------|---------|----------|----------|---------------|------------|----------|--------------|-----------|----------|------------|
| BGNL-033* | 000425    | 0915     | 23            | 7.88    | 165              | 8.50    | 10.9     | ?None    | 102           | 0.6        | 12       | 0.384        | 0.015 LDL | 0.337    | 0.023      |
| BGNL-033* | 000621    | 0945     | 29            | 7.65    | 220              | 5.43    | 5.3      | 10.27    | 78            | 0.4        | 7        | 0.143        | 0.015 LDL | 0.38     | 0.073      |
| BGNL-033* | 000510    | 1015     | 20.5          | 7.48    | 217              | 6.33    | 6.1      | 17.82    | 106           | 0.7        | 11       | 0.129        | 0.007     | 0.401    | 0.041      |
| BGNL-033* | 000718    | 1100     | 27            | 7.81    | 189              | 3.89    | 8.7      | 1.5      | 92            | 1          | 10       | 0.003 LDL    | 0.015 LDL | 0.381    | 0.06       |

\*21 ADEM K=less than  
 \*\*131 TVA \$=calculated value  
 ^112 WRD ?=No Flow due to high swift water  
 LDL=Low Detection Limit

**Big Nance Creek Water Quality Data**

Station I.D. BGNL-34 - Off Harmony Road, near Harmony Church  
 State-Alabama Latitude 34°38'15"  
 County-Lawrence Longitude 87°20'38"  
 Agency - SW1/4, Sec. 2, T5S, R8W RM 18.3

| Station # | Coll Date | Time | Air Temp°C | Water Temp°C | pH s.u. | Cond umhos @ 25C | DO mg/L | Turb NTU | Flow cfs | Hardness mg/L | BOD-5 mg/L | TSS mg/L | NO2/NO3 mg/L | NH3 mg/L  | TKN mg/L | T-PO4 mg/L |
|-----------|-----------|------|------------|--------------|---------|------------------|---------|----------|----------|---------------|------------|----------|--------------|-----------|----------|------------|
| BGNL-034* | 000425    | 1100 | 24.5       | 15.14        | 7.80    | 159              | 8.74    | 14.3     | N/A      | 112           | 0.4        | 10       | 0.375        | 0.015 LDL | 0.342    | 0.025      |
| BGNL-034* | 000510    | 1200 | 22         | 22.0         | 7.82    | 215              | 6.76    | 7.7      | N/A      | 116           | 0.9        | 11       | 0.346        | 0.015 LDL | 0.34     | 0.043      |
| BGNL-034* | 000718    | 1220 | 24         | 25.17        | 7.71    | 207              | 5.16    | 2.8      | N/A      | 102           | 0.4        | 1        | 0.205        | 0.017     | 0.364    | 0.065      |

\*21 ADEM

\*\*131 TVA

^112 WRD

K=less than

\$=calculated value

?=No Flow due to high swift water

LDL=Low Detection Limit

### Big Nance Creek Water Quality Data

Station I.D. BIGNANCECREEK02 - Harmony Road Bridge  
 State-Alabama Latitude 34°38'40"  
 County-Lawrence Longitude 87°19'31"  
 Agency - NE1/4, Sec. 1, T5S, R8W RM 15.6

| Station Name     | Date       | Time  | WATER TEMP. °C | WATER TEMP. °F | Stream Flow cfs | D.O. mg/l | D.O. SAT % | BOD <sub>5</sub> mg/l | Residue TOT NFLT mg/l | TKN mg/l | NH <sub>3</sub> +NH <sub>4</sub> -N mg/l |
|------------------|------------|-------|----------------|----------------|-----------------|-----------|------------|-----------------------|-----------------------|----------|--|
| BIG NANCE CREEK* | 06/06/1988 | 11:00 | 26             | 78.8\$         | 1.21            | 9.5       | 115.9\$    | 1.1                   |                       | 0.22     | K 0.03                                   |
| BIG NANCE CREEK* | 07/11/1988 | 9:00  | 23             | 73.4\$         | 1.82            | 7         | 80.46\$    | 3.6                   |                       | 0.28     | 0.08                                     |
| BIG NANCE CREEK* | 08/03/1988 | 11:30 | 23             | 73.4\$         | 0               | 8.1       | 93.1\$     | 9.1                   |                       | 0.19     | 0.01                                     |
| BIG NANCE CREEK* | 09/06/1988 | 10:30 | 22             | 71.6\$         |                 | 5.1       | 57.95\$    | 0.04                  |                       | 0.62     |  |
| BIG NANCE CREEK* | 09/06/1988 | 10:30 |                |                |                 |           |            |                       |                       |          | 0.04                                     |
| BIG NANCE CREEK* | 09/06/1988 | 10:50 |                |                |                 |           |            |                       |                       |          | 0.04                                     |
| BIG NANCE CREEK* | 10/05/1988 | 11:30 | 18             | 64.4\$         | 10.2            | 5.7       | 60\$       | 0.8                   |                       | 0.78     | 0.1                                      |

| Station # | Coll Date | Time | Stream Depth m | Sampling Depth m | Water Temp °C | pH  | Cond umhos @ 25C | DO mg/L | Flow cfs | BOD-5 mg/L | NO2/NO3 mg/L | NH3 mg/L | TKN mg/L | T-PO4 mg/L |
|-----------|-----------|------|----------------|------------------|---------------|-----|------------------|---------|----------|------------|--------------|----------|----------|------------|
| TN02*     | 960620    | 1558 | 1.5            | 0                | 29            | 7.7 |                  | 7.8     |          | 1.6        | 1.312        | 0.034    | 0.252    | 0.05K      |
| TN02*     | 960718    | 936  | 2              | 1                | 26            | 7.1 |                  | 4.5     |          |            |              |          |          |            |
| TN02*     | 960815    | 1425 | 1              | 1                |               | 6.5 |                  | 6.7     |          | 1.2        | 0.952        | 0.099    | 0.421    | 0.088      |
| TN02*     | 960904    | 1504 | 2              | 1                | 25            | 7.4 |                  | 10      |          |            |              |          |          |            |
| TN02*     | 961022    | 1539 | 2              | 1                | 16            | 7.6 | 338              | 6.8     |          | 1.1        | 1.5          | 0.1K     | 0.15K    | 0.06       |

| Station # | Coll Date | Time | Air Temp °C | Water Temp °C | pH   | Cond umhos @ 25C | DO mg/L | Turb NTU | Flow cfs | Hardness mg/L | BOD-5 mg/L | TSS mg/L | NO2/NO3 mg/L | NH3 mg/L  | TKN mg/L | T-PO4 mg/L |
|-----------|-----------|------|-------------|---------------|------|------------------|---------|----------|----------|---------------|------------|----------|--------------|-----------|----------|------------|
| BGNL-035* | 000425    | 1130 | 26.0        | 15.71         | 7.98 | 180              | 9.47    | 24.4     | N/A      | 116           | 0.3        | 9        | 0.89         | 0.015 LDL | 0.595    | 0.025      |
| BGNL-035* | 000510    | 1215 | 26          | 20.1          | 7.69 | 255              | 6.83    | 8.1      | N/A      | 158           | 0.7        | 8        | 1.438        | 0.015 LDL | 0.316    | 0.048      |
| BGNL-035* | 000718    | 1240 | 28          | 25.32         | 7.44 | 144              | 6.9     | 7.1      | N/A      | 130           | 0.7        | 9        | 0.739        | 0.015 LDL | 0.436    | 0.048      |

\*21 ADEM K=less than  
 \*\*131 TVA \$=calculated value  
 M12 WRD ?=No Flow due to high swift water  
 LDL=Low Detection Limit

**Big Nance Creek Water Quality Data**

Station I.D. BGNL-32 - Off County Rd #150, just south of Courtland  
 State-Alabama Latitude 34°39'37"  
 County-Lawrence Longitude 87°18'34"  
 Agency - NW1/4, Sec. 31, T4S, R8W RM 14

| Station # | Coll Date | Time | Air Temp°C | Water Temp°C | pH s.u. | Cond umhos @ 25C | DO mg/L | Turb NTU | Flow cfs | Hardness mg/L | BOD-5 mg/L | TSS mg/L | NO2/NO3 mg/L | NH3 mg/L  | TKN mg/L | T-PO4 mg/L |
|-----------|-----------|------|------------|--------------|---------|------------------|---------|----------|----------|---------------|------------|----------|--------------|-----------|----------|------------|
| BGNL-032* | 000425    | 1145 | 28         | 16.6         | 7.76    | 189              | 8.93    | 11.4     | N/A      | 122           | 0.3        | 9        | 1.205        | 0.015 LDL | 0.263    | 0.026      |
| BGNL-032* | 000510    | 1315 | 25.5       | 20.9         | 7.83    | 273              | 6.91    | 6.7      | N/A      | 150           | 0.9        | 17       | 2.187        | 0.015 LDL | 0.097    | 0.035      |
| BGNL-032* | 000718    | 1415 | 27         | 24.04        | 7.71    | 311              | 5.75    | 2        | N/A      | 158           | 0.3        | 5        | 1.966        | 0.015 LDL | 0.296    | 0.033      |

\*21 ADEM

\*\*131 TVA

^112 WRD

LDL=Low Detection Limit

**Big Nance Creek Water Quality Data**

Station I.D. 3586500 - gaging station at Hwy 72  
 State-Alabama Latitude 34°40'12"  
 County-Lawrence Longitude 87°19'02"  
 Agency - SW1/4, Sec. 30, T4S, R7W RM 12.8

| Station Name        | Date       | Time  | WATER TEMP. °C | WATER TEMP. °F | Stream Flow cfs | D.O. mg/l | D.O. SAT % | BOD <sub>5</sub> mg/l | Residue TOT NFLT mg/l | TKN mg/l | NH <sub>3</sub> +NH <sub>4</sub> -N mg/l |
|---------------------|------------|-------|----------------|----------------|-----------------|-----------|------------|-----------------------|-----------------------|----------|--|
| BNC @ COURTLAND^ AL | 05/21/1985 | 15:50 | 19             | 66.2\$         | est 82          | 7         | 74.47\$    |                       | 15                    |          |  |
| BNC @ COURTLAND^ AL | 05/29/1985 | 9:30  | 20.5           | 68.9\$         | est 20.5        | 6.2       | 67.39\$    |                       | 8                     | 0.05     | 0.08                                     |
| BNC @ COURTLAND^ AL | 10/31/1985 | 8:50  | 17             | 62.6\$         | est 31.9        | 7.6       | 78.35\$    |                       | 19                    | 0.68     | 0.1                                      |
| BNC @ COURTLAND^ AL | 06/03/1986 | 17:26 | 23             | 73.4\$         | est 92.9        | 6.5       | 74.72\$    |                       | 40                    |          |  |
| BNC @ COURTLAND^ AL | 10/23/1986 | 9:47  | 14             | 57.2\$         | K 0.1           | 5.9       | 56.73\$    |                       | 6                     | 1.31     | 0.03                                     |
| BNC @ COURTLAND^ AL | 05/20/1987 | 9:45  |                |                | 8.36            | 3.4       |            |                       | 9                     | 0.41     |  |
| BNC @ COURTLAND^ AL | 11/04/1987 | 9:15  |                |                | 0               | 1.6       |            |                       | 3                     |          |  |
| BNC @ COURTLAND^ AL | 05/18/1988 | 9:30  |                |                | 8.37            |           |            |                       | 4                     |          |  |
| BNC @ COURTLAND^ AL | 12/07/1988 | 9:22  |                |                | 61              | 9.6       |            |                       | 8                     |          |  |
| BNC @ COURTLAND^ AL | 06/02/1989 | 9:30  |                |                | 30              | 6.1       |            |                       | 15                    |          |  |
| BNC @ COURTLAND^ AL | 12/07/1990 | 9:22  | 6              | 42.8\$         | 61              | 9.6       | 76.81\$    |                       |                       |          |  |

\*21 ADEM K=less than LDL=Low Detection Limit  
 \*\*131 TVA \$=calculated value  
 ^112 WRD ?=No Flow due to high swift water



**Big Nance Creek Water Quality Data**

Station I.D. 17916  
 State-Alabama Latitude 34°41'26"  
 County-Lawrence Longitude 87°18'51"  
 Agency - NW1/4, Sec. 19, T4S, R7W RM11.3

| Station Name      | Date       | Time  | WATER TEMP. °C | WATER TEMP. °F | Stream Flow cfs | D.O. mg/l | D.O. SAT % | BOD <sub>5</sub> mg/l | Residue TOT NFLT mg/l | TKN mg/l | NH <sub>3</sub> +NH <sub>4</sub> -N mg/l |
|-------------------|------------|-------|----------------|----------------|-----------------|-----------|------------|-----------------------|-----------------------|----------|--|
| DOWNSTREAM SITE** | 06/30/1997 | 16:20 | 23.8           | 74.84          |                 | 5.71      | 67.18\$    | 3                     | 120                   | 0.96     | 0.06                                     |
| DOWNSTREAM SITE** | 07/22/1997 | 15:30 | 22.5           | 72.59\$        |                 | 5.2       | 59.77\$    | 2                     | 5                     | 0.28     | 0.02                                     |
| DOWNSTREAM SITE** | 08/14/1997 | 8:00  | 24.01          | 75.22\$        |                 | 6.01      | 70.71\$    | 2                     |                       | 0.43     | 0.1                                      |
| DOWNSTREAM SITE** | 09/11/1997 | 8:00  | 21.4           | 70.52\$        |                 | 5.14      | 57.11\$    | K 2                   | 10                    | 0.28     | 0.03                                     |
| DOWNSTREAM SITE** | 10/16/1997 | 15:30 | 16.05          | 60.89\$        |                 | 5.99      | 59.9\$     | K 2                   | 3                     | 0.30     | 0.02                                     |

\*21 ADEM  
 \*\*131 TVA  
 ^112 WRD

K=less than  
 \$=calculated value  
 ?=No Flow due to high swift water

LDL=Low Detection Limit

**Big Nance Creek Water Quality Data**

Station I.D. BIGNANCECREEK03 - Red Bank  
 State-Alabama Latitude 34°45'59"  
 County-Lawrence Longitude 87°22'16"  
 Agency - NE1/4, Sec. 28, T6S, R8W RM 2.9

| Station Name     | Date       | Time  | WATER TEMP. °C | WATER TEMP. °F | Stream Flow cfs | D.O. mg/l | D.O. SAT % | BOD <sub>5</sub> mg/l | Residue TOT NFLT mg/l | TKN mg/l | NH <sub>3</sub> +NH <sub>4</sub> -N mg/l |
|------------------|------------|-------|----------------|----------------|-----------------|-----------|------------|-----------------------|-----------------------|----------|--|
| BIG NANCE CREEK* | 06/06/1988 | 12:45 | 22.5           | 72.5\$         | 16.5            | 8.5       | 96.59\$    | 0.7                   |                       | 0.11     | K 0.03                                   |
| BIG NANCE CREEK* | 07/11/1988 | 10:15 | 25             | 77\$           | 9.06            | 7.1       | 84.52\$    | 1.6                   |                       | 0.02     | K 0.03                                   |
| BIG NANCE CREEK* | 08/03/1988 | 12:30 | 27             | 80.6\$         | 9.28            | 9.5       | 117.3\$    | 5.2                   |                       | 0.04     | 0.03                                     |
| BIG NANCE CREEK* | 09/06/1988 | 11:00 | 20             | 68\$           | 5.95            | 8.2       | 89.13\$    | 0.2                   |                       | 0.22     | 0.02                                     |
| BIG NANCE CREEK* | 10/05/1988 | 12:30 | 19             | 66.2\$         | 31.2            | 8.9       | 94.68\$    | 0                     |                       | 0.92     | 0.06                                     |

| Station # | Coll Date | Time | Stream Depth m | Sampling Depth m | Water Temp °C | pH  | Cond umhos @ 25C | DO mg/L | Flow cfs | BOD-5 mg/L | NO2/NO3 mg/L | NH3 mg/L | TKN mg/L | T-PO4 mg/L |
|-----------|-----------|------|----------------|------------------|---------------|-----|------------------|---------|----------|------------|--------------|----------|----------|------------|
| TN01*     | 960620    | 1412 | 2              | 0                | 29            | 8   |                  | 12.2    |          | 1.4        | 1.591        | 0.008    | 0.158    | 0.05K      |
| TN01*     | 960717    | 1159 | 1.5            | 0.75             | 27            | 6.7 |                  | 11.2    |          |            |              |          |          |            |
| TN01*     | 960815    | 1452 | 1              | 0.5              | 6.7           | 6.7 |                  | 10.3    |          | 0.1K       | 0.919        | 0.012    | 0.26     | 0.108      |
| TN01*     | 960904    | 1439 | 4              | 2                | 25            | 7.5 |                  | 11      |          |            |              |          |          |            |
| TN01*     | 961022    | 1506 | 2              | 1                | 17            | 7.3 | 257              | 10      |          | 1.4        | 1.8          | 0.1K     | 0.17     | 0.05K      |

| Station # | Coll Date | Time | Air Temp °C | Water Temp °C | pH   | Cond umhos @ 25C | DO mg/L | Turb NTU | Flow cfs | Hardness mg/L | BOD-5 mg/L | TSS mg/L | NO2/NO3 mg/L | NH3 mg/L  | TKN mg/L | T-PO4 mg/L |
|-----------|-----------|------|-------------|---------------|------|------------------|---------|----------|----------|---------------|------------|----------|--------------|-----------|----------|------------|
| BGNL-037* | 000425    | 1300 | 32          | 16.56         | 7.76 | 212              | 9.37    | 9.9      | N/A      | 130           | 0.1        | 7        | 2.048        | 0.015 LDL | 0.335    | 0.031      |
| BGNL-037* | 000510    | 1400 | 27          | 21.35         | 7.85 | 266              | 9.29    | 4.8      | N/A      | 154           | 0.7        | 6        | 2.452        | 0.015 LDL | 0.173    | 0.031      |

\*21 ADEM K=less than  
 \*\*131 TVA \$=calculated value  
 ^112 WRD ?=No Flow due to high swift water

LDL=Low Detection Limit

**Big Nance Creek Water Quality Data**

Station I.D. CRCL-001 - Lawrence County Rd. 150, Crooked Creek  
 State-Alabama Latitude 34°36'50"  
 County-Lawrence Longitude 87°21'07"  
 Agency - E1/2, Sec. 15, T5S, R8W

NOTE: [Cows in creek below sampling point.]

| Station # | Coll Date | Time | Air Temp°C | Water Temp°C | pH s.u. | Cond umhos @ 25C | DO mg/L | Turb NTU | Flow cfs | Hardness mg/L | BOD-5 mg/L | TSS mg/L | NO2/NO3 mg/L | NH3 mg/L | TKN mg/L | T-PO4 mg/L |
|-----------|-----------|------|------------|--------------|---------|------------------|---------|----------|----------|---------------|------------|----------|--------------|----------|----------|------------|
| CRCL-001* | 000425    | 1000 | 24.5       | 15.25        | 7.96    | 107              | 9.39    | 19.5     | 13.46    | 66            | 0.6        | 18       | 0.446        | 0.052    | 0.445    | 0.028      |
| CRCL-001* | 000510    | 1115 | 21         | 20.63        | 7.68    | 152              | 6.61    | 10.9     | 2.8      | 82            | 0.9        | 12       | 0.28         | 0.019    | 0.394    | 0.046      |
| CRCL-001* | 000718    | 1200 | 27         | 23.48        | 7.41    | 211              | 4.38    | 13.3     | 0.6      | 96            | 0.6        | 9        | 0.325        | 0.159    | 0.619    | 0.064      |

\*21 ADEM

K=less than

LDL=Low Detection Limit

\*\*131 TVA

\$=calculated value

?=No Flow due to high swift water

^112 WRD

### ***9.3 Water Quality Model Input and Output Files***

## ***9.4 Spreadsheet Water Quality Model (SWQM) User Guide***